The documentation and process conversion measures necessary to comply with this document shall be completed by 25 August 2020.

INCH-POUND

MIL-PRF-19500/539H
w/AMENDMENT 1
25 May 2020
SUPERSEDING
MIL-PRF-19500/539H
6 December 2019

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, NPN, SILICON, POWER DARLINGTON,
TYPES 2N6300 AND 2N6301, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN silicon power Darlington transistors. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each encapsulated device type as specified in MIL-PRF-19500.

1.2. Package outlines. The device package outlines are as follows: TO-213AA (formerly TO-66) in accordance with figure 1 for all encapsulated device types.

1.2 Physical dimensions. The device package style is TO-213AA (formerly TO-66) in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, T_C = +25°C.

Types	P_T			$R_{\theta JC}$ Max	V_{CBO}	V_{CBO}	V_{EBO}	I_C	I_B	T_J and T_{STG}
	T_C = +0°C	T_C = +27°C	T_C = +100°C							
	W	W	W	°C/W	V dc	V dc	V dc	A dc	mA dc	°C
2N6300	75	65	37	2.66	60	60	5	8	120	-55 to +200
2N6301	75	65	37	2.66	80	80	5	8	120	-55 to +200

(1) See figure 2 for temperature-power derating curves.
(2) See figure 3 for thermal impedance curve.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

* 1.4 Primary electrical characteristics. Unless otherwise specified, T_A = +25°C.

Limit	h_{FE2} (1) V_{CE} = 3 V dc I_C = 4 A dc	h_{FE3} (1) V_{CE} = 3 V dc I_C = 8 A dc	$\|h_{fe}\|$ V_{CE} = 3 V dc I_C = 3 A dc f = 1 MHz	C_{OBO} 100 kHz ≤ f ≤ 1 MHz V_{CB1} = 10 V dc, I_E = 0	Pulse response	
					t_{on}	t_{off}
				pF	µs	µs
Min	750	100	25			
Max	18,000		350	200	2.0	8.0

Limit	$V_{BE(SAT)2}$ I_C = 8 A dc I_B = 80 mA dc	$V_{CE(SAT)2}$ I_C = 8 A dc I_B = 80 mA dc	h_{FE} V_{CE} = 3 V dc I_C = 3 A dc f = 1kHz
	V dc	V dc	
Min			300
Max	4.0	3.0	

(1) Pulsed (see 4.5.1).

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", and "JANTXV".

1.5.2 Device type. The designation system for the devices covered by this specification sheet is as follows.

1.5.2.1 First number and first letter symbols. The devices of this specification sheet use the first number and letter symbols "2N".

1.5.2.2 Second number symbols. The second number symbols for the devices covered by this specification sheet are as follows: "6300" and "6301".

1.5.3 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

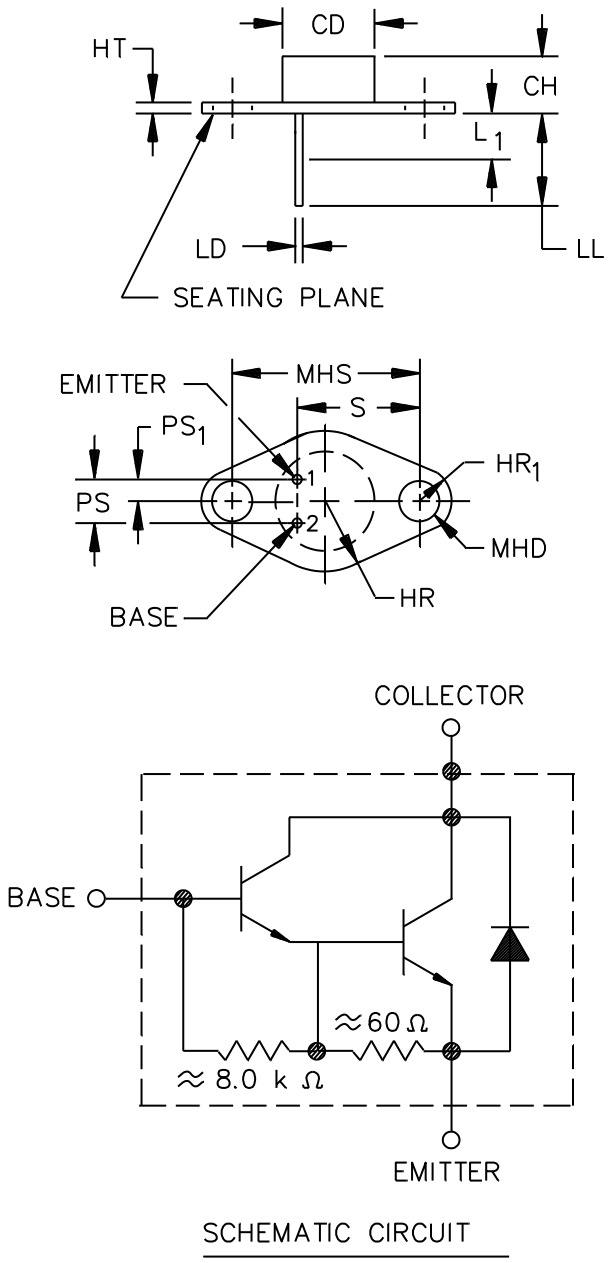


FIGURE 1. Physical dimensions and schematic (TO-213AA, formerly TO-66).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.470	.500	11.94	12.70	3
CH	.250	.340	6.35	8.64	
HR		.350		8.89	
HR_1	.115	.145	2.92	3.68	4
HT	.050	.075	1.27	1.91	3, 5
LD	.028	.034	0.71	0.86	6, 7
LL	.360	.500	9.14	12.70	6
L_1		.050		1.27	6, 8
MHD	.142	.152	3.61	3.86	4
MHS	.958	.962	24.33	24.43	
PS	.190	.210	4.83	5.33	9
PS_1	.093	0.107	2.37	2.71	9
S	.570	.590	14.48	14.99	9

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Terminal 1 is the emitter and terminal 2 is the base. The collector shall be electrically connected to the case.
3. Body contour is optional within zone defined by dimension CD.
4. Applies to two holes, at both ends.
5. Dimension HT does not include sealing flanges.
6. Applies to both terminals.
7. The lead diameter (dimension LD) is uncontrolled within dimension L_1. Dimension LD applies beyond dimensionL_1 to the end of dimension LL>
8. Within this zone the lead diameter may vary to allow for lead finishes and irregularities.
9. These dimensions shall be measured at points .050 inch (1.27 mm) to .055 inch (1.40 mm) below seating plane. When gauge is not used, measurement shall be made at seating plane.
10. The seating plane of header shall be flat within .001 inch (0.03 mm), concave to .004 (0.10 mm), convex inside a .520 inch (13.20 mm) diameter circle on the center of the header, and flat within .001 inch (0.03 mm), concave to .006 inch (0.15 mm), convex overall.
11. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions and schematic (TO-213AA, formerly TO-66) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML-19500) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

I_M The measurement current applied to forward bias the junction for measurement of V_{BE}.
I_H The collector current applied to the device under test during the heating period.
t_H The duration of the applied heating power pulse.
t_{SW} Sample window time during which final V_{BE} measurement is made.

3.4 Interface requirements and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead finish. Unless otherwise specified, lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750 and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Polarity. The polarity of the device types shall be as shown on figures 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.7 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement
	JANTX and JANTXV levels
3c (1)	Thermal impedance, see 4.3.1
9	I_{CEX1} and h_{FE2}
11	I_{CEX1} and h_{FE2} ΔI_{CEX1} = ±100 percent of initial value or 100 nA dc, whichever is greater. Δh_{FE2} = ±40 percent of initial value.
12	See 4.3.2
13	See table I, subgroup 2 herein ΔI_{CEX1} = ±100 percent of initial value or 100 nA dc, whichever is greater Δh_{FE2} = ±40 percent of initial value

(1) This test shall be performed anytime after temperature cycling (screen 3a) and does not need to be repeated in screening requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with test method 3131 of MIL-STD-750 using the guidelines in that test method for determining I_M, I_H, t_H, t_{MD}, t_{SW}, (and V_H where appropriate). The thermal impedance limit used in screen 3c and table I, subgroup 2 herein shall be set statistically by the supplier. See table II, subgroup 4 herein.

4.3.2 Power burn-in conditions. Power burn-in conditions shall be as follows: T_J = +162.5°C ±12.5°C, V_{CE} ≥ 10 Vdc. Note: No heat sink or forced air cooling on the devices shall be permitted.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E–VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and as follows.

Subgroup	Method	Conditions
B3	1037	V_{CE} ≥ +10 V dc, adjust device current, or power, to achieve a minimum ΔT_J of + 100°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E–VII of MIL-PRF-19500 and as follows.

Subgroup	Method	Conditions
C2	2036	Test condition A, weight = 10 lbs (4.54 Kg), time = 15 s.
C5	3131	See 4.3.1, $R_{\theta JC}$ = 2.66°C/W.
C6	1037	V_{CE} ≥ +10 V dc, adjust device current, or power, to achieve a minimum ΔT_J of + 100°C.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse response measurements. Conditions for pulse response measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3131	See 4.3.1	$Z_{\theta JX}$			°C/W
Breakdown voltage collector to emitter	3011	Bias condition D, I_C = 100 mA dc; pulsed (see 4.5.1);	$V_{(BR)CEO}$			
2N6300				60		V dc
2N6301				80		V dc
* Collector to emitter cutoff current	3041	Bias condition A, V_{BE} = 1.5 V dc;	I_{CEX1}			
2N6300		V_{CE} = 60 V dc			10	µA dc
2N6301		V_{CE} = 80 V dc			10	µA dc
Collector to emitter cutoff current	3041	Bias condition D.	I_{CEO}			
2N6300		V_{CE} = 30 V dc			0.5	mA dc
2N6301		V_{CE} = 40 V dc			0.5	mA dc
Emitter to base cutoff current	3061	Bias condition D, V_{EB} = 5 V dc	I_{EBO}		2.0	mA dc
Forward-current transfer Ratio	3076	V_{CE} = 3 V dc; I_C = 1 A dc; Pulsed (see 4.5.1)	h_{FE1}	500		
Forward-current transfer ratio	3076	V_{CE} = 3 V dc; I_C = 4 A dc; Pulsed (see 4.5.1)	h_{FE2}	750	18,000	
Forward-current transfer ratio	3076	V_{CE} = 3 V dc; I_C = 8 A dc; Pulsed (see 4.5.1)	h_{FE3}	100		
Base emitter voltage (nonsaturated)	3066	Condition B, V_{CE} = 3 V dc; I_C = 4 A dc; pulsed (see 4.5.1)	$V_{BE(on)}$		2.8	V dc
Base emitter voltage (saturated)	3066	Condition A, I_C = 8 V dc; I_B = 80 mA dc; pulsed (see 4.5.1)	$V_{BE(SAT)2}$		4.0	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 – Continued.						
Saturation voltage collector to emitter	3071	I_C = 4 A dc; I_B = 16 mA dc; (see 4.5.1)	$V_{CE(sat)1}$		2.0	V dc
Saturation voltage collector to emitter	3071	I_C = 8.0 A dc; I_B = 80 mA dc; (see 4.5.1)	$V_{CE(sat)2}$		3.0	V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A, V_{EB} = 1.5 V dc	I_{CEX2}			
2N6300		V_{CE} = 60 V dc			1.0	mA dc
2N6301		V_{CE} = 80 V dc			1.0	mA dc
Low temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 3 V dc, I_C = 4 A dc; pulsed (see 4.5.1);	h_{FE4}	200		
Subgroup 4						
Small-signal, short-circuit forward-current transfer ratio	3206	V_{CE} = 3 V dc; I_C = 3 A dc; f = 1 kHz	h_{fe}	300		
Magnitude small-signal, short-circuit forward-current transfer ratio	3306	V_{CE} = 3 V dc; I_C = 3 A dc; f = 1 MHz	$\|h_{fe}\|$	25	350	
Pulse response transfer ratio	3251	Test condition A, except test circuit and pulse requirements in accordance with figure 4 and figure 5 herein.				
Turn-on time		V_{CC} = 30 V dc; (see figure 4) I_C = 4 A dc, I_{B1} = 16 mA dc	t_{on}		2.0	µs
Turn-off time		V_{CC} = 30 V dc; (see figure 5) I_C = 4 A dc, I_{B1} = -I_{B2} = 16 mA dc	t_{off}		8.0	µs
Open-circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0 100 kHz ≤ f ≤ 1 MHz	C_{obo}		200	pF

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = +25°C + 10°C; t = 1.0 s, 1 cycle; (see figure 6)				
Test 1						
All device types		V_{CE} = 8.0 V dc; I_C = 8 A dc				
Test 2						
All device types		V_{CE} = 20 V dc; I_C = 2.0 A dc				
Test 3						
2N6300		V_{CE} = 60 V dc; I_C = 100 mA dc				
2N6301		V_{CE} = 80 V dc; I_C = 100 mA dc				
Safe operating area (switching)	3053	Load condition B, (clamped inductive load), T_A = +25°C; $t_r + t_f \leq 1.0$ µs duty cycle ≤ 10%, t_p = 1 ms (vary to obtain I_C), R_S = 0.1 Ω, R_{BB1} = 80 Ω, V_{BB1} = 16 V dc, R_{BB2} = 100 Ω, V_{BB2} = 1.5 V dc, V_{CC} = 50 V dc, I_C = 8 A dc, $R_L \leq 2$ Ω, L = 1 mH.				
2N6300		Clamp voltage = 60 V dc				
2N6301		Clamp voltage = 80 V dc				
Safe operating area (switching)	3053	Load condition C, (clamped inductive load), (see figure 7) T_A = +25°C; duty cycle ≤ 10%, $R_S \leq 0.1$ Ω				
Test 1		t_p = 1 ms (vary to obtain I_C), R_{BB1} = 80 Ω, $V_{BB1} \geq 12$ V dc, R_{BB2} = ∞, $V_{CC} \geq 30$ V dc, I_C = 8 A dc, $R_L \leq 0.5$ Ω, L = 1 mH at 8 A dc.				
Test 2		t_p = 1 ms (vary to obtain I_C), R_{BB1} = 80 Ω, $V_{BB1} \geq 12$ V dc, R_{BB2} = ∞, V_{BB2} = 0 V dc, $V_{CC} \geq 30$ V dc, Ico 2 A dc $R_L \leq 0.5$ Ω, L = 100 mH at 0.2 A dc.				

*

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 6 and 7 Not applicable						


1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point measurements, this test is required for the following subgroups.
Group B, subgroup 2 and 3 (JAN, JANTX, and JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroups 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) – for qualification and requalification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling (air to air)	1051	500 cycles	
Hermetic seal Fine leak Gross leak	1071		
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 2			45 devices c = 0
Blocking life	1048	Test temperature = + 125C; V_{CB} = 80 percent rate; T = 1,000 hours.	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500	
Subgroup 6			11 devices
Electrostatic discharge sensitivity classification	1020		
Subgroup 8			45 devices c = 0
Reverse voltage leakage stability	1033	Condition B for all types.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

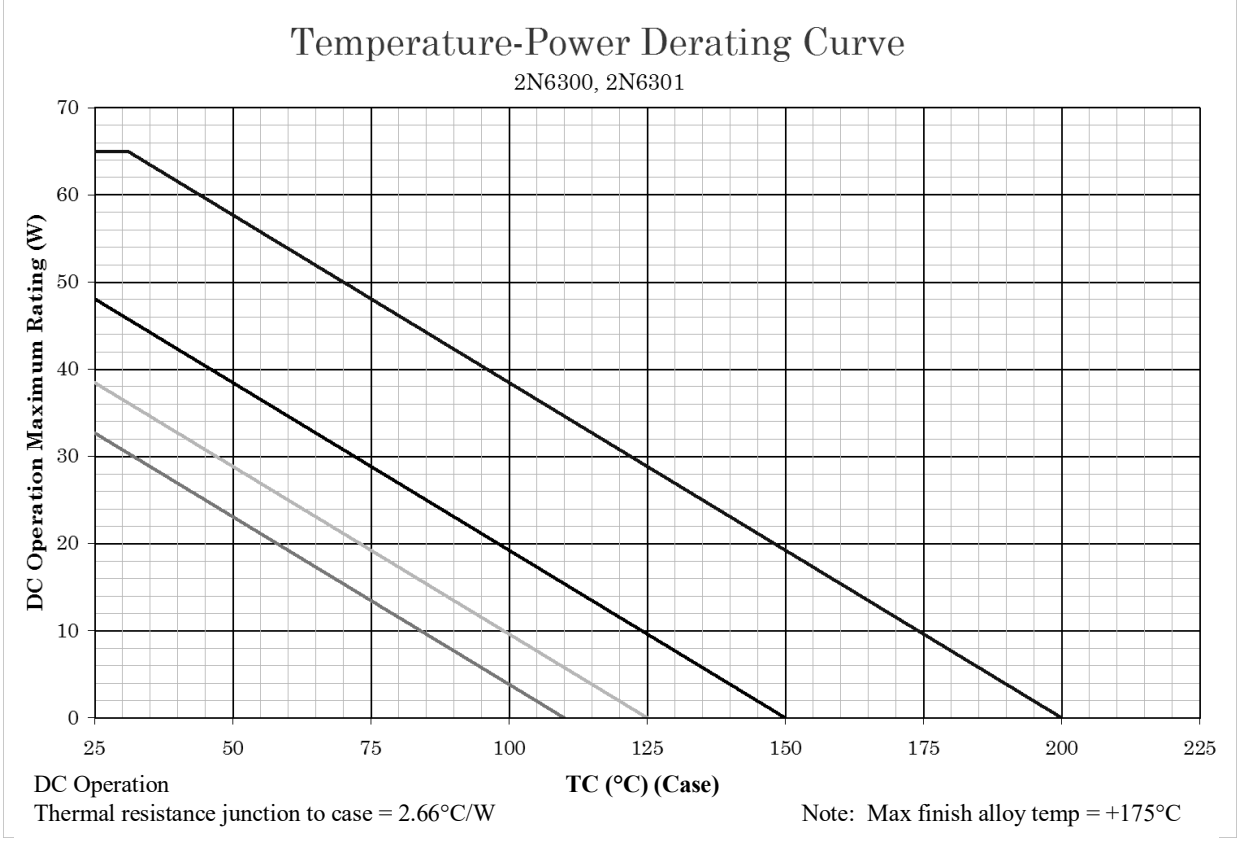


NOTES:

1. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ +200°C) and power rating specified (see 1.3 herein.)
3. Derate design curve chosen at T_J ≤ +150°C where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ +125°C and +110°C to show power rating where most users want to limit T_J in their application.

FIGURE 2. Temperature-power derating graph for device types 2N6300 and 2N6301.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

Maximum Thermal Impedance

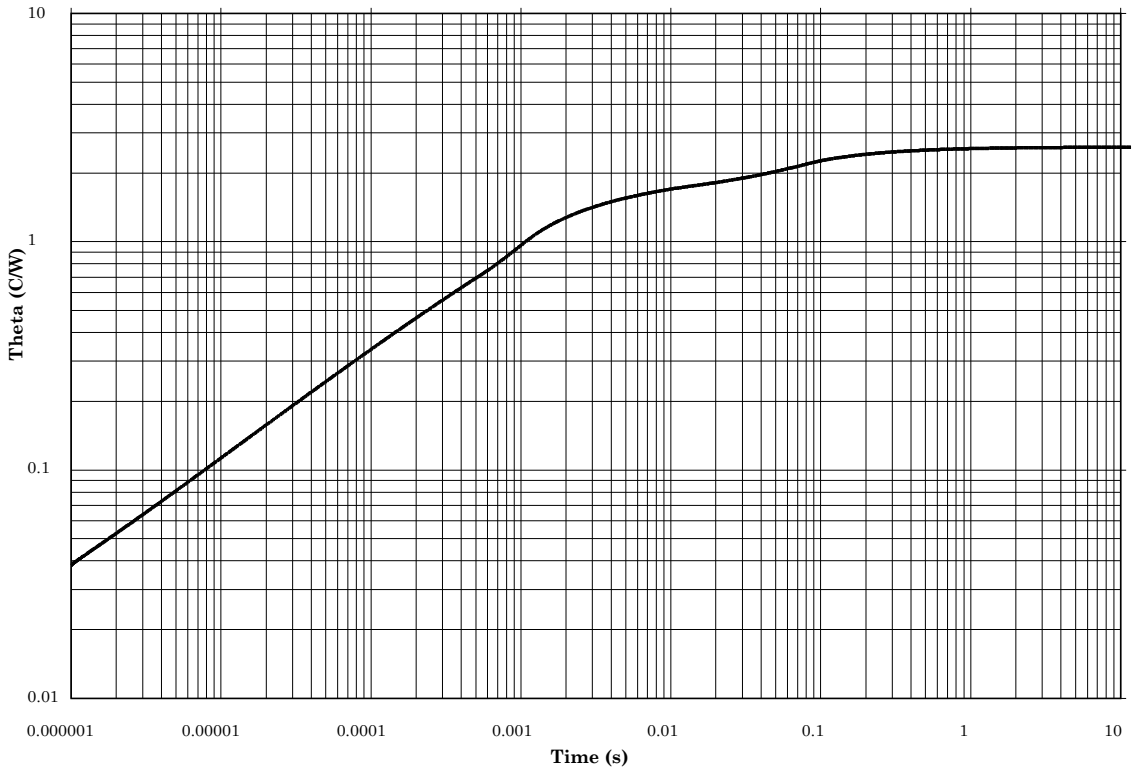

* $R_{\Theta JC}$ = 2.66° C/W

* FIGURE 3. Thermal impedance graph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.


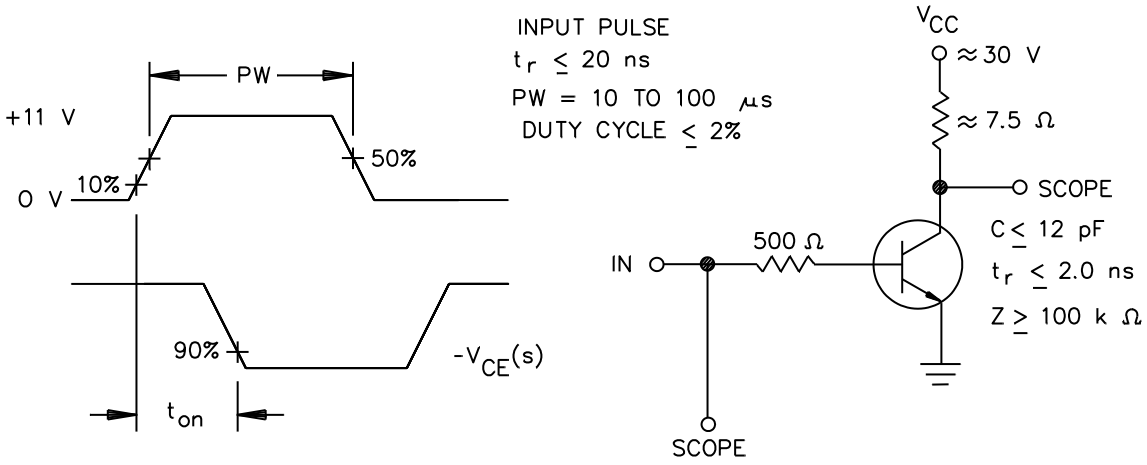


FIGURE 4. Turn on (t_{on}) time test circuit.

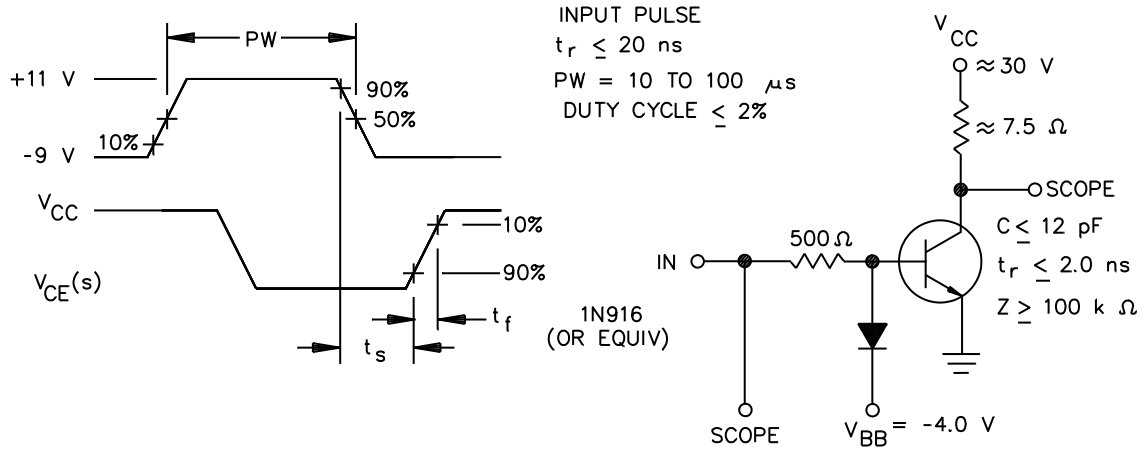

NOTE: $t_s + t_f = t_{off}$

FIGURE 5. Turn off (t_{off}) time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

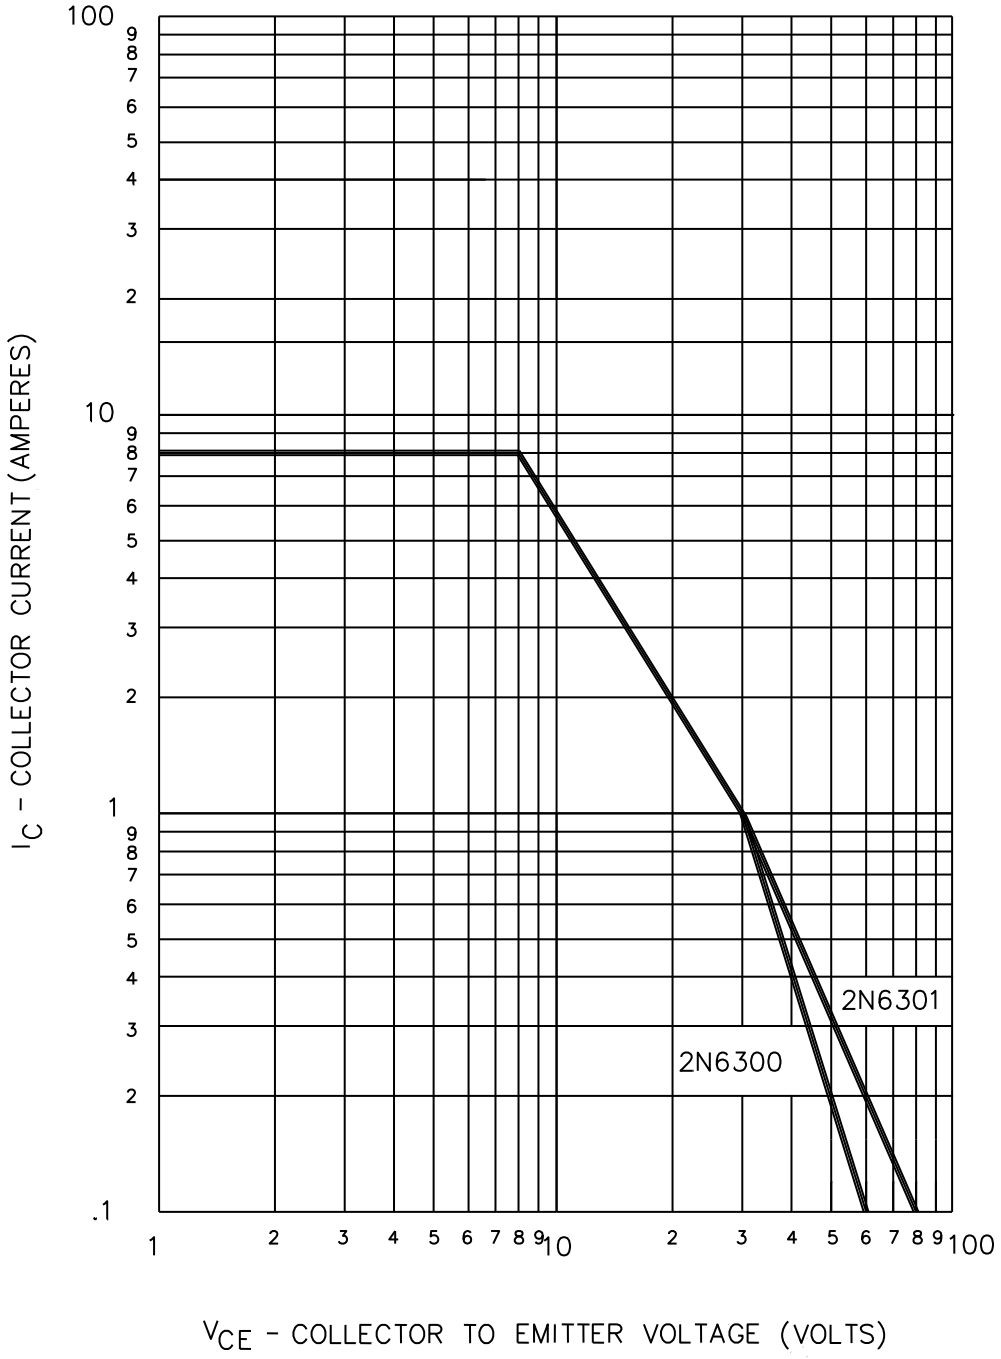


FIGURE 6. Maximum safe operating graph (dc).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

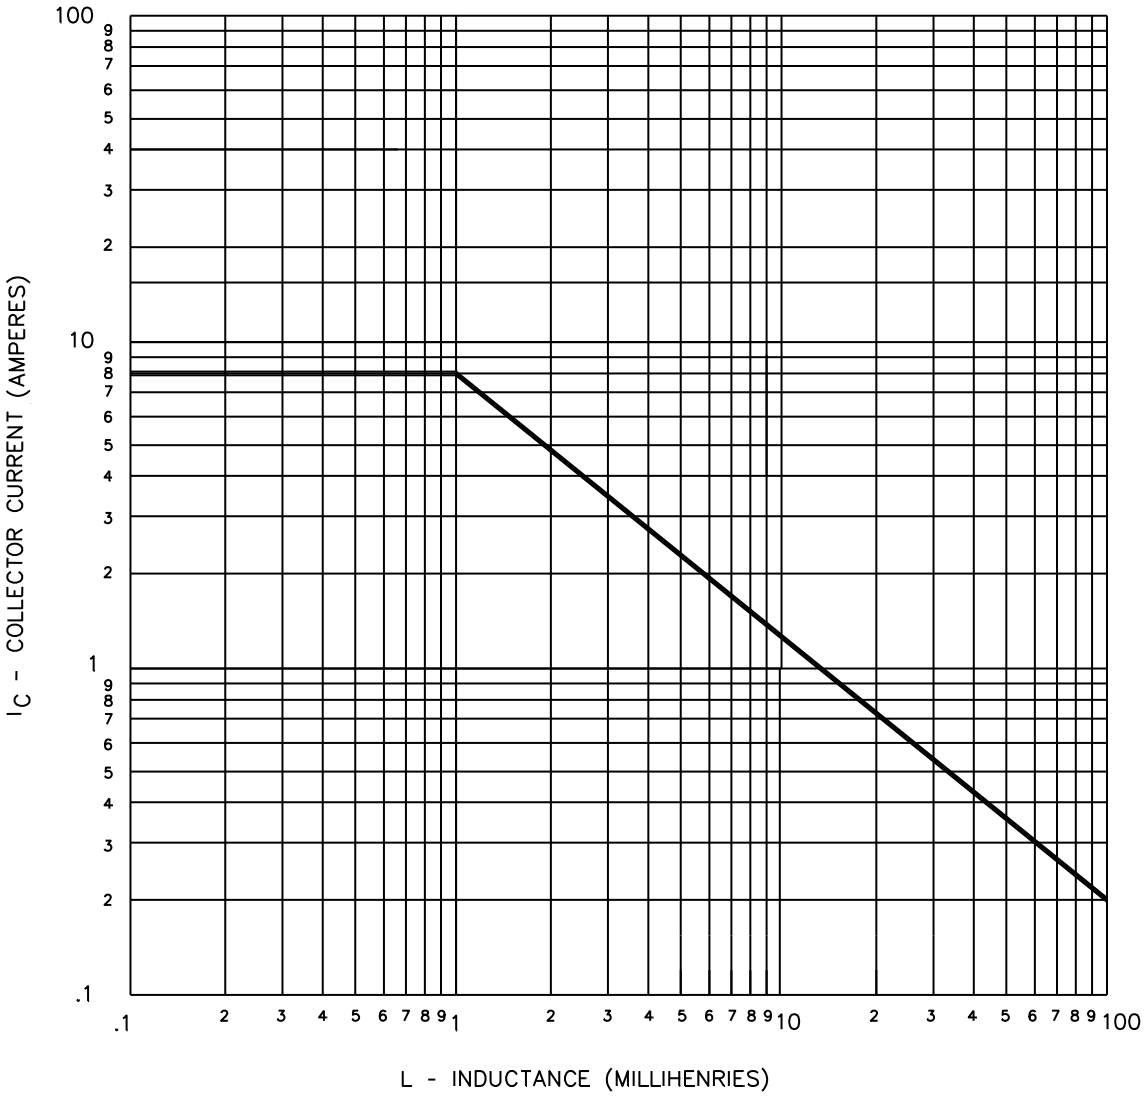


FIGURE 7. Safe operating area for switching between saturation and cutoff - (unclamped inductive load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.4.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218–3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated and unencapsulated devices and are constructed using the following forms.

6.4.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

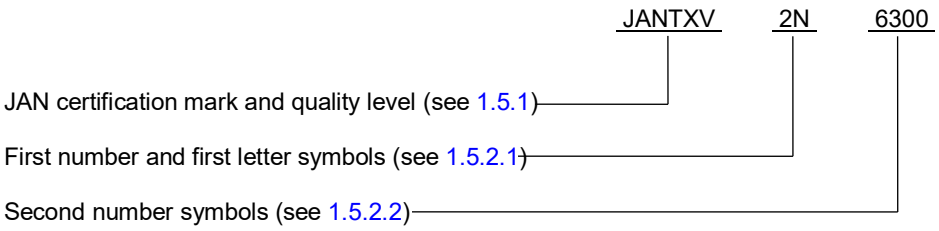

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.

6.5 List if PINs.

6.5.1 List of PINs. The following is a list of possible PINs available for encapsulated devices and unencapsulated die covered by this specification sheet.

Quality level JAN	Quality level JANTX	Quality level JANTXV
JAN2N6300	JANTX2N6300	JANTXV2N6300
JAN2N6301	JANTX2N6301	JANTXV2N6301

* 6.6 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Air Force - 85
Navy - EC
NASA - NA
DLA - CC

Review activities:
Army - AV

Preparing activity:
DLA - CC

(Project 5961-2020-023)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:58Z
Check the source to verify that this is the current version before use.