The documentation and process conversion measures necessary to comply with this document shall be completed by 30 June 2025.

INCH-POUND

MIL-PRF-19500/701D
w/AMENDMENT 1
30 January 2025
SUPERSEDING
MIL-PRF-19500/701D
21 January 2020

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, FIELD, EFFECT, N-CHANNEL, SILICON,
RADIATION HARDENED (TOTAL DOSE AND SINGLE EVENT EFFECTS)
TYPES 2N7491T2, 2N7492T2, AND 2N7493T2,
QUALITY LEVELS JANTXV AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for a N-Channel, enhancement-mode, MOSFET, radiation hardened (total dose and single event effects (SEE)), power transistor. These transistors include ratings for avalanche energy maximum rating (E_{AS}) and maximum avalanche current (I_{AS}). Two levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outline. The device package outline is a TO-205AF package in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25 °C.

Type	P_T (1) T_C = +25 °C	P_T T_A = +25 °C	$R_{\theta JC}$ (2)	V_{DS}	V_{DG}	V_{GS}	I_{D1} (3) (4) T_C = +25 °C	I_{D2} (3) (4) T_C = +100 °C	I_S	I_{DM} (5)	T_J and T_{STG}
	W	W	°C/W	V dc	V dc	V dc	A dc	A dc	A dc	A (pk)	°C
2N7491T2	25	0.71	5	30	30	±20	12	10	12	48	-55
2N7492T2	25	0.71	5	60	60	±20	12	9.5	12	48	to
2N7493T2	25	0.71	5	100	100	±20	11.7	7.4	11.7	46.8	+150

(1) Derate linearly 0.2 W/°C for T_C > +25°C.
(2) See figure 2, thermal impedance curves.
(3) The following formula derives the maximum theoretical I_D limit. I_D is limited by package and device construction to 12 amps.

$$I_D = \sqrt{\frac{T_{JM} - T_C}{(R_{\theta JC}) \text{ X } (r_{DS(on)}) \text{ at } T_{JM}}}$$

(4) See figure 3 , maximum drain current graphs.
(5) I_{DM} = 4 X I_{D1}; I_{D1} as calculated by note (3).

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A
FSC 5961

* DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified at T_C = +25°C.

Type	Min $V_{(BR)DSS}$ V_{GS} = 0 I_D = 1.0 mA dc	$V_{GS(TH)1}$ $V_{DS} \geq V_{GS}$ I_D = 1.0 mA dc		Max I_{DSS1} V_{GS} = 0 V_{DS} = 80 percent of rated V_{DS}	Max $r_{DS(on)}$ (1) V_{GS} = 12 V, $I_D = I_{D2}$		E_{AS}
					T_J = +25°C	T_J = +150°C	
	V dc	V dc Min	V dc Max	µA dc	Ω	Ω	mJ
2N7491T2	30	2.0	4.0	10	0.045	0.100	520
2N7492T2	60	2.0	4.0	10	0.048	0.110	270
2N7493T2	100	2.0	4.0	10	0.080	0.184	173

(1) Pulsed (see 4.5.1).

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example, 6.5 for a list of available PINs, and 6.6 for cross-reference information.

1.5.1 JAN certification mark and quality level. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are "JANTXV" and "JANS".

1.5.2 RHA designator. The RHA levels that are applicable for this specification sheet from lowest to highest for quality levels JANS and JANKC are as follows: "R", "F", "G", and "H".

1.5.3 Device type. The designation system for the devices covered by this specification sheet is as follows.

1.5.3.1 First number and first letter symbols. The devices of this specification sheet use the first number and letter symbols "2N".

1.5.3.2 Second number symbols. The second number symbols for the devices covered by this specification sheet are as follows: "7491", "7492", and "7493".

1.5.4 Suffix symbols. The suffix symbols "T2" are incorporated into the PINs for this specification sheet.

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

* 1.6 Radiation features. The following radiation features are applicable for RHA devices supplied to this specification sheet.

* 1.6.1 Maximum total ionizing dose (TID). The maximum TID that RHA devices were tested to in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750 are as follows:

For device type 2N7491T2:..... 300 krad(Si) 1/
For device type 2N7492T2, AND 2N7493T2:..... 100 krad(Si) 1/

* 1.6.2 Heavy ion irradiation SEE. SEE testing includes Single-Event Burnout (SEB) and Single-Event Gate Rupture (SEGR) tests at the specified linear energy transfer (LET) units. See 6.7 for the specific RHA SEE characterization testing details. The following characterization conditions were used for the testing to the requirements herein:

For device type 2N7491T2:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 25 V and V_{GS} = -5 V)
(In-situ Bias V_{DS} = 20 V and V_{GS} = -10 V)

For device type 2N7492T2:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 30 V and V_{GS} = -5 V)
(In-situ Bias V_{DS} = 25 V and V_{GS} = -10 V)
(In-situ Bias V_{DS} = 20 V and V_{GS} = -15 V)
(In-situ Bias V_{DS} = 15 V and V_{GS} = -20 V)


For device type 2N7493T2:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 100 V and V_{GS} = -5 V)
(In-situ Bias V_{DS} = 80 V and V_{GS} = -10 V)
(In-situ Bias V_{DS} = 25 V and V_{GS} = -15 V)

* 1/ The manufacturers supplying these device types have performed characterization testing in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750. The radiation end point limits are guaranteed only to a maximum TID level of 100 and 300 krad(Si).

* 2/ The manufacturers have performed SEE tests at Brookhaven National Laboratories (BNL) Radiation Effects Facility in accordance with method1080 of MIL-STD-750. For more information on SEE testing and results, customers should contact the qualified manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.315	.355	8.00	9.02	4
CH	.160	.180	4.06	4.57	
HD	.340	.370	8.64	9.40	4
LC	.200 BSC		5.08 BSC		5
LD	.016	.021	0.41	0.53	6, 7
LL	.500	.750	12.70	19.05	6, 7, 8
LU	.016	.019	0.41	0.48	6, 7
L1		.050		1.27	6, 7
L2	.250		6.35		6, 7
P	.070		1.78		
Q		.050		1.27	4
TL	.029	.045	0.74	1.14	9
TW	.028	.034	0.71	0.86	10
r		.010		0.25	11
α	45° BSC		45° BSC		5

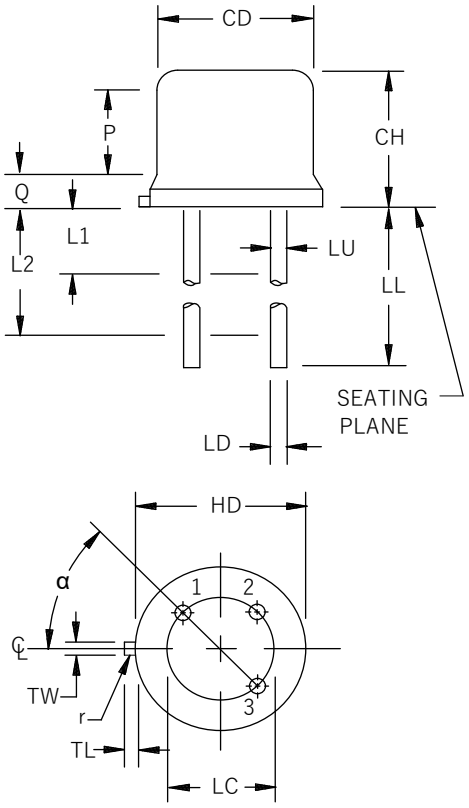

* NOTES:

1. Dimension are in inches. Millimeters are given for general information only.
2. Terminal 1 = source, terminal 2 = gate, and terminal 3 is electrically connected to the case.
3. Terminal 4 is omitted from this outline.
4. Body contour optional within zone defined by dimensions CD, HD, and Q.
5. Leads at gauge plane .054 +.001 −.000 inch (1.37 +0.03 −0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods.
6. Dimension LU applies between dimensions L1 and L2. Dimension LD applies between dimensions L2 and LL minimum. Diameter is uncontrolled in dimension L1 and beyond dimension LL minimum.
7. All three leads.
8. For "L" suffix devices, dimension LL = 1.5 inches (38.10 mm) minimum and 1.75 inches (44.45 mm) maximum.
9. Dimension TL measured from maximum HD.
10. Beyond r (radius) maximum, dimension TW shall be held for a minimum length of .011 inch (0.28 mm).
11. Dimension r (radius) applies to both inside corners of tab.

FIGURE 1. Physical dimensions for TO-205AF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

I_{AS}	Rated avalanche current, nonrepetitive
nC	nano Coulomb
SEE	Single Event Effects

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1 (TO-205AF).

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Internal construction. Multiple chip construction shall not be permitted to meet the requirements of this specification.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the transistor but shall be retained on the initial container.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Electrostatic discharge sensitive (ESDS). The devices covered by this specification sheet have been classified as ESDS. The devices shall be handled in accordance with the ESD program established to comply with the requirements of MIL-PRF-19500 to avoid damage due to the accumulation of static charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent if practical.

g. Care should be exercised during test and troubleshooting to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, R ≤ or 100 kΩ, whenever bias voltage is applied drain to source.

3.9 RHA. The RHA requirements and test levels shall be as defined in MIL-PRF-19500.

3.10 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

* 4.2.2 SEE. SEE (SEB/SEGR) shall be performed in accordance with TM1080 of MIL-STD-750 at initial qualification and after process or design changes which may affect radiation hardness (see tables III and IV). Upon qualification, manufacturers shall provide the verification test conditions from section 5 of method 1080 of MIL-STD-750 that were used to qualify the device for inclusion into section 6 of the slash sheet. End-point electrical measurements shall be in accordance with table II. SEE (SEB/SEGR) characterization data shall be made available upon request of the qualifying or acquiring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS and JANTXV). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (1) (2)	Measurements for JANS	Measurements for JANTXV
(3)	Gate stress test (see 4.3.1)	Gate stress test (see 4.3.1)
(3)	Single pulse avalanche energy test (see 4.3.2)	Single pulse avalanche energy test (see 4.3.2)
(3) 3c	thermal impedance (see 4.3.3)	thermal impedance (see 4.3.3)
9	Subgroup 2 of table I herein I_{DSS1}, I_{GSSF1}, I_{GSSR1}, as a minimum	Not applicable
10	Method 1042 of MIL-STD-750, test condition B	Method 1042 of MIL-STD-750, test condition B
11	I_{GSSF1}, I_{GSSR1}, I_{DSS1}, $r_{DS(ON)1}$, $V_{GS(TH)1}$ Subgroup 2 of table I herein. ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±10 µA dc or ±100 percent of initial value, whichever is greater.	I_{GSSF1}, I_{GSSR1}, I_{DSS1}, $r_{DS(ON)}1$, $V_{GS(TH)1}$ Subgroup 2 of table I herein.
12	Method 1042 of MIL-STD-750, test condition A	Method 1042 of MIL-STD-750, test condition A
13	Subgroups 2 and 3 of table I herein ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±10 µA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(ON)1}$ = ±20 percent of initial value. $\Delta V_{GS(TH)1}$ = ±20 percent of initial value.	Subgroups 2 and 3 of table I herein ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±10 µA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(ON)1}$ = ±20 percent of initial value. $\Delta V_{GS(TH)1}$ = ±20 percent of initial value.

(1) At the end of the test program, I_{GSSF1}, I_{GSSR1}, and I_{DSS1} are measured.
(2) An out-of-family program to characterize I_{GSSF1}, I_{GSSR1}, I_{DSS1}, and $V_{GS(th)1}$ shall be invoked.
(3) Shall be performed anytime after temperature cycling, screen 3a; Quality level JANTXV does not need to be repeated in screening requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

4.3.1 Gate stress test. Apply V_{GS} = 24 V minimum for t = 250 µs minimum.

4.3.2 Single pulse avalanche energy (E_{AS}). The test for single pulse avalanche energy shall be performed in accordance with method 3470 of MIL-STD-750. The following details shall apply:

a. Peak current, $I_{AS} = I_{D1}$.

b. Inductance, $L = (2E_{AS}/(I_{D1})^2)*((V_{BR} - V_{DD})/V_{BR})$ mH minimum.

c. Gate to source resistor, R_{GS}: 25 Ω ≤ R_{GS} ≤ 200 Ω.

d. Supply voltage, V_{DD} = 25 V dc, except V_{DD} = 50 V dc for 2N7493T2.

e. Initial case temperature, T_C = +25 °C, -5 °C, +10 °C.

f. Gate voltage, V_{GS} = 12 V dc.

g. Number of pulses to be applied: 1 pulse minimum.

4.3.3 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3161 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}, t_{MD} (and V_H where appropriate). See table III, group E, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and in table E-VIB (JANTXV) of MIL-PRF-19500, and as follows.

4.4.2.1 Quality level JANS.

Subgroup	Method	Condition
B3	1051	Test condition G, 100 cycles.
B3	2077	SEM (scanning electron microscope).
B4	1042	Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. t_{on} = 30 seconds minimum.
B5	1042	Accelerated steady-state gate bias, condition B, V_{GS} = rated; T_A = +175 °C, t = 24 hours minimum; or T_A = +150 °C, t = 48 hours minimum.
B5	1042	Accelerated steady-state reverse bias, condition A, V_{DS} = rated; T_A = +175 °C, t = 120 hours minimum; or T_A = +150 °C, t = 240 hours minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

4.4.2.2 Quality level JANTXV.

Subgroup	Method	Condition
B2	1051	Test condition G, 25 cycles.
B3	1042	Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. t_{on} = 30 seconds minimum.
B5		Not applicable.
B6		Not applicable.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows.

Subgroup	Method	Condition
C2	2036	Test condition E; weight = 8 ounces (226 grams), 3 arcs of 90 degrees
C5	3161	See 4.3.3.
C6	1042	Intermittent operation life, condition D, 6,000 cycles. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. t_{on} = 30 seconds minimum.

4.4.4 Group D inspection. Group D inspection shall be conducted in accordance with table E- VIII of MIL-PRF-19500 and table II herein.

4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table III herein.

* 4.4.5.1 SEE. The heavy ion SEE (SEB/SEGR) characterization testing shall be performed in accordance with method 1080 of MIL-STD-750. Electrical measurements (end-points) shall be in accordance with table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3161	See 4.3.3	$Z_{\theta JC}$			°C/W
Breakdown voltage drain to source	3407	Bias condition C, V_{GS} = 0, I_D = 1 mA dc,	$V_{(BR)DSS}$			
2N7491T2				30		V dc
2N7492T2				60		V dc
2N7493T2				100		V dc
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 1 mA dc	$V_{GS(TH)1}$	2.0	4.0	V dc
Gate current	3411	V_{GS} = +20 V dc, bias condition C, V_{DS} = 0	I_{GSSF1}		+100	nA dc
Gate current	3411	V_{GS} = -20 V dc, bias condition C, V_{DS} = 0	I_{GSSR1}		-100	nA dc
Drain current	3413	V_{GS} = 0, bias condition C, V_{DS} = 80 percent of rated V_{DS}	I_{DSS1}		10	µA dc
Static drain to source on-state resistance	3421	V_{GS} = 12 V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$	$r_{DS(ON)1}$			
2N7491T2					0.045	Ω
2N7492T2					0.048	Ω
2N7493T2					0.080	Ω
Forward voltage	4011	V_{GS} = 0, condition A, pulsed (see 4.5.1), $I_D = I_{D1}$	V_{SD}		1.5	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 3						
High temperature operation		$T_C = T_J = +125$ °C				
Gate current	3411	$V_{GS} = \pm 20$V dc, bias condition C, $V_{DS} = 0$	I_{GSS2}		±200	nA dc
Drain current	3413	$V_{GS} = 0$, bias condition C, V_{DS} = 80 percent of rated V_{DS}	I_{DSS2}		25	µA dc
Static drain to source on-state resistance	3421	V_{GS} = 12 V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$	$r_{DS(ON)3}$			
2N7491T2					0.090	Ω
2N7492T2					0.096	Ω
2N7493T2					0.160	Ω
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 1 mA dc	$V_{GS(TH)2}$	1.0		V dc
Low temperature operation		$T_C = T_J = -55$ °C				
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS(TH)3}$, I_D = 1 mA dc	$V_{GS(TH)3}$		5.0	V dc
Subgroup 4						
Forward transconductance	3475	$I_D = I_{D2}$, V_{DD} = 15 V dc (see 4.5.1)	g_{FS}			
2N7491T2				12		S
2N7492T2				12		S
2N7493T2				8.7		S
Switching time test	3472	$I_D = I_{D1}$, V_{GS} = 12 V dc, R_G = 7.5 Ω, V_{DD} = 50 percent of rated V_{DS}				
Turn-on delay time			$t_{D(on)}$		25	ns
Rise time			tr		100	ns
Turn-off delay time			$t_{D(off)}$		35	ns
Fall time			t_f		30	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 5						
Safe operating area test (high voltage)	3474	See figure 4, tp = 10 ms minimum, V_{DS} = 80 percent of maximum rated V_{DS}				
Electrical measurements		See table I, subgroup 2				
Subgroup 6						
Not applicable						
Subgroup 7						
Gate charge	3471	Condition B; $I_D = I_{D1}$, V_{GS} = 12 V dc, V_{DD} = 50 percent of rated V_{DS}				
On-state gate charge			$Q_{G(ON)}$			
2N7491T2					65	nC
2N7492T2					40	nC
2N7493T2					50	nC
Gate to source charge			Q_{GS}			
2N7491T2					20	nC
2N7492T2					10	nC
2N7493T2					7.4	nC
Gate to drain charge			Q_{GD}			
2N7491T2					10	nC
2N7492T2					15	nC
2N7493T2					20	nC
Reverse recovery time	3473	di/dt = −100 A/µs, $V_{DD} \leq V_{(BR)DSS} \leq 50$ V, $I_D = I_{D1}$	t_{rr}			
2N7491T2					92	ns
2N7492T2					100	ns
2N7493T2					202	ns

1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point electrical measurements, this test is required for the following subgroups:
Group B, subgroups 2 and 3 (JANTXV).
Group B, subgroups 3 and 4 (JANS).
Group C, subgroup 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection.

	Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Pre-irradiation limits		Post-irradiation limits				Unit
		Method	Conditions		R, F, G, and H		R, F, and G		H 4/		
					Min	Max	Min	Max	Min	Max	
	Subgroup 1										
	Not applicable										
	Subgroup 2		T_C = +25°C								
*	Steady-state total dose irradiation (V_{GS} bias) 5/	1019	Condition A, V_{GS} = 12 V; V_{DS} = 0								
*	Steady-state total dose irradiation (V_{DS} bias) 5/	1019	Condition A, V_{GS} = 0; V_{DS} = 80 percent of rated V_{DS} (pre-irradiation)								
	End-point electricals										
	Breakdown voltage, drain to source	3407	V_{GS} = 0; I_D = 1 mA; bias condition C	$V_{(BR)DSS}$							
	2N7491T2				30		30		30		V dc
	2N7492T2				60		60		60		V dc
	2N7493T2				100		100		100		V dc
	Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$; I_D = 1 mA	$V_{GS(th)1}$	2.0	4.0	2.0	4.0	1.5	4.0	V dc
	Gate current	3411	V_{GS} = +20 V; V_{DS} = 0, bias condition C	I_{GSSF1}		100		100		100	nA dc
	Gate current	3411	V_{GS} = -20 V; V_{DS} = 0 bias condition C	I_{GSSR1}		-100		-100		-100	nA dc
	Drain current	3413	V_{GS} = 0, V_{DS} = 80 percent of rated V_{DS} (pre-irradiation) bias condition C	I_{DSS}		10		10		25	µA dc
	Static drain to source on-state voltage	3405	V_{GS} = 12 V; I_D = I_{D2} condition A pulsed (see 4.5.1)	$V_{DS(on)}$							
	2N7491T2					0.240		0.240		0.300	V dc
	2N7492T2					0.323		0.323		0.408	V dc
	2N7493T2					0.474		0.474		0.592	V dc
*	Forward voltage source drain diode	4011	V_{GS} = 0; I_D = I_{D1} bias condition A	V_{SD}		1.5		1.5		1.5	V dc

1/ For sampling plan see MIL-PRF-19500.
2/ Group D qualification may be performed prior to lot formation. Wafers qualified to these group D QCI requirements may be used for any other specification sheet utilizing the same die design.
3/ At the manufacturer's option, group D samples need not be subjected to the screening tests, and may be assembled in it's qualified package or in any qualified package that the manufacturer has data to correlate the performance to the designated package.
4/ The H designation represents devices which pass end-point electricals at all 100K, 300K and 500K rads(Si).
5/ Separate samples shall be pulled for each bias.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) for qualification or re-qualification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices, c = 0
Temperature cycling	1051	Test condition G, 500 cycles.	
Hermetic seal	1071	Fine and gross leak.	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 2 1/			45 devices, c = 0
Steady-state gate bias	1042	Condition B, 1,000 hours..	
Electrical measurements		See table I, subgroup 2 herein.	
Steady-state reverse bias	1042	Condition A, 1,000 hours.	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 4			Sample size, N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 5			
Not applicable			
Subgroup 10			22 devices, c = 0
Commutating diode for safe operating area test procedure for measuring dv/dt during reverse recovery of power MOSFET transistors or insulated gate bipolar transistors	3476	Test conditions shall be derived by the manufacturer.	
Subgroup 11			3 devices
SEE 2/ 3/	1080	See MIL-STD-750 method 1080.	

1/ A separate sample for each test shall be pulled.
2/ Group E qualification of SEE testing may be performed prior to lot formation. Qualification may be extended to other specification sheets utilizing the same structurally identical die design.
3/ Device qualification to a higher level LET is sufficient to qualify all lower level LETs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.


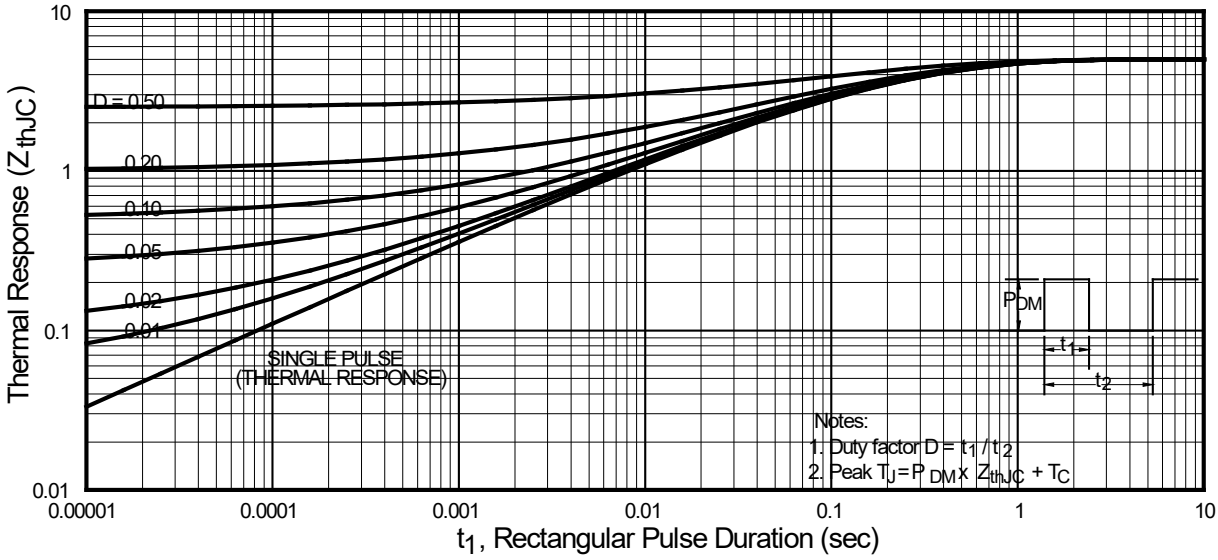



FIGURE 2. Thermal impedance curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

2N7491T2

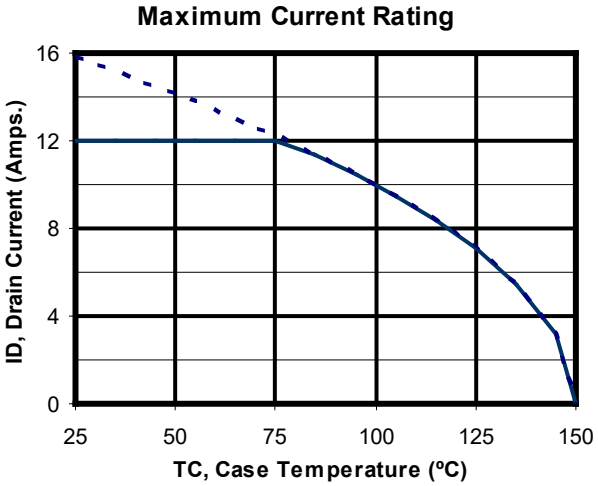

2N7492T2

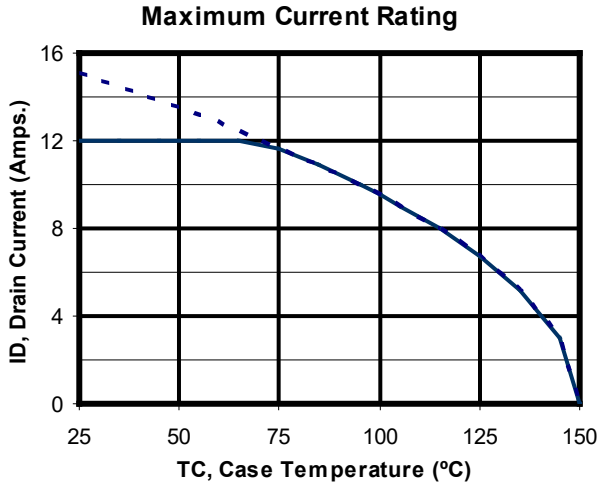

2N7493T2


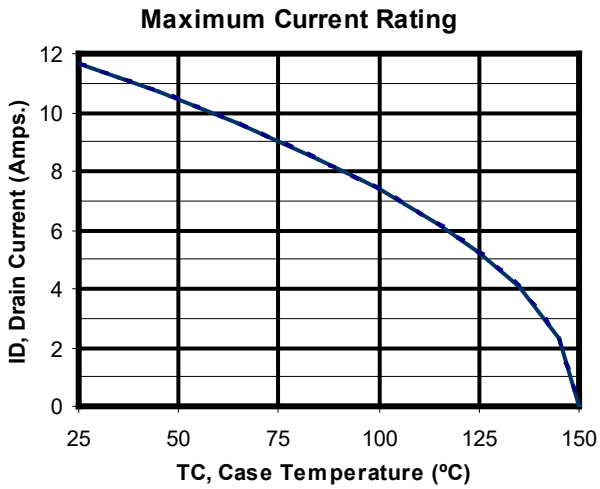


FIGURE 3. Maximum drain current versus case temperature graphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

2N7491T2

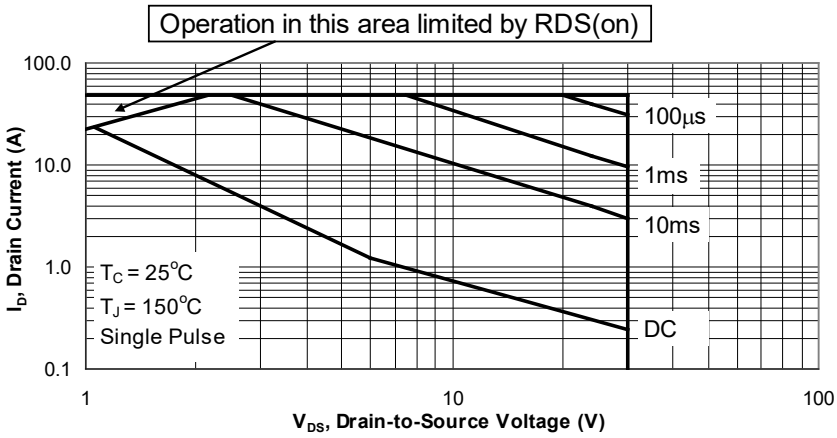

2N7492T2

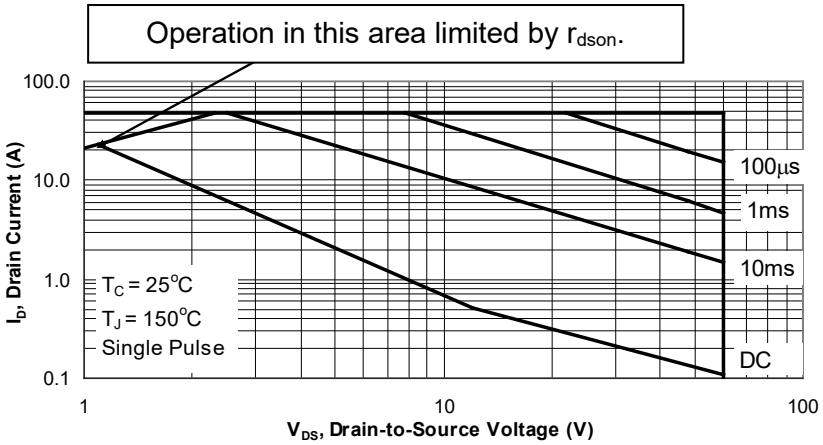


FIGURE 4. Safe operating area graphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

2N7493T2

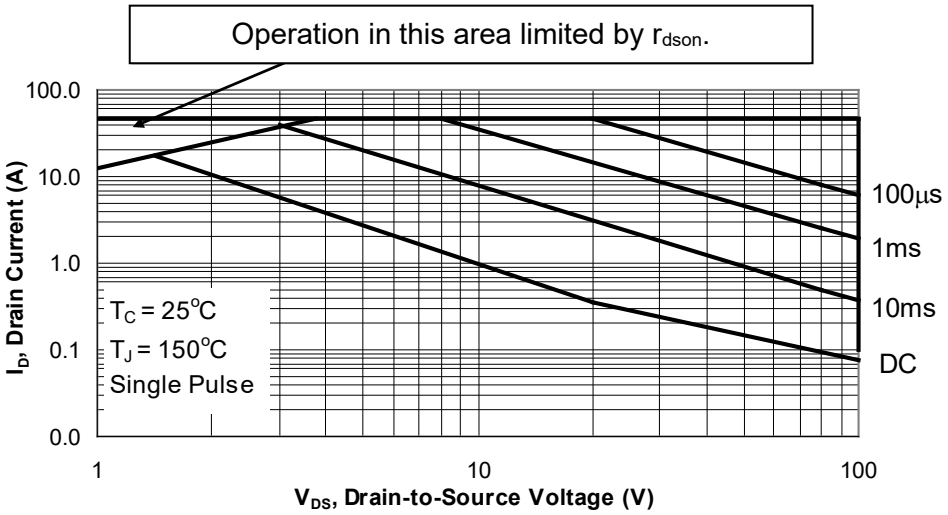


FIGURE 4. Safe operating area graphs - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.4.

e. For acquisition of RHA designated devices, table II, subgroup 1 testing of group D herein is optional. If subgroup 1 is desired, it should be specified in the contract or order.


f. If SEE testing data is desired, it should be specified in the contract or order.

g. If specific SEE characterization conditions are desired (see section 6.7 and table IV), manufacturer's cage code should be specified in the contract or order.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

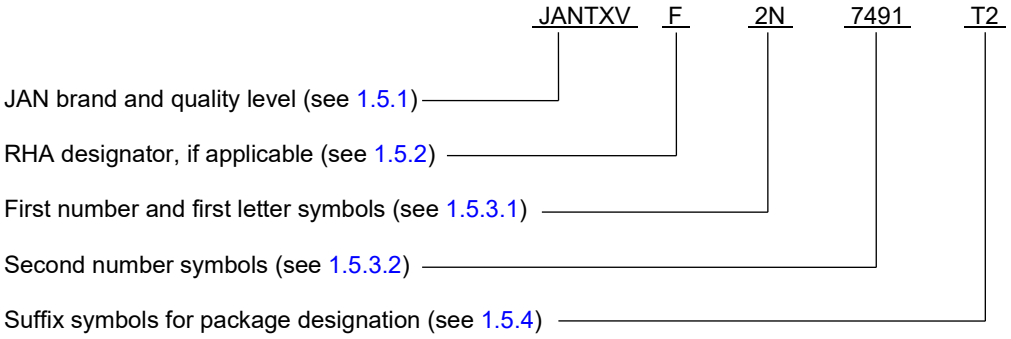

6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

PINs for devices of the "F" RHA level	PINs for devices of the "G" RHA level	PINs for devices of the "H" RHA level	PINs for devices of the "R" RHA level
JANTXVF2N7491T2	JANTXVG2N7491T2	JANTXVH2N7491T2	JANTXVR2N7491T2
JANTXVF2N7492T2	JANTXVG2N7492T2	JANTXVH2N7492T2	JANTXVR2N7492T2
JANTXVF2N7493T2	JANTXVG2N7493T2	JANTXVH2N7493T2	JANTXVR2N7493T2
JANSF2N7491T2	JANSG2N7491T2	JANSH2N7491T2	JANSR2N7491T2
JANSF2N7492T2	JANSG2N7492T2	JANSH2N7492T2	JANSR2N7492T2
JANSF2N7493T2	JANSG2N7493T2	JANSH2N7493T2	JANSR2N7493T2

6.6 Cross-reference list. The following table shows the generic P/N and its associated military P/N (without JAN and RHA prefix).

Generic P/N	Military P/N
IRHF57Z30	2N7491T2
IRHF57034	2N7492T2
IRHF57130	2N7493T2

6.7 Application data.

6.7.1 Manufacturer specific irradiation data. Each manufacturer qualified to this slash sheet has characterized its devices to the requirements of MIL-STD-750 method 1080 and as specified herein. Since each manufacturer's characterization conditions can be different and can vary by the version of method 1080 qualified to, the MIL-STD-750 method 1080 revision version date and conditions used by each manufacturer for characterization have been listed here (see table IV) for information only. SEE conditions and figures listed in section 6 are current as of the date of this specification sheet, please contact the manufacturer for the most recent conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturers characterization conditions.

Manufactures cage	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
69210 (Applicable to devices with a date code of September 2009 and older)	SEE 1/	1080	See MIL-STD-750E method 1080.0 dated 20 November 2006. See figure 5.	
	Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	3 devices
	SEE irradiation:		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 2E3 to 2E4 ions/cm^2/sec, temperature = +25 ±5 °C	
	2N7491T2		Surface LET = 38 MeV-cm^2/mg ±5%, range = 38 µm ±7.5%, energy = 300 MeV ±7.5% In-situ bias conditions: V_{DS} = 30 V and V_{GS} = −10 V V_{DS} = 22.5 V and V_{GS} = −15 V V_{DS} = 15 V and V_{GS} = −20 V (nominal 3.86 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7492T2		In situ bias conditions: V_{DS} = 60 V and V_{GS} = −15 V V_{DS} = 30 V and V_{GS} = −20 V (nominal 3.86 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7493T2		In-situ bias conditions: V_{DS} =100 V and V_{GS} = −20 V (nominal 3.86 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7491T2		Surface LET = 61 MeV-cm^2/mg ± 5%, range = 31 µm ±10%, energy = 330 MeV ±7.5% In-situ bias conditions: V_{DS} = 25 V and V_{GS} = −5 V V_{DS} = 20 V and V_{GS} = −10 V V_{DS} = 15 V and V_{GS} = −15 V V_{DS} = 7.5 V and V_{GS} = −20 V (nominal 2.92 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7492T2		In-situ bias conditions: V_{DS} = 46 V and V_{GS} = −5 V V_{DS} = 35 V and V_{GS} = −10 V V_{DS} = 25 V and V_{GS} = −15 V V_{DS} = 15 V and V_{GS} = −20 V (nominal 2.92 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7493T2		In-situ bias conditions: V_{DS} = 100 V and V_{GS} = −10 V V_{DS} = 35 V and V_{GS} = −15 V V_{DS} = 25 V and V_{GS} = −20 V (nominal 2.92 MeV/nucleon at Brookhaven National Lab Accelerator)	

See footnotes at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturers characterization conditions - Continued.


Manufactures cage	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
*	2N7491T2		Surface LET = 84 MeV-cm^2/mg ±5%, range = 28 µm ±7.5%, energy = 350 MeV ±10% In-situ bias conditions: V_{DS} = 25 V and V_{GS} = -5 V V_{DS} = 20 V and V_{GS} = -10 V (nominal 1.98 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7492T2		In-situ bias conditions: V_{DS} = 30 V and V_{GS} = -5 V V_{DS} = 25 V and V_{GS} = -10 V V_{DS} = 20 V and V_{GS} = -15 V V_{DS} = 15 V and V_{GS} = -20 V (nominal 1.98 MeV/nucleon at Brookhaven National Lab Accelerator)	
	2N7493T2		In-situ bias conditions: V_{DS} = 100 V and V_{GS} = -5 V V_{DS} = 80 V and V_{GS} = -10 V V_{DS} = 25 V and V_{GS} = -15 V (nominal 1.98 MeV/nucleon at Brookhaven National Lab Accelerator)	
	Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
Upon qualification, all manufacturers should provide the verification test conditions to be added to this table.				

1/ I_{GSSF1}, I_{GSSR1}, and I_{DSS1} was examined before and following SEE irradiation to determine acceptability for each bias condition. Other test conditions in accordance with table I, subgroup 2, may be performed at the manufacturer's option.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

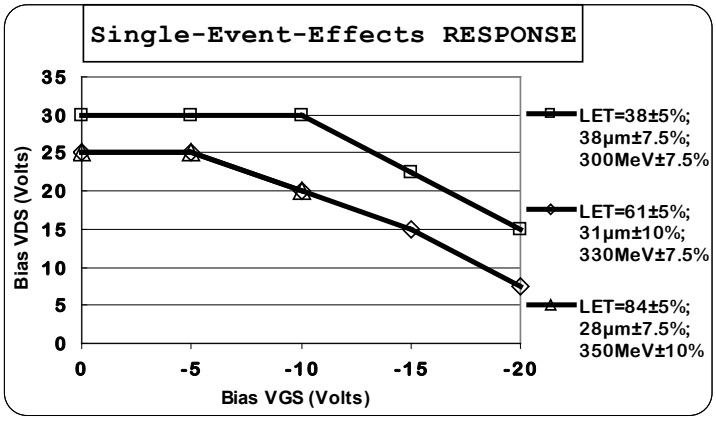

2N7491T2

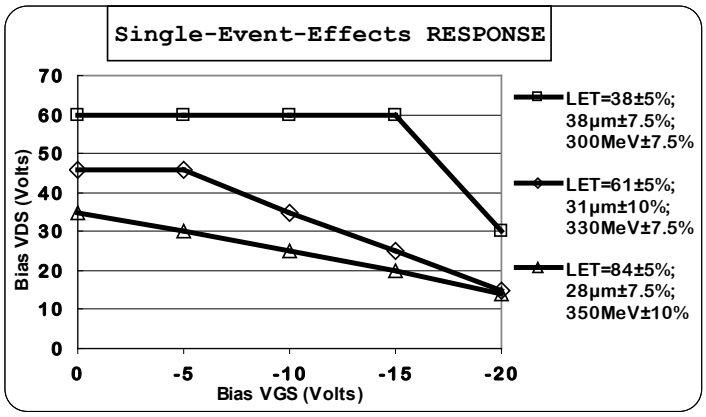

2N7492T2

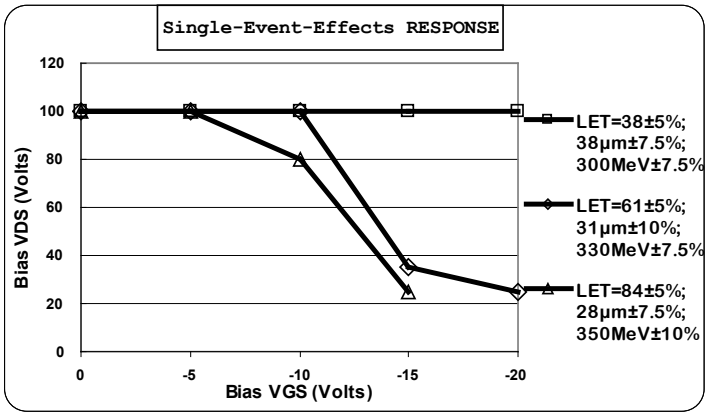

2N7493T2

FIGURE 5. Cage 69210 typical SEE response graphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.

* 6.8 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil.

* 6.9 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
* Navy - SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − MI
Air Force − 19, 71

Preparing activity:
DLA − CC

(Project 5961-2025-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:57Z
Check the source to verify that this is the current version before use.