9 September 1969
SUPERSEDING
MIL-C-2221A
31 December 1963

MILITARY SPECIFICATION

COVERS, COTTON DUCK, MOBILE BAKERY PLANT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for canvas covers for various components of the Mobile Bakery Plant.

1.2 Classification.- Mobile bakery covers shall be of the following types, each in one size, as specified (see 6.1):

Type I	-	Cover, Cotton Duck, Mixer, Mobile Bakery, M-534
Type II	-	Cover, Cotton Duck, Moulder and Divider, Mobile Bakery, M-534
Type III	-	Cover, Cotton Duck, Oven Trailer, Mobile Bakery, M-533
Type IV	-	Cover, Cotton Duck, Divider Hopper, Mobile Bakery, M-534
Type V	-	Cover, Cotton Duck, Lighting Blackout, Mobile Bakery, M-533 and M-534

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-C-571	-	Cords, Cotton; General and Special Purpose, Sash and Venetian Blind
V-F-106	-	Fasteners, Slide, Interlocking
V-T-285	-	Thread, Polyester
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	-	Label; for Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-496	-	Clips, End, Strap
MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-F-21840	-	Fastener, Tape, Hook and Pile Nylon
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized and Containerized Unit Loads; 40" x 48" Pallets, Skids, Runners or Pallet-Type Base

DRAWINGS

ARMY NATICK LABORATORIES

5-10-17	-	Cover, Cotton Duck, Mixer, Mobile Bakery, M-534; Illustrative Assembly
5-10-18	-	Details "A"
5-10-19	-	Details "B"
5-10-20	-	Details "C"
5-10-21	-	Details "D"
5-10-22	-	Cover, Cotton Duck, Moulder and Divider, Mobile Bakery, M-534; Illustrative Assembly
5-10-23	-	Details "A"
5-10-24	-	Details "B"
5-10-25	-	Cover, Cotton Duck, Oven Trailer, Mobile Bakery, M-533; Illustrative Assembly
5-10-26	-	Details
5-10-27	-	Cover, Cotton Duck, Mixer, Mobile Bakery, M-534; Hopper Cover
5-10-28	-	Cover, Cotton Duck, Blackout Lighting, Mobile Bakery, M-533 and M-534

(Figures 1 through 5 are miniature reproductions of Drawings 5-10-17, 5-10-22, 5-10-25, 5-10-27 and 5-10-28, and are attached for information only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

Department of the Army Technical Manual TM 10-269 - General Repair for Canvas and Webbing

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.,

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials and components.-

3.2.1 Cloth, duck, cotton No. 8.- The cloth, before finishing, shall be No. 8 hard texture conforming to type I of CCC-C-419.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

3.2.1.1 Color and treatment.- The cloth shall be dyed and finished to conform to type I, class B, shade olive drab No. 7 of CCC-D-950.

3.2.2 Cloth, duck, cotton 12.29 ounce.- Cloth for the dough mixing hopper cover shall be 12.29 ounces per square yard in the gray (unbleached), conforming to type III of CCC-C-419.

3.2.3 Cloth, duck, cotton, 9.85 ounce.- Cloth for the blackout covers, before finishing, shall be 9.85 ounces per square yard conforming to type III of CCC-C-419. The cloth shall be dyed and finished to conform to 3.2.1.1.

* 3.2.4 Tape, textile, cotton.- The tape shall conform to type I, class 4, 3/4-inch and 1-1/2 inch widths of MIL-T-43566 and shall match shade olive drab No. 7.

* 3.2.5 Webbing, textile, cotton.- The webbing shall conform to type II, class 4, 5-5/8 inch width and type IIb, class 4, 1-inch width of MIL-W-530 and shall match shade olive drab No. 7.

* 3.2.6 Thread, polyester.- The thread for all stitching, except stitching on type IV covers, shall conform to type I, class 1, subclass B of V-T-285. Thread for stitching on type IV covers shall conform to type I or II, class 1 of V-T-285. Thread sizes shall be as follows:

For all stitching except stitching indicated by "Z"	Size FF for needle and bobbin
For stitching indicated by "Z" on drawings	Size FF for needle, size F for looper

3.2.6.1 Color and treatment.- Thread for stitching on type IV covers shall be undyed. The thread for all stitching on the other covers shall be dyed to match shade S-1 (cable no. 66022) and shall show fastness to weathering equal to or better than the standard shade sample (see 6.3). If no standard shade sample is available, the thread shall show good fastness to weathering.

* 3.2.7 Buckle, single bar, with lip.- The buckles shall conform to type IV, class 1, size 1-inch of MIL-B-543.

3.2.8 Clips, end.- The end clips shall conform to type I, class 1, size 1-inch of MIL-C-496.

* 3.2.9 Fasteners, slide, interlocking.- The slide fasteners shall conform to type I, style 2, size H, single wire-stirrup pull of V-F-106. Slide-fastener chains shall be fabricated of brass, aluminum, or zinc. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

length of the slide-fastener chains shall be such that after the slide fastener is sewed on, the tape shall not be puckered and the slider shall operate freely. Slide fastener tape shall be dyed to match shade olive drab S (Cable No. 66519), and shall be water repellent and mildew-resistant treated. The color of the tape after treatment will be considered acceptable. The tape shall show fastness to weathering equal to or better than the standard sample. If no standard sample is available the tape shall show good fastness to weathering.

* 3.2.10 Cord, cotton.- Braided cord shall conform to type I, size 4, class 2 and 3 of T-C-571. Class 3 cord shall be dyed to match shade olive drab No. 7.

* 3.2.11 Fastener, tape.- The hook and pile nylon tape fastener shall conform to type II, 5/8-inch width of MIL-F-21840 and shall be dyed to match shade olive green No. 106.

* 3.3 Construction.- The construction shall conform to the drawings listed in section 2 and as specified herein.

3.3.1 Stitching machine.-

3.3.1.1 Stitch types.- Stitching shall conform to FED-STD-751 as follows:

For all stitching except stitching indicated by "Z" on drawings	Type 301, 5 to 7 stitches per inch
For stitching indicated by "Z" on drawings	Type 401, 5 to 7 stitches per inch Chain portion of stitching shall not appear on outside of covers

* 3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1-inch at each break on stitch type 301, and not less than 1-1/2 inches on stitch type 401. Thread breaks in type 401 stitching may be overstitched with stitch type 301.

* 3.3.1.3 Stitching ends, type 301.- Stitching at the ends shall be overstitched not less than 1-inch except where ends are turned under in a hem or held down by other stitching. Where stitching is performed automatically on stitch patterns such as box, box with cross-stitch, "W" stitching or straight line tacking, at least three or more tying, overlapping or backstitches shall be used to secure the ends.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

* 3.3.1.4 Skipped stitches.- Two or more skipped stitches occurring consecutively in type 301 stitching shall be overstitched not less than 1-inch. Any skipped stitch in type 401 stitching shall be overstitched not less than 1-1/2 inches. Skipped stitches in type 401 stitching may be overstitched with stitch type 301.

* 3.3.1.5 The addition of any lubricant to the polyester thread prior to or during the sewing operation is prohibited.

3.3.2 Setting of end clips.- The webbing shall be inserted the full depth of the clips. Clips shall be securely attached without cutting the webbing which shall be flat at the point of entrance.

3.3.3 Repairs.- Repairs, whenever necessary and when authorized by the contracting officer, shall be effected in accordance with Department of the Army Technical Manual TM 10-269, except that handsewn or glued patches will not be permitted.

3.4 Marking.- All marking and labels shall conform to DDD-L-20.

* 3.4.1 Special marking.- The item nomenclature and "U.S." marking shall conform to type IV, class 9 in the size and locations indicated on the drawings and shall be clearly legible after subjection to accelerated weathering.

3.4.2 Identification marking.- The identification marking for types IV and V covers shall conform to type IV, class 5 in the location indicated on the drawings.

3.4.3 Identification labels.- Identification labels for types I, II and III covers shall be stitched to the covers in the locations shown on the drawings and shall conform to type II, class 6. The size of the labels shall be 3-1/2 inches by 5-1/2 inches with a blank space of at least 1-1/4 inches provided at the bottom of the labels for the Department of Defense inspector's stamp.

* 3.5 Workmanship.- Cloth components shall be free of holes, cuts, tears or cloth defects such as multiple floats or broken or missing yarns. Cord components shall be free of cuts or breaks. Thread tension shall be maintained so that there shall be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats, or open seams shall result. Care shall be taken to insure that no needle chews occur. All thread ends shall be trimmed to 1/2 inch or less. Metal components shall be free of burrs, sharp edges or corroded areas and shall not be broken or malformed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in tables I and II. Any visual defect or any dimension not within the specified requirements shall be cause for rejection of the preproduction sample.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Components and materials.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 Process examination.- Examination shall be made to determine that the following are as specified:

(a) There shall be no lubrication of polyester thread prior to or during sewing operations for compliance with 3.3.1.5.
(b) Webbing shall be inserted the full depth of end clips for compliance with 3.3.2.

Whenever nonconformance is noted, correction shall be made to the items affected and to the process.

* 4.3.3 End product inspection.- The lot shall consist of all completely fabricated covers of one type offered for inspection at one time. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

* 4.3.3.1 Visual examination.- Completely fabricated covers of one type shall be examined for defects in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

TABLE I.- Examination for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Cut, tear or hole:			
	- greater than 1/4-inch in length or diameter	X		
	- greater than 1/8-inch but not greater than 1/4-inch in length or diameter		X	
	- more than 5 holes 1/8-inch or less in length or diameter		X	
	Broken or missing yarn, multiple floats clearly visible at normal inspection distance (3 feet)		X	
Webbing and tape	Frayed or scalloped edge		X	
Hardware	Broken	X		
	Malformed:			
	- fails to perform intended function	X		
	- but will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
End clips	Improperly clinched; i.e., webbing not flat at point of entrance to clip		X	
	Clinched excessively tight, cutting webbing	X		
Buckles	Not assembled to buckle chapes as specified i.e., reversed, failing to effect a secure fastening of the straps	X		
Seams and stitching	Open seam on stitch type 301:			
	- for more than 1/4 inch but not more than 1 inch			X
	- for more than 1 inch		X	
	Open seam on stitch type 401:			
	- one row of stitching open for 1-inch or less			X
	- both rows of stitching open (not necessarily at same location)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

TABLE I.- Examination for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when one or more skipped or run-off stitches occur. On double stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			
	Raw edges caught in stitching:			
	- more than 1-inch but not more than 3 inches			X
	- more than 3-inches		X	
	NOTE: Raw edges not caught in stitching shall be classified as open seams.			
	Thread breaks:			
	- overstitched less than 1-inch on stitch type 301; less than 1-1/2 inches on stitch type 401			X
	NOTE: Thread breaks not overstitched shall be classified as open seams.			
	Skipped stitches:			
	- overstitched less than 1-1/2 inches on stitch type 401		X	
	- overstitched less than 1-inch on stitch type 301 (when two or more skipped stitches occur consecutively)	X		
	NOTE: Skipped stitches not overstitched shall be classified as open seams.			
	Needle chew, resulting in cut, tear or hole (see cut, tear or hole)			

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

TABLE I.- Examination for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
Box stitching	Incomplete:			
	- one row of stitching omitted			X
	- two or more rows of stitching omitted		X	
	Any boxstitching less than specified by more than 1/8-inch			X
Stitching ends	Overstitched less than 1 inch on stitch type 301 (except where ends are held down by other stitching, turned under in a hem, or where stitching is performed automatically)		X	
	Secured with less than 3 tying, overlapping or backstitches when automatic stitching is performed		X	
Seams	Seam pleated		X	
	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread for more than 6 inches			X
	Tight as evidenced by puckering on fabric for more than 6 inches		X	
Stitches per inch	Less than minimum:			
	- one stitch			X
	- two or more stitches		X	
	More than maximum specified:			
	- one stitch			X
	- two or more stitches		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

TABLE I.- Examination for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
Stitches per inch (cont'd)	NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places, or in turning corners, shall be classified as follows: a. within the minor "B" defect classification - no defect b. within the minor "A" defect classification - minor "B" defect			
Stitching gage	Not as specified		X	
Stitching margin	Larger than specified by more than 1/8-inch:			
	- for more than 2 inches but not more than 4 inches in length			X
	- for more than 4 inches in length		X	
Stitching indicated by "Z" on drawings	Chain portion of stitching shown on outside of cover		X	
	One or more required rows of stitching omitted	X		
Mends, darns or patches	Not authorized by the contracting officer or not in accordance with Department of the Army Technical Manual TM-10-269 (see 3.3.3)	X		
Hems	Twisted or pleated			X
	Constructed with a partial turnunder when double turnunder is required	X		
Components and assembly	Any component not fabricated of applicable referenced material	X		
	Any operation omitted or incorrectly performed	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

TABLE I.- Examination for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Marking; special and identification	Omitted, incorrect, illegible or misplaced			X
Construction detail defects				
Buckle chapes	Misplaced	X		
Billet straps	Misplaced	X		
Slide fasteners	Slider jams or fails to interlock chain; slide fastener tapes improperly attached, causing failure of chain to effect a smooth and secure closure	X		
Cleanness	Grease or oil stains; thread ends not trimmed to 1/2 inch or less			X

4.3.3.2 Dimensional examination.- Completely fabricated covers, of one type, shall be examined for defects in table II.

TABLE II.- Examination for dimensional characteristics.

Examine	Defect	Classification Major	Minor A	Minor B
Overall dimensions	Smaller than specified dimensions less applicable minus tolerance indicated on drawings	X		
	Larger than specified dimensions and applicable plus tolerance indicated on drawings			X
Component and location dimensions	Not within specified tolerance			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection levels	AQL's
For defects applicable to table I	II	6.5 Major 15.0 Major and minor A 40.0 Total; major, minor A and B defects combined
For defects applicable to table II	S-3	6.5 Major 15.0 Major and minor A 40.0 Total; major, minor A and B defects combined

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Bulging or distortion of containers
Content	Number of units per container is more or less than specified

* 4.3.5 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and reinforcing shall be in accordance with the appendix of that specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

* 4.3.6 Examination for palletization.- When palletization is required, an examination shall be made to determine compliance with the palletization requirements of section 5 of this specification. Defects shall be scored in accordance with table IV. The sample unit shall be one palletized unit load fully prepared for delivery. The lot shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE IV.- Examination of palletization

Examination	Defect
Finished dimensions	Length, width, or height exceeding specified maximum requirements
Palletization	Not as specified Container pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, or improper size, location, sequence or method of application

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each cover (slide fastener of type I cover open) shall be completely folded in such a manner that identification marking is readily visible. The billets (where applicable) shall be tucked within the folds. Each type I, II, or III cover shall be securely tied at each end with cotton tape or twine. Ten type IV or V covers shall be neatly stacked in a bundle and securely crosstied with cotton tape or twine.

5.1.2 Level C.- Covers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Covers packaged as specified in 5.1, shall be packed in quantities as shown in table V within a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B.- Covers, packaged as specified in 5.1, shall be packed in quantities as shown in table V within a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to type CF, class domestic variety DW, grade 275 of PPP-F-320.

TABLE V.- Packing quantities of covers

Type	Quantity per container (each)
I	3
II	5
III	5
IV	20
V	20

* 5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), covers packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, any pallet pattern may be used provided approval is obtained from the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers and palletized units shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The covers governed by this specification, with the exception of the type V cover, are used to protect various components of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

Mobile Baker Plant from dust, dirt, and the elements. The type V cover is used, for blackout purposes, with a string of five portable working lights and three overhead lights provided with the "Bakery Oven, Trailer Mounted, M-533" and the "Dough Mixing and Make-Up outfit, Trailer Mounted, M-534" respectively.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Stock number
(c) First article.- When preproduction sample is not required (see 3.1)
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
(e) When weather resistant boxes are required for level B shipments (see 5.2.2.1)
(f) When palletization is not required (see 5.3)

* 6.3 For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
Navy - YD

User activity:


Navy - MC

Preparing activity:


Army - GL

Project No. 7310-0296


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

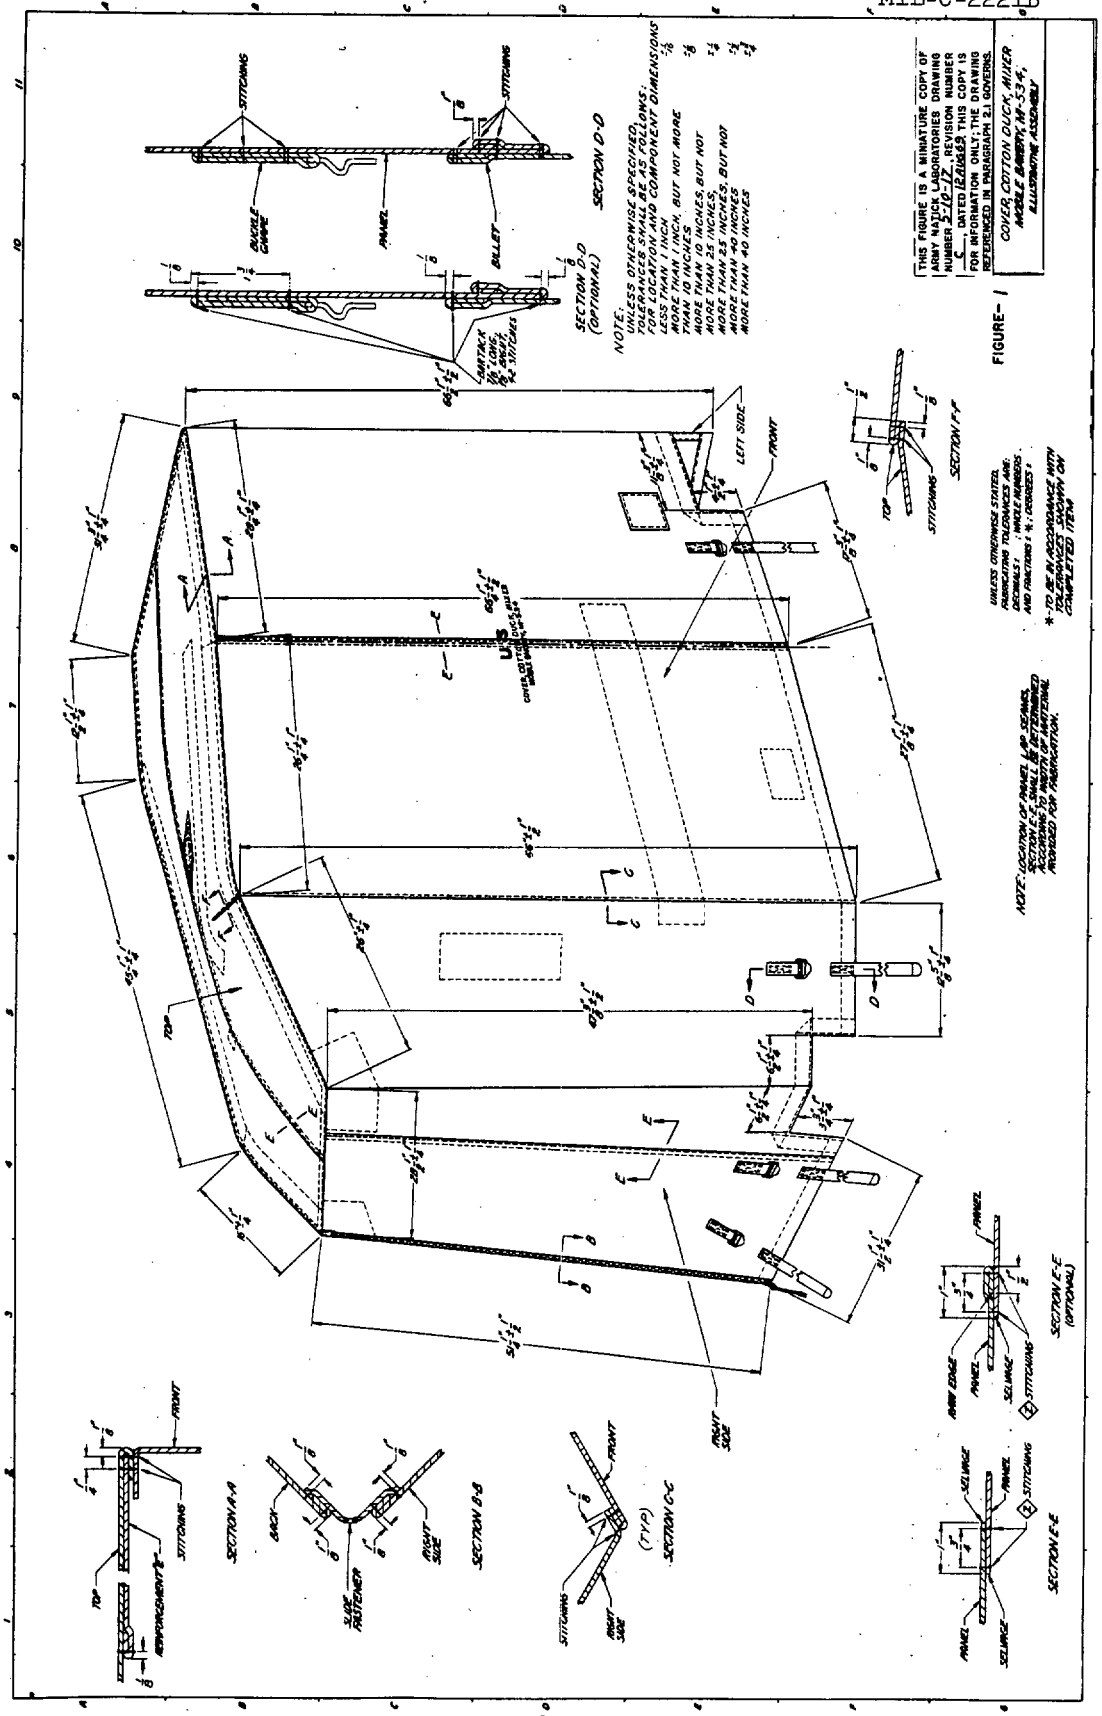

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

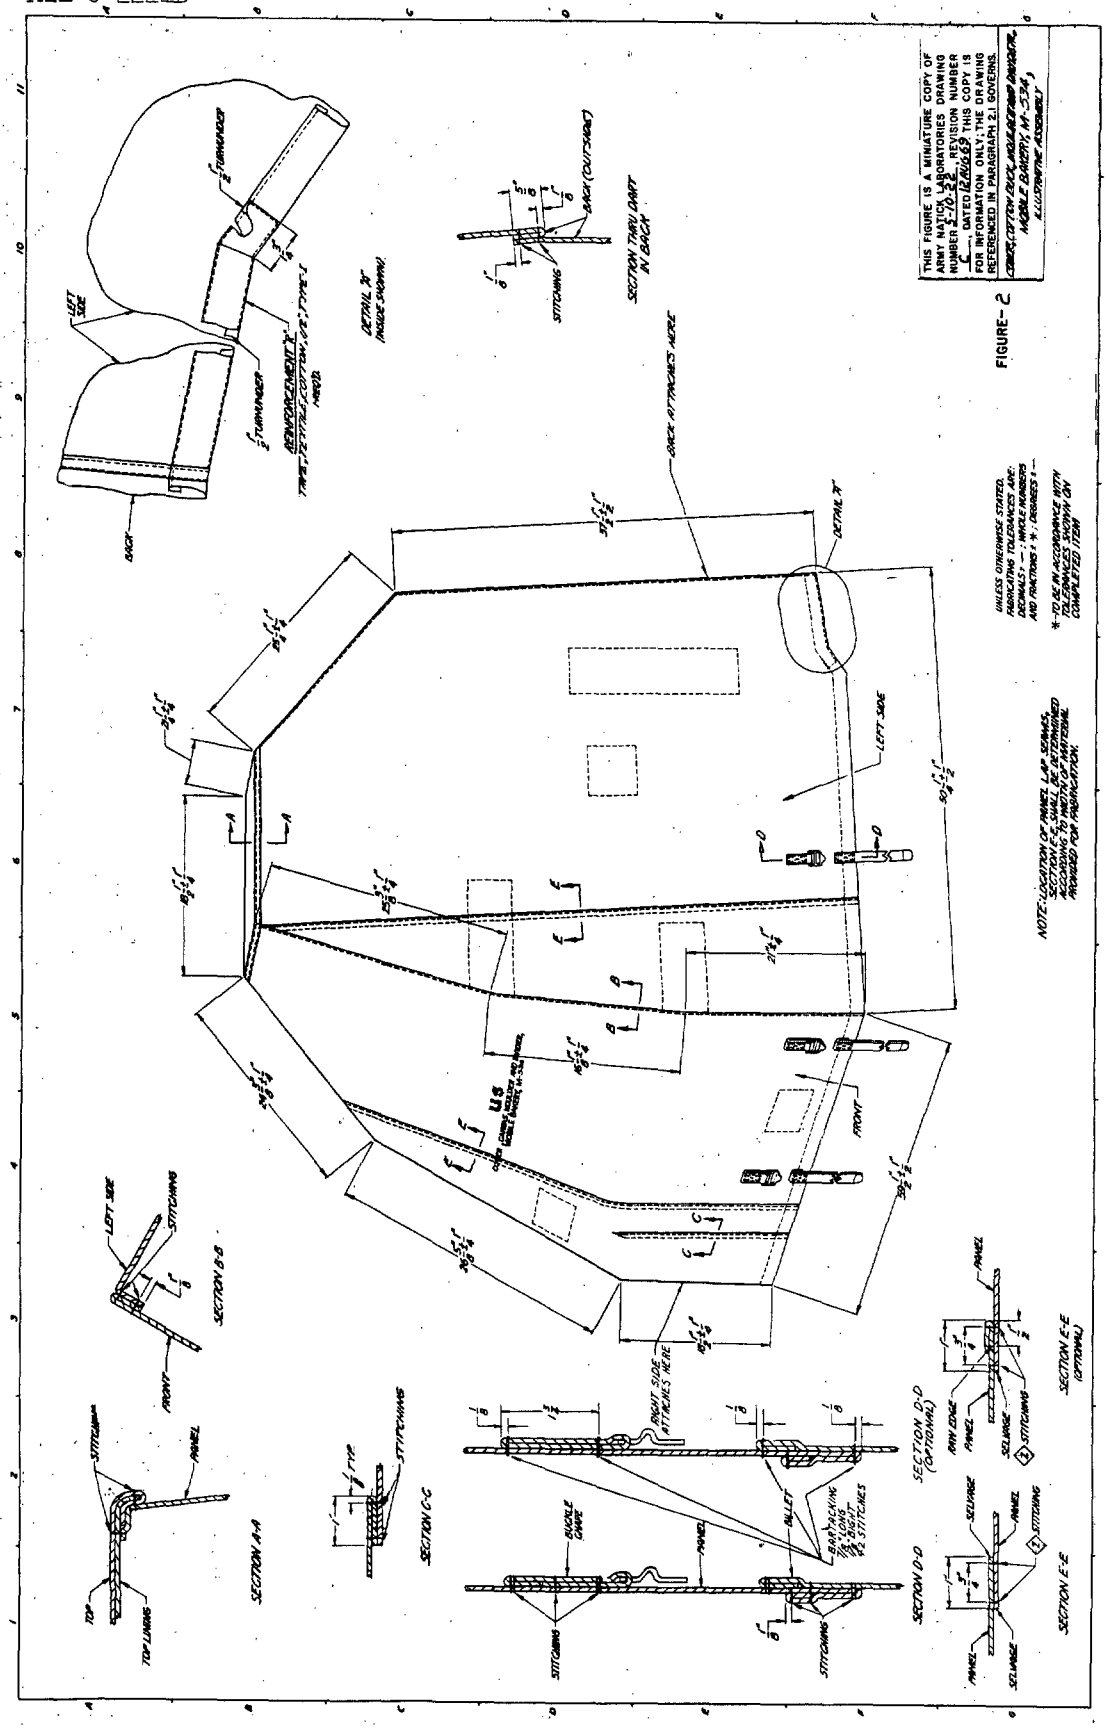

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

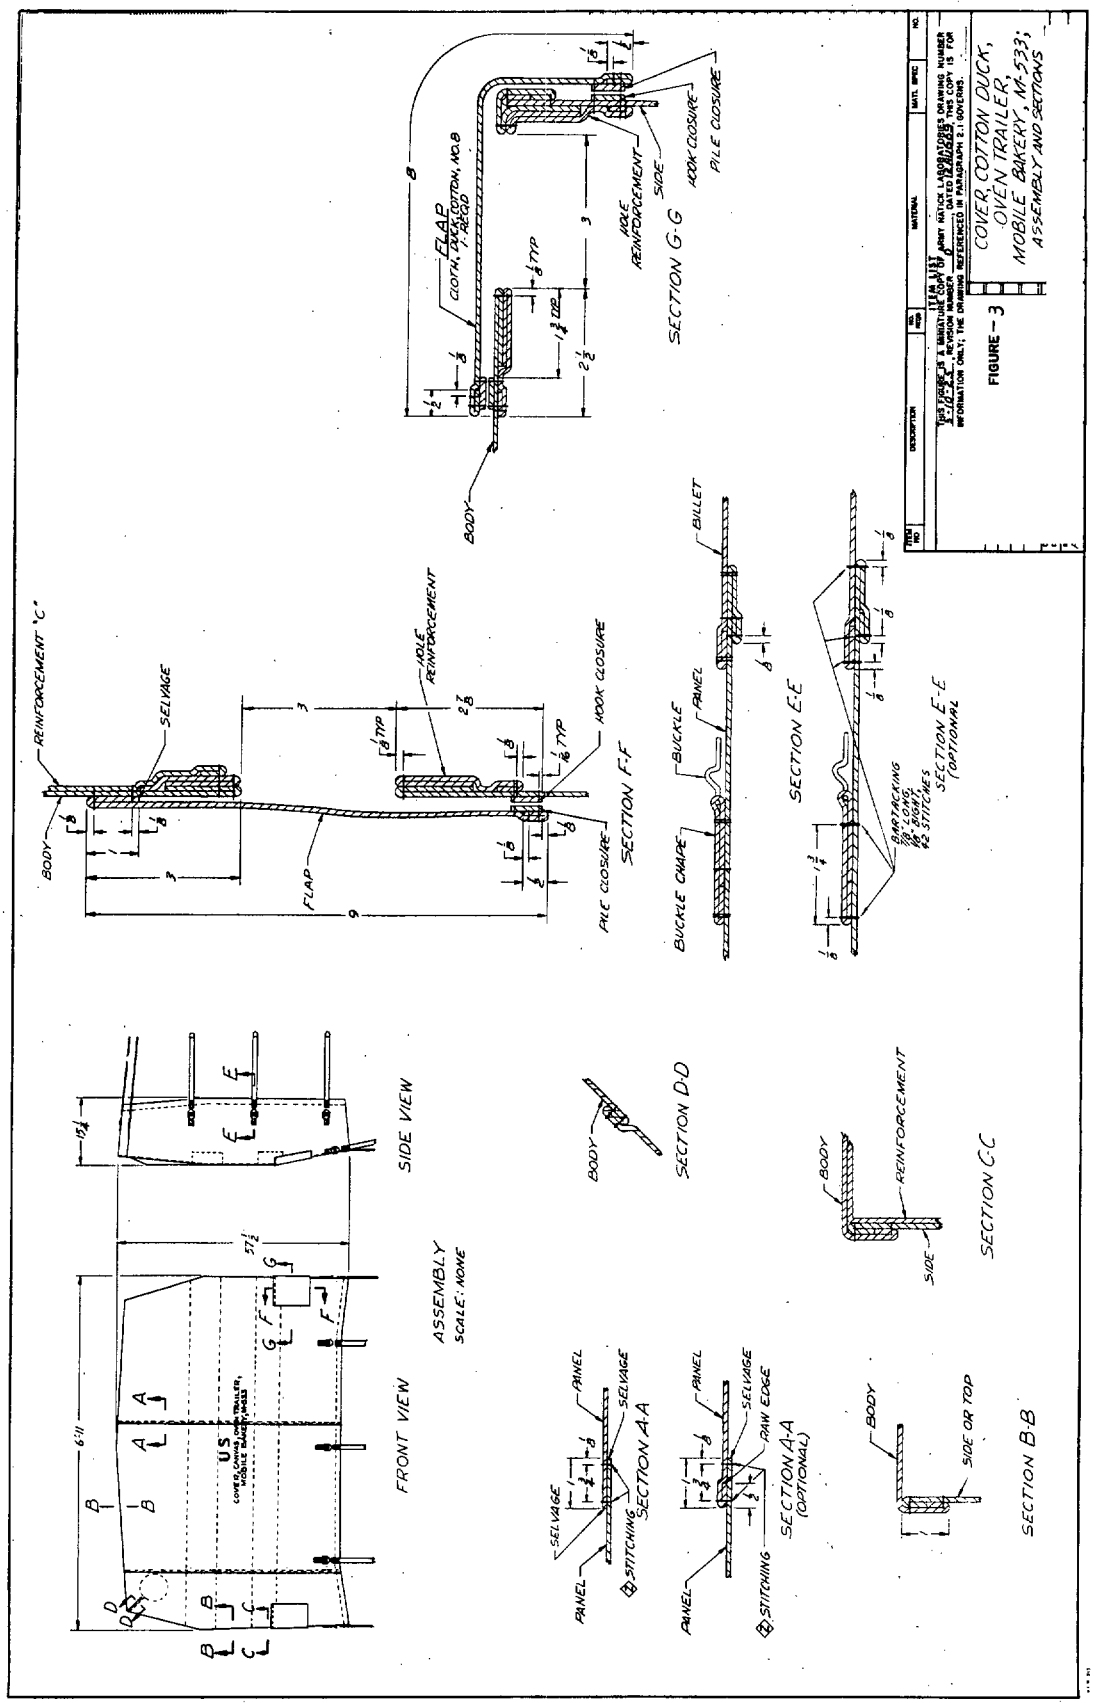

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.


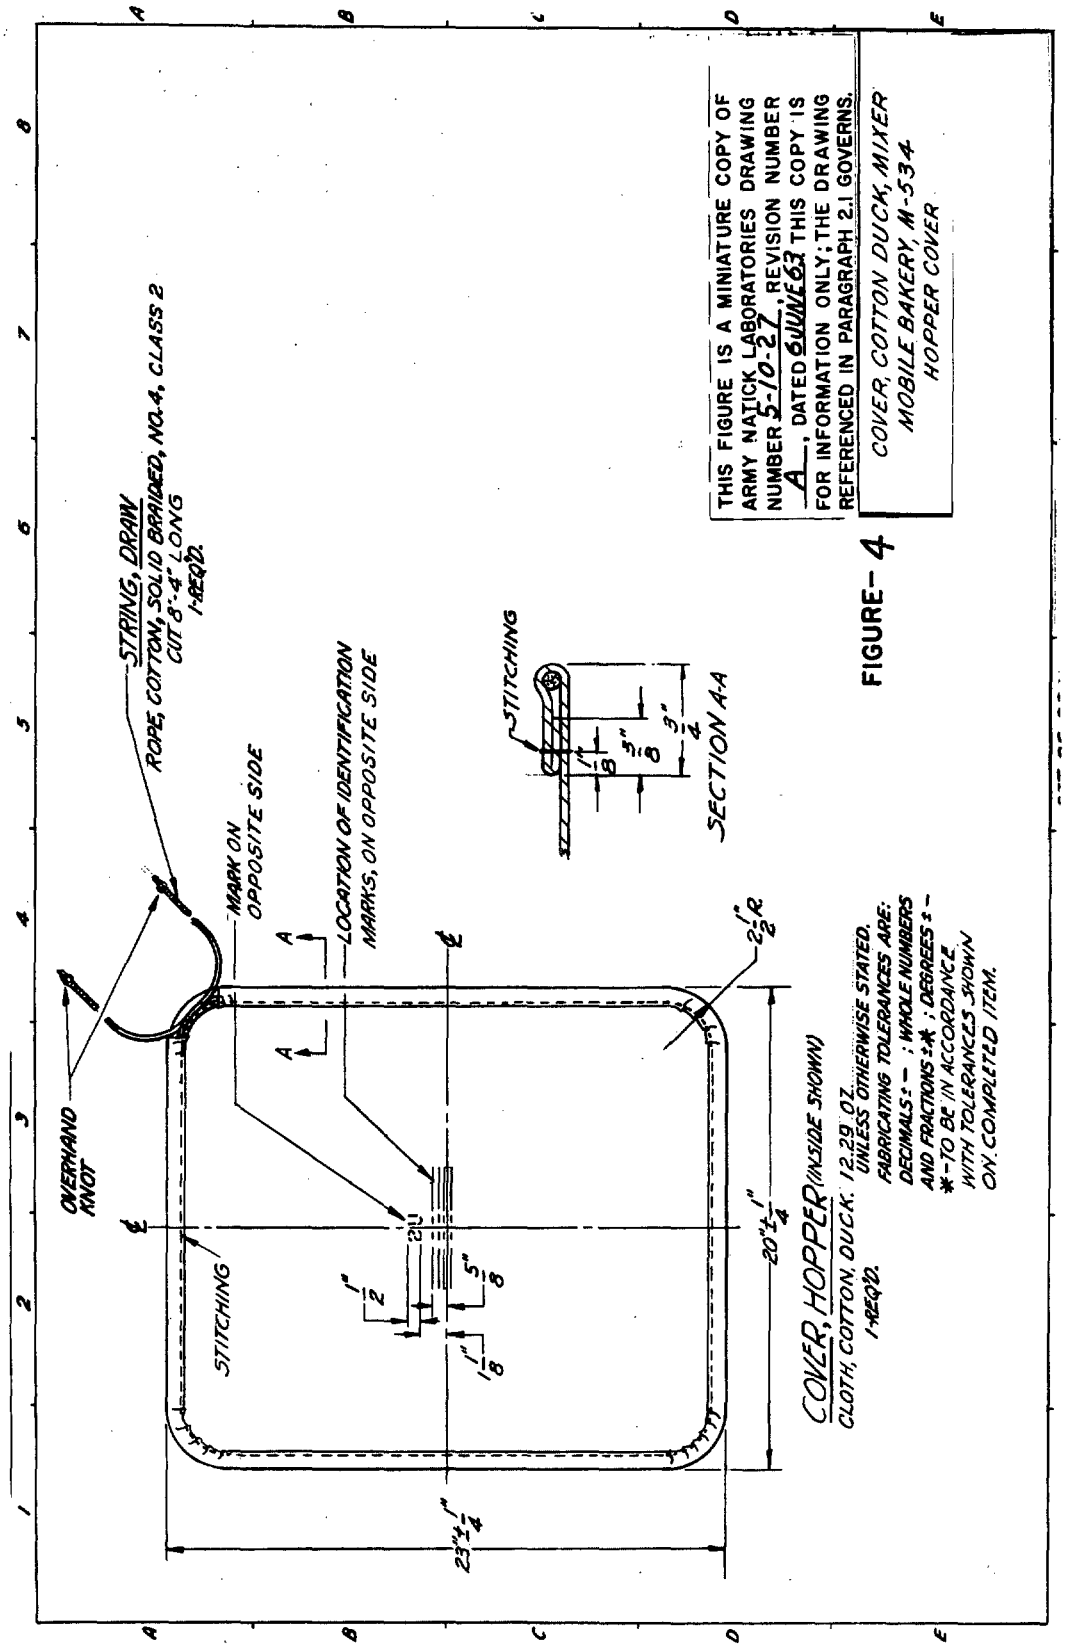


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

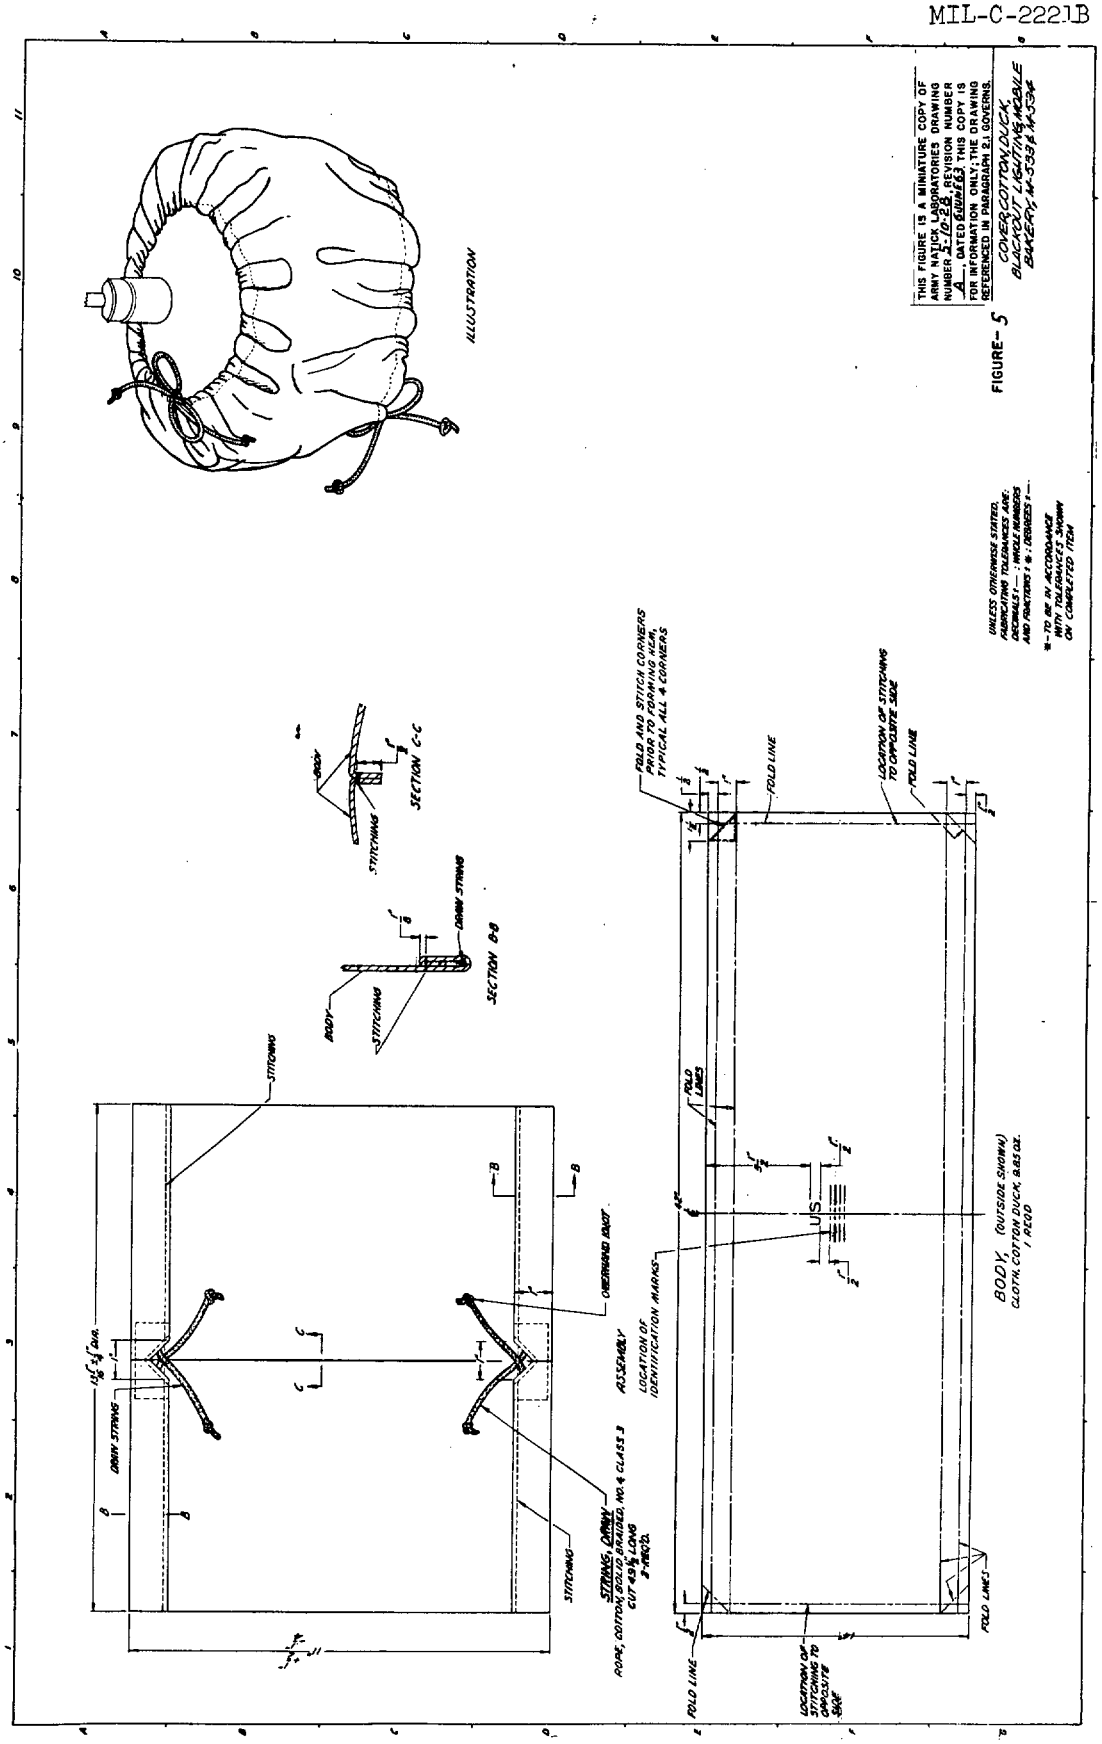

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Covers, Cotton Duck, Mobile Bakery Plant MIL-C-2221B

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:36Z
Check the source to verify that this is the current version before use.

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.