21 June 1973
SUPERSEDING
MIL-T-2211D
21 March 1967

MILITARY SPECIFICATION

TABLE, LAUNDRY, FOLDING, 3 BY 8 FEET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of folding laundry table (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
QQ-A-250/2	- Aluminum Alloy 3003, Plate and Sheet.
QQ-S-630	- Steel, Bar, Carbon, Hot Rolled Merchant Quality .
QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
TT-C-490	- Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-485	- Enamel, Semi-Gloss, Rust-Inhibiting.
TT-V-121	- Varnish, Spar, Water-Resisting.
MMM-A-188	- Adhesive; Urea-Resin-Type (Liquid and Powder).
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-B-43165	- Bags, Polyethylene.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes l
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

DRAWINGS

ARMY NATICK LABORATORIES

5-13-2498 - Table, Laundry, Folding; Assembly
5-132499 - Table, Laundry, Folding; Details

(Miniature copy of Drawings 5-13-2498 and 2499, Identified as figures 1, and 2, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with epecific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

United Statea Department of Commerce Publications

Commercial standard - CS-35-61 Hardwood Plywood
Product Standard PS 1-66 - Softwood Plywood, Construction and Industrial

(Application for copies of Department of Commerce publications should be addressed to the Superintendent of Documents, U. S. Government Printing Office , Washington, D. C. 20402.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classificaion Committe, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article, When specified (ace 6.2), the supplier shall furnish a sample for first article Inspection and approval (see 4.2 and 6.3).

3.2 Materials. Materials not definitely specified shall be of the quality normally used for the purpose in commercial practical.

* 3.2.1 Plywood. Plywood used for the tabletop and battens shall be l ither softwood or hardwood as follows:

* 3.2.1.1 Sofwood plywood. The softwood plywood shall be exterior type, grade A-B, sanded two sides, conforming to group 1 of Product Standard PS 1-66.

3.2.1.2 Hardwood plywood. Hardwood plywood shall be waterproof bond, high or medium density, grade 2 face and back, sanded two sides, conforming to type I of Conmercial Standard CS-35-61.

3.2.2 Aluminum and steel angles and shapes.

3.2.2.1 Aluminum angles. Aluminum angles shall be fabricated of an alloy conforming to the requirements of QQ-A-250/2, temper H-14.

* 3.2.2.2 Steel, bar size shapes. Bar size shapes shall conform to QQ-S-630 or if formed from steel sheet or strip shall conform to QQ-S-698.

3.2.3 Hardware. Nuts and bolts, wing nuts, wood screws, washers, rivets, and cotter pins shall be standard commercial products, fabricated from steel and except for wood screws shall be cadmium plated.

* 3.2.4 Enamel. Enamel shall be semigloss conforming to the require-ments of TT-E-485. The color shall be olive drab 24087 conforming to FED-STD-595.

3.2.5 Varnish, spar. Spar varnish shall conform to the requirements of TT-V-121.

3.2.6 Adhesive. Adhesive shall be urea-resin-type conforming to either of types III of MM-A-188.

3.3 Construction. The construction of all components and assemblies of the item covered by this specification shall conform to the require-ments herein and the design, details, dimenions, material classification and sizes specified on Drawing 5-13-2498.

3.3.1 Top. The top shall be plywood specified In 3.2.1 and sanded smooth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

3.3.1.1 Reinforcing and edging. The top shall be reinforced with steel angles specified in 3.2.2.2 and securely held to plywood top with wood screws. All edges of top shall be protected with aluminum angles specified in 3.2.2.1, and securely held to plywood top with wood screws.

3.3.2 Battens. The battens shall be plywood specified in 3.2.1 and with all sides and edges sanded smooth. Battens shall be fastened to plywood top with adhesive specified in 3.2.6 and securely held in place with wood screws.

3.3.3 Hinges. Angles and channels forming hinges shall be firmly bolted through the battens and the top with 3/8-inch carriage bolts, countersunk Into the top and the nuts tightly drawn against lockwashers.

* 3*3.4 Legs end braces. The legs, stretchers and braces shall be formed from the steel sheet or strip specified in 3.2.2.2.

3.3.5 Finish.

3.3.5.1 Plywood. All exposed surfaces of plywood parts shall be cleaned of all dust and dirt. Exposed plywood shall be coated with spar varnish as specified in 3.2.5, before assembly and with a sufficient number of coats to produce a uniformly glossy appearance.

3.3.5.2 Metal. All metal surfaces, except aluminum angles and the heads of carriage bolts , shall be prepared for painting according to type I or II of TT-C-490, and shall be coated with enamel specified in 3.2.4.

3.4 Marking for identification. Marking for identification of the tables shall be on the underside of the top and shall be in accordance with the requirements of MIL-STD-130.

3.5 Workmanship. Tables shall be free from defects such as fractures, splits, punctures, or dents. There shall be no sharp edges, slivers, burrs, or projections.

3.5.1 Application of finish, The finish applied to the end item shall be continuous, smooth, adherent without discoloration or foreign material imbedded end contains no sags, rum, drips, creeps, laps, bubbles, streaks, wrinkles, blitsters, cracks, scratches, pores, pits, lumps, flux, or orange peel. No rust, rough grinds or toolmarks shall show through the coating.

3.5.2 Welding. All surfaces of parts to be welded shall be clean. Welding shall be l ccomplished in a manner which will prevent the occurrence of burn holes, cracks, fractures or incomplete fusion. All scale and flux deposits shall be removed from finished welds.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:33Z
Check the source to verify that this is the current version before use.

3.5.3 Bolts, nuts, screws, studs, and other threaded fasteners. Threaded fasteners shall not be broken, stripped, fractured, or loose.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified In the contract or purchase order, the supplier is responsible for the performance of all Inspection requirements as specified herein. Except as otherwise specified In the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article Inspection. When a first article is required, it shall be examined for defects listed in table II and specified dimensions. The presence of any visual defect , any dimension not within specified requirements, shall be cause for rejection of the first article.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Inspection of materials and components. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification, or applicable purchase document.

4.3.2 In-process inspection. Examination shall be made during the manufacturing for the requirements specified in table I to establish that no deviation is made from the indicated requirements. When nonconformance is noted, correction shall be made to affected items in process.

TABLE I. In-process inspection

Requirements	Requirement paragraph
Application of varnish prior to assembly.	**3.3.5.1**
Cleaning and application of enamel on metal surfaces.	**3.3.5.2**

4.3.3 End item inspection. A lot shall consist of all tables offered for inspection at one time. The sample unit shall be one completely fabricated folding laundry table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

4.3.3.1 Visual examination. The completely assembled end item shall be examined for defects as specified In table II. The Inspection level shall be level II and the acceptable quality levels (AQL's) shall be 4.0 for major defects and 10 total defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Plywood not varnished	X	
	Steel components not enameled	X	
	Enamel not matched to color 24087, FED-STD-595		X
	Not continuous or adherent		X
	Discoloration, or imbedded foreign matter		X
	Sags, runs, drips, creeps, laps bubbles, streaks, wrinkles, blisters, lumps, or orange peel		X
	Rust, grind or tool marks that show through finish	X	
Construction and workmanship (applicable to all components and assemblies)	Fractures, splits, punctures, or dents	X	
	Sharp edges, sliver, burr or projections	X	
	Fastening assembly bolt not peened or secured with hex nut and washer	X	
	Battens not recessed	X	
Table top	Battens not glued and screwed to table top	X	
	Carriage bolt heads not counter-sunk	X	
	Top of edging and table not flush	X	
	Fastening assembly missing	X	
Legs	Stretcher missing	X	
	Do not fold properly	X	
	Brace not cut to fit stretcher	X	
	Omitted	X	
Welding	Burn holes, cracks, fractures, or incomplete fusion	X	
	Scale or flux deposits not removed		X

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:33Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Threaded fasteners	Broken, stripped, missing, fractured or loose	X	
Identification marking	Missing, illegible, or incomplete, not on underside of table	X	

4.3.3.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 total defects, expressed in terms of defects per hundred units.

4.3.4 Examination of preparation for delivery. An examination shall be made to detemine that packaging, packing and marking required by section 5 of this specification are complied with. Defects will be recorded as listed in table III. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be sealed. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE III. Examination of preparation for delivery

Examine	Defect
Marking	Incorrect; illegible; omitted; of improper size, location, sequence, or method of application.
Materials	Component missing, or damaged.
Workmanship	Legs of table not bolded and secured, inadequate application of components such as closure of polyethylene bag and closure of container flaps, loose metal straps, improper location of straps, pads not properly cut, bulging or distortion of containers as specified in section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. The legs of each table shall be folded and secured to the underside the fastening assembly. Each table shall then be packaged in a close-fitting polyethylene bagg conforming to style I or II of MIL-B-43165. The film shall be minimum .003-inch thick conforming to type II, grade A, B or C finish 1 of L-P-378. Closure shall be accomplished by heat sealing. Prior to or during the closure operation, excess air within the bag shall be expelled,

5.1.2 Level C. Each table shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Each table, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, V2s of PPP-B-636, except that weight and dimensional limitations shall be waived. A fiberboard pad made of the same material as the shipping container shall be placed on the top and bottom of the table within each shipping container. Each pad shall be one-eighth of an inch less than the inside length and width of the shipping container. Each shipping container shell be closed, waterproofed and reinforced with tape binding or flat strapping in accordance with the appendix of the box specification.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), each table, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, type CF or SF, class domestic, variety optional, grade 350 of PPP-B-636, except that the weight and dimensional limitations shall be waived. A fiberboard pad made of the same material as the shipping container having a minimum bursting strength of 275 pounds per square inch, shall be placed at the top and bottom of the table within each shipping container. Each pad shall be one-eighth of an Inch less than the inside length and width of the shipping container. Each shipping container shall be closed in accordance with the reinforcing requirements as specified in 5.2.1.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Tables, packaged as specified in 5.1, shall be packed in a manner to Insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The folding table covered by this specification is intended for use es a component of a field laundry.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, end date of this specification.
(b) When a first article is required (see 3.1, 4.2, and 6.3).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Whether resistent grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 First article. When a first article Is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first l rticle should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 The margins of this specification are marked with an asterisk to Indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This wee done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

User activities:


Army - ME
Navy - MC, YD

Preparing activity:


Army - GL

Project No. 3510-0175

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.

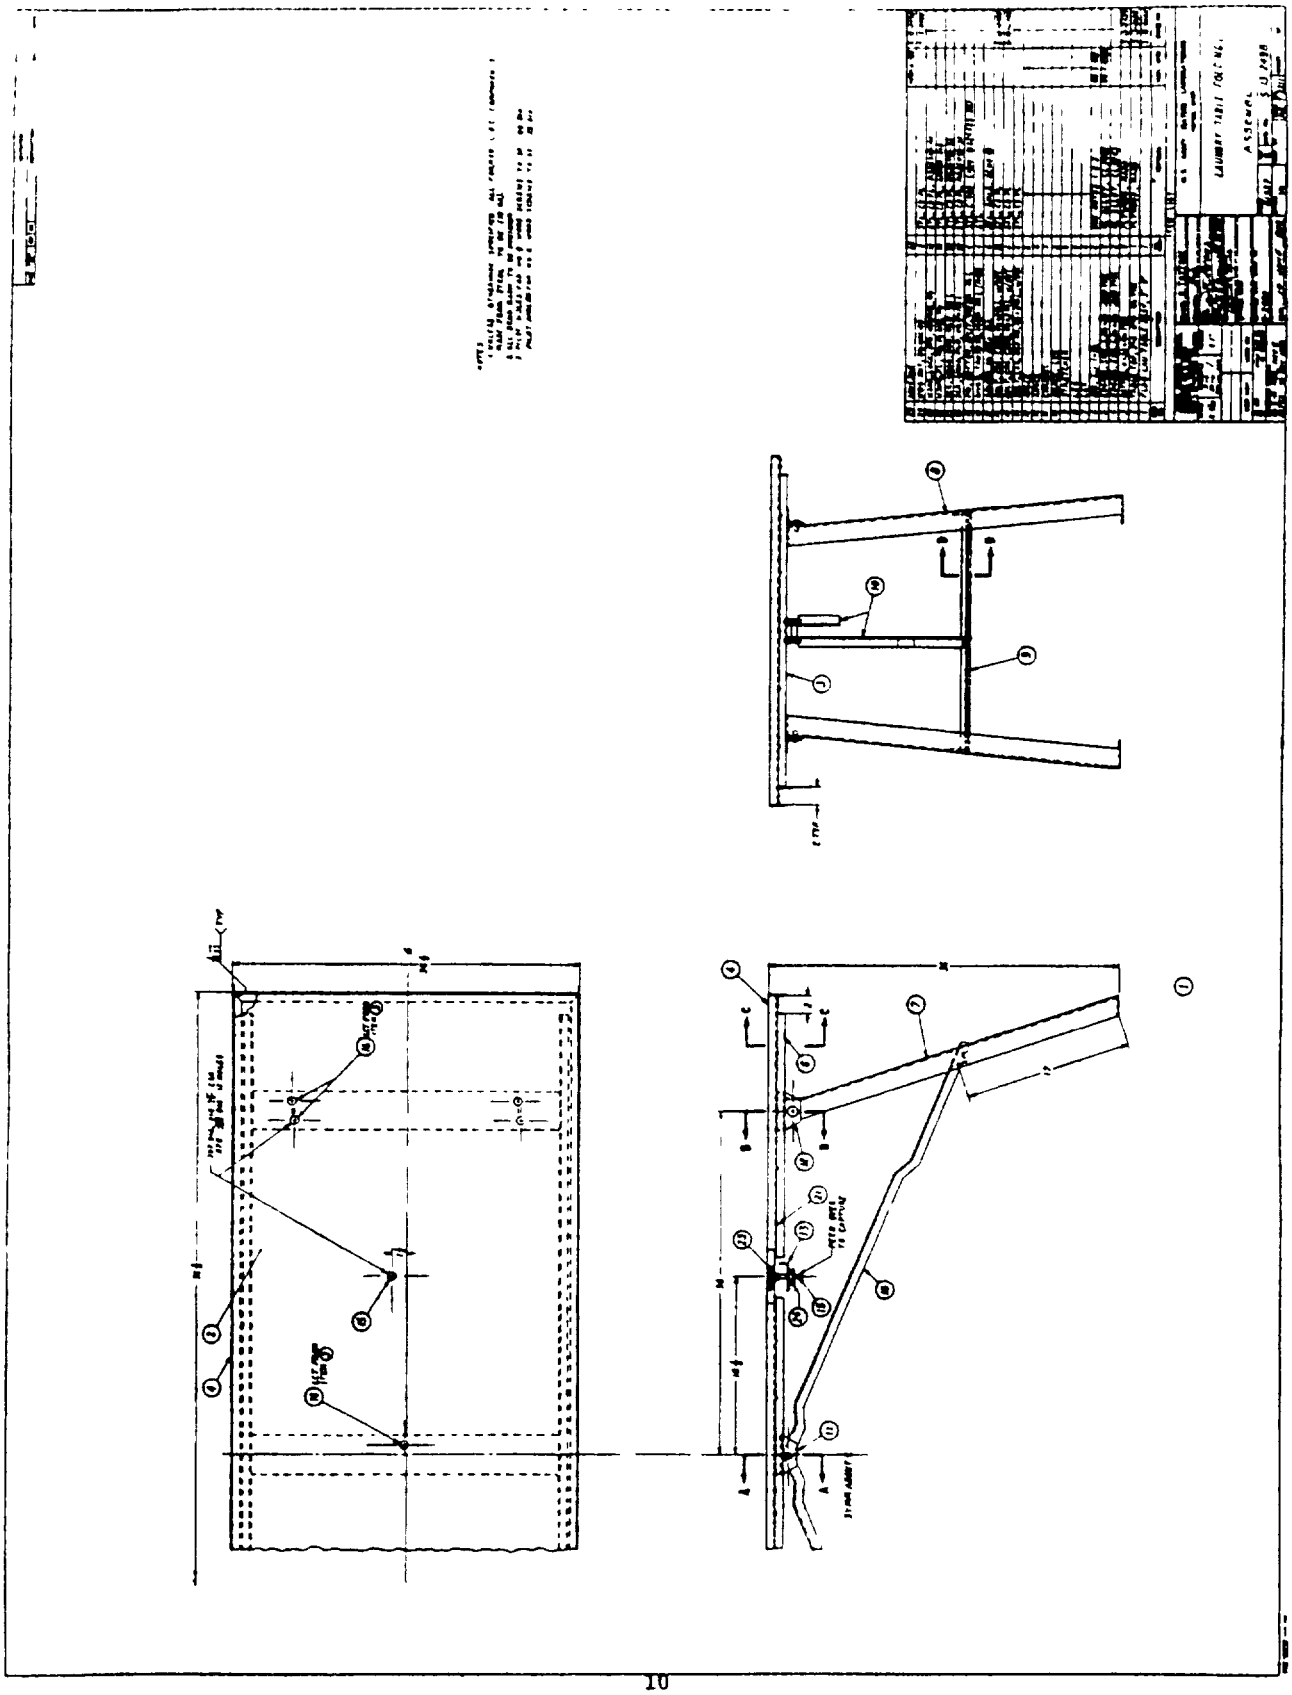

Source: https://assist.dla.mil -- Downloaded: 2026l0-16T14:33Z
Check the source to verify that this is the currentversion before use.

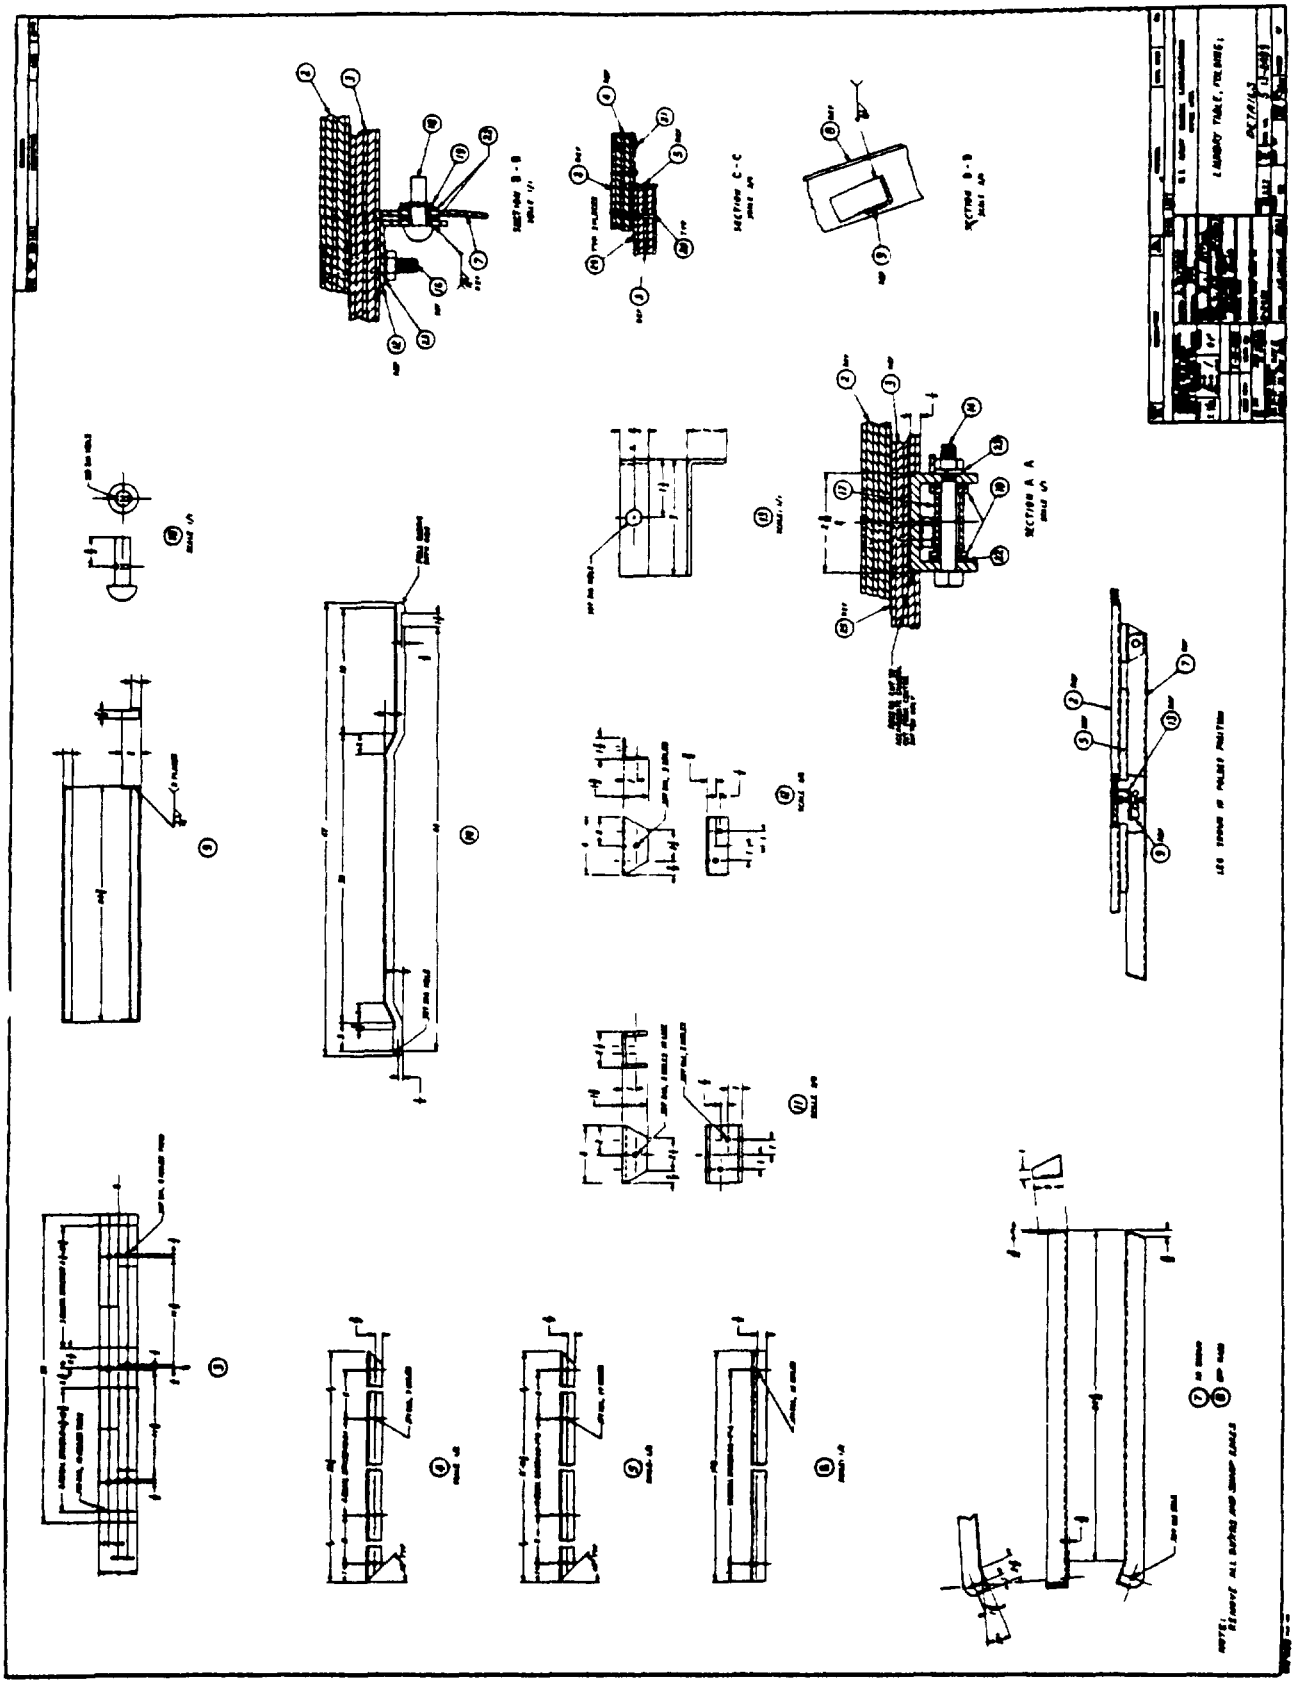

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
US Army Natick Laboratories
ATTN: AMXRET-EQS
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:33Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:33Z
Check the source to verify that this is the current version before use.