MILITARY SPECIFICATION

FILTERS, COOKING GREASE

This amendment forms a part of Military Specification MIL-F-2296E, dated 9 June 1977, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.1 Delete "Type II - Pumped drain" and substitute: "Type II - Gravity drain and pumped refill".

Add the following:

"Type III - Pumped suction and pumped refill

Size 1 - 80 pound (36.3 kg) minimum reservoir fat capacity".

PAGE 3

2.2 (cont'd), under "Underwriters Laboratories Inc": Delete addresses and substitute:

"(Application for copies should be addressed to the Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.)"

PAGE 5

3.3, at end of paragraph: Add "(see 6.4)".


3.4.2, line 2, after second "of": Insert "gravity drain and pumped return by a".


Add the following new paragraph:

"3.4.3 Type III. The type III filter shall be designed to filter and refill the cooking medium to the cooking vessels of the deep-fat fryers or donut machines by means of pumped drain and pumped refill. The type III filters requirements shall be the same as specified in 3.4.2 (type II) above, except that type III units shall be provided with a reversing type motor and a three position switch. The type III filter shall be capable of filtering and refilling frying medium to the cooking vessel at a minimum rate of 3-1/2 gallons (13 liters) per minute when tested as specified in 4.3.7."




Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:39Z
Check the source to verify that this is the current version before use.

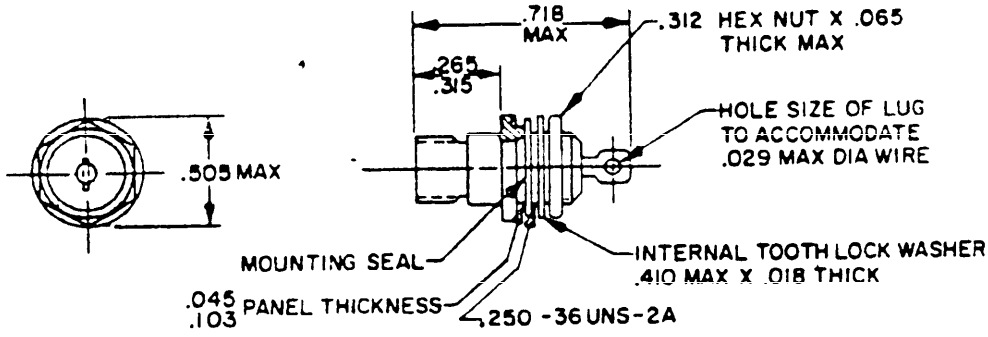


BODY "D"
MOUNTING SURFACE




RECOMMENDED
MOUNTING HOLE

| INCHES | MM |
|---|---|
| .002 | .05 |
| .003 | .08 |
| .004 | .10 |
| .018 | .46 |
| .029 | .74 |
| .045 | 1.14 |
| .065 | 1.65 |
| .088 | 2.24 |
| .103 | 2.62 |
| .125 | 3.18 |
| .250 | 6.35 |
| .265 | 6.73 |
| .279 | 7.09 |
| .281 | 7.14 |
| .312 | 7.92 |
| .315 | 8.00 |
| .404 | 10.26 |
| .460 | 11.68 |
| .505 | 12.83 |
| .718 | 18.24 |

M39012/62 - 3002
- 4002

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for genera information only and are based upon 1 inch = 25.4 mm.
3. Dimension .505 (12.83 mm) is the largest overall diameter of the connector.
4. All undimensioned pictorial configurations are for reference purposes only.

FIGURE 1. General configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 202610-16T14:39Z
Check the source to verify that this is the current version before use.

PAGE 13 (cont'd)

Add the following new paragraph:

"4.3.7 Performance (type III). The performance of the type III filter shall be the same as that specified in 4.3.4 (type II) with the addition that the hose shall be placed in the frying medium in the cooking vessel and the switch turned to the filtering position. The unit shall be operated a minimum of 15 minutes to determine conformance with the filtering rate requirements of 3.4.3. Any nonconformance with specified requirements shall constitute failure of this test."

PAGE 14

5.1.1.2.3, line 1, after "3": Insert "and type III, size 1".

5.1.1.2.4, line 1, after "3": Insert "and type III, size 1".

PAGE 15

5.2.1.2, line 1, after "3": Insert "and type III, size 1".

PAGE 16

5.2.2.2, paragraph title, after "Type II": Insert "and type III".
Line 1, after "Each type II": Insert "and type III".

6.1, line 4, after "size 1": Insert "and type III, size 1".

PAGE 17

Insert new paragraph:

"6.4 Recycled materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification (see 3.3)."

Custodians:

Army - CL
Navy - SA
Air Force - 99

Preparing activity:

Army - GL

Project No. 7330-0511

Review activities:

Army - MD
Navy - MS, YD, MC



Source: https://assist.dla.mil -- Downloaded: 202610-16T14:39Z
Check the source to verify that this is the currentversion before use.