NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-14409/1A
9 June 1969
SUPERSEDING
MIL-C-14409/1
29 May 1963


PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, *TUBULAR TRIMMER*), *STYLE PC35*

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-PRF-14409.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

NOT FOR NEW DESIGN
FOR REPLACEMENT PURPOSES ONLY

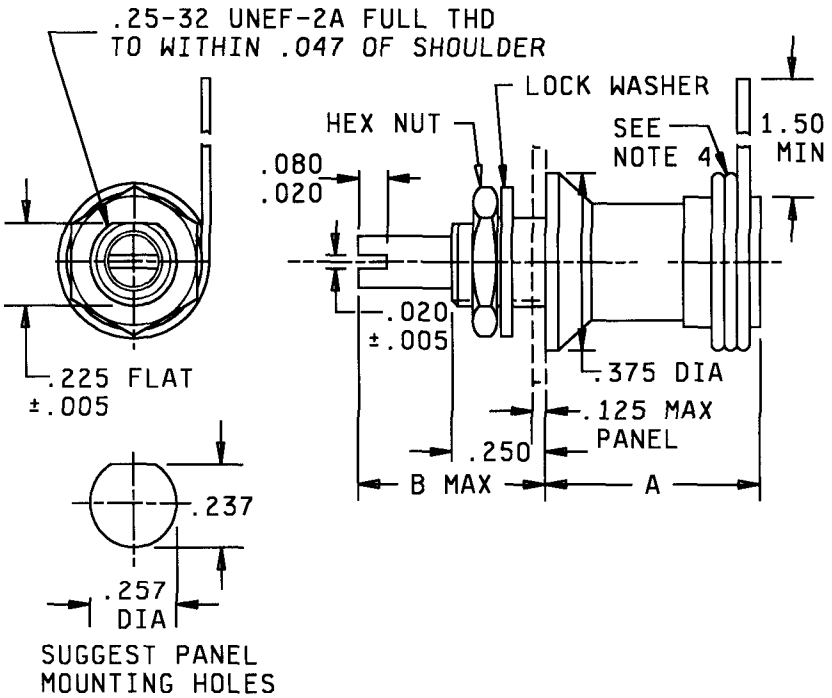

INCHES	MM
.005	.13
.016	.41
.020	.51
.062	*1.57*
.080	2.03
.112	2.84
.225	5.72
.230	5.84
.234	5.94
.250	6.35
.251	6.38
.255	6.48
.312	7.92
.375	9.53
1.50	38.10

NOTES:
1. *Dimensions are in inches.*
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. There shall be a minimum of one and one-half turns of AWG size 22 wire around the body. These turns of wire shall be completely soldered to the body.
5. *The flat on the mounting bushing shall extend to the mounting surface of the shoulder.*
6. The piston shall not extend beyond the end of the tube at the maximum rated capacitance position.
7. For dimensions A and B see table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure and table I.

DC voltage rating: 750 volts.

Construction: Glass, see figure and table I.

Capacitance range: See table I.

Insulation resistance (IR): Method 302 of MIL-STD-202, test condition B (500 volts ±10 percent); not less than 1,000,000 megohms throughout temperature range.

Quality factor (Q): See table I.

Temperature cycling: Method 102 of MIL-STD-202, test condition D, except the step 3 temperature shall be 125°C ±5°C.

Barometric pressure (reduced): Not applicable.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Dimensions 1/		Q	Dielectric material
	Min	Max	A ± .031(.79)	B (max)		
	pf	pf				
PC35H4R5	0.5	4.5	.484(12.29)	.625(15.88)	1,000	Glass
PC35H130	0.8	13.0	.609(15.47)	.625(15.88)	900	Glass
PC35H240	1.0	24.0	1.000(25.40)	.812(20.62)	700	Glass
PC35H400	1.0	40.0	1.594(40.49)	1.125(28.58)	500	Glass

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parenthesis.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Preparing activity:
Army - EL

(Project 5910-0842-2)

Review activities:
Army -
Navy - AS, OS
Air Force -
DSA - ES

User activities:
Army -
Navy - CG, MC
Air Force -

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-520/A-7406

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:11Z
Check the source to verify that this is the current version before use.