INCH-POUND
MIL-PRF-14409/1C
7 March 2007
SUPERSEDING
MIL-PRF-14409/1B
25 July 2001

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE,
TUBULAR TRIMMER), STYLE PC35

This specification sheet is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-14409.

NOT FOR NEW DESIGN
FOR REPLACEMENT PURPOSES ONLY

Inches	mm
.005	0.13
.016	0.41
.020	0.51
.062	1.57
.080	2.03
.112	2.84
.225	5.72
.230	5.84
.234	5.94
.250	6.35
.251	6.38
.255	6.48
.312	7.92
.375	9.53
1.50	38.10

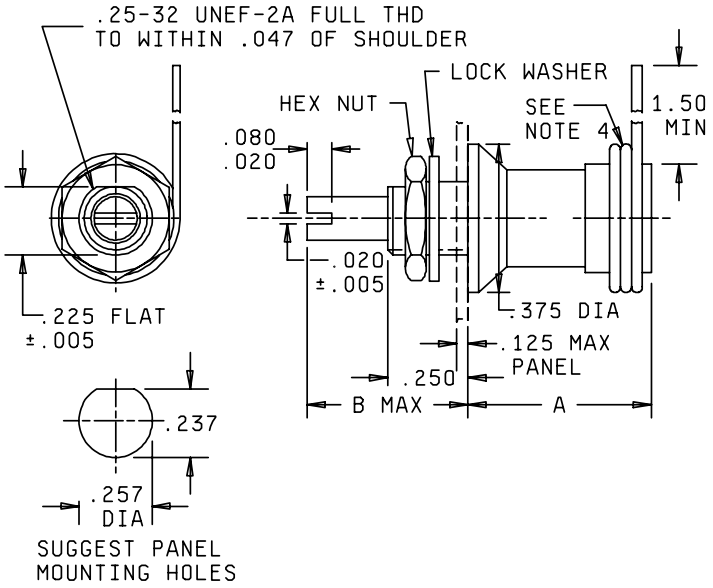

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. There shall be a minimum of one and one-half turns of AWG size 22 wire around the body. These turns of wire shall be completely soldered to the body.
5. The flat on the mounting bushing shall extend to the mounting surface of the shoulder.
6. The piston shall not extend beyond the end of the tube at the maximum rated capacitance position.
7. For dimensions A and B see table I.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

DC voltage rating: 750 volts.

Construction: Glass, see figure 1 and table I.

Capacitance range: See table I.

Insulation resistance (IR): Method 302 of MIL-STD-202, test condition B (500 volts ± 10 percent); not less than 1,000,000 megohms throughout temperature range.

Quality factor (Q): See table I.

Thermal Shock: Method 107 of MIL-STD-202, test condition A, except that the step 3 temperature shall be 125°C ± 5°C.

Barometric pressure (reduced): Not applicable.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Dimensions 1/		Q	Dielectric material
	Min	Max	A ± .031 (0.79)	B (max)		
	pF	pF				
PC35H4R5	0.5	4.5	.484 (12.29)	.625 (15.88)	1,000	Glass
PC35H130	0.8	13.0	.609 (15.47)	.625 (15.88)	900	Glass
PC35H240	1.0	24.0	1.000 (25.40)	.812 (20.62)	700	Glass
PC35H400	1.0	40.0	1.594 (40.49)	1.125 (28.58)	500	Glass

1/ Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm. Millimeters are in parentheses.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents: In addition to MIL-PRF-14409, this document also references MIL-STD-202.

Custodians:
Army - CR
Navy - EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5910-2007-012)

Review activities:
Navy - AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:11Z
Check the source to verify that this is the current version before use.