MILITARY SPECIFICATION

BOAT, RECONNAISSANCE/LAND/ASSAULT, INFLATABLE:

3-, 7-, 15-PERSON

This specification is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers 3-, 7-, and 15-person, inflatable boats complete with accessories, carrying case, pumps, and paddles.

1.2 Classification. Boats shall have the following capacities with characteristics as specified in 3.6:

Type I - 3-Person - Reconnaissance
Type II - 7-Person - Landing, Assault
Type III - 15-Person - Landing, Assault

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel and Seals.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed and Lock-Corner.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple Wall.

SPECIFICATIONS

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-O-11585	- Outboard Motor, Gasoline, With Carrying Chest.
MIL-C-43307	- Cord, Nylon, Solid Braid, General Use.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-313	- Material Safety Data Sheets Preparation and the Submission of.
FED-STD-601	- Rubber, Sampling and Testing.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DEPARTMENT OF LABOR (DOL)

OSHA 29 CFR 1910.167 - Safety and Health Standards.

(Application for copies should be obtained from the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards, required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 412 - Rubber Properties in Tension.
ASTN D 413 - Rubber Property - Adhesion to Flexible Substrate.
ASTM D 471 - Test Method for Rubber Property - Effect of Liquids.
ASTM D 573 - Test Method for Rubber - Deterioration in an Air Oven.
ASTM D 750 - Rubber Deterioration in Carbon-Arc or Weathering Apparatus RECM.
ASTM D 751 - Standards Methods for Testing Coated Fabrics.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The inflatable boat shall consist of an elastomeric/plastomeric coated fabric with attached handles and fittings, emergency repair items, paddles, pump and carrying case.

3.2 First article. When specified (see 6.2), samples shall be subjected to first article inspection (see 4.3 and 6.5.2).

3.2.1 Sample selection plan. The contractor shall furnish a sample selection plan as specified (see 6.2). The plan shall be designed for use in the quality conformance testing of section 4 and will provide the Government a method of selecting production seam, coating compound, and coated fabric samples for destructive tests. Samples provided for testing will be the same material, use the same processes and be prepared at the same time as the production boats are being produced. The test specimens of seams, coating compound, and coated fabrics shall be provided in sufficient quantity for testing as specified herein. The sample selection plan shall be subject to the approval of the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

3.3 Process data. As specified (see 6.2), the contractor shall make available to the Government a description of materials, documented work instruction, processing and fabricating procedures which will be used by the contractor to assure that each production boat is a duplicate of the first article boat. Change of materials, components, procedures, or sources of supply from those initially selected shall be subject to the approval of the contracting officer.

3.4 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification. Boats shall not be made with materials that fail to meet the requirements of table I through IV; however, conformance with these requirements shall not be construed as justification for failure to meet requirements of this specification. All materials used in construction of the boat shall be resistant to salt water, fresh water, sunlight, atmospheric ozone, and exposure to motor fuels. Material safety data sheets in accordance with FED-STD-313 shall be prepared for adhesives used in repair kits (see 6.2.1).

3.4.1 Material deterioration prevention and control. The boat shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the boat may be exposed.

3.4.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.4.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.4.2 Cloth. The cloth of the coated fabric shall be heat set, high-tenacity, and improved heat and light resistant. The cloth shall be free from any imperfection affecting strength, coating adhesion, or coating thickness.

3.4.3 Coating compounds. Each and every compound used for the formulation of elastomeric/plastomeric coatings, tie gums, diffusion barrier (if used), and any other materials applied to the coated fabric shall conform to table I. The coating compounds shall be suitable for use when in continuous contact with rainwater, ground water or saltwater and shall be fungus and weather resistant. Swelling, shrinkage or other deterioration of the coating compound shall be within the limits specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics of coating compounds.

Item	Property	Requirements (all boats)	ASTM test methods
1	Tensile strength (initial)	1500 lbs/sq in (min.)	D 412
2	Ultimate elongation	300% (min.)	D 412
3	Tensile strength after immersion in distilled water at 160 °F ±2 °F for the following durations:		
	14 days	70% of initial	D 471, D 412
	42 days	50% of initial	D 471, D 412
4	Resistance to light after 500 hrs accelerated weathering at 10% elongation 1/	80% of initial tensile strength	D 750 2/ D 412
5	After oven aging of 100 °C (212 °F) for 94 hours		D 573
	Tensile strength retained - percent	85 (min.)	D 412
	Ultimate Elongation retained - percent	85 (min.)	D 412
6	After immersion in fuel A for 46 hours at 73 °F ±2 °F		D 471
	Tensile strength retained - percent	50 (min.)	D 412
	Volume change - percent	25 (max.)	D 471

1/ Applicable to all exterior compounds. That is, compounds between the fabric and the outside of the boat.
2/ Alternate corex D filters in place.

3.4.4 Coated fabric. The elastomeric/plastomeric coated fabric may include a barrier to augment air retention. The coated fabric shall be free from blisters or pinholes and shall show no signs of coating delamination. The coated fabric shall withstand the effects of humidity, fungus, and weather elements without damage, deterioration, or failure of meeting performance requirements specified herein. No pigmentation of the coated cloth is required. The elastomeric/plastomeric coated fabric shall conform to the requirements of table II.

3.4.4.1 Color.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the currentversion before use.

TABLE II. Characteristics of coated fabric.

Item	Property	Type Requirement Person capacity			Test paragraph or test method of FED-STD-191
		3 (I)	7 (II)	15 (III)	
1	Weight (oz/sq yd)	14 (min.)	30 (min.)	30 (min.)	5041
2	Tearing strength warp and fill (lb [min.])	8	25	25	5134
3	Breaking strength - warp - fill (lbs/in [min.])	 225 180	 350 335	 350 335	5102
4	Weathering resistance after 500 hours exposure at 5% elongation, warp and fill (percent retention of initial breaking strength [min.])	80	80	80	5804/5102 1/
5	Puncture resistance (lbs [min.])	90	110	110	4.5.2.9/5120
6	Low temperature crease resistance: Appearance after unfolding	No cracking, peeling, or delamination			4.5.2.10
7	Porosity - (air retention)	No Leaks	No Leaks	No Leaks	4.5.2.13
8	Fungus resistance	No cracking, blistering, or delamination of coating. Retention of breaking strength 50% (min.)			5762 2/
9	Blocking	Specimens to separate within 5 seconds			4.5.2.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE II. Characteristics of coated fabric - Continued.

Item	Property	Type Requirement Person capacity 3 (I)	7 (II)	15 (III)	Test paragraph or test method of FED-STD-191
10	Coating adhesion (initial) (lbs/in [min.])	12	20	20	4.5.2.12
11	Coating adhesion after immersion in distilled water at 160 °F ±2 °F for the following duration:				
	14 days (lbs/in)	8	10	10	4.5.2.12
	42 days (lbs/in)	6	8	8	4.5.2.12

1/ Specimens shall have exterior coating facing carbon arc. Alternate corex D filters shall be removed.

2/ Except that the specimens shall be prepared per method 5102 and the number of specimens shall be reduced from 40 to 5 warp and 5 fill. Leaching of specimens is unnecessary. The specimens shall be exposed to the soil for eight weeks.

3.4.5 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the boat may be newly fabricated from recovered materials to the maximum extent practicable, provided the boat produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the boat.

3.5 Boat construction. The boat shall be fabricated from coated fabric as specified herein. The configuration and dimensions of the boat and the location of the fittings and handles shall be commensurate with the performance and capacity specified herein. The boat shall be airtight and watertight.

3.5.1 Seams. All boat seams including end closures, handle reinforcing patches, and fabric flanges of valve fittings shall conform to the requirements of table III. All seams shall be water and airtight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE III. Characteristics of seams.

Item	Property	Type Requirement Person capacity 3 (I)	7 (II)	15 (III)	Test paragraph, test method of FED-STD-601 or ASTM test methods
1	Breaking strength (initial) (lbs/in [min.]) 1/	190	300	300	D 751 2/ 4.5.2.14
2	Breaking strength after immersion in distilled water at 160 °F ±2 °F for the following durations:				
	14 days (lbs/in)	180	280	280	D 751/D 471/4.5.2.14
	42 days (lbs/in)	90	140	140	D 751/D 471/4.5.2.14
3	Dead load shear resistance under 50 lb/in stress at 200 °F for 24 hours	0.1 inch slippage (max)			4.5.2.1.5
4	Peel adhesion (initial) (lbs/in [min.])	12	20	20	D 413 machine method 4.5.2.14
5	Peel adhesion after immersion in distilled water at 160 °F ±2 °F for the following durations:				
	14 days (lbs/in)	8	10	10	D 413 machine method D 471/4.5.2.14
	42 days (lbs/in)	6	8	8	D 413 machine method D 471/4.5.2.14

1/ All specimens must break in the coated fabric. Failure of any specimen in a seam area at any value shall constitute failure of this test.
2/ Except that the specimens shall be 2 inches in width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

3.5.2 Tow bridles and lifelines. All boats shall be equipped with suitable provisions for towing. A tow bridle shall be provided for each boat. Braided nylon in accordance with MIL-C-43307 shall be utilized with the exception that the color shall be black. All boats shall also have lifelines provided and mounted on the top sections of each buoyancy tube.

3.5.3 Attachment patch assemblies. When tested in accordance to 4.5.2.5, the patch assemblies shall withstand the following loads without any evidence of failure or separation of the patches from the boat:

Assembly	Pull in pounds		
	Type I	Type II	Type III
Tow Bridle Patch	500	500	1000
Lifeline Patch	200	250	500
Carrying Handles	250	250	500
Tiedown Patch	N/A	200	N/A
Fuel Tank Patch	N/A	200	200

3.5.4 Compartmentation. All inflatable boat types shall be constructed so that there are at least two individual air compartments within the hull. The boat shall be capable of supporting 80 percent of the rated load (see 3.5.8) with the largest compartment deflated.

3.5.4.1 Compartment strength. Each compartment shall withstand a minimum of 1.5 times the manufacturer's suggested working pressure for 30 minutes with the adjacent compartment at atmospheric pressure. No evidence of failure shall occur such as seam slippage, rupture, or permanent distortion.

3.5.5 Boat strength. The boat shall be able to withstand a minimum pressure of 2-1/2 times the manufacturer's suggested working pressure for 10 minutes. No evidence of failure shall occur such as seam slippage, rupture, or permanent distortion.

3.5.6 Pressure retention. The boat, with all air compartments inflated to the manufacturer's working pressure, shall not lose more than 10 percent of this pressure over 24 hours of inflation. Appropriate corrections shall be made for changes in temperatures and barometric pressure (see 4.5.2.4).

3.5.7 Motor attachment (type II/III boats). The transom or motor mount and its attachments to the boats shall be designed to withstand the maximum stresses arising from: (1) the forward/reverse thrust of a 40 horsepower outboard motor; (2) the weight of such motor(s). The transom height must be designed to accomodate engines that comform to MIL-O-11585.

3.5.8 Maximum weight (rated load) capacity. The following formula shall be used to determine the boats' upper limit for the maximum weight capacity:

Maximum weight capacity = $0.6D_c - W$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

where:

D_c = Main buoyancy chamber displacement. This excludes the displacement of all removable chambers. Displacement is expressed in pounds of fresh water.

W Boat weight. Weight of boat hull, floorboards, and all its permanent accessories, excluding motor.

3.5.9 Maximum persons capacity. The following formula shall be used to determine the upper limit of persons capacity (based on usable passenger carrying area) and shall not exceed the number given by A or B whichever is smaller:

A - Passenger carrying area (A) divided by 4. Where A is defined as that horizontal area of the boat (in square feet) inboard of the buoyancy tubes and transom. The area under bow dodgers is to be excluded from A. Results of calculations are to be rounded to the nearest whole number.

B - The maximum weight capacity divided by 263. Results of calculations are to be rounded to the nearest whole number.

3.6 Boat performance characteristics. The characteristics of boat performance are listed below by type boat. Type boats are as follows:

Type I - 3-Person - Reconnaissance
Type II - 7-Person - Landing, Assault
Type III - 15-Person - Landing, Assault

a. Type I - 3-Person - Reconnaissance

(1) The boat shall be equipped with such suitable provisions for carrying that it can be easily and quietly hand carried by two persons, upright or inverted when fully inflated and ready to use.

(2) The boat shall be of minimum overall dimensions commensurate with the capacity specified. Particular emphasis shall be placed on minimum width (within the limits of waterborne stability) to reduce the requirements for trail clearance.

(3) The boat shall be simple in design and construction and should require a minimum of critical materials.

(4) The boat interior shall be so designed as to provide comfortable kneeling space for its maximum passenger and crew capacity.

(a) The average area occupied per crew member (with equipment, packs) is 4 square feet.

(5) The boat shall be transportable on a 1.5 ton cargo trailer (M105 trailer, L - 9 ft. 2 in.; W - 4 ft. 5 in.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(6) The boat shall require minimum storing or transport volume by being either nestable, collapsible or folding.

(7) The boat shall have the inherent capability of acceptable performance within an ambient air temperature range extending from 125 °F, minimum exposure of four hours with full impact of solar radiation, 360 BTU/ft square/hour to 0 °F, minimum exposure of 30 days without benefit of solar radiation; and shall be capable of safe storage and transportation without permanent impairment of its capabilities from the effects of temperature, at temperature from -60 °F, for periods of at least three days duration, to 160 °F, for periods as long as four hours per day.

(8) The boat shall be capable of carrying a crew of 3 persons with individual equipment.

(a) The average total crew weight (with equipment packs) for the 3-person boat is 884 pounds.

(9) The boat shall be constructed so as to be considered noiseless when scraped against rocks or similar objects in landings or similar operations.

(10) The boat shall be sufficiently rugged to withstand field use without excessive damage.

(11) The boat shall be capable of being easily carried, when fully inflated and ready for use, by two persons.

(12) The boat shall be capable of being inflated and placed in operation by three persons within 5 minutes after arrival at the waters edge.

(13) The boat shall be provided with carrying case, equipment bag, inflation-deflation pumps, 48-inch maple or ash paddles (black), repair kit, pressure gauge, and tow bridle. Each boat shall have a separate stowage pocket onboard for the repair kit, pressure gauge, and pumps.

(14) The boat with its accessories and carrying case shall not exceed a one person pack load of 60 pounds.

(15) Oarlocks shall be provided and mounted on each side of the boat.

(16) Drain plugs shall be provided for drainage of water from the boat.

(17) The boat material shall be capable of rapid decontamination during NBC operations.

b. Type II - 7-person - Landing Assault.

(1) The boat shall be equipped with such suitable provisions for carrying that it can be easily and quietly hand carried by six persons, upright or inverted when fully inflated and ready to use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(2) The boat shall be of minimum overall dimensions commensurate with the capacity specified. Particular emphasis shall be placed on minimum width (within the limits of waterborne stability) to reduce the requirements for trail clearance.

(3) The boat shall be capable of carrying a crew of 7 persons with individual equipment.

(a) The average crew weight (with equipment) for the 7-person boat is 1845 pounds.

(b) Equipment tiedowns shall be provided for the 7-person boat.

(4) The boat without paddles and motor propulsion unit shall be light enough so that a maximum of six persons can carry it without excessive fatigue for several hundred yards. Weight shall not exceed 300 pounds.

(5) The boat shall be fitted with a spray rail, rubbing strake, or other device that is sufficiently wide and robust to support the weight of the paddlers feet and legs.

(6) The boat interior shall be so designed as to provide comfortable kneeling space for its maximum passenger and crew capacity.

(a) The average area space occupied per crew member (with equipment, packs) is 4 square feet.

(7) The boat shall be suitable for either paddle or motor propulsion. Fuel tank securing strap(s) shall be provided.

(8) The boat shall be transportable on a 1.5 ton cargo trailer (M105 trailer, L - 9 ft. 2 in.; W - 4 ft. 5 in.).

(9) The boat shall require minimum storing or transport volume by being either nestable, collapsible or folding.

(10) The boat shall have the inherent capability of acceptable performance within an ambient air temperature range extending from 125 °F, minimum of four hours with full impact of solar radiation, 360 BTU/ft square/hour to 0 °F, minimum exposure of 30 days without benefit of solar radiation; and shall be capable of safe storage and transportation without permanent impairment of its capabilities from the effects of temperature, at temperature from -60 °F, for periods of at least three days duration, to 160 °F, for periods as long as four hours per day.

(11) The boat shall be maneuverable when paddled by two or three persons in currents up to 4 feet per second.

(12) The boat shall be constructed so as to be considered noiseless when scraped against rocks or similar objects in landing or similar operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(13) The boat shall be sufficiently rugged to withstand field use without excessive damage.

(14) The boat shall be provided with carrying case, equipment bag, inflation-deflation pumps, 48 inch maple or ash paddles (black), repair kit, pressure gauge, and towing bridle. Each boat shall have a separate stowage pocket onboard for the repair kit, pressure gauge, and pumps.

(15) The boat shall be automatically inflated using a pressurized gas cylinder method as well as a means of manual inflation using inflation-deflation pumps.

(16) The boat shall be designed to permit easy egress and access, while floating, for swimmers and divers wearing diving equipment (scuba) with minimum tendency to overturn or ship water.

(17) The boat shall be sufficiently rugged as to withstand repeated beaching (min. of 8) at speeds up to 4 knots on beaches of abrasive soil types and to be resistant to impact against rocks, coral, and boulders.

(18) The boat shall be sufficiently rugged to withstand the wear created by repeated assault disembarkations (min. of 10) by soldiers wearing combat boots.

(19) The boat material shall be capable of rapid decontamination during NBC operation.

c. Type III - 15-person - Landing Assault

(1) The boat shall be maneuverable, stable, and capable of maintaining headway in currents of 5-feet per second by the use of paddles, when carrying its normal load of a 3-person engineer crew plus a 9-person rifle or weapons squad plus three soldiers, all with individual and crew served weapons and equipment.

(a) The average total crew weight (with equipment) for the 15-person boat is 3954 pounds.

(2) The boat shall also be maneuverable with paddles and remain seaworthy when carrying a minimum load of a 3-person engineer crew plus a 9-person rifle or weapons squad with weapons and equipment in currents up to at least 8-feet per second.

(a) The average total crew weight (with equipment) for the 15-person boat is 3954 pounds.

(3) The boat shall be equipped with such suitable provisions for carrying that it can be easily and quietly hand carried by six persons, upright or inverted when fully inflated and ready to use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(4) The boat shall be of minimum overall dimensions commensurate with the capacity specified. Particular emphasis shall be placed on minimum width (within the limits of waterborne stability) to reduce the requirements for trail clearance.

(5) The boat without paddles and motor propulsion unit shall be light enough so that a maximum of six persons can carry it without excessive fatigue for several hundred yards. Weight shall not exceed 350 pounds.

(6) The boat shall be fitted with a spray rail, rubbing strake, or other device that is sufficiently wide and robust to support the weight of the paddlers feet and legs.

(7) The boat interior shall be so designed as to provide comfortable kneeling space for its maximum passenger and crew capacity.

(a) The average area space occupied per crew member (with equipment, packs) is 4 square feet.

(8) The boat shall be suitable for either paddle or motor propulsion. Fuel tank securing strap(s) shall be provided.

(9) The boat shall be transportable on a 1.5 ton cargo trailer (M105 trailer, L - 9 ft. 2 in.; W - 4 ft. 5 in.).

(10) The boat shall require minimum storing or transport volume by being either nestable, collapsible or folding.

(11) The boat shall have the inherent capability of acceptable performance within an ambient air temperature range extending from 125 °F, minimum exposure of four hours with full impact of solar radiation, 360 BTU/ft square/hour to 0 °F, minimum exposure of 30 days without benefit of solar radiation; and shall be capable of safe storage and transportation without permanent impairment of its capabilities from the effects of temperature, at temperature from -60 °F, for periods of at least three days duration, to 160 °F, for periods as long as four hours per day.

(12) The boat shall be sufficiently rugged to withstand field use without excessive damage.

(13) The boat shal be provided with carrying case, equipment bag, inflation-deflation pumps, 48 inch maple or ash paddles (black), repair kit, pressure gauge, and towing bridle. Each boat shall have a separate stowage pocket on board for the repair kit, pressure gauge, and pumps.

(14) The boat shall be designed to permit easy egress and access, while floating, for swimmers and divers wearing diving equipment (scuba) with minimum tendency to overturn or ship water.

(15) The boat shall be sufficiently rugged to withstand repeated beaching (min. of 8) at speeds up to 4 knots on beaches of abrasive soil types and be resistant to impact against rocks, coral and boulders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(16) The boat shall be sufficiently rugged to withstand the wear created by repeated assault disembarkations (min. of 10) by soldiers wearing combat boots.

(17) The boat shall be constructed so as to be considered noiseless when scrapped against rocks or similar objects in landing and similar operations.

(18) The boat material shall be capable of rapid decontamination during NBC operation.

3.7 Maintenance. The boat(s) shall exhibit no degradation in performance after maintenance operations using emergency repair parts furnished with the boat.

3.8 Human factors engineering. The boats shall conform to human factors engineering design criteria as described in MIL-STD-1472. Special design emphasis shall be given, but not limited to, paragraphs 4 (General Requirements), 5.5 (Labeling), 5.6 (Anthropometry), 5.9 (Design for Maintainability), 5.11 (Small Systems and Equipment), and 5.13 (Hazards and Safety) of MIL-STD-1472 as applicable.

3.9 Accessories.

3.9.1 Type I/II/III boats. Unless otherwise specified (see 6.2), each boat shall be provided with the following accessories:

Item	Conforming to	Quantity
Repair Kit	Commercial Quality	1 ea.
Paddle	Commercial Quality	3 ea. Collapsible Paddle/Type I; 6 ea. paddles/Type II; 11 ea. paddles/Type III
Carrying Case	Commercial Quality	1 ea.
Equipment Bag	Commercial Quality	1 ea.
Inflation Pump	Commercial Quality	2 ea.
Air/CO_2 Cylinder	Commercial Quality (OSHA 29 CFR 1910.167)	1 ea. (Type II only)
Instruction/Maintenance Manual	Commercial Quality	2 ea.
Tow Bridle	MIL-C-43307	1 ea.

3.10 Identification marking. The boat shall be identified in accordance with MIL-STD-130 by means of an identification label. The label shall be stamped on an aluminum plate and permanently attached to the boat. The following information shall be made visible using 0.50-inch (minimum) letters, on the identification label:

Boat, Inflatable:	(Specify Reconnaissance or Landing)
NSN:	(Specify)
Maximum HP:	(Specify)
Maximum Weight Capacity:	(Specify in pounds)
Maximum Persons:	(Specify)
Recommended Inflation Pressure:	(Specify pounds per square inch, psi)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

MFR:	(MFR Name and location of plant)
MFR Date:	(Specify month [3 letters] and year)
Weight Empty:	(Specify approximate number of pounds)

3.11 Workmanship. Workmanship shall be the highest quality and shall permit no defects adversely affecting the strength or serviceability of the finished boat. Any fabric-reinforced valves shall contain no gum voids, cracks, or tears that could adversely affect the strength of the assembly. All metal parts shall be clean and free of sand, dirt, scale, and flux. Surfaces shall be smooth with edges rounded and leveled. The inside and outside of the boat shall be clean and free of foreign materials. Any necessary repair or rework shall restore the reworked area to its full strength and shall meet all applicable requirements of this specification.

3.12 Reliability. In addition to the inspection specified in 4.3 for first article boats, the Government may perform additional testing as specified in the contract to verify reliability of the boats. When tested as specified in the contract, the boat shall not fail to complete any test including the use of the repair kit.

3.13 Durability. It is desirable that the boat shall have a service life of 5 years following 10 years of storage.

3.14 Repair of collapsible fabric boats. Any repair (see 6.5.1) of a boat shall be accomplished before quality conformance inspection. The edges of any repair patch shall extend a minimum of three-inches beyond the edge of the area that requires repair. Individual patches shall not exceed 64 square inches. The total repaired area of any boat shall not exceed 1 percent of the total boat surface area of the repaired boat. All repair procedures shall be in accordance with the repair plan. The admissible percentage of repaired and accepted boats shall not exceed 10 percent of the total boats submitted for acceptance.

3.14.1 Repair plan. When specified by the contract (see 6.2.1), the contractor shall furnish a repair plan. The plan shall include a specific description of the methods and procedures for repairing an anomaly which may occur during the production of a boat. The plan shall include documented work instructions which shall be used by the contractor to ensure that repairs have structural integrity equal to or greater than that of unrepaired panels and seams, as applicable. No part of the plan shall conflict with, or take precedence over the requirements of this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection. The first article inspection will be performed by the contractor subject to surveillance and approval by the Government. Acceptance of a first article boat shall not exclude the remaining boats from the quality conformance inspection and acceptance provisions specified in section 4. In addition to any inspection specified as part of the first article inspection, the Government reserves the right to conduct any and all inspections contained in this specification as part of the first article inspection and failure of such additional inspections shall have the same effect as failure of those inspections specified as first article inspection. Approved first article boat(s) shall be used as production standard.

4.3.1 Examination. The first article boat(s), complete with all components, carrying case, pumps, repair items, and paddles, shall be examined as specified in 4.5.1, table IV. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article boat(s) shall be tested as specified in 4.5.2.1 through 4.5.2.7, and representative seam/coated cloth and coating compound samples shall be tested as specified in 4.5.2.8 through 4.5.2.15. The samples for lap seam strength tests shall be fabricated identically to seams in the first article boat(s) from coated cloth representative of that used to fabricate the boat and bonded simultaneously and identically to the boat represented.

4.4 Quality conformance inspection.

4.4.1 Sampling for tests.

4.4.1.1 Production boats. One sample boat shall be selected at random from each lot of 25 boats or fraction thereof submitted for acceptance at one time.

4.4.1.2 Seams. Samples for the lap-seam tests shall be fabricated identically to seams in the boat, except the width of overlap shall not exceed the minimum overlap used in any seam in the boat, from cloth representative of the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the current version before use.

boat, and bonded/sealed identically to the boats represented. Seam samples shall be prepared and furnished for test in quantities as specified in the sample selection plan for each lot of 25 boats. Each sample shall be marked with serial number, date, and time.

4.4.2 Examination. Each boat, complete with carrying case, pumps, paddles and repair items, shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Tests.

4.4.3.1 Individual. Each boat shall be tested as specified in 4.5.2.1 through 4.5.2.4. Failure of any test shall be cause for rejection. Rejected boats may be repaired and resubmitted for test and acceptance. Repairs shall conform to 3.14. Reworking or resealing shall not adversely affect the strength or serviceability of the boat.

4.4.3.2 Samples.

4.4.3.2.1 Sample production boats. A sample production boat selected in accordance with 4.4.1.1 shall be tested as specified in 4.5.2.5 and 4.5.2.6. Failure of any test shall be cause for rejection of the lot represented by the sample boat.

4.4.3.2.2 Seam tests. Samples selected in accordance with the sample selection plan and fabricated in accordance with 4.4.1.2 shall be tested as specified in 4.5.2.14 and 4.5.2.15. Failure of any test specimen prepared from the samples shall be cause for rejection of the lot of boats represented by the samples.

4.5 Inspection procedure.

4.5.1 Examination. The boat, carrying case, pumps, paddles, and repair items shall be examined as specified herein for the following defects:

TABLE IV. Examination schedule.

Examination number	Examination description	Requirement paragraph
101.	Materials not as specified.	3.4
102.	Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.	3.4.1
103.	Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.	3.4.1.1
104.	Contractor does not have documentation available for identification of material, material finishes, or treatment.	3.4.1.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination schedule - Continued.

Examination number	Examination description	Requirement paragraph
105.	Used, rebuilt or remanufactured components, pieces, or parts incorporated in the boat.	3.4.5
106.	Repair not as specified in the repair plan.	3.14.1
107	Delamination between coating, fabric, or barrier film (if applicable).	3.4.4
108.	Blisters or pinholes in coated fabric.	3.4.4
109.	Boat not equipped with handles for carrying.	3.6
110.	Emergency repair kit missing or not as specified.	3.9.1
111.	Accessories not as specified.	3.9.1
112.	Identification label not as specified.	3.10
113.	Identification marking missing, incomplete, or illegible.	3.10
114.	Human factors not as specified in MIL-STD-1472.	3.8
115.	Workmanship not as specified.	3.11
116.	Tow bridles and lifelines not as specified.	3.5.2
117.	Equipment tiedowns not as specified.	3.6.b
118.	Material safety data sheets not prepared in accordance with FED-STD-313.	3.4
119.	Spray rail/rubbing strake not as specified.	3.6

4.5.2 Tests.

4.5.2.1 Compartmentation. Inflate compartments to manufacturer's recommended working pressure leaving the largest compartment deflated. The boat shall be loaded to 80 percent of the rated maximum weight capacity. Nonconformance to 3.5.4 shall constitute failure of this test.

4.5.2.2 Compartment strength. Inflate each compartment to 1.5 times the manufacturer's recommended working pressure for 30 minutes with the adjacent compartment(s) deflated. Nonconformance to 3.5.4.1 shall constitute failure of this test.

4.5.2.3 Boat strength. Inflate all air compartments to 2-1/2 times the manufacturer's recommended working pressure for 10 minutes. Nonconformance to 3.5.5 shall constitute failure of this test.

4.5.2.4 Pressure retention. Inflate all air compartments to manufacturer's recommended working pressure. The pressure shall not lose more than 10 percent of this pressure over 24 hours of inflation. Adjust the final pressure reading to compensate for any temperature or barometric pressure changes during the test period. The correction for any temperature change shall be calculated in accordance with 4.5.2.4.1. For any barometric pressure change, the correction shall be in accordance with 4.5.2.4.2. Nonconformance to 3.5.6 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging

4.5.2.4.1 Temperature correction. For each degree Fahrenheit (only) rise in temperature, 0.03 psig shall be subtracted from the final pressure reading. For each degree drop in temperature, 0.03 psig shall be added to the final pressure reading. The corresponding correction per degree Celcius is 0.056 psig.

4.5.2.4.2 Barometric pressure correction. For each 0.1 inch of mercury rise in barometric pressure, 0.049 psig shall be added to the final temperature corrected reading. For each 0.1 inch of mercury drop in barometric pressure, 0.049 psig shall be subtracted from the final temperature corrected reading.

4.5.2.5 Pull resistance. Apply the appropriate pull for each type boat and patch as listed in 3.5.3. The boat shall be inflated to the manufacturer's recommended working pressure. The direction of pull for the carrying handles shall be parallel to the patch. The direction of pull for the towing patch shall be in the direction of the towing bridle (forward). The direction of pull for the tiedown, fuel tank, and lifeline patch shall be perpendicular to the patch. Position the boat so that the test loads will not distort the boat. Hold each load for not less than 7 seconds and examine the attachment patch for defects. Nonconformance to 3.5.3 shall constitute failure of this test.

4.5.2.6 Motor attachment. A 40 HP outboard motor that is in conformance to MIL-O-11585 shall be attached to the boats transom. Nonconformance to 3.5.7 shall constitute failure of this test. The boat shall undergo a 2-hour in the water endurance trial carrying 0.50 times the maximum weight capacity (see 3.5.7) and powered at maximum rpm.

4.5.2.7 Boat watertightness. Inflate all compartments of the boat to the manufacturer's working pressure. Place the boat in water not less than 2 feet deep with sufficient breadth to allow the boat to float unobstructed. Place the maximum weight capacity in pounds of material, such as filled sandbags or other noninjurious material in the boat and distribute the load evenly over the entire floor. If water-absorbing material is used for this test, such as filled sandbags, the material shall be wrapped with waterproof plastic sheeting to prevent absorption of any water that possibly leaks into the boat during this test. After the loaded boat has been in the water for 1 hour, remove material from the boat and inspect both material used as the load and boat for water. Nonconformance to 3.5 shall constitute failure of this test.

4.5.2.8 Materials.

4.5.2.8.1 Coated fabric. Coated fabric properties shall be tested in accordance with test methods shown in table II. Nonconformance to 3.4.3 and table II shall constitute failure of this test.

4.5.2.8.2 Coating compound. Coating compound properties shall be tested in accordance with test methods shown in table I. Nonconformance to 3.4.4 and table I shall constitute failure of this test.

4.5.2.9 Puncture resistance. FED-STD-191, method 5120 applies except that the ring clamp mechanism shall have an internal diameter of 3.00 inch, and the ball shall be replaced by a piercing instrument shaped like a flared, flat-tip

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

screwdriver, having a width of 0.312, ±0.010 inch, and a thickness of 0.031, ±0.004 inch, at the extreme tip. The piercing tip edges shall be rounded to a 0.010 inch radius. The piercing instrument shall be oriented to intercept the warp and fill threads at an angle of approximately 45 degrees. The average of three test specimens shall be reported. Nonconformance to 3.4.4 and table II shall constitute failure of this test.

4.5.2.10 Low temperature crease resistance. Fold two coated fabric specimens (each 8 inches square) in half in each direction so that a folded corner occurs in the center of each specimen. Place each folded specimen under a 4-pound load and condition at -60 °F for 46 hours. At the end of the conditioning period, unfold the specimens while still at a temperature of -60 °F and examine visually. Signs of cracking, peeling, or delamination of any coating material or, nonconformance to 3.4.4 and table II shall constitute failure of this test.

4.5.2.11 Blocking. Place two coated fabric specimens 6 inches by 1 inch in an oven on a smooth surface in such a manner that the ends are overlapped 1 inch. Place a 4-pound weight directly on the overlapped area. After conditioning at a temperature of 158 ±2 °F, for 4 hours, remove the weight and take the specimens from the oven and condition for 1 hour at 73 ±3 °F. Attach one end of the specimen in a suitable clamping device allowing the free end to hang down. Suspend a 4-ounce weight from the free end of the specimens. Inability of the strips to separate within 5 seconds under 4-ounce load shall constitute failure of this test.

4.5.2.12 Coating adhesion. Samples of coated fabric shall be bonded face-to-face to provide specimens for determining adhesion between the cloth and exterior coating(s), between the cloth and interior coating(s), between laminations of interior coatings and barrier (if used), and between laminations of exterior coatings. In forming this bond the specimens shall be subjected to no heat or pressure other than that normally encountered in curing the coated fabric, except for minimal pressure necessary to ensure contract while the bond is setting.

4.5.2.12.1 Test procedure. The adhesion shall be determined in accordance with ASTM D 413, machine method except that the specimens shall be 2 inches wide. The specimens shall be of sufficient length to conduct adhesion tests for both initial values and after water immersions. The adhesion results obtained on each immersed specimen shall be compared with the initial adhesion of the same specimen to determine percentage of adhesion retained. The reported adhesion and percent retention shall be the average on not less than two specimens. Attempts shall be made to cut the coating back to the cloth and to determine the adhesion value at the coating-to-cloth interface. However, if a specimen separates at a plane other than the bond of the coating to cloth (such as between layers of coating materials or between barrier film and coating) the adhesion value and the plane of failure shall be recorded. Immersed specimens shall be conditioned in distilled water at 73 ±5 °F, for 30 to 90 minutes before testing. Testing of immersed specimens shall be completed within 3 minutes after removal from the conditioning water. Immersion of specimens shall be in accordance with ASTM D 471. Nonconformance to 3.4.4 and table II shall or any

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the current version before use.

obvious bond failure evident after immersion but before stressing, even if the plane of failure is not sandwiched between the layers of fabric, shall constitute failure of this test.

4.5.2.13 Porosity test - (air retention). Three specimens (13 inches in diameter) of the coated cloth for each boat type shall be individually tested on the test jig as shown in figure 1. The specimen shall be placed, (coated side up), on the holder and the plate collar tightly bolted thereon. Care should be taken to ensure a leaktight fit. Water shall be poured on top of the specimen, sufficient to keep the top of the specimen completely covered at all levels of pressure. The specimen shall be inflated to an air pressure of 10 psi for 5 minutes. The air bubbles on the cloth surface produced by air pressure closing the spaces between the cloth and coating shall be removed. The cloth shall show no signs of leakage as evidenced by continued production of air bubbles.

4.5.2.14 Seam tests. The bonding together of any two or more pieces of coated fabric (such as lap joints, butt joints, and closure, chafing or reinforcing patches, coated fabric flanges of valves, etc.) shall be considered as seams and shall be subjected to all seam tests specified herein, except chafing patches which will only be tested for peel. The average breaking strength of five specimens for each type seam for each test shall be reported for conformance to table III. Breaking strength specimens shall be 2 inches wide (parallel to the seam) and shall extend (perpendicular to the seam) 3 inches beyond both edges of the seam. No part of the test specimens shall be coated or covered during the water immersion periods. Specimens shall be cooled in the immersion fluids at 73 ±5 °F, for 30 to 90 minutes before testing. Testing of immersed specimens shall be completed within 3 minutes after removal from the immersion fluids. The average peel adhesion strength of two specimens for each type seam shall be reported for conformance to table III. Peel adhesion specimens shall be of sufficient length to determine both the initial and after water adhesion values on the same specimen. If seam construction involves the use of binding thread, then the peel specimens shall be prepared with threads removed. Nonconformance to 3.5.1 and table III shall constitute failure of this test.

4.5.2.15 Dead load shear resistance. The test specimens shall be 1.0 inch, ±0.020-inch wide, (parallel to the seam) and coated fabric shall extend a minimum of 3 inches (perpendicular to the seam) on each side of the seam. One index mark shall be scribed on each side of the seam to facilitate observation and measurement of slippage. Each specimen shall be subjected to a constant (dead load) tension force of 50 ±1/2 pound, at 200 ±5 °F. After 24 hours examine each specimen while still under tension for signs of slippage or separation. Three specimens shall be tested for each determination. Slippage, by any specimen, greater than specified in 3.5.1 and table III shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article pack inspection.

4.6.1.1 Examination. The first article pack shall be examined for the defects specified in 4.6.2.4. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Inspection stages. Inspection shall be in two stages as follows:

a. The first stage shall include inspection of materials and methods inside the shipping container.
b. The second stage shall include inspection of materials and marking after the container is closed.

4.6.2.2 Unit of product. For the purpose of inspection, a unit of product for the first stage of inspection shall be a complete pack with the box top off. For the second stage of inspection, a unit of product shall be a completed pack ready for shipment.

4.6.2.3 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.4 Examination. Samples selected in accordance with 4.6.2.3 shall be examined for the following defects. AQL (Acceptable Quality Level) shall be 1 percent defective.

120. Repair kit not preserved as specified for level A.
121. Pump not preserved as specified for level A.
122. Components not stowed in each boat as specified for level A or C.
123. Boat not dusted with talc, potato flour, or powdered soapstone as specified for level A or C.
124. Boat not folded, placed in carrying case, and secured as specified for level A or C.
125. Shipping containers not as specified for level A or B.
126. Strapping not as specified for level A or B.
127. Boats not secured to pallets, if applicable, as specified for level C.
128. Marking missing, illegible, incorrect or incomplete.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination as specified (see 6.2) to prove, prior to starting production packaging, that the applied preservation, packing, and marking comply with the requirements of this specification. Examinations shall be those specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3). The first article pack may be accomplished utilizing the first article boat or a production boat. If the first article boat is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first article boat and production boats.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.2.1 Level A. Each pump with the number hose assemblies and adapters as required and repair kit items of like description, with the exception of the buffing solution and repair instructions sheet, shall be individually preserved

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

in accordance with MIL-P-116, method IC-1 or IC-3. The pump shall be cushioned to prevent damage to the method IC-1 or IC-3 barrier material. The repair kit items shall be placed in a repair kit stowage pocket in a manner to prevent damage to each other and to the boat. The pumps, with hose assemblies and adapters, shall be placed in their respective stowage pockets on the boat. The paddles shall be placed and secured in a carrying case. The tow bridle shall be coiled or hanked and secured in the best manner for its placement with the boat. The boat shall be dusted with soapstone, talc, or potato flour. All components shall be stowed as provided for, and the boat shall be folded and placed in the carrying case in accordance with the instructions specified on the carrying case. The carrying case shall be secured with its respective flaps and straps.

5.2.2 Level C. The repair kit items shall be placed in the repair kit pocket. The inflation pump, with required hose assemblies and adapters, shall be placed in their respective pockets on the boat. The paddles shall be placed and secured in the carrying case. The boat shall be dusted with soapstone, talc, or potato flour. The boat shall be folded and placed in the carrying case in accordance with the instructions specified on the carrying case. The carrying case shall be secured with its respective flaps and straps.

5.3 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.3.1 Level A. Each carrying case containing one complete boat shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, style optional, grade B, or PPP-B-621, class 2, style optional, grade B. Box closure and strapping shall be in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, finish B, size as applicable.

5.3.2 Level B. Packing shall be as specified in 5.3.1 for level A, except the boxes shall be domestic type or class as applicable. As an alternate, at the option of the contractor, a box conforming to PPP-B-640, class 2, style E may be used. Box closure and strapping shall be in accordance with the appendix to the applicable box specification; strapping shall be flat steel, finish A.

5.3.3 Level C. Each carrying case containing one complete boat shall require no additional packing. Quantities of boats may be palletized on wood pallets for expedited handling. Boats shall be secured to the pallet in a manner which will not damage boats or carrying cases.

5.4 Marking. Packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.

Type I - The boat is intended to carry 3 men with individual equipment, on reconnaissance missions across or along streams or rivers having a current not to exceed four feet per second. The boat may also be used for general utility work in bridge construction.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:12Z
Check the source to verify that this is the currentversion before use.

Type II - The boat is intended to carry 7 men with individual equipment/ weapons in the assault phase of river crossing operations, and is capable of being propelled by either paddles provided or by a 25-40 hp outboard motor (with 27.5 in. shaft). The boat may also be used for inspecting/determining stream and river bank conditions, and for general work in floating bridge construction. The boat is also intended to be used by the SF (Special Forces) combat swimmer (diver in open and closed circuit scuba operations) as well as by the engineer diver (MOS 00B) in open circuit scuba diving operations.

Type III - The boat is intended to carry 15 men with individual weapons and equipment in the assault phase of river crossing operations, and is capable of being propelled by either the paddles provided or by a 25-40 hp outboard motor (with 27.5 in. shaft). The boat may also be used for inspecting/determining stream and river bank conditions, and for general work in floating bridge construction. The boat is also intended for use by the SF combat swimmer (diver in open and closed circuit scuba operations) as well as by the engineer diver (MOS 00B) in open circuit scuba diving operations.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this specification (see 3.2).
b. When a first article is required for inspection and approval.
c. Type and capacity of boat (see 3.6).
d. Item and quantity of accessories (see 3.9.1).
e. Time frame for submission of sample selection plan (see 3.2.1) and process data (see 3.3).
f. Time frame required for submission of first article pack (see 5.1).
g. Level of preservation and packing required (see 5.2 and 5.3).

6.2.1 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) the data requirements identified shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Part 27.410.6 are invoked and the DD Form 1423 is not used, the data specified shall be delivered by the contractor in accordance with the contract or purchase order requirements.

Paragraph	Data Requirement	Applicable DID No.	Options
3.14.1	Repair plan	DI-P-5372	Delete: 1.a. Vacuum Plating 2.b. Purchase Description Title

Sufficient time should be alloted for review and approval by the Government.

(Copies of DIDs required by contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

6.3 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack, and mark the boats in accordance with this specification.

6.4 Provisioning. The contracting officer should include provisioning requirements for repair items as necessary and instructions on shipment of boats.

6.5 Definitions.

6.5.1 Repair. Repair shall be defined as a corrective operation which is required because of an omission of a step or incorrect performance of a step or process during a previously completed manufacturing operation.

6.5.2 First article. When a first article inspection is required, the boat(s) should be an initial production boat. In addition, the first article must include at least one type of repair for validation of each repair procedure. The repairs may be applied to the first article boat(s) or to separate samples. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first article.

6.6 Material safety data sheets. Contracting officers will identify those activities requiring copies of completed Material Safety Data Sheets prepared in accordance with FED-STD-313. The pertinent Government mailing address for submission of data are listed in appendix B of FED-STD-313.

6.7 Subject term (key word listing).

Assault
Boat, Rubber
Boat, Inflatable
Landing, Reconnaissance
Pneumatic

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 1940-A065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

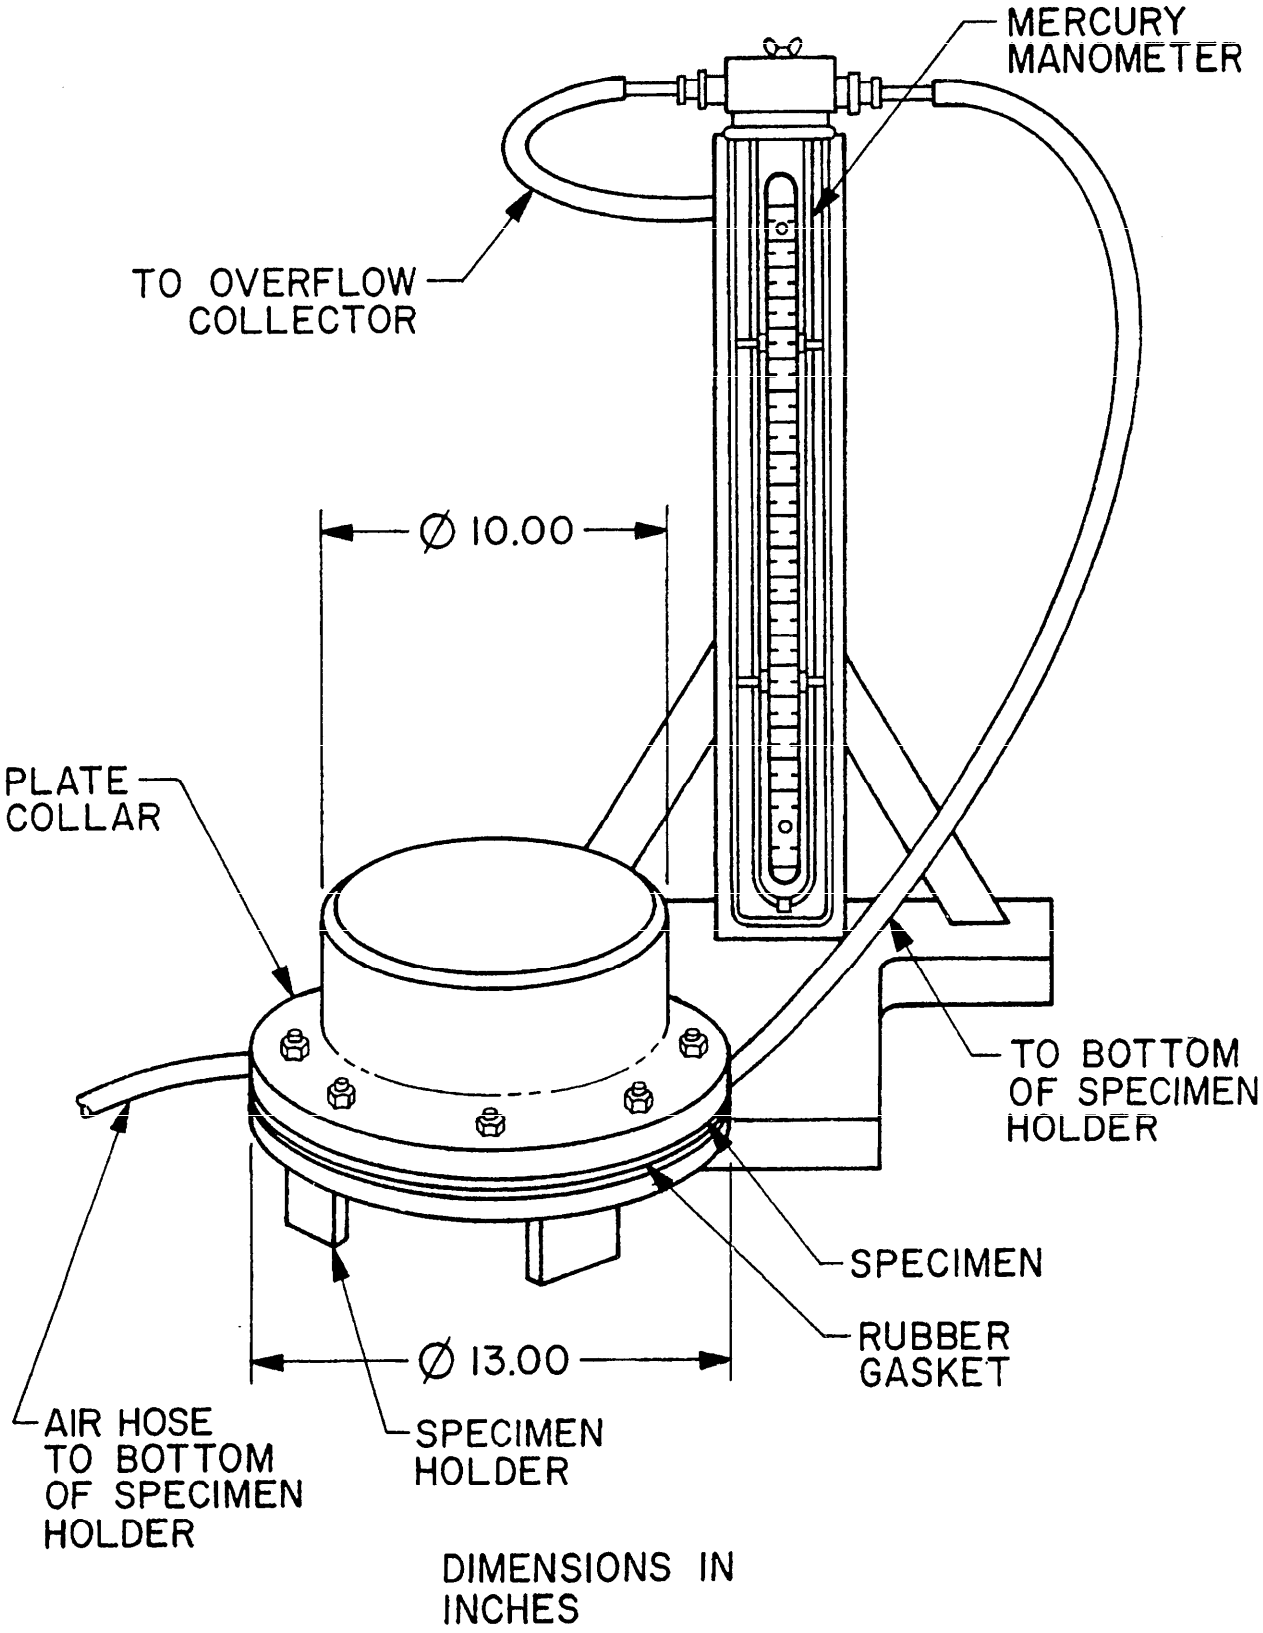


FIGURE 1. Air leakage test jig.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-53067(ME)	Boat, Reconnaissance/Landing/Assault, Inflatable: 3, 7, 15-Person

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

d are manufactured, examined, and tested in accordance with the materials use

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir RDE Center
ATTN: STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.