MILITARY
SPECIFICATION

MIL-C-55194(SigC)
26 September 1962

CONTROL, INTERCOMMUNICATION SET C-1611( )/AIC

1. SCOPE

1.1 Scope.- This specification covers one type of intercommunication control designated Control, Intercommunication Set, C-1611( )/AIC, which is a unit of Intercommunication Set AN/AIC-12.

1.2 The Control, Intercommunication Set C-1611( )/AIC is a fully transistorized unit using printed circuits and includes a headset amplifier, microphone preamplifier, microphone amplifier, and power filter circuitry.

2. APPLICABLE DOCUMENTS.

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced.
PPP-B-585	Boxes, Wirebound.
PPP-B-591	Boxes, Wood Cleated Fiberboard.
PPP-B-601	Boxes, Wood Cleated Plywood.
PPP-B-621	Boxes, Nailed Wood.
PPP-B-636	Boxes, Fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont'd)

MILITARY

MIL-P-116	Preservation, Methods of
MIL-E-5400	Electronic Equipment, Aircraft, General Specification.
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment.
MIL-I-6181	Interference Limits, Test and Design Requirements, Aircraft Electrical Equipment.
MIL-E-7894	Electric Power, Aircraft Characteristics of.
MIL-M-13231	Marking of Electronic Items.
MIL-F-14072	Finishes for Ground Signal Equipment.
MIL-P-55110	Printed Wiring Boards.

SIGNAL CORPS

SCS-155	Coatings, Conformal (For Coating Printed Wiring Assemblies).

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-170	Moisture Resistance Test Cycle for Ground Signal Equipment.
MIL-STD-202	Test Methods for Electronic and Electric Component Parts.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects for.
MIL-STD-415	Test Points and Test Facilities for Electronic Systems and Associated Equipment, Design Standard For.

DRAWINGS

SIGNAL CORPS

SC-A-46439	Lists of Accessories for Package Tester.
SC-A-362100	Requirements for Preparation of Packaging and Packing Illustrations and Bills of Material.

(Copies of the documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and identifying number or symbol should be stipulated when requesting copies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

3.1 Description.- Control, Intercommunication Set C-1611( )/AIC is an Improved, completely transistorized intercommunication and control unit of a multistation intercommunication and radio control system in Army Aircraft. The system includes one or more C-1611( )/AIC and is able to control eight radio receivess and four radio transmitters. The number of C-1611( )/AIC used in an aircraft is determined by the type of aircraft in which they are installed. Provisions are made for:

(a) Normal intercommunication between crew members.

(b) Controlling voice radio air-to-air or air-to-ground communication through a maximum of four transmitter-receiver combinations.

(c) Monitoring the output of a group of three navigational type radio receivers (Marker beacon, LF navigational and VHF navigational receivers).

(d) Routing the output of an emergency radio receiver directly to the earphones.

(e) Private interphone.

3.2 Size and weight.- The size and weight of the equipment shall be as per model, having overall dimensions of 3 inches high, 5.75 inches deep and 5.75 inches wide. The weight is approximately 2 pounds.

3.3 Procurement model.- A procurement mo of the equipment will be available for inspection by prospective bidders and will be lent to the contractor. Unless otherwise specified herein or in the invitation for bids, physical construction of the equipment shall conform to the model. (NOTE: In case of conflict between specified performance characteristics for the equipment and the performance of the model, the specified performance characteristics govern.)

3.4 Preproduction samples.- The contractor shall furnish 2 preproduction samples of Control, Intercommunication Set C-1611( )/AIC for approval, provided the invitation for bids and contract require samples. (See 4.3).

3.5 Parts, materials, and processes: General.- In addition to any requirements of this specification covering parts, materials, and processes, such items shall conform to the requirements of Specification MIL-E-5400 for Class IA equipments including the selection requirements therein.

3.5.1 Finish, protective.- The equipment shall be given protective finish in accordance with Specification MIL-F-14072, except that nickel plated brass screws may be used in contact with aluminum. The exterior surfaces shall be finished with epoxy semigloss, ebony-black enamel, as per model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.5.2 Connectors.- All connections from the control shall be made through a single connector, using connector, Cannon DC-37P or equivalent, and shall be connected to conform with the model.

3.5.3 Marking.- In addition to the requirements of Specification MIL-M-13231, the following shall apply:

3.5.3.1 Front panel marking.- Front panel marking shall be Group 1 per MIL-M-13231.

3.5.3.2 Serial numbers.- Each control unit shall be serial numbered.

3.5.3.3 Test points.- Test points shall be labeled in accordance with MIL-STD-415.

3.5.4 Printed wiring.- All printed wiring assemblies shall conform to Specification MIL-P-55110.

3.5.4.1 Conformal coatings.- Conformal coatings used on printed wiring assemblies shall be Class A Type ER of SCS-155.

3.5.5 Relay.- The relay used for interphone operation shall be a standard hermetically sealed miniature crystal can type relay as covered by the applicable subsidiary specification referenced.

3.5.6 Technical literature, tools, and running spare parts.- Technical literature and all tools required for installation and operation, including special tools and running spare parts, shall be provided as specified in the bid request and contract. Running spare parts shall be identical to corresponding parts in the equipment furnished on the order.

3.6 Control functions.- Each control station shall provide the following functions: Interphone operation, selection of any one (1) of four (4) radio transmitters (and associated receivers); selection of seven (7) radio receivers, four (4) of which are associated with the four (4) transmitters; and control of audio volume to the headset. Full listening and intercommunication facilities are required at all stations in the system.

3.6.1 Interphone operations.- Each control station shall provide a monitoring control for the interphone line regardless of the selector switch position. The selector switch shall provide monitoring as well as means for connecting the mike amplifier to the interphone line or private interphone circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.6.1.1 Hot mike.- When in private interphone mode and wired for hot mike operation, the microphone amplifier gain below AGC level shall be reduced 5 to 10 db. (See 4.6.2).

3.6.2 Transmitter selection.- The outgoing-signal selector switch shall allow the audio from the microphone amplifier to feed any one of the four (4) transmitters. Concurrent with the selection of a particular transmitter shall be the automatic selection of the associated receiver; also, the appropriate receive-transmit relay shall be connected to the operator's push-to-talk button.

3.6.3 Receiver selection.- Mutual isolation shall be provided to permit reception of any one, several, or all of the receivers without interference from any unselected receiver. This isolation shall be such that an undesired signal is attenuated at least 40 db below the desired signal. A single toggle switch shall be used to select the three Navigation Receivers.

3.6.4 Volume control (See 4.6.3).- Full output of 200 milliwatts shall be obtained when the control is rotated to approximately its 1 to 2 o'clock position. Further clockwise rotation shall cause speech-peak clipping as specified herein. Rotation of the control to its extreme counter-clockwise position shall cause the output signal to be attenuated 15 to 20 db below full output. Operation of the volume control shall not affect the headset level for the low frequency receiver, and emergency receiver inputs.

3.6.5 Two-button operation.- The aircraft in which this communication station is installed may contain a rocker-type switch (double-pole-double-throw action) on the controlstick for the pilot and/or co-pilot. Facilities shall be provided in the aircraft communication station such that, when the rocker-switch is wired to appropriate terminals on this equipment, the pilot (or co-pilot) may alternately select interphone or radio transmission by manual operation of rocker-switch only. This will be a spring-loaded switch, normally in the neutral or "off" position. By pressing the switch in one direction, the operator shall select radio (transmit) operation as determined by the transmitter setting on the selector switch of the communication station. By pressing the rocker-switch in the other direction, the operator shall select interphone (ICS) operation regardless of the position of the selector switch of the communication station.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.7 Interphone amplifiers.- A headset amplifier shall be provided as per model for each communication station to serve as an interphone listening amplifier, and as an audio amplifier for the selected signals from the various receivers. A microphone amplifier shall be provided at each station to serve as a microphone amplifier for interphone communications, or as a radio transmitter preamplifier. This equipment shall be for use with Headset Microphone H-101( )/U, Headset H-78( )/AIC or equivalent. The amplifiers shall be as per model, replaceable units or group of units.

3.7.1 Headset amplifier.- The headset amplifier shall provide the following performance. Measurements shall be made with a constant voltage source of 150 ohms ±10 ohms resistive internal impedance. The input to the isolation network supplying the headset amplifier shall be terminated by 150 ohm ±10 ohms resistive load for these tests. The headset amplifier output shall be terminated by 8 ohms ±0.5 ohms.

3.7.1.1 Frequency response (See 4.6.4.1).- The response to any frequency in the range 300 to 6000 cycles-per-second shall not vary more than +1 to - 3 db from the response at 1000 cycles per second. The volume control shall be in the extreme clockwise position. The response at 10,000 cycles-per-second shall be at least 5 db below the response level at 1000 cycles per second.

3.7.1.2 Distortion.- The total harmonic audio distortion shall not exceed 5% over the frequency range of 300 to 6000 cycles per second. This test shall be made with the volume control set fully clockwise and a constant input signal of 0.5 volts.

3.7.1.3 Gain.- The gain of the amplifier at 1000 cycles per second shall be such that an input of 0.5 volts into any reciever line having a bridging resistor of 4700 ohms (nominal) shall produce 100 milliwatts output ±2 db, with the volume control fully clockwise.

3.7.1.4 Internal noise.- With the input and output connections of the headset amplifier properly terminated and signal removed, the measured noise output shall be less than -12 dbm.

3.7.1.5 Input impedance.- The input impedance to any receiver line shall be such that the isolation between terminated lines shall be at least 40 db.

3.7.1.6 Output impedance.- The headset amplifier output impedance shall be between 8 and 15 ohms, so that maximum power will be delivered to the headsets specified.

3.7.1.7 Speech-peak clipping.- The headset amplifier shall be capable of providing any level of speech-peak clipping from 0 to 9 db ±3 db at the option of the operator. Control shall be by means of the volume control as specified in paragraph 3.6.4. Clipping shall be symmetrical so that the positive and negative peaks will be clipped within 1 db of each other.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.7.1.8 Power output.- The maximum unclipped power output at 1000 cycles per second shall be 200 milliwatts +2 db -2 db.

3.7.2 Microphone amplifier.- The microphone amplifier shall provide thefollowing performance: Measurements shall be made with a constant voltage source of 5 ohms ±0.5 ohms resistive internal impedance. The microphone amplifier shall be terminated in 150 ohms ±15 ohms.

3.7.2.1 Frequency response.- With a constant input of .075 volts (into a 5000 ohms to 5 ohms pad), the output of the amplifier relative to 1000 cycles per second output shall be within the limits of Table I.

TABLE I

Frequency, cps	Output (DB relative to 1000 cps)	
300	Plus 1	Minus 6
500	Plus 1	Minus 3.5
1000	0	
1500	Plus 1.5	Minus 1.5
2000	Plus 1.5	Minus 1.5
3000	Plus 1.0	Minus 2.5
4000	Plus 0	Minus 4.0
5000	Plus 0	Minus 6.5
10000	Minus 1	Minus 10.0

3.7.2.2 Distortion. - The total harmonic distortion present in the output voltage of the amplifier at 300 cycles per second shall not exceed the values shown in Table II.

TABLE II

Voltage Input Into a 5000 ohms to 5 ohms pad	Distortion Limits %
.134	5
.425	5
.75	6
1.34	7
2.4	10

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

3.7.2.3 Gain.- The gain of the microphone amplifier at 1000 cycles per second shall be such that an input of 0.6 volts (into a 5000 ohm to 5 ohm pad) shall produce an output of 50 mw ±1db.

3.7.2.4 Internal noise.- The noise outputof the microphone amplifier shall not exceed .085 volts (-13 dbm).

3.7.2.5 Input impedance.- The input impedance of the microphone amplifier shall be scuh as to be capable of working satisfactorily from low impedance signal source of 5 to 15 ohms.

3.7.2.6 Output impedance.- The microphone amplifier output shall work into a resistive load of 150 ohms ±15 ohms.

3.7.2.7 Isolation and line loading.- Isolation and line loading shall be a prime factor of the multi-place system. Any station shall be able to listen to the common line through isolation resistors which shall have a negligible effect upon the line impedance. Any combination of interphone or receiver switch settings at any or all positions shall not cause more than a 3 db change in level at any other control station.

3.7.2.8 Spurious signals.- Proper isolation circuitry shall be provided to minimize spurious signal rectification and amplification in the audio input circuits.

3.7.2.9 Sidetone.- Sidetone output shall be provided when the station is operated in any interphone position. The talkers sidetone level shall be 4 to 6 db below the talker's listen level. Sidetone output shall also be received on any of the four (4) radio transmitter positions from the associated radio receiver.

3.7.2.10 Automatic gain control.- The microphone amplifier shall incorporate automatic gain control. The release time of the A.G.C. circuit at 1 Kc shall be seven (7) seconds ±30%. The A.G.C. attack time at 1 Kc shall be 0.20 sec. maximum. Release time is defined as the time required for the output voltage to attain a value within 2 db of its ultimate value when the signal input is reduced from 1.34 volts to .425 volts (into a 5000 ohm to 5 ohm pad). Attack time is defined as time required to attain a value within 2 db of its ultimate value after applying 1.34 volts (into a 5000 ohm to 5 ohm pad), input.

3.7.2.10.1 Location of A.G.C. breakpoint.- The A.G.C. breakpoint shall be defined herein as the knee on the input-output curve caused by the A.G.C. action of the amplifier. The breakpoint shall be the point where a variance in linearity of the input-output characteristics is 1 db. This point shall occur at an input between .20 volts and .425 volts (into a 5000 ohms to 5 ohms pad) inclusive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.7.2.10.2 A.G.C. slope.- A.G.C. slope of the microphone amplifier at 1 Kc shall be such that a 20 db change in input, starting from the A.G.C. breakpoint shall produce no more than a 4 db change in the output of the amplifier.

3.8 Noise in output due to ripple on DC line.- With 3.0 volts ac peak-to-peak superimposed on the 27.5 volts d.c. line, the volume control at midposition and the selector switch at "Int", the headset amplifier output voltage measured across an 8 ohm resistor shall not exceed the following:

Ripple Frequency	Output Voltage
400	.042
5 Kc	.076
10 Kc	.020

3.9.1 Microphonics.- Microphonics in the amplifier circuits shall be held to at least equal to or better than the model.

3.9 Power supply.- The equipment shall be designed to operate directly from the nominally 27.5 volt d.c. supply of an aircraft. No dynamotor, vibrator, or other similar device shall be used. The equipment shall meet all requirements of this specification at 27.5 volts dc supply, and shall be operable and not suffer damage for any supply voltage from 24 to 29 volts. Performance at any of these voltages shall be at least as per model.

3.9.1 Power source transient.- The transient conditions specified in Specification MIL-E-7894 shall be considered in the fabrication of the equipment to the extent that it shall not suffer permanent damage when the transients are present on the primary power lines.

3.10 Interference limits.- The equipment shall meet the requirements of Specification MIL-I-6181.

3.11 Dimensions and tolerances.- When dimensions or tolerances are not specified but must be maintained to insure that components will fit together properly in use, or that replaceable parts will be interchangeable in all equipment on order, the contractor shall recommend suitable dimensions and tolerances and submit them to the contracting officer. Equipment on order shall conform to the approved dimensions and tolerances.

3.12 Adjustment and repair.- The equipment shall be so constructed that parts, terminals, wiring, etc., are accessible for circuit checking, adjustment, maintenance, repair, and replacement with minimum disturbance to other parts and wiring and with use of the minimum number and variety of special tools, particularly those needed for tuning and adjustment. When tools for tuning or adjustment are needed, the component where they are used shall provide convenient means for mounting them.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:14Z
Check the source to verify that this is the currentversion before use.

3.13 Interchangeability.- Corresponding components, replaceable subassemblies, and replaceable parts on contract shall be physically and functionally interchangeable as units without modification thereof or of other items with which the units are used. When dimensions, ratings, characteristics, etc., are not specified, the manufacturer's design limits shall be used to determine compliance with the foregoing. If the contractor is in doubt as to whether a particular subassembly or part is to be considered replaceable, the contracting officer's technical representative shall be consulted.

3.14 Service conditions.- The equipment shall meet the following service conditions, and the applicable requirements of Specification MIL-E-5400. Where a test is referenced, meeting the test shall be considered as compliance with the requirement.

3.14.1 Operation.- Continuous operation for a period of 1000 hours under the world-wide environmental conditions specified in 3.14.2 through 3.14.6 with a duty cycle of 23 hours on and 1 hour off without servicing and 5000 hours of operation with no more than normal maintenance and replacement of parts. Where the contractor is required to make a selection of parts, materials, processes, construction methods, etc. he shall be guided by this requirement. Approval of the preproduction sample (see 3.4) shall be considered as compliance with this requirement.

3.14.2 Temperature (see 4:7.5).-

(a) Operating: Ambient temperature in the range of +131°F to -40°F, except as noted in 3.14.4; exposure at the high temperature extreme not to exceed 4 hours, after the equipment reaches temperature equilibrium, and at the low temperature not to exceed twenty-four hours after equipment reaches temperature equilibrium. Allowable degradation at the extremes of 5 db from reading noted at room temperature.

(b) Nonoperating: Exposure in the range of +185°F to -80°F; exposure at the high temperature extreme not to exceed 4 hours, after the equipment reaches temperature equilibrium, and at the low temperature extreme not to exceed 24 hours after equipment reaches equilibrium.

3.14.3 Relative humidity(see 4.7.6).- Up to 97 percent relative humidity for 20 hours; and exposure at 100 percent relative humidity, with condensation, for 4 hours.

3.14.4 Elevation (see 4.7.7).- The equipment shall meet all requirements under pressure conditions corresponding to an altitude of 20,000 feet and shall withstand extended storage at altitude equivalent to 50,000 feet (to simulate air transport) without any damage to the equipment. At altitude conditions equivalent to 15,000 feet or higher, maximum temperature shall be 86°F.

3.14.5 Orientation, operating and nonoperating: Indefinite storage in any orientation.

3.14.6 Vibration, bounce and shock.- As described in 3.15.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:14Z
Check the source to verify that this is the current version before use.

3.15 Vibration, bounce and shock.-

3.15.1 Vibration.- The equipment shall meet the vibration requirements of Specification MIL-E-5400 for combination aircraft and helicopter equipment.

3.15.2 Bounce and shock.- The equipment shall be capable of meeting the following requirements:

Paragraph heading	Bounce and Shock Par. No.	Performance after tests
Bounce test;	4.7.2	Specified performance. No physical damage.(Note A)
Shock;bench-handling	4.7.3	Specified performance. No physical damage.(Note A)
Shock; Service	4.7.4.1	Specified performance. No physical damage.(Note A)
Shock; Crash	4.7.4.2	Operable (Note A). Any physical damage shall be minor only

NOTE: Upon completion of each test, the equipment shall be submitted to the electrical tests in para. 4.6.

3.16 Preconditioning.- The equipment shall be capable of meeting the requirements herein, without subsequent processing after subjection to the bounce preconditioning of 4.5.

3.17 Workmanship.- The equipment shall be manufactured and assembled in a thoroughly workmanlike manner, in accordance with the applicable portions of Specification MIL-E-5400 and of the following:

3.17.1 Dimensions.- All dimensions and toleranees shall be consistent with the best shop practices. Where dimensions and tolerances affect interchangeability, operation, or performance of the equipment, they shall be held or limited accordingly.

3.17.2 Fabrication.- All machining, drilling, and forming shall be performed by the use of accurate templates, jigs or gages. Boxes, cases, shields, racks, panels and compartment walls shall be made by casting, drawing, or bending and welding, except where ease of servicing of the equipment requires that a removable panel construction be used or where the applied stresses dictate the use of a strong aluminum alloy which does not provide a good weld. For such parts riveting or bolting may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.17.3 Clean-up.- After final assembly units shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign material.

3.17.4 Marking.- Marking shall conform to the requirements of this Specification. (See 3.5.3 through 3.5.3. 3)

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor's responsibility.- The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract. The Government reserves the right; to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection shall be classified as follows:

(a) Preproduction inspection (does not include preparation for delivery)

(b) Acceptance inspection.

(1) Acceptance inspection of equipment before preparation for delivery. (See 4.4).

(2) Acceptance inspection of preparation for delivery. (See 4.10 and Section 5).

4.3 Preproduction inspection.- This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in table IV and the Group A, Group B and Group C inspection specified in tables V, VI, and VII respectively. Other nondestructive tests on preproduction samples may be performed to determine compliance with specified requirements. The preproduction inspection will normally be performed in this order: (1) vibration, (2) bounce, (3) shock, bench handling and (4) shock, service and crash; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

Table IV Preproduction Inspection

Inspection	Reqt Para.	Insp Para.
Bounce	3.15.2	4.7.2
Shock, Crash	3.15.2	4.7.4.2

4.3.1 Acceptance inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the acceptance before preparation for delivery:

ITEM	WHERE REQUIRED
Finish	3.5.1
Marking	3.5.3
Interference Limits	3.10

4.4 Acceptance inspection of equipment before preparation for delivery.- The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified in 4.4.1 thru 4.4.5. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the Contractor's inspection procedures and examine the contractor's inspection records. In addition the Government--at its discretion--may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. Each unit, which will be subjected to group A, group B, or group C inspection shall be preconditioned after final assembly.

4.4.1 Group A inspection.- This inspection, including sampling, shall conform to table V and the ordinary inspection procedures of Standard MIL-STD-105. Group A inspection shall be performed in any order which is satisfactory to the Government, except that the operational inspection shall be last.

Table V Group A Inspection

Inspection or test	Rqt Para.	Insp Para.	AQL Major	AQL Minor
Visual & Mechanical	3.17			
Control, Intercommunication Set C-1611( )/AIC		4.3	1.5 dphu	6.5 dphu
Electrical				
Head Set Amplifier	3.7.1	4.6.4)	1.5 dphu for *	
Microphone Amplifier	3.7.2	4.6.5)	the group	
All Controls	3.6	4.6)		

*All electrical defects are considered major

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

4.4.2 Group B inspection.- This inspection (including sampling) shall conform to table VI and to the special procedures for small-sample inspection of Standard MIL-STD-105. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R-1. Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with 4.4.5 and the requirements of Standard MIL-STD-105 for disposition of rejected product.

Table VI Group B Inspection

Inspection	Rqt Para.	Test Para	AQL
Interchangeability	3.13	4.9	6.5%
Interference Limits	3.10	4.3.1	4.0%
Microphonics	3.8.1	4.7.1	1.0%

4.4.2.1 Group B sampling plans.- The group B sampling plans, for the AQL's listed in table VI, shall be as follows:

AQL	Inspection level for normal and tightened inspection	Inspection level for reduced inspection
4.0%	L-8	L-6
6.5%	L-7	L-5

4.4.2.2 Procedure in case of failure.- When an inspection lot fails, the contractor shall immediately investiage the cause of failure and take corrective action to assure that subsequent lots do not contain the same defect or defects.

4.4.3 Group C inspection.- This inspection shall be as listed in table, VII:

Table VII Group C Inspection

Inspection	Rqt Para.	Test Para.
Temperature	3.14.2	4.7.5
Moisture-Resistance	3.14.3	4.7.6
Altitude	3.14.4	4.7.7
Vibration	3.15.1	4.7.1
Shock (service)	3.15.2	4.7.4.1

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

4.4.3.1 Sampling for inspection of equipment.- Two units from each month's production or two units out of every 100 whichever occurs first shall be selected without regard to their quality, except that the units inspected at the start of the contract shall be selected from the first units produced.

4.4.3.2 Noncompliance.- If a sample unit fails group C inspection, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken on the process and all units of product which were manufactured with the same conditions, materials, processes, etc. If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the contractor cannot determine the cause of failure, the matter shall be referred to the contracting officer. (See 6.4).

4.4.4 Reinspection of conforming group B and group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed group B or group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.4.5 Disposition of nonconforming product.- Disposition of nonconforming product shall conform to Standard MIL-STD-105. Such product shall be suitably tagged or identified to indicate the cause of failure and means employed to correct the fault. The required information shall be presented to the Government when the product is submitted.

4.5 Bounce preconditioning.- The control and interconnecting box shall be placed in its normal operating position on the table of Package Tester, Type 1000-SC, as made by the L.A.B. Corporation, Skaneateles, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the unit shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.

4.6 Electrical tests.- Each control unit shall be subjected to the test required to determine compliance with the requirements of this specification and MIL-E-5400. The test setup circuits and equipment shown in figure 1 or equal shall be used as specied below. Tests shall be made with a 1000 cps input unless otherwise indicated. Electrical tests shall include but not be restricted to the following:

4.6.1 Continuity.- Electrical continuity of wiring and other connections including ground connections to the chassis shall be verified by a point-to-point test.

4.6.2 Hot mike operation.- (See 3.6.1.1).- Using figure 1, connect the input to pin 2 and output to pin 8. With the selection switch in PVT position, an input of 0.425V shall give an output of 0.52 to 1.85V.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

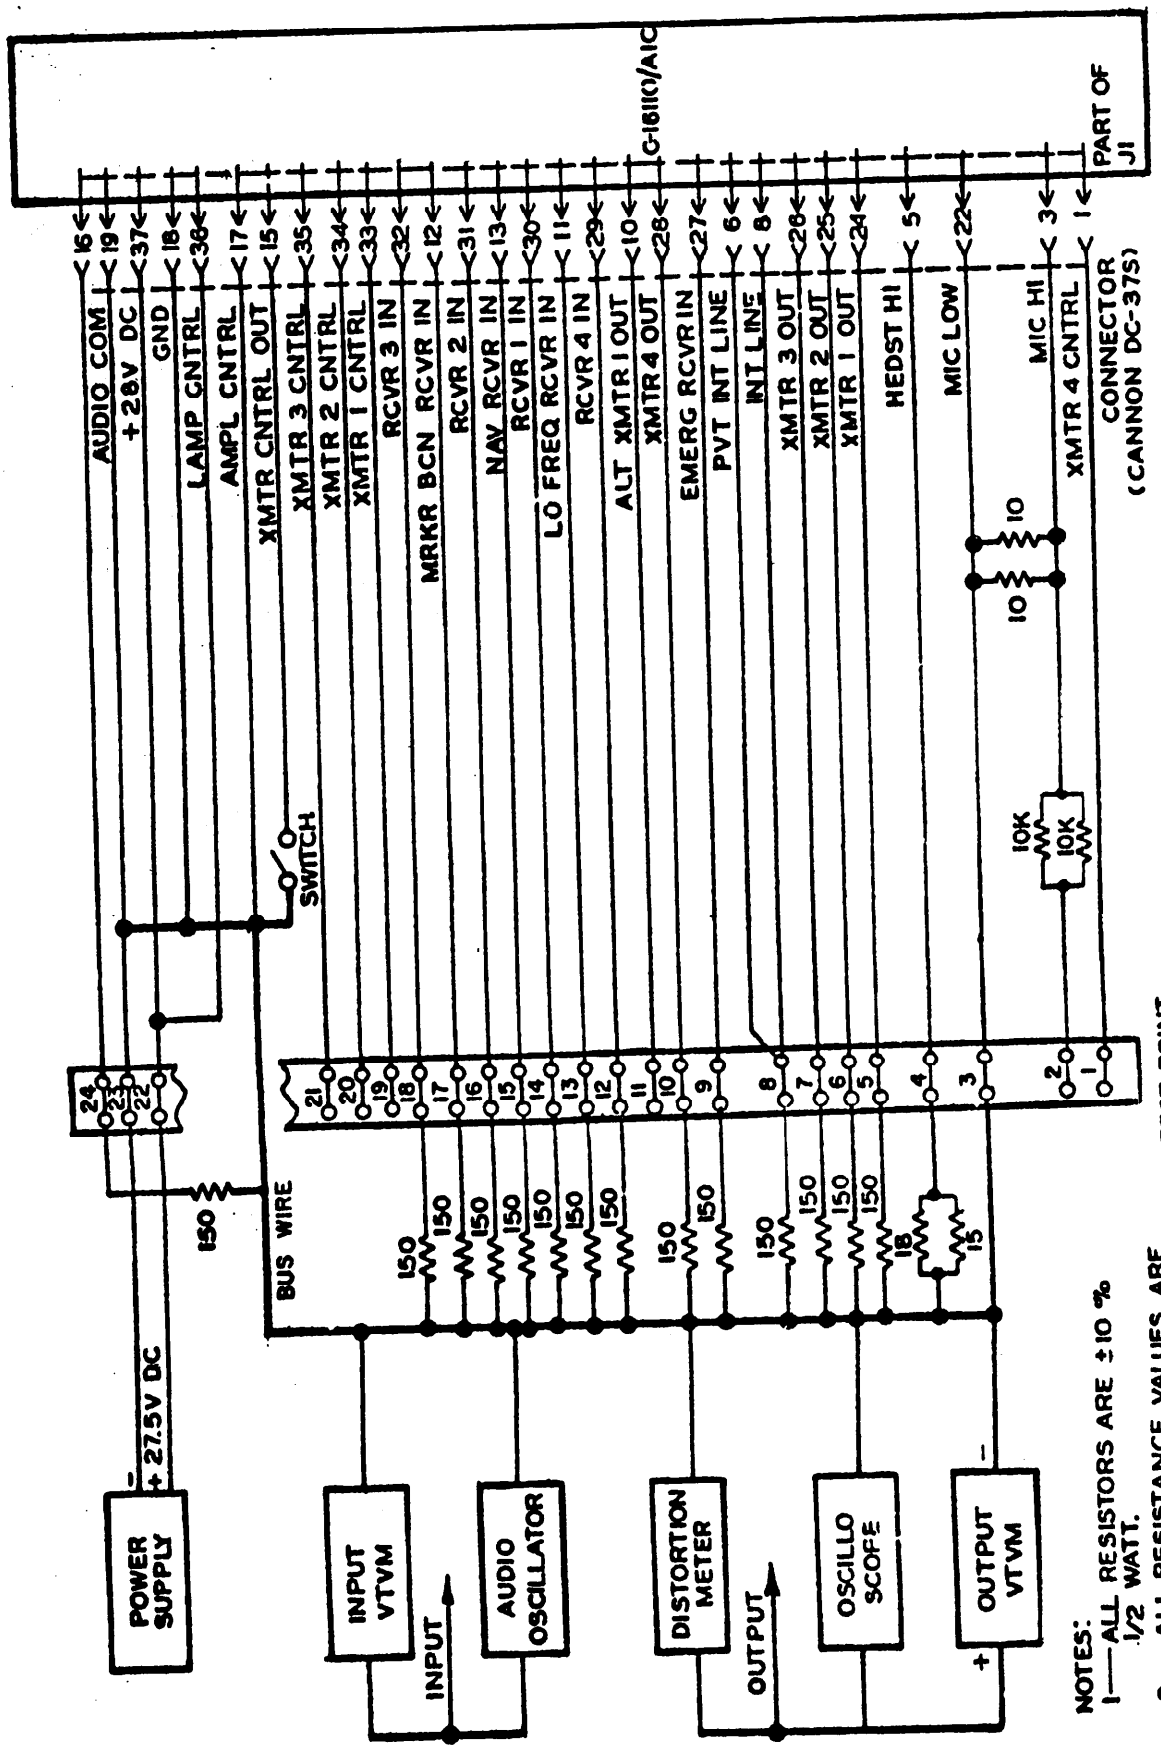


FIGURE 1. CONTROL INTERCOMMUNICATION SET C-16110/AIC TEST SETUP CIRCUIT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.6.3 Volume control (See 3.6.4).-

(a) Using fig. 1, connect the input to pin 14 and the output to pin 4. Set the volume control between 1 & 2 o'clock, the transmit-interphone selection switch in 1 position and the receiver switches off. Increase input level (at 1 kc) until the output just begins to clip. The output shall measure between 1.0 and 1.6V. Further clockwise rotation of the volume control shall not increase the output voltage. Rotation of the volume control fully counterclockwise should cause the output to be 15 to 20 db less than the maximum output.

(b) Transfer the input from pin 14 to pin 9. Rotation of the volume control should not change the output level significantly.

(c) Transfer the input from pin 9 to pin 13. Turn on the NAV receivers switch. Rotation of the volume control should not change the output level significantly.

4.6.4 Headset amplifier(see 3.7.1) The performance of the headset amplifiier shall be determined as described below.

4.6.4.1 Frequency response (See 3.7.1.1).- Using fig. 1, connect input to pin 14 and output to pin 4. Set volume control fully clockwise, selection switch in position 1 and all receiver switches off. Keeping the input level constant at 0.5 volts, measure the output levels at 300, 1000, 2000, 3000, 4000, 6000, and 10,000 cps which should meet the requirements of paragraph 3.7.1.1.

4.6.4.2 Distortion.(See 3.7.1.2).- Using the same test set-up as in paragraph 4.6.4.1, and keeping the input level constant at 0.5 volts, measure the harmonic audio distortion at 300, 1000, 3000, and 6000 cps. It should not exceed 5%.

4.6.4.3 Gain (See 3.7.1.3).- Using the same test set up as in par. 4.6.4.1, set the input to 0.5 volts at 1000 cps and measure the output which should be between 0.71 and 1.21 volts.

4.6.4.4 Internal noise (see 3.7.1.4).- Using the same test set up as in par. 4.6.4.1, remove the input from pin 14 and measure the output noise which should be less than -12 dbm.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

4.6.4.5 Speech-peak clipping.- Using the same test set up as in para 4.6.4.1, set the volume control at 12 o'clock and increase the 1 kc input until clipping just takes place on either the top or the bottom of the sine wave. Note output voltage. Increase input until the remaining half of the sine wave begins to clip: Note output voltage. Difference in output voltages shall not exceed 1 db. Reduce input level until clipping is just taking place. Note input voltage. Turn volume control fully clockwise. Reduce input level until clipping is again just occurring. Note input voltage again. Difference in input voltage shall be within 6 to 12 db.

4.6.5 Microphone amplifier(See 3.7.2).- Ther performance of the microphone amplifier shall be determined as described below.

4.6.5.1 Frequency response(See 3.7.2.1).- Using figure 1, connect the input to pin 2 and output to pin 5. Set selector switch to position 1 and receiver switches off Set volume control at 12 o'clock. Measure the output level at each of the frequencies shown in Table I, keeping the input constant at 0.075 volts.

4.6.5.2 Distortion.-(See 3.7.2.2).- Using the same test set up as in paragraph 4.6.5.1, set the input frequency to 300 cps and measure the harmonic distortion at the input levels listed in Table II.

4.6.5.3 Gain(See 3.7.2.3).- Using the same test set up as in Paragraph 4.6.5.1, and an input of .6 volts at 1000 cps, measure the output.

4.6.5.4 Internal noise (See 3.7.2.4).- Using the same test set up as in paragraph 4.6.5.1 but with the input lead removed, measure the output at pin 5.

4.6.5.5 Input impedance (see 3.7.2.5).- Using the circuit of figure 1, replace the 5k to 5 ohm pad between pins 2 & 3 with a 5 k to 15 ohm pad. Repeat tests 4.6.5.1, 4.6.5.2, and 4.6.5.3 using approximately 5 db less input voltage than required with the 5 k to 5 ohm pad. The results of these tests, using a 15 ohm source impedance shall be within the limits set for each test.

4.6.5.6 Automatic gain control release time (See 3.7.2.10).- Using the circuit of Figure 1, connect input to pin 2 and set input to 0.425 volts at 1 kc. Center the output wave on the oscilloscope, and adjust vertical sensitivity so that peak of wave is three cm. above the center line. Set sweep time to two seconds/cm. Increase input to 1.34 volts. Reduce input to 0.425 volts and measure time required for output to reach 2.4 cm. from centerline, which should be from 4.9 to 9.1 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.6.5.7 Automatic gain control attack time (See 3.7.2.10).- Using the test set up of 4.6.5.6, set input to 1.34 volts at 1 kc. Adjust verticalsensitivity so that peak of wave is 3 cm. above center line. Adjust horizontal position so the start of the wave is one cm. to the left of vertical center line. Set sweep mode to pre-set. Set sweep time to 0.2 seconds/cm (vernier fully clockwise). Turn oscillator switch to term. Leave switch open for at least 30 seconds. Close switch and note time for the outpu t level to reach 3.75 cm. above center line. This is the attack time.

4.6.5.8 Location of A.G.C. breakpoint(See 3.7.2.10.1).- Using the test set up of 4.6.5.6, set the input level to 0.2 volts and note db reading on both input and output meters. Increase input gradually until the difference in db reading of input and output meters has increased 1 db. The input at this point is the AGC breakpoint.

4.6.5.9 A.G.C. slope (See 3.7.2.10.2).- Set input to AGC breakpoint as determined in 4.6.5.8. Note db reading of output meter. Increase input 20 db and note difference in db reading of output meter from the initial reading.

4.6.6 Noise in output due to ripple on DC line (See 3.8).- Using figure 1, disconnect the audio oscillator and input VTVM from the circuit. Set the volume control to mid-position and selector switch to "Int." Connect the output lead to pin 4. Using the audio oscillator and a suitable isolation transformer, in series with the power supply, superimpose a 3 volt peak-to-peak (1.06 volts rms) ripple across pin 22 & pin 23 at 400, 5000, & 10,000 cps. The voltages on the output VTVM shall not exceed 0.042, 0.076, and 0.020 respectively.

4.6.7 Systems tests.- Units shall be consistent among themselves, so that it will not be necessary to select matched units to meet the s m requirements of this specification.

4.6.8 Interphone system.- Units shall be connected in a two-station interphone system, with each interphone line externally shunted by a 150 ohm ±10 ohms resistance. Units shall be checked for frequency response, distortion, and signal-plus-noise to noise ratio and shall meet all requirements of this specification for any audio frequency within its range. The interphone line shall be checked. Test limits shall be consistent with engineering practices.

4.7 Service conditions tests.- The units shall be submitted to the following tests utilizing the applicable tests of MIL-E-5400 or MIL-STD-202.

4.7.1 Vibration test.-

(a) The equipment shall be tested forcompliance with the requirements of para.3.15.1 as specified in Specification MIL-T-5422.

(b) Mechanical resonance, if any, of the complete structure, of sub-assemblies, and of component parts shall be determined visually by means of a Strobotac, as made by the General Radio Corporation, Cambridge, Massachusetts, or equal, or by energizing the equipment and detecting mechanical vibration through electrical output indications. Any microphonics in the equipment (as from the microphone amplifier) shall be noted, and recorded as objectional Modulation.

(c) The electrical tests of para. 4.6 shall be made upon completion of the vibration test. No mechanical or electrical deterioration shall be evident.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.7.2 Bounce test.- The equipment shall be tested on the package tester, type 1000SC, as made by the L.A.B. Corporation, Skaneateles, New York, or equal. Accessories shall be selected from those listed on Drawing SC-A-46439. The test shall be as follows:

(a) Secure the equipment to the 48 by 48 inch vehicular adapter plate in the same manner as it would be mounted in an aircraft. The adapter plate shall be free of cracks and broken welds, and all unused holes except the 2-inch breather holes shall be plugged. No part of the mounted surface shall be less than 7 inches from the edge of the adapter plate.

(b) Cover the tester bed with a panel of 1/2 inch plywood, with the grain parallel to the drive chain. Space sixpenny nails, with the heads below the surface at 6-inch intervals around all four edges and at 3-inch intervals in a 6-inch square in the center.

(c) Place the adapter plate on the bed of the package tester. Limit the lateral motion, by wooden fences, to not more than 3 inches and not less than 1 inch. Additional barriers may be used to safeguard personnel, provided that the fore-and-aft motion of the adapter plate against the backstop is not restrained.

(d) Operate the package tester, shafts in phase, for a total of 3 hours at 283 ± 1 rpm. Turn the adapter plate 90 degrees at the end of each 45 minutes, each time in the same direction.

4.7.3 Shock test: Bench-handling.- Each assembly which can be serviced on a bench shall be tested as follows: The chassis and front panel assembly shall be removed from its enclosure, as for servicing, and placed in a suitable position for servicing on a solid, 2-inch fir bench top. The test shall be performed as follows, in a manner simulating shocks liable to occur during servicing:

(a) Tilt up the assembly through an angle of 30 degrees, using one edge of the assembly as an axis, and permit the assembly to drop back freely to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of four drops.

(b) Repeat "(a)" with the assembly resting on other faces, until it has been dropped for a total of four times on each face on which the assembly might practically be placed during servicing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.7.4 Shock test: Service and Crash.- These shock tests shall be conducted as follows, utilizing method 205 of MIL-STD-202:

4.7.4.1 Shock (Service).- The equipment mounted as in a service installation shall be subjected to shocks as specified for test condition A. The equipment shall meet the requirements specified herein after completion of the test.

4.7.4.2 Shock (Crash).- The equipment when mounted as in a service installation, shall be subjected to shocks as specified in Test Condition B of Method 205 of MIL-STD-202 except that only two shocks shall be applied in each direction.

4.7.5 Temperature tests.- The equipment shall be turned off between each temperature change. The equipment temperature shall be allowed to stabilize before testing.

STEP	CONDITION
(1)	Stabilize the equipment temperature at any temperature ± 3 between 70F and 90F. Conduct performance tests. Performance shall meet the requirements of this specification.
(2)	Reduce the equipment temperature to minus 80 (+0 -6)F and maintain in a non-operating condition for five hours.
(3)	Raise the equipment temperature to minus 40 (+0 -6)F. Conduct performance tests. Performance shall meet the requirements of this specification.
(4)	Raise the equipment temperature to any temperature ± 3 between 70F and 90F. Conduct performance tests. Performance shall meet the requirements of this specification.
(5)	Raise the equipment temperature to 185 (+6 -0)F and maintain in a non-operating condition for five hours.
(6)	Reduce the equipment temperature to 150 (+6 -0)F. Equipment shall be operable although not necessarily meeting performance requirements of this specification.
(7)	Reduce the equipment temperature to 131 ± 3F. Conduct performance tests. Performances shall meet the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.7.6 Moisture-resistance test for units.- The units shall be tested as follows:

4.7.6.1 Test conditions.-

(a) Do not move units from the humidity chamber for measurements.

(b) Start measurements not more than 5 minutes after power is applied to the units. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.7.6.2 Test method.-

(a) Dry at 130° ± 5°F for 24 hours.

(b) Condition at 77° ± 5° F and 40 to 50 percent relative humidity for 24 hours.

(c) Take measurements as specified in 4.7.6.3 and readjust or realine as necessary to meet full specification requirements.

(d) Subject to continuous cycling for five 48-hour cycles. Temperature, relative humidity and period of time for each portion of the cycle shall conform to Standard MIL-STD-170. The performance measurements shall be made during the periods shown on the standard and shall comply with specification requirements.

(e) After cycling has been completed, condition the equipment for 24 hours at 77 ± 5F and 40 to 60 percent relative humidity. Then adjust for optimum performance, using only those means provided by the units. No repair or replacement of parts shall be made. The units shall meet full specified performance.

4.7.6.3 Performance.- Measurements made during test, and specified performance during cycling, shall be in accordance with the tests of 4.6.

4.7.6.4 Failure.- If the equipment fails to meet specified performance during cycling, it shall be readjusted once. If the equipment then fails subsequently during cycle, it does not pass the test. In addition, if the equipment does not meet 4.7.6.3 it does not pass the test.

4.7.7 Elevation.- The equipment shall be subjected to the following tests, utilizing method 105 of MIL-STD-202:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.7.7 Elevation.- (Contd)

STEP	CONDITION
(1)	The equipment shall be placed in its normal operating position in an altitude chamber and operated for 15 minutes at the prevailing room conditions. Performance tests shall then be made and shall meet the requirements of this specification.
(2)	The altitude chamber door shall be closed and evacuation of the chamber initiated. The equipment shall be operated at this time.
(3)	Continue to evacuate the chamber to 13.5 inches of mercury (approximately 20,000 ft. altitude) with the equipment still operating. The equipment shall be operated at this pressure for 15 minutes. There shall be no degradation in the mechanical and electrical characteristics of the equipment.
(4)	Increase the pressure to room ambient at a temperature between 70F and 90F.
(5)	Performance tests shall be made and the equipment shall meet the requirements of this specification.
(6)	Turn off the equipment. Lower the pressure to 3.4 inches of mercury (approximately 50,000 feet altitude). Maintain the set at this pressure in a nonoperating condition for five hours.
(7)	Increase the pressure to room ambient at a temperature between 70F and 90F.
(8)	Performance tests shall be made and the equipment shall meet the requirements of this specification.

4.8 Visual and mechanical inspection.- All units, assemblies and sub-assemblies shall be examined for the defects listed in Standard MIL-STD-252 and table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

Table VIII Classification of defects

Type Defect	Description of Defect
Major	Large burrs, stripped threads and imperfections which will interfere with the assembly for any operation. Missing, inoperative, improperly assembled, defective, or wrong parts which could cause equipment to become inoperative in service. Inoperative panel fastenings.
Minor	Burrs or imperfections on parts which will not interfere with proper operation, assembly or disassembly.

4.9 Inspection for interchangeability.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirement of 3.13. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

(b) Dimensions of cavities, of the console and other units, when such dimensions affect insertion of items.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

4.10 Acceptance inspection of preparation for delivery.- Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of section 5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Level A.- Control, Intercommunication Set C-1611( )/AIC shall be preserved, packaged and tested in accordance with the applicable provisions of Specification MIL-P-116 and in a manner that will afford adequate protection against corrosion, deterioration and damage during worldwide shipment, handling and open storage.

5.1.2 Level C.- Control, Intercommunication Set C-1611( )/AIC shall be afforded preservation and packaging in accordance with the suppliers' normal commercial practice.

5.2 Packing.- Control, Intercommunication Set C-1611( )/AIC packaged as specified, shall be packed in shipping containers conforming to the requirements of the specifications referenced below for the designated level. The gross weight shall not exceed the weight shown unless an individually packed item exceeds that amount. Closure and strapping shall be as prescribed in the applicable box specification or appendix thereto, except that bands of reinforced, pressure-sensitive adhesive tape, 1/2 inch wide and conforming to Specification PPP-T-97 for Grade IV, shall be used for fiberboard boxes in lieu of metal strapping.

5.2.1 Level A.-

BOX SPECIFICATION		MAX. GROSS WT.
Fiberboard (Type I, Class 2)	PPP-B-636	Table VI
Nailed Wood (Style 4, Class 2)	PPP-B-621	200 lbs.
Wirebound (Style 2 or 3, Class 2)	PPP-B-585	200 lbs.
Wood Cleated Fiberboard (Overseas)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Overseas)	PPP-B-601	200 lbs.

5.2.2 Level B.-

BOX SPECIFICATION		MAX. GROSS WT.
Fiberboard (Type I, Class 1)	PPP-B-636	Table I
Nailed Wood (Style 4, Class 1)	PPP-B-621	200 lbs.
Wirebound (Style 3, Class 1)	PPP-B-585	200 lbs.
Wood Cleated Fiberboard (Domestic)	PPP-B-591	200 lbs.
Wood Cleated Plywood (Domestic)	PPP-B-601	200 lbs.

5.2.3 Level C.- Control, Intercommunication Set C-1611( )/AIC shall be packed in shipping containers of the type, size and kind commonly used for the purpose in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the rules or regulations of the common carrier, applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

5.2.4 Pilot Pack.- When Level "A" packaging and packing is specified above, one acceptable model of Control, Intercommunication Set C-1611( )/AIC will be pilot packed in a manner that will pass the preproduction tests prescribed in Specification MIL-P-116. Illustrations of the packaging and packing procedure, together with Bills of Material, will be prepared and furnished in accordance with the provisions of Signal Corps Drawing No. SC-A-362100.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL-STD-129.

6. NOTES

6.1 Intended use.- The Control, Intercommunication Set C-1611( )/AIC is a component of Intercommunication Set AN/AIC-12. It is a control unit installed at the personnel stations in army aircraft for the purpose of intercommunication. The number of control units used in an installation depends on the type of aircraft designated.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Level of packaging and level of packing required for shipment. (Level A, level B or level C).

(c) The specific paragraphs of section 5 which are applicable to the particular procurement.

(d) Preproduction inspection:

(1) Two sample units of each item cited in section 1 are generally required so that lengthy environmental tests can be completed on one sample unit while complete performance measurements can be made on the second sample unit. (See 3.4).

(2) Preproduction pack(s) as follows:

Makeup of pack(s).
Number of each kind of pack to be submitted.
Inspection to be performed thereon.

(e) Marking and shipping of samples.

(f) Place of final inspection.

(g) Technical literature required. (See 3.5.7).

(h) Quantity of tools and running spare parts required. (See 3.5.7).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

6.3 Nomenclature.- The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: C-1611W/AIC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Group C inspection.- Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action. (See 4.4.3).

6.5 Definition of level B.- Level B packaging requirements detailed herein are designed to furnish protection against corrosion, deterioration, and physical damage during domestic shipments; covered storage for a period of three years or less; and distribution within the continental limits of the United States.

6.6 Verification inspection.- Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality system and the quality history of the product, and will normally be identified by the categories listed below:

(a) Type A--The total of that inspection set forth in the Quality Assurance Provisions of this specification or the contract. Included in this category is that amount of inspection referred to as normal and tightened inspection by Military Standard 105.

(b) Type B--That inspection set forth in the Quality Assurance Provisions of this specification or the contract reduced in amount under the reduced inspection provisions of Military Standard 105.

(c) Type C--A reduced inspection procedure resulting in a material reduction in the amount of inspection set forth in the Quality Assurance Provisions of this specification. The amount of inspection is less than that provided for in type B and is based upon a consistently acceptable product resulting from a planned quality control system voluntarily employed by the contractor in the production of the product.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.