MIL-L-54002B
3 February 1983
SUPERSEDING
MIL-L-54002A
9 May 1969

MILITARY SPECIFICATION

LADDERS: ALUMINUM, THREE-WAY COMBINATION


STEP, STRAIGHT, EXTENSION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers three-way combination aluminum ladders.

1.2 Classification. The ladders covered by this specification shall be designated in the following form (see 6.2 and 6.6).

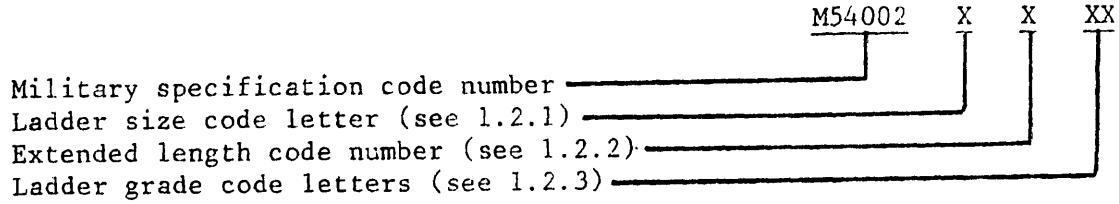

1.2.1 Ladder size. The ladder size is identified by a single letter (see table I).

TABLE I. Ladder size code letter.

Code letter	Size
A	6 feet
B	8 feet
C	10 feet

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

1.2.2 Extended length. The ladders extended length is identified by a single digit number (see table II).

TABLE II. Extended length code number.

Code number	Extended length
1	10 feet
2	14 feet
3	18 feet

1.2.3 Ladder grade. The ladder grade is identified by two letters (see table III).

TABLE III. Ladder grade code letters.

Code letters	Grade
AA	Grade A Heavy duty
BB	Grade B Medium duty
CC	Grade C Light duty

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-640	- Box, Fiberboard, Corrugated, Triple-Wall.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-sensitive.
MIL-P-23377	- Primer Coating, Epoxy Polyamide, Chemical and Solvent Resistant.
MIL-C-52950	- Crate, Wood, Open and Covered.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

American National Standards Institute (ANSI)

ANSI A14.2 - Safety Requirements for Portable Metal Ladders.

ANSI/ASME - Boiler and Pressure Vessel Code, Section IX, Welding Qualification.

ANSI/AWS D1.1 - Structural Welding Code, Section 5, Qualification.

Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The three-way aluminum ladder is convertible from a step ladder to a straight ladder or to an extension ladder. As a step ladder it is adaptable to surfaces of a different plane. The ladder shall conform to ANSI A14.2.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration and control. The ladders shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and/or operating environment to which the item may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation shall be provided by an insulating barrier such as a coat of epoxy primer conforming to MIL-P-23377, or corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or his/her designated representative.

3.4 Construction.

3.4.1 Front section. The front section shall consist of two side rails joined at equal intervals by steps. The front section shall have one step at its top which completely covers the ends of the side rails. The side rails shall be heavy gage heat-treated aluminum channels, minimum section 3 inches by 3/4 inch, and shall be the specified length plus or minus 1/2 inch. The steps shall be 15 inches in length minimum and 3 inches deep, and shall be spaced 12 inches plus or minus 1/8 inch center to center beginning at the center of the top step, All steps shall have a nonskid working surface and shall be parallel to each other and to the horizontal plane.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:13Z
Check the source to verify that this is the currentversion before use.

3.4.2 Back section. The two side rails of the back section shall be heavy gage heat-treated aluminum alloy of suitable cross-section. The back section shall provide a means for leveling when the ladder is used as a step ladder in a stairway or other terraced or eneven surface. When fully extended, the back section shall become an extension of the front section and the combined length of the two sections shall be 10, 14, and 18 feet respectively for the 6, 8, and 10 foot step ladder size. The back section shall have rungs of suitable strength material, either round, square, or D-shaped, not less than 15 inches in length and shall be spaced 12 inches plus or minus 1/8 inch on center starting with the first step above the top step of the front section when the ladder is extended.

3.4.3 Leveling device. The minimum leveling device adjustable range for the back section shall be as shown below:

Step ladder size (feet)	Adjustable range (inches)
6	0-21
8	0-33
10	0-45

3.4.4 Step and rungs. There shall be no permanent deformation (see 4.5.2 d) of the steps or rungs when tested in accordance with 4.5.2.1.

3.4.4.1 Bracing. The bottom step and every third step of the front section, and the first and last rung of the adjustable part of the back section shall be provided with bracing members. The bracing members shall form a triangle with the underside of the step or rung and the side rails when the ladder is in the extended position. The contractor's standard bracing design may be used subject to the approval of the contracting officer.

3.4.5 Side rails. There shall be no permanent deformation of the side rails when tested in accordance with 4.5.2.4.

3.4.6 Bucket shelf. The bucket shelf shall fold within the ladder structure when not in use and shall have a working area of not less than 105 square inches. The shelf shall withstand a uniformly distributed static load of 50 pounds without failure (see 4.5.2 b), or permanent deformation to the shelf or any component of the shelf or ladder when tested in accordance with 4.5.2.2.

3.4.7 Extension locking device. The extension locking device shall be designed to withstand all load tests.

3.4.8 Stops. Ladders shall be equipped in such a manner that the ladders, when used as extension ladders, shall not exceed the maximum working lengths specified.

3.4.9 End caps. End caps shall be provided on the upper ends of each side rail of a combination section when the rail is not otherwise capped.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:13Z
Check the source to verify that this is the currentversion before use.

3.5 Nonskid feet. The side rail ends of both front and back sections which rest on the surface shall be provided with nonskid pads. When erected as an extension, straight, or step ladder the nonskid pads shall be in full contact with the surface. The dimensions of the non-skid pads shall be not less than the dimensions of the projected area outlined by the cross section of the end of the rail.

3.6 Spreaders. The spreaders shall connect each front rail to its corresponding back side rail. The spreaders shall be sufficient size and strength to securely hold the front and back section of the ladder in an open position. The spreaders shall be constructed to permit changing from a step ladder to an extension ladder, or a straight ladder. The spreaders shall be not more than 6-1/2 feet above the base supporting surface.

3.7 Slope. When the step ladder is erected on a level surface, the slope for the front and back section shall be 3-1/2 inches, and 2 inches plus or minus 1/4 inch respectively, for a foot length of side rail.

3.8 Performance.

3.8.1 Step ladder assembly. When erected on a level surface or on stairs, the step ladder shall withstand the tests in accordance with 4.5.2.3 without failure or deformation.

3.8.2 Stability of step ladder. When erected on a level surface or on stairs, the step ladder shall remain in a level position with all feet on the surface and shall withstand each pull force without raising the base of the side rails from the surface, when tested in accordance with 4.5.2.3.

3.8.3 Extension ladder assembly. The ladder in the extended position shall not fail or have any permanent set (see 4.5.2 c) when tested in accordance with 4.5.2.4.1.

3.8.4 Erection, 75-1/2 degrees. When fully extended and erected at an angle of 75-1/2 degrees to the horizontal, the ladder shall not fail or show any permanent set of the side rails when tested in accordance with 4.5.2.4.2.

3.8.5 Front rails. The front rails of the ladder shall show no visible defects (see 4.5.2 a) or permanent deformation when tested in accordance with 4.5.2.5.

3.8.6 Rear rails. The rear rails of the ladder shall show no visible defects or permanent deformation when tested in accordance with 4.5.2.6.

3.8.7 Compression resistance. The ladders shall withstand, without failure or permanent deformation, the amount of compression specified for each grade when tested in accordance with 4.5.2.7.

3.9 Identification marking. The ladders shall be identified in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.10 Treatment and painting. Unless otherwise specified (see 6.2), the ladders shall not be painted.

3.10.1 Painting. When painting is required the ladders shall be cleaned, treated, and painted in accordance with MIL-T-704. Color shall be as specified (see 6.2).

3.11 Workmanship. All parts of the ladder, and welded parts shall be clean and free from sand, dirt, pits, scale, grease, and other harmful, extraneous material. External surfaces shall be free from burrs, sharp edges, and corners.

3.11.1 Welders and welding.

3.11.1.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

ANSI/ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.
ANSI/AWS D1.1, Structural Welding Code, Section 5, Qualification.

3.11.1.2 Welding. The surface of parts to be welded shall be free from scale, paint, grease, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. All welds shall be free from undercuts, cracks, and closely spaced in-line surface porosity.

3.11.1.3 Aluminum welding. Aluminum welding shall be done by the metal-inert-gas method or any other method that will provide equivalent mechanical properties of the filler metal to base metal combinations. Complete and uniform penetration and fusion of the metals shall be obtained on all welds. Aluminum welds may be ground, filed, wire brushed, or chipped but shall not be hammered. Preheating for welding is permissible provided the temperature does not exceed 400° F. for a total of 30 minutes.

3.11.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. All bolts and nuts shall be correctly torqued.

3.11.3 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes and in full contact with the surface of the member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article ladder shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Test. The first article ladder shall be tested as specified in 4.5.2 through 4.5.2.7. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Lot. All ladders of the same size and grade offered for inspection at one time shall constitute a lot.

4.4.2 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.4 Tests. Samples selected in accordance with 4.4.2 shall be tested as specified in 4.5.2.1 through 4.5.2.7. AQL shall be 2.5 percent defective.

4.5 Inspection procedures.

4.5.1 Examination. The ladders shall be examined as specified herein for the following defects:

101. Material not as specified.
102. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage and/or operating environment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
104. Contractor does not have documentation available for identification of material, material finishes or treatments.
105. Dimensions not as specified.
106. Steps and rungs not as specified.
107. Leveling range not as specified.
108. Side rails not as specified.
109. Shelf working area not as specified.
110. Stops not as specified.
111. End caps not as specified.
112. Nonskid pads not as specified.
113. Spreaders not as specified.
114. Slope of front and back sections not as specified.
115. Identification marking incorrect or missing.
116. Workmanship not as specified.

4.5.2 Tests. The terms visible damage, failure, permanent set, and permanent deformation shall be defined as follows:

a. Visible damage: Damage clearly evident to the naked eye without recourse to external measuring or magnifying devices.
b. Failure: Damage in which the structure or component is buckled, twisted, torn, or fractured.
c. Permanent set: Any set in excess of 1/1000 of the effective span of an extension ladder side rail, or any set in excess of 1/100 of the effective span of a step ladder step or an extension ladder rung.
d. Permanent deformation: Permanent set to the ladder structure which is clearly visible in accordance with the definition of visible damage

4.5.2.1 Rungs and steps.

4.5.2.1.1 Rung and step bending. Apply one of the following loads as specified herein:

Ladder grade	Test load, pounds
A	1,000
B	900
C	800

The load shall be applied over a 3-1/2 inch width on the center of the longest or bottom step. The test load shall also be applied to the longest like step without braces as well as all steps of different design or material specifications. Inability of the step or rung to withstand the load without failure or permanent set in excess of 1/100 of the length of the step measured between the inside web of the side rails shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.5.2.1.2 Rung or step side rail shear strength. Apply the applicable test load as specified in 4.5.2.1.1 over a 3-1/2 inch width on the longest step with the least fastening, as near the side rail as possible while the ladder is in an open position. Remove the load. Any indication of failure in the fastening means attaching the step or rung to the side rail shall constitute failure of this test.

4.5.2.1.3 Rung and step torque. Apply a torque load in accordance with table IV to a 3-1/2 inch wide area at the center of a rung or step. The torque shall be applied using a test bar, that will not damage the rung or step, with a 30 inch long moment arm. The torque shall be applied first in a clockwise then in a counterclockwise direction for ten alternate load cycles. Any visible relative motion between the rung or step and the side rail during application of the torque load shall constitute failure of this test.

TABLE IV. Rung torque test.

Grade	Torque Test (inch pounds)	Test load (pounds)
A	900	30
B	810	27
C	720	24

4.5.2.2 Bucket shelf. Erect the step ladder. Place a uniformly distributed static load of 50 pounds on the bucket shelf. Deformation of the shelf by twisting, sagging, bending, or breaking shall constitute failure of this test.

4.5.2.3 Stability. Set the ladder in the open position on a level floor. Apply a uniformly distributed test load in accordance with table V to the ladder top step. Subject the ladder to a horizontal pulling force applied at the geometric center of the step ladders top cap, at a distance of not more than 1/2 inch above its top surface, in accordance with table V to test for front, side, and rear stability. Then apply the horizontal pulling force to the side at the top step to test for side stability. Inability of the ladder to remain in a level position during testing or raising of the base of the side rails from the floor during testing shall constitute failure of this test.

TABLE V. Stability loads.

Grade of ladder	Uniformly distributed load on top step	Pulling force minimum (pounds)		
		Front	Side	Rear
A	250	25	20	45
B	225	25	20	45
C	200	25	20	45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.5.2.4 Extension ladder.

4.5.2.4.1 Horizontal bending. Place the ladder in a flat, horizontal position, supported 6 inches from the ends of the side rails. Open the ladder to its maximum length as an extension ladder. In order to set the ladder, preload it to 75 percent of the test load as shown in table VI, and hold for 1 minute, and unload. Then apply a load as shown in table VI equally to the side rails at the center of the ladder by means of a 3-1/2 inch wide beam. Evidence of permanent set in excess of 1/1000 of the effective span of the side rails or any other visible weakening or failure of the ladder shall constitute failure of this test.

TABLE VI. Extension ladder horizontal bending loads.

Grade	Test load (pounds)
A	250
B	225
C	200

4.5.2.4.2 Erection, 75-1/2 degrees. Set up the ladder in the extension position to its maximum length at the working angle of 75-1/2 degrees. A series of loads shall be applied to the step or rung in accordance with table VII. Each load shall be applied to the step or rung at the center of the step or rung, over an area of 3-1/2 inches wide. Evidence of permanent set of the side rails or any other visible weakening or failure of the ladder shall constitute failure of this test.

TABLE VII. Location and pound loads.

Extension ladder size (extended feet)	Step and rung number	Grade of ladder and pound load per step or rung		
		A	B	C
10	3, 5, 7	250	225	200
14	5, 7, 9	250	225	200
18	7, 9, 11	250	225	200

4.5.2.5 Front rail cantilever bending. Open the ladder and place on its side. Clamp the lower side rails to a horizontal support. Apply a load over a 2 inch wide block across the side rail parallel to the bottom edge in accordance with table VIII. Remove the test load. Evidence of visible damage or permanent deformation to the front side rail section shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.5.2.6 Rear rail cantilever bending. Open the ladder and place on its side with one set of rails clamped to a horizontal support. Apply the test load over a 2 inch wide block across the side rail parallel to the bottom edge in accordance with table VIII. Remove the test load. Evidence of visible damage or permanent deformation shall constitute failure of this test.

TABLE VIII. Step ladder cantilever bending test.

Grade	Front rail cantilever test load (pounds)	Rear rail cantilever test load (pounds)
A	200	125
B	150	100
C	100	75

4.5.2.7 Step ladder compression. Set up the step ladder in the open position and apply a uniformly distributed load as shown in table IX to the ladder top step. Evidence of failure or permanent deformation of the ladder shall constitute failure of this test.

TABLE IX. Step ladder test load.

Grade	Test load (pounds)
A	1000
B	900
C	800

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

117. Material, methods and containers not as specified. Each incorrect material, method, or container shall constitute one defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

118. Blocking, bracing, cushioning, and tiedown not provided as specified.
119. Packing not as specified.
120. Strapping not as specified for level A.
121. Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.1.1 Level A. Each ladder shall be collapsed and movable parts secured with tape conforming to PPP-T-97, type II, or soft annealed steel wire. Ladders of like size and description shall be packed in wood cleated plywood boxes conforming to PPP-B-601, overseas type, in quantities not to exceed the weight limitations of the box specification. Blocking, bracing, cushioning, and tiedowns shall be provided to prevent movement and damage to the contents. The boxes shall be closed and strapped in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, finish B unless finish A strapping is specified (see 6.2).

5.1.2 Level B. Each ladder shall be collapsed, and the movable parts secured with tape conforming to PPP-T-97, type II or soft annealed steel wire. Ladders of like size and description shall be packed in fiberboard boxes conforming to PPP-B-640, class 2, or wood crates conforming to MIL-C-52950, style A, type II, in quantities not to exceed the weight limitations of the box or crate specification. Closure and strapping shall be in accordance with the appendix of the box or crate specification, as applicable.

5.1.3 Commercial. The ladders shall be packed in accordance with MIL-STD-1188.

5.2 Marking. Marking for levels A and B packing shall be in accordance with MIL-STD-129. Marking for commercial packing shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use.

6.1.1 Grade A. Heavy duty ladders are intended for industrial use such as in contruction or industrial maintenance.

6.1.2 Grade B. Medium duty ladders are intended for light industrial or commercial use in offices or light construction work, such as prefabricated buildings, and replacing or installing partitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

6.1.3 Grade C. Light duty ladders are intended for household use, such as painting and minor repairs.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Military specification part number required (see 1.2).
c. When a first article is required for inspection and approval and the number of units required (see 3.2).
d. When ladders require treatment or painting (see 3.10).
e. Color of paint when required (see 3.10.1).
f. Degree of packing required (see 5.1 and 6.4).
g. When finish A strapping is required (see 5.1.1).

6.3 First article. When a first article inspection is required, the item shall be examined and should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test approval of the documents first article.

6.4 Marking. Preservation requirements have not been included in this document. For the purpose of shipping, marking shall be designated as A/A, B/B, or Commercial/Commercial.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

6.6 Definitive military specification part number. The military specification part number is a definitive part number which corresponds to the sizes, extended lengths and grades of ladders covered by this specification. The military specification number, and the size, length, and grade of ladder codes are combined to form a definitive part number.

Custodians:
Army - ME
Air Force - 99

Review activity:
Air Force - 84

User activity:
Army - CE

Preparing activity:
Army - ME

Project 5440-0029

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-L-54002B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   [ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY MOBILITY EQUIPMENT RESEARCH
AND DEVELOPMENT COMMAND
ATTN: DRDME-DS
FORT BELVOIR, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.