MIL-R-55016B(EL)
Amendment 3
1 May 1968

SUPERSEDES
Amendment 2
26 July 1967

MILITARY SPECIFICATION

RADIO SET AN/TRC-68() (UNITS OF)

This amendment forms a part of Military Specification MIL-R-55016B(EL), dated 23 July 1963

Paragraph 1.1, replace "Case, Accessories CY-2713()/TRC-68" with "Case, Standardised Components, Electrical CY-4868()/TRC-68."

Paragraph 2.1, under "SPECIFICATIONS" "FEDERAL" add the following:

FF-B-571	Bolts, Nuts, Studs, and Tap-Rivets and Material for Same.
QQ-S-781	Strapping, Flat; Steel
UU-P-268	Paper, Kraft, Untreated, Wrapping
UU-P-553	Paper, Wrapping, Tissue
PPP-B-20	Bag, Cotton, Mailing
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber.
PPP-B-1055	Barrier Material, Waterproofed, Flexible
PPP-C-843	Cushioning Material, Cellulosic.
PPP-F-320	Fiberboard, Sheet, Stock and Cut Shapes.
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-76	Tape, Pressure-Sensitive, Adhesive Paper (for Carton Sealing).

Paragraph 2.1, under "SPECIFICATIONS " "MILITARY" delete the following:

MIL-C-4150	Cases, Carrying and Storage, Shock and Water Proof.

Paragraph 2.1, under "SPECIFICATIONS" "MILITARY" add the following:

MIL-E-75	Electron Tubes, Packaging, Packing and Container Marking for: General Specification for.
MIL-C-45662	Calibration of Standards.

FSC 5820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

MIL-P-55110 Printed Wiring Board

Paragraph 2.1, under "STANDARDS" "MILITARY" add the following:

MIL-STD-129 Marking for Shipment and Storage.

MIL-STD-731 Quality of Wood Members for Containers and Pallets.

MS-15795 Washer Flat-Metal, Round, General Purpose.

Paragraph 2.1, under DRAWINGS" " SIGNAL CORPS" Delete the following:

SC-A-46570 Materials and Processes for Printed Wiring Assembly.

SC-DL-345283 Drawing and Data List for Accessories Case CY-2713()/TRC-68.

Paragraph 2.1, under "DRAWINGS" "SIGNAL CORPS" add the following:

SM-B-345104 Bag, Water Repellent Cotton Duck

DL-SM-A-536293 Drawing and Data List for Case, Standardized Components, Electrical CY-4868()/TRC-68.

Paragraph 3.3, replace "CY-2713()/TRC-68" and "SC-DL-345283" with "CY-4868()/TRC-68" and "DL-SM-A-536293."

Paragraph 3.4.5.3, replace "Case, Accessories CY-2713()/TRC-68" with "Case, Standardized Components, Electrical CY-4868()/TRC-68."

Paragraph 3.4.12.10, add the following at the end of the paragraph: "The requirements of the drawing shall apply to chassis of all material, not only steel and aluminum."

Paragraph 3.4.19, replace "SC-A-46570" with "MIL-P-55110."

Paragraph 3.5.6, add at end of paragraph: "(This requirement does not apply to Case, Standardized Components, Electrical CY-4868()/TRC-68)."

Paragraph 3.5.7, delete this paragraph.

Paragraph 3.5.9, change this paragraph to read: " The natural frequency of the equipment, mounted on its shock-mounts, shall be between 25 and 35 cps when vibrated in the vertical plane, and shall be between 18 and 25 cps when vibrated in the side to side and front to back planes. The amplitude of vibration of the mounted equipment shall not exceed three times the amplitude of the applied vibration at any frequency between 10 and 25 cps or 35 and 55 cps for the vertical plane and between 10 and 18 cps or 25 and 55 cps for the side to side and the front to back planes."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

Paragraph 3.5.10, add the following to Table II:

Paragraph heading	Para No.	Performance after test
Shock, drop (Case, Standardized Components, Electrical CY-4868()/TRC-68 only)	4.7.12	Any physical damage shall be minor only

Paragraph 3.6.2, change second sentence to read: "This requirement does not apply to Case, Standardized Components, Electrical CY-4868()/TRC-68 or Mounting MT-2297()/TRC-68."

Paragraph 3.8.2(a), in first sentence, change "(extreme counter clockwise)" to "threshold)."

Paragraph 3.8.2(b), in second sentence, change "200" to "150."

Paragraph 3.8.19, add at end of paragraph: "This requirement shall be met with both 50 and 60 cycle a.c. input."

Paragraph 3.9.7, add at end of paragraph: "This requirement shall be met with both 50 and 60 cycle a.c. input."

Paragraph 3.10.1, change second sentence to read: "The ripple shall not exceed 0.5_v. with 60 cycle a.c. input and 1.5_v. with 50 cycle a.c. input."

Paragraph 3.10.2, change this paragraph to read: "When tested as specified in 4.11.2, the potential between pin 10 and pin 12 shall not be less than 147 and no greater than 163_v. The ripple shall not exceed 0.25_v with 60 cycle a.c. input and 0.4_v. with 50 cycle a.c. input."

Paragraph 3.10.5, change second sentence to read: "The ripple shall not exceed 0.5_v. with 60 cycle a.c. input and 1.0_v. with 50 cycle a.c. input."

Paragraph 3.10.8, change "275" to "310."

Paragraph 3.13, change this paragraph to read: "Case, Standardized Components, Electrical CY-4868()/TRC-68. - This case shall meet the requirements of the bounce, shock-drop, and immersion tests."

Add the following after paragraph 4.1, Responsibility for inspection:

"4.1.1 Test and inspection facilities. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to permit performance of the required inspection. The supplier shall establish calibration of inspection equipment to the satisfaction of the Government. Calibration of the standards which control the accuracy of inspection equipment shall comply with the requirements of Specification MIL-C-45662."

Paragraph 4.3, in Table III Preproduction inspection, delete:

"Tumbling	3.5.7	4.7.12
Immersion	3.5.11	4.7.11"

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

Add: "Shock, drop (Case CY-4868()/TRC-68 only) 3.5.10 4.7.12

Paragraph 4.5.1, replace Table IV with the following:

"Table IV. Group A inspection

Inspection	Rqt Para	Insp Para	AQL Major	AQL Minor
Visual and mechanical:	3.19	4.18		
Receiver-Transmitter, Radio RT-441 ( )/TRC-68				
Front panel & relays			1.5 dphu*	6.5 dphu
Audio ampl and modulator			1.5 dphu	6.5 dphu
UHF injection system			1.5 dphu	6.5 dphu
RF and PA unit			1.5 dphu	6.5 dphu
20.9-29.9 mc IF ampl			1.5 dphu	6.5 dphu
3.0-3.9 IF mc ampl			1.5 dphu	6.5 dphu
500 kc IF ampl & filter			1.5 dphu	6.5 dphu
Fan Centrifugal HD-390( )/U			1.0%	4.0%
Case, Standardized Components, Electrical CY-4868()/TRC-68			1.0%	4.0%
Case, Receiver-Transmitter CY-2712 ()/TRC-68			1.0%	4.0%
Mounting MT-2297()/TRC-68			1.0%	4.0%
Power Supply PP-1494()/U			1.5 dphu	6.5 dphu
Radio Set AN/TRC-68(), complete assembly			1.0 dphu	4.0 dphu
See notes below table.				
Electrical:				
Receiver-Transmitter, Radio RT-441 ()/TRC-68				
Receiver:				
Sensitivity	3.8.1	4.9.2)	4.0 dphu	
Squelch	3.8.2	4.9.3)	for the	
AGC characteristics	3.8.3	4.9.4)	groups	
Selectivity	3.8.5	4.9.6)	combined	
Audio output	3.8.12	4.9.13)		
Audio level adjustments	3.8.13	4.9.14)		
Audio response characteristics.	3.8.14	4.9.15)		
Audio response characteristics extended range	3.8.15	4.9.16)		**
Audio distortion	3.8.16	4.9.17		
Noise rejection	3.8.17	4.9.18		
Signal-plus-noise-to-noise	3.8.19	4.9.20		

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the current version before use.

age or adverse effects of temperature and storage conditions:

"Table IV. Group A inspection- continued

Inspection	Rqt Para	Insp Para	AQL Major	AQL Minor
Transmitter:				
Transmitter RF power out.....	3.9.1	4.10.2)		
Modulation capability.....	3.9.2	4.10.3)		
Automatic Modulation Limitor.....	3.9.3	4.10.4)		
Audio response.....	3.9.4	4.10.5)		
Audio response, extended range....	3.9.5	4.10.6)		
Overall distortion.....	3.9.6	4.10.7)		
Carrier noise level.....	3.9.7	4.10.8)		
Sidetone.....	3.9.8	4.10.9)		
Power Supply PP-1494()/U.....	3.10	4.11	1.0 dphu	
Case; Receiver-Transmitter CY-2712()/TRC-68.....	3.11	4.12	1.0%	
Fan, HD-390()/U.....	3.12	4.13	1.0%	**
Air seal.....	3.15	4.15	1.0%	
Operational	3.17	4.16.1	1.0%	

* Defects per hundred units.
** All electrical defents are considered major."

Paragraph 4.5.2, replace Table V with the following:

"Table V. Group B inspection

Inspection	Rqt Para	Insp Para	AQL (See 4.5.2.1)
Radio Set AN/TRC-68()			
Interchangeability.....	3.4.17	4.17	6.5%
Frequency stability vs supply voltage	3.7.2.1	4.8.1.1	
Frequency stability vs temperature and time.....	3.7.2.2	4.8.1.2	6.5%
Warm-up.....	3.7.3	4.8.2	for the
Channel changing time.....	3.7.4	4.8.3	group
Resettability.....	3.7.5	4.8.4	combined
Transmit-receive interval.....	3.7.6	4.8.5	
Panel meter.....	3.7.7	4.8.6	
Power drain.....	3.7.8	4.8.7	
Operating input potential*.....	3.7.9	4.8.8	
System operation**.....	3.16	4.16	
Receiver-Transmitter, Radio RT-441 ()TRC-68 Receiver:			
Receiver			
AGC time constant.....	3.8.4	4.9.5	6.5%
IF rejection	3.8.6	4.9.7	for the
Image rejection	3.8.7	4.9.8	group
Spurious response.....	3.8.8	4.9.9"	combined

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

Table V. Group B inspection - continued

Inspection	Rqt Para	Insp Para	AQL (See 4.5.2.1)
Internal signals.....	3.8.9	4.9.10	
Cross modulation.....	3.8.10	4.9.11	
Desensitization.....	3.8.11	4.9.12	
Blocking.....	3.8.18	4.9.19	
Case CY-4868()/TRC-68.....	3.13	4.7.8 4.7.11 4.7.12	6.5%
Mounting MT-2297()/TRC-68.....	3.14 3.19	4.7	6.5%
Immersion.....	3.5.11	4.7.11	6.5%

*Tests made during Group A inspection at normal operating input voltages need not be repeated for Group B inspection.
**Operational tests of 4.16.1 need not be repeated."

Paragraph 4.5.3, add the following to Table VI:

Inspection	Rqt Para	Insp Para
Transmitter:		
Spurious radiation.....	3.9.10	4.10.11

Paragraph 4.7.2.1 (c), change to read as follows: "Test sealed equipment with the seal intact, except during the last two (2) cycles. Bring out leads for electrical measurements through a hole in the equipment enclosure and seal against entrance of moisture. Perform the fourth and fifth cycles with the chassis removed from its enclosure."

Paragraph 4.7.2.2(d), change third sentence to read as follows: "The measurements specified in 4.7.2.3 shall be made during the periods shown on the standard only for the first three cycles and shall comply with 4.7.2.3."

Paragraph 4.7.5, Sand and Dust Test, change the first sentence to read, "The equipment (except the CY-4868()/TRC-68) shall be tested as follows."

Paragraph 4.7.10, Shock Test; ballistic, change the first sentence to read, "This test (not applicable to the CY-4868()/TRC-68) shall be conducted on the 'Shock Testing Machine for Light Weight Equipment' covered in Specification MIL-S-901."

Paragraph 4.7.12, delete this paragraph and replace with the following: "4.7.12 Shock test, drop (Case CY-486890/TRC-68 only) - The accessory case with all the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the current version before use.

accessories contained therein shall be dropped from a height of 48 inches on each face, edge, and corner for a total of 26 drops. The floor or barrier receiving the impact shall be 2 inch fir locked by concrete or a rigid steel frame. Drops shall be made from a quick release hood, or pendulum tester as make by LAB Corporation, Shaneateles, New York or equal."

Paragraph 4.9.3, add the following after the fifth sentence: "The operational spread in degrees of shaft rotation between the maximum and minimum squelch sensitivity shall be measured from the maximum clockwise position of the squelch control to the threshold point.

Paragraph 4.10.6, delete this paragraph and replace with the following: "With the same test set-up as 4.10.5, except that the input test signal shall be 5.0 volts, measurements shall be made at 300, 3000, 6000, 10,000, 15,000, and 25,000 cps. The requirements of 3.9.5 shall be met."

Paragraph 4.11.2, in first sentence, change "ground" to "pin 12."

Paragraph 5.1, delete this paragraph in its entirety and replace with the following:

5.1 Preservation and packaging. Preservation and packaging of Radio Set AN/TRC-68() and Units Of shall be level A or C as specified (See 6.12).

5.1.1 Level A.

5.1.1.1 Cleaning. Each radio set and units of shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Each radio set and units of shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. None required.

5.1.1.4 Unit packaging. Unit packaging shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be packaged method IC-1.

5.1.1.4.2 Electron Tubes. Remove all operating tubes over 4 inches in length and not securely clamped in place and together with the spare tubes, package individually in accordance with MIL-E-75.

5.1.1.4.3 Radio Set AN/TRC-68(). Each radio set shall be packaged in accordance with items 1 through 5 of table VII and figure 1, items 1 through 5 of table VIII and figure 2 and items 1 through 15 of table IX and figure 3.

5.1.2 Level C. Each radio set shall be preserved and packaged in a manner that will afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (See 6.13).

5.2.1 Level A. Each Radio Set AN/TRC-68() shall be packed as follows:

5.2.1.1 Receiver-Transmitter Group OA-2649()/TRC-68. Each receiver-transmitter group, packaged as specified in 5.1.1.4.3, shall be packed in accordance with items 6 through 8 of Table VII and Figure 1.

5.2.1.2 Case, Accessories CY-4868()/TRC-68, Antenna AT-197/GR and Radio Control C-1439()/U. Each accessories case, antenna and radio control, packaged as specified in 5.1.1.4.3, shall be packed together in a close-fitting wood box conforming to PPP-B-621, class 2, style 2. The voids within the wood box shall be filled with dummy boxes conforming to PPP-B-636, W5c, cells and pads conforming to PPP-F-320, class weather-resistant, variety SW, grade W5c or combination thereof, to form a type 1 load as described in Section 6 of the wood box specification. Close the box in accordance with the appendix to the box specification. The shipping container shall be reinforced by flat steel strapping in accordance with the appendix to the box specification.

5.2.2 Level B. Each radio set, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the wood box shall be class 1.

5.2.3 Level C. Each radio set, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the fiberboard boxes and the wood boxes shall be of the type, size and kind commonly used for the purpose and shall comply with the rules and regulations of the common carrier as applicable to the mode of transportation. Packing shall be accomplished in a manner that will afford adequate protection to the package and its contents during shipment from the supply source to the first receiving activity.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VII

REF No.	ITEM Nomenclature	No. Reqd.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Receiver-Transmitter Group OA-2649( )/TRC-68 consisting of:	1	III	20	18-1/4	12	(Bare wt 155.6 lbs)						
	Receiver-Transmitter RT-441( )/TRC-68	1	III	9-1/2	10	15-1/2							
	Dust Cover Assembly	1	III	9-15/16	9-5/8	1-15/16							
				Place dust cover over face of Receiver-Transmitter and secure with fastenings.									
	Power Supply PP-1494( )/U	1	III	7-1/8	18-3/4	12							
	Fan, Centrifugal HD-390( )/U	1	III	9-1/2	9-1/2	3-1/2							
	Mounting MT-2297( )/TRC-68		III										
				Secure to base of Case CY-2712( )/TRC-68.									
	Case, Receiver Transmitter CY-2712( )/TRC-68	1	III	20	19-1/4	12-1/2							
				Securely assemble Receiver-Transmitter, Power Supply and Fan in appropriate spaces within the case.									
2	Conversion Kit Assembly	1	III										
	Paper, Wrapping	1		28	18		UU-P-553	1	2				

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VII (cont'd)

REF No.	ITEM Nomenclature	No. Req.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
				Wrap Kit angles in paper									
	Bag, Cotton	1		5	3		PPP-B-20						
				Place kit screws in bag and secure draw strings									
	Bag, Cotton Duck	1		12	4		SM-B-345 104						
				Place wrapped angles and bagged screws in bag and secure draw strings. Tie to lifting eyes with draw strings.									
3	Cushioning, Cellulosic	3		8	8	1/2	PPP-C-843	II	B				
	Tape	3		10	2		PPP-T-76						
				Place cushioning over lifting eyes and secure with tape.									
	Bolts, Nuts and Washers	4 sets		2-3/4	5/16 dia		FF-B-571 MS 15795						
				Fasten item 1 to floor and skids.									
4	Skid Floor	2		23-1/2	4	2	MIL-STD-731						
				To fit wood box									
5	Technical literature	2		10-1/4	7-3/4								
	Bag	2		12	9		MIL-B-117	II	C				
				Secure packaged technical literature to top of case with tape conforming to PPP-T-76.									
6	Barrier Material	1					PPP-B-1055		H-1				
				Form shroud over item 1 to hang free and reach box floor. All sharp points of contact between the item and shroud shall be cushioned to prevent rupture or chafing of the shroud.									

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VII (cont'd)

REF No.	ITEM Nomenclature	No. Req'd.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
7	Box, Wood Modified	1		25-1/8	22	17-3/4	PPP-B-621		2				2 modified
8	Strapping, Steel	2		98	5/8	0.020	QQ-S781	I	B		2		

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VIII

REF No.	ITEM Nomenclature	No. Req.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Case, Accessories CY-4868( )/TRC-68	1	III	22-3/8	18-3/8	13-3/8							
	containing:												
	Headset H-113( )/U	1	III										
	Paperboard, Cushioning	1		15	10		PPP-P-291	I					
	Tape	1		8	2		PPP-T-45	III					
	Cable Assy CX-4883( )/U	1		3 ft.									
	Cable Assy CX-4984( )/U	1		3 ft.									
				Place cables within designated compartment of case with end connectors secured in clips.									
	Microphone M-29( )/U with cover CW-292( )/U	2	III	7	2-1/2	1							
	Paperboard, Cushioning	2		9	9		PPP-P-291	I					
	Tape	2		7	1		PPP-T-45	III					
	Connector UG-565( )/U	1	III										
	Paperboard, Cushioning	1		5	3		PPP-P-291	I					
	Tape	1		3	1		PPP-T-45	III					
	Tube, Electron	12		Package per MIL-E-75									
	Fuse	40	III	Package fuses of like stock number together within a small coin envelope. Fold flap and staple for closure.									
	Lamp	3											

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VIII (cont'd)

REF No.	ITEM Nomenclature	No. Read.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
	Paperboard, Cushioning	3		3	2		PPP-P-291	I					
	Tape	3		2	1		PPP-T-45	III					
	Control Group AN/GRA-6 consisting Of:	1											
	Control, Local C-434( )/GRC	1	III	9-1/2	7-5/8	3-1/16							
	Paperboard, Cushioning	1		26	13		PPP-P-291	I					
	Tape	1		12	2		PPP-T-45	III					
	Control, Remote C-433( )/GRC	1	III	8-9/16	7-1/16	3-1/2							
	Paperboard, Cushioning	1		26	13		PPP-P-291	I					
	Tape	1		12	2		PPP-T-45	III					
	Handset H-33( )/PT	1	III										
	Paperboard, Cushioning	1		14	14		PPP-P-291	I					
	Tape	1		10	2		PPP-T-45	III					
	Bag CW-189( )/GR	1		Fold to proportions to fit snugly within designated compartment of case.									
	Interconnecting Box J-654( )/G	1	III	4-5/8	2-1/8	1-1/4							
	Paperboard, Cushioning	1		10	7		PPP-P-291	I					
	Tape	1		6	1		PPP-T-45	III					

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VIII (cont'd)

REF No.	ITEM Nomenclature	No. Read.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
	Technical Literature	4	IC-1										
	Bag	4					MIL-B-117	II	C				
	Lamp	2	III										
	Paperboard, Cushioning	2		3	2		PPP-P-291	I					
	Tape	2		2	1		PPP-T-45	III					
				Place above packaged items in space provided in Case, CY-4868( )/TRC-68									
2	Pad, Top and Bottom	2		23-3/4	19-3/4	3/4	PPP-F-320	CF	DW	WR	V15c		
3	Pad, Corner	4		15	3-1/2	3-1/2	PPP-F-320	CF	DW	WR	V15c		
4	Box, Fiberboard	1		24	20	15	PPP-B-636	CF	WR	SW	V3c		
5	Tape	1		15	3		PPP-T-76						
		2		29	3								
		4		25	3								

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE IX

REF No.	ITEM Nomenclature	No. Req.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Antenna AT-197/GR	1	III	26-3/8	6-1/8	4-3/8	Bare wt 6-1/2 lbs						
	Paper, Wrapping	1		15	7		UU-P-268				B		
	Tape	1		5	2		PPP-T-76						
2	Paperboard, Cushioning	1		9	9		PPP-P-291	I					
3	Tape	1		8	2		PPP-T-76						
	Fold elements, wrap with paper and secure with tape. Cover wrap with cushioning and secure with tape.												
4	Upper Radiation Assy in Box, Fiberboard	1	III	13-1/4	13-1/4	5/8	PPP-B-636	CF	WR	SW	W6c		
5	Tape	1		17	2		PPP-T-76						
6	Box, Fiberboard	1		27-1/4	13-1/2	5-3/4	PPP-B-636	CF	WR	SW	W5c		
	Place boxed upper radiation assembly and antenna within the box. Fill all voids with cells or pads or both to prevent movement and absorb shock of impact in handling and transit.												
7	Tape	1		6	3		PPP-T-76						
		2		33-1/2	3								
		4		20	3								
8	Control, Radio C-1439( )/U	1	III	6-1/2	2-7/8	6-1/2	Bare wt 5 lbs						

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE IX (cont'd)

REF No.	ITEM Nomenclature	No. Reqd.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
9	Lamp	1	III										
10	Paperboard, Cushioning	1		3	2		PPP-P-291	I					
11	Tape	1		2	1		PPP-T-45	III					
				Secure cushioned lamp within front cavity using tape conforming to PPP-T-76.									
12	Paperboard, Cushioning	1		22	14		PPP-P-291	I					
13	Tape	1		8	2		PPP-T-45	III					
14	Box, Fiberboard	1		7	7	3-1/4	PPP-B-636	CF	WR	SW	W6c		
15	Tape	1 6		3-1/4 12	2 2		PPP-T-76						

Lev. A - PACKED WEIGHT
Lev. A - PACKED VOLUME

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

RECEIVER-TRANSMITTER
GROUP OA -2649( )/TRC -68

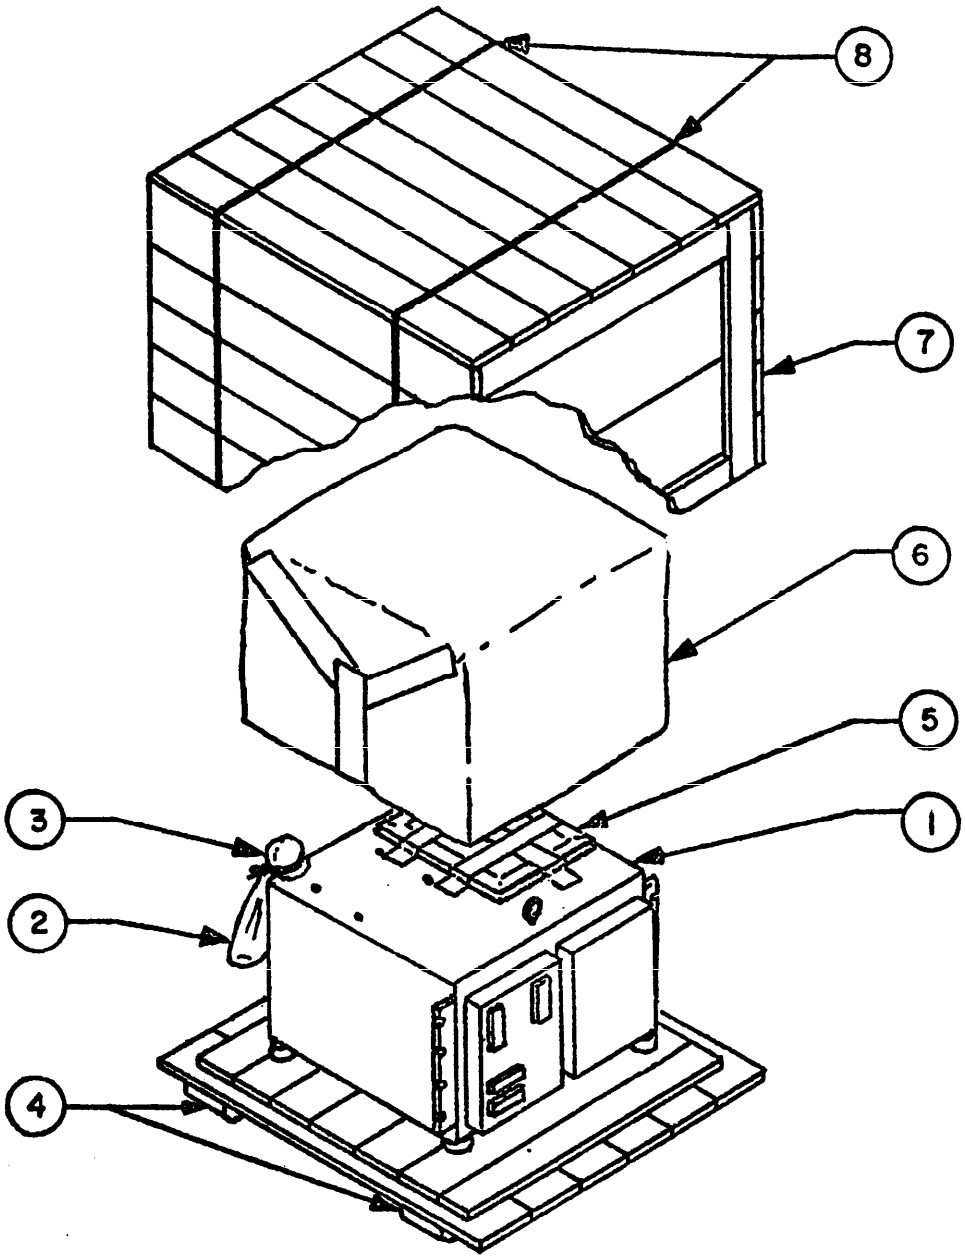


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

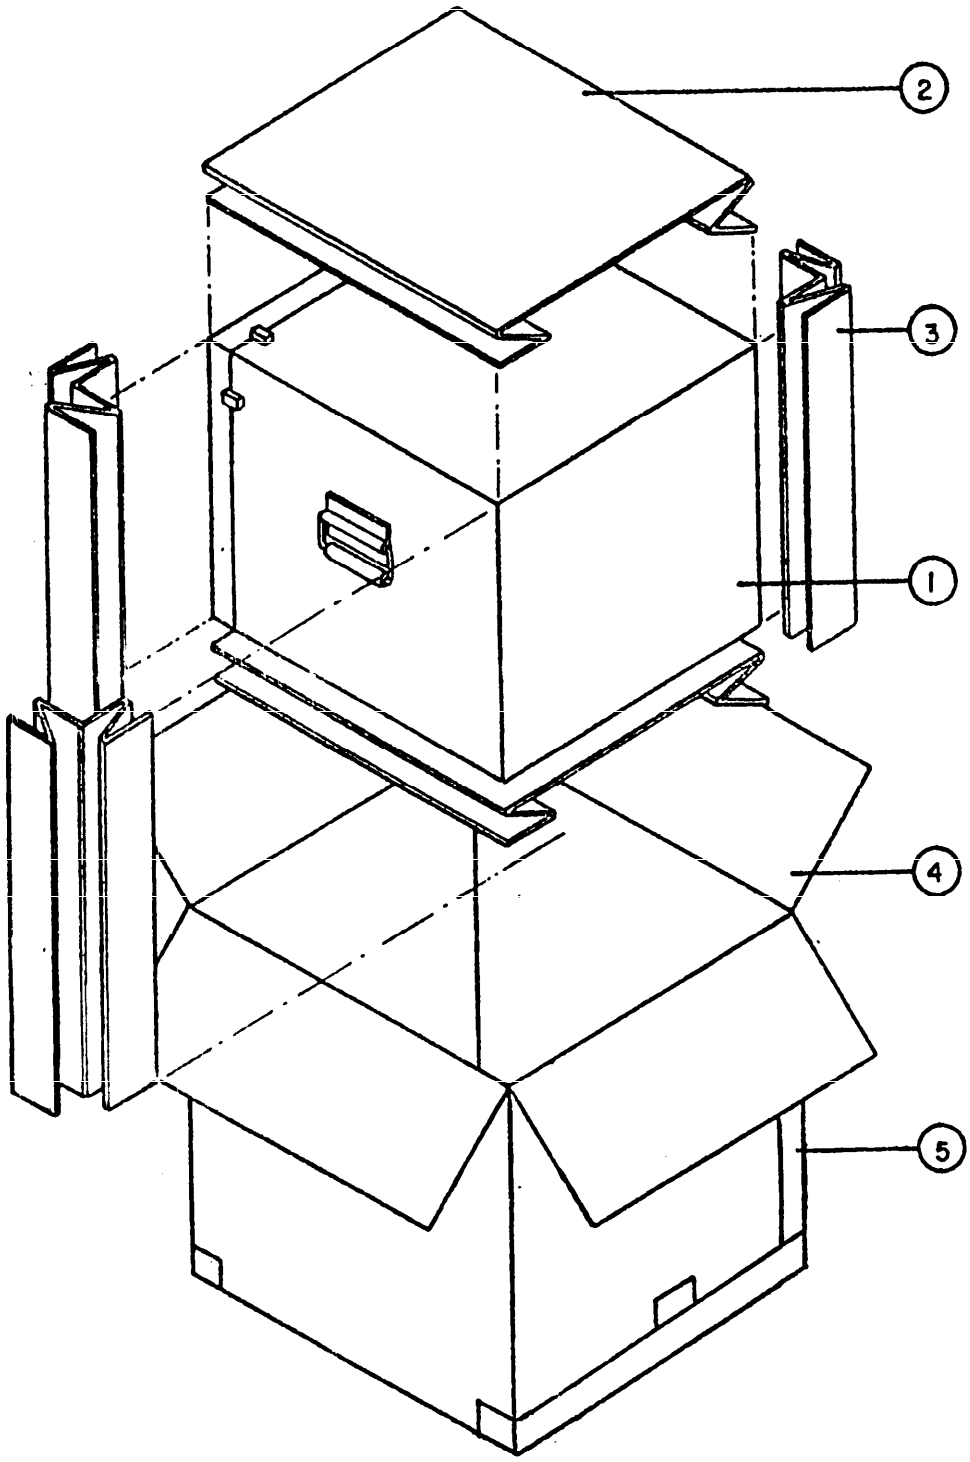


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

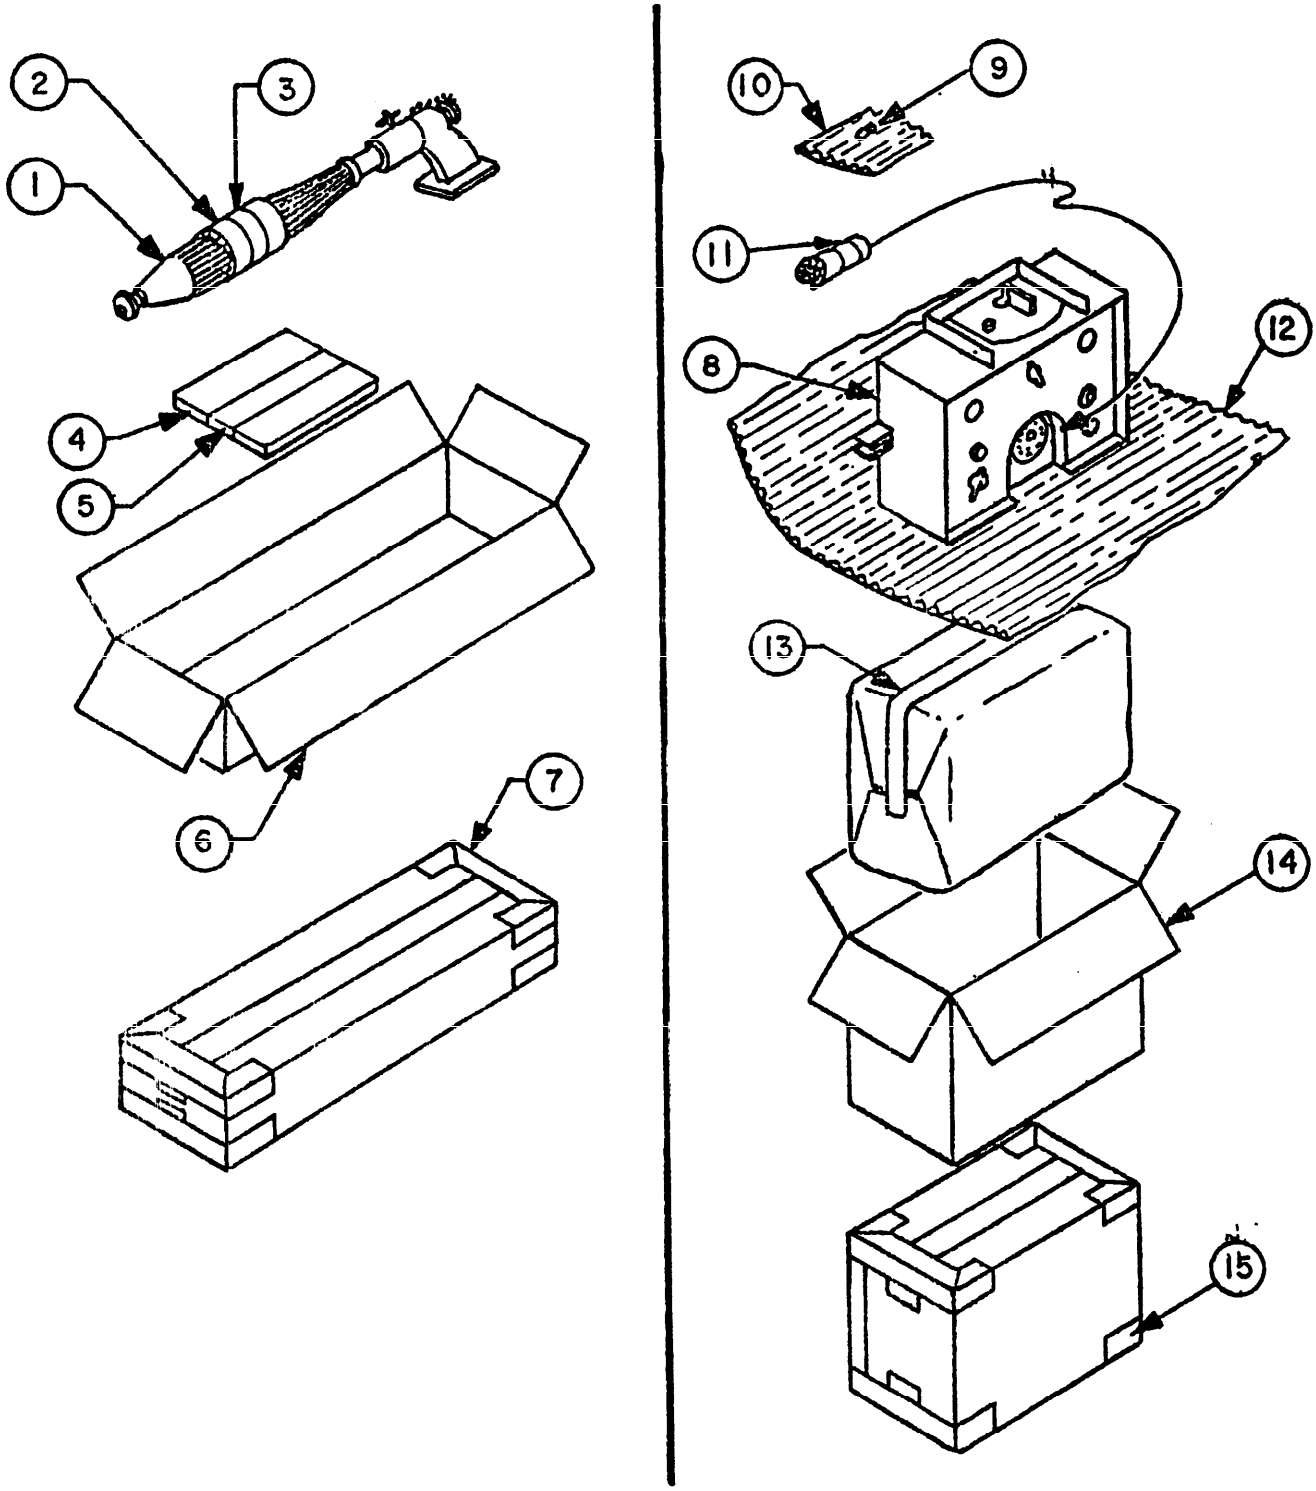


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

Paragraph "6.10 Humidity,"delete. Add "6.11 Humidity."

Add Paragraph "6.12. Levels of preservation and packaging and packing. (See Section 5)."

Add Paragraph "6.13. If rough handling and functional tests are required."

Custodian Army - EL

Preparing Activity
Army - EL

Project No. 5820-A395

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:13Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION AMEND 3 - MIL-R-55016B(EL), RADIO SET AN/TRC-68( ) (UNITS OF)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-TD-SS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

303-227 (Z1243)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the current version before use.