MILITARY
SPECIFICATION

MIL-R-55044(SigC)

REPEATER, TELEPHONE TA-287( )/G

17 November 1958

1. SCOPE

1.1 This specification covers Telephone Repeater TA-287( )/G, a two-wire, two-way, voice frequency repeater. It is a portable, battery operated device, employing a negative impedance transistor circuit. (See 6.3).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

CCC-C-419	Cloth, Cotton, Duck, Unbleached, Plied-Yarns (Army and Numbered)
LLL-F-291	Fiberboard; Corrugated, Single Face (Flexible)
PPP-B-585	Boxes; Wood, Wirebound
PPP-B-591	Boxes, Fiberboard, Wood-Cleated
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-T-76	Tape, Pressure-Sensitive, Adhesive, Paper, Water-Resistant

Military

MIL-T-27	Transformers and Inductors (Audio, Power and Pulse)
MIL-P-116	Preservation, Methods of
MIL-B-117	Bags, Interior Packaging
MIL-D-504	Dyeing and Aftertreating Processes for Cotton Duck and Twill
MIL-P-11268	Parts, Materials and Processes Used in Signal Corps Equipment
MIL-M-13231	Marking of Electronic Items

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-169	Extreme-Temperature Cycle
MIL-STD-170	Moisture-Resistance Test Cycle for Ground Signal Equipment
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer. Both the title and identifying number or symbol should be stipulated when requesting copies.)

2.2 Other publications.- The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

AMERICAN TRUCKING ASSOCIATION

National Motor Freight Classification No. A-3 and No. 14

(Application for copies should be addressed to the American Trucking Association, 1424 16th Street, N.W., Washington 6, D.C.)

UNIFORM FREIGHT CLASSIFICATION

Uniform Freight Classification No. 4

(Applications for copies should be addressed to Uniform Freight Classification, 202 Chicago Union Station, Chicago 6, Illinois.)

CONSOLIDATED CLASSIFICATION COMMITTEE

Consolidated Freight Classification Rules No. 21

(Application for copies should be addressed to Consolidated Classification Committee, 1 Park Avenue and 33rd Street, New York 16, New York.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Procurement model.- A procurement model of the item on contract will be available for inspection by prospective bidders and will be lent to the contractor. Unless otherwise specified herein or in the invitation for bids, the item on contract shall conform to the following:

3.1.1 Construction.- Physical construction of the item on contract shall conform to the procurement model.

3.1.2 Features.- The item on contract shall incorporate all features of the procurement model.

3.1.3 Performance.- In case of conflict between specified performance characteristics for the item on contract and the performance of the model, the former shall govern.

3.1.4 Exceptions to the model.-

a. The chassis is not encapsulated as required by 3.2.2.
b. The battery leads shall not be spliced.
c. The canvas bag shall be enlarged to accommodate the repeater and batteries.
d. The nomenclature plate is missing from the model.
e. The model does not meet service condition tests since it is not encapsulated.

3.2 Parts, materials and processes; general.- In addition to any requirements of this specification, covering parts, materials, and processes, such items shall conform to Specification MIL-P-11268 including the selection requirements therein.

3.2.1 Marking.-

3.2.1.1 General.- Marking shall conform to Specification MIL-M-13231.

3.2.1.2 Visibility.- Wherever practicable, parts and assemblies shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.2.1.3 Serial numbers.- The equipment shall not be serial numbered.

3.2.2 Encapsulating compound.- The encapsulating compound shall meet the service conditions of 3.4. The maximum internal temperature shall not exceed 160°F during the curing process. The repeater shall be encapsulated in type G.R. 101 compound as manufactured by Nareco Incorporated, or equal. When encapsulated, the repeater shall be a flat sided, rectangular block in shape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.2.3 Transformers.- Transformers shall conform to Specification MIL-T-27 except that encapsulation is not required.

3.3 Electrical requirements.-

3.3.1 Frequency-attenuation characteristics.- The response of the repeater over dry and wet artificial field wire shall meet the following requirements:

Frequency (cps)	Output (dbm)	
	Dry	Wet
300	-8.0 ±1.0	-11 ±1
600	-5.0 ± .7	-10.0 ±1.0
1000	-6.0 ± .5	-10.0 ±1.0
2150	-10.0 ±1.0	- 9.0 ±1.0
3500	-14.5 ±1.0	-20.0 ±1.0

3.3.2 Harmonic distortion.- The total harmonic distortion shall not exceed 5 percent for any fundamental frequency within the range of 300 to 3500 cps.

3.3.3 Current drain.- The current drain of the emitter and collector shall be 0.5 ma ±0.1 ma.

3.3.4 Noise level.- The noise level shall not exceed 20 dba.

3.3.5 Longitudinal balance.- The longitudinal balance shall be at least 50 db over the frequency range of 300 to 3500 cps.

3.3.6 Power source.- The telephone repeater shall operate from a 3 volt battery (BA-406/U) and a 22-1/2 volt battery (BA-421/U).

3.3.7 Breakdown voltage.- The repeater shall show no visible deterioration and meet full specification performance after withstanding 400 volts or two times the maximum peak operating voltage, whichever is greater. The test voltage shall be dc or peak ac of the same value.

3.4 Service conditions.- The equipment shall meet the following service conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.4.1 Equipment nonoperating.- The equipment shall comply with the operational requirements of 3.4.2 after subjection to any of the following nonoperating conditions successively or in combinations encountered during worldwide short-term storage and transit.

a. Temperature.- Exposure in the range of +160°F to -80°F; however, exposure at the high temperature extreme not to exceed 4 hours and at the low temperature extreme not to exceed 24 hours at any one time.

b. Relative humidity.- Relative humidity up to 97 percent, for an indefinite period of time, and exposure at 100 percent relative humidity, with condensation for 4 hours.

c. Elevation.- Elevation up to 25,000 feet above sea level.

d. Bounce and shock.- As described in 3.5.

3.4.2 Equipment operating.- The equipment shall meet the performance requirements of this specification while subjected to any of the following conditions successively or in combinations likely to be encountered during worldwide operations.

a. Temperature.- Ambient temperature in the range of +132°F to -40°F. Exposure at the high temperature extreme not to exceed 4 hours and at the low temperature extreme not to exceed 72 hours.

b. Relative humidity.- Relative humidity up to 97 percent, and exposure at 100 percent relative humidity with condensation for 4 hours.

c. Elevation.- Elevation up to 10,000 feet above sea level.

3.5 Bounce and shock.-

3.5.1 Bounce.- The repeater shall meet full specification performance and show no physical damage except surface abrasion after subjection to the test of 4.9.4.

3.5.2 Shock; drop.- The equipment shall be operable after subjection to the test of 4.9.5. Minor mechanical damage is permissible.

3.6 Canvas bag.- The bag shall be fabricated of duck, type I, number 6, hard texture, in accordance with Federal Specification CCC-C-419. The duck shall be olive drab No. 7, dyed per type I with after treating process class C, both in accordance with Specification MIL-D-504.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.7 Preproduction samples.- The contractor shall furnish preproduction samples for approval, as required by the invitation for bids and contract.

3.8 Preconditioning.- The equipment shall be capable of meeting the inspection of Section 4, without subsequent processing, after subjection to the bounce preconditioning of 4.5.

3.9 Instruction sheet.- An instruction sheet covering the installation of the repeater in the field wire shall be provided.

3.10 Workmanship.- Workmanship on components covered by this specification shall be such as to meet all the requirements of this specification and any referenced subsidiary specification, drawing, or other document, when inspected in accordance with 4.6, including the applicable portions of the following paragraphs:

a. In specification MIL-P-11268:

General requirements for plastic material and plastic parts.	Flux and cleaning agents for soldering.
Wiring and cabling, including: Slack Protection Clearance Splicing Connections, general Grounding, General Shielding on wire and cable	Process for soldering. Cleaning of equipment. General requirements for securing of parts.

b. In this specification:

Marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor responsibility.- Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 Classification of inspection.- Inspection shall be classified as follows:

a. Preproduction inspection (does not include preparation for delivery.) (See 4.3)

b. Procurement inspection. (Procurement inspection shall be the inspection performed by the contractor and by the Government, as specified by 4.4). (See 4.4. and 4.10)

1. Procurement inspection of items before preparation for delivery. (See 4.4)

2. Procurement inspection of preparation for delivery. (See 4.10 and Section 5)

4.3 Preproduction inspection.- This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in table I and the group A and group B inspection specified in table II, and III respectively. Other nondestructive tests on preproduction samples may be performed to determine compliance with specified requirements. The preproduction inspection will normally be performed in this order: (1) bounce, (2) shock; drop, other preproduction inspection may precede, follow, or be interspersed between the foregoing.

TABLE I

Preproduction Inspection

Inspection	Rqt. Par.	Insp. Par.
Temperature	3.4	4.9.1
Moisture resistance	3.4	4.9.2
Altitude	3.4	4.9.3
Bounce	3.5.1	4.9.4
Shock; drop	3.5.2	4.9.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

Governing transportation on Government-owned or controlled

4.4 Procurement inspection of items before preparation for delivery.-

The contractor shall perform the inspection specified by (a) through (d) below, to demonstrate compliance with specified requirements. However, this does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition the Government---at its discretion---may perform all or any part of the inspection specified in (a), to verify the contractor's compliance with specified requirements. (The amount of such verification inspection will depend on the extent to which the contractor's inspection procedures and records insure that the equipment on contract meets the specified procurement inspection. Also see 6.4.)

a. Procurement inspection shall consist of group A and group B inspection as specified in 4.4.1 through 4.4.2.2.

b. When Standard MIL-STD-105 specifies actions by the Government, the Government may authorize the contractor to perform any of such actions except that responsibility for acceptance rests with the Government.

c. Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection. However, the order may be varied when it is considered more practical to select separate samples for group B inspection.

d. Each unit which will be subjected to group A or group B inspection shall be preconditioned after final assembly. (See 3.8)

4.4.1 Group A inspection.- This inspection (including sampling) shall conform to Table II and Standard MIL-STD-105. Unless otherwise specified, normal inspection shall be used at the start of the contract. Group A inspection shall be performed in any order which is satisfactory to the Government.

TABLE II

Group A Inspection

Inspection	Req't Par.	Insp Par.	AQL Major	AQL Minor
Visual and Mechanical				
Repeater (performed prior to encapsulation)	3.10	4.6	1.0DPHU	4.0DPHU
Canvas Bag	3.6	4.6	1.0DPHU	4.0DPHU
Electrical				
Frequency Attenuation	3.3.1	4.7.2	1.0%	*
Harmonic Distortion	3.3.2	4.7.3		
Longitudinal Balance	3.3.5	4.7.6		
Operation		4.8	.65%	*

*All electrical and operational defects are of major category.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection.- This inspection (including sampling) shall conform to table III and the Appendix to Standard MIL-STD-105. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R-1. Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with 4.4.4 and the requirements of Standard MIL-STD-105 for disposition of rejected product.

4.4.2.1 Group B sampling plans.- The group B sampling plans, as listed in table III, shall be as follows:

Group B plan	AQL	Inspection level for normal inspection	Inspection level for reduced inspection
B-2	4.0%	L-8	L-6

4.4.2.2 Order of inspection within group B.- Group B inspection shall be performed in any order which is satisfactory to the Government.

TABLE III

Group B Inspection

Inspection	Req't Par.	Insp Par.	Sampling Plan
Current drain	3.3.3	4.7.4	4% defective L-8 Normal & tightened L-6 Reduced R-1 Appendix MIL-STD-105
Noise	3.3.4	4.7.5	
Dielectric	3.3.7	4.7.7	

4.4.3 Reinspection of conforming group B sample units.- Unless otherwise specified, sample units which have been subjected to and passed group B inspection may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.4.4 Disposition of nonconforming product.- When defective sample units or failed inspection lots are submitted for acceptance, such product shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault. The required information shall be presented to the Government when the product is submitted and shall become the property of the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.5 Bounce preconditioning.- The equipment shall be placed in its normal operating position on the table of the Package Tester as made by the L.A.B. Corporation, Skaeneatles, N.Y., or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch thick strip of material under one corner or edge of the equipment to a distance of three inches as the equipment bounces. The equipment shall be subjected to this preconditioning for 1 minute. After bounce preconditioning , the equipment shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.

4.6 Visual and mechanical inspection.- The equipment shall be examined for the defects listed in Standard MIL-STD-252. This inspection shall be made before encapsulation.

4.7 Electrical tests.-

4.7.1 Test conditioning.- The repeater shall be connected to Batteries BA-406( )/U and BA-421( )/U, or equivalent power source for all electrical tests. An artificial line panel will be furnished the contractor by the Government for making the tests of 4.7.2 and 4.7.3.

4.7.2 Frequency-attenuation characteristics test.- Connect a Signal Generator SG-15( )/PCM adjusted to -3dbm and a Decibel Meter ME-22( )/PCM in the terminating position as shown in Figure I. Make response measurements at 300, 600, 1000, 2150 and 3500 cps to determine compliance with 3.3.1. Measurements shall be made for both the dry and wet line conditions.

4.7.3 Harmonic distortion.- Using the same connections as in 4.7.2, replace the decibel meter with a distortion analyzer terminated in 600 ohms. Measure the distortion at 300, 600, 1000, 2150 and 3500 cps to determine compliance with 3.3.2 Measurements shall be made for both the dry and wet line conditions.

4.7.4 Current drain.- Connect an ammeter in series with the emitter and measure the current. Repeat measurement for the collector to determine compliance with 3.3.3.

4.7.5 Noise.- Terminate one pair of line leads in 1200 ohms and connect a Transmission Measuring Set TS-559/FT using FIA line weighting to the other pair. Noise level shall be in conformance with 3.3.4.

4.7.6 Longitudinal balance.- Connect Signal Generator SG-15( )/PCM, voltmeter and repeater as shown in Figure 2. With ground switch in the A position, adjust the output level of the oscillator for a -6dbm reference reading on the voltmeter. With the ground switch in the B position, measure the longitudinal balance on voltmeter for compliance with 3.3.5. The actual value shall be the difference between the -6dbm and the recorded reading. Reverse repeater line leads and repeat measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

RESPONSE MEASUREMENTS


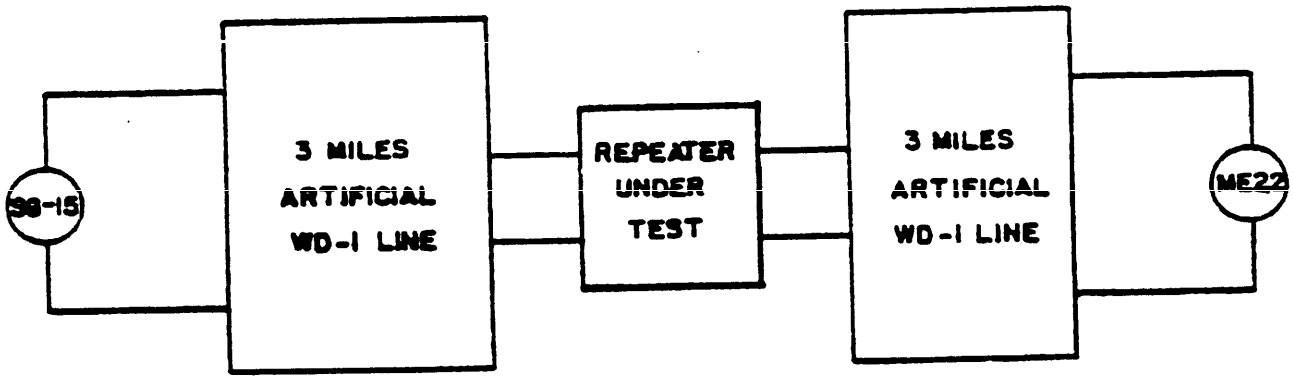


FIGURE 1

LONGITUDINAL BALANCE

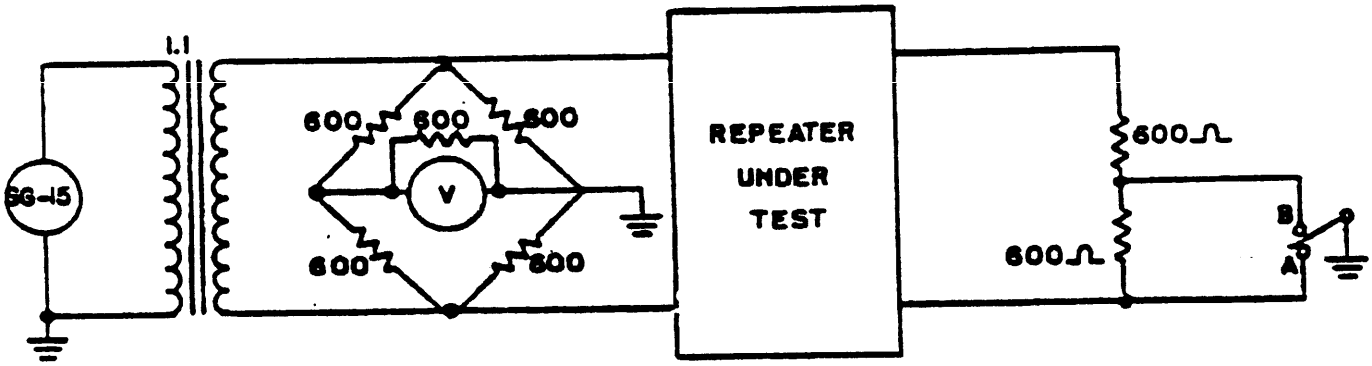

ALL RESISTORS .1%

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

4.7.7 Dielectric test.- The dielectric strength of all circuits shall be tested to determine compliance with 3.3.7 as follows: With one test probe connected to one of the line leads, apply the voltage for 10 seconds through the other 3 remaining leads and to the common battery connection on the printed card respectively. Repeat the same test for all the line leads.

4.8 Operation test.- Short one pair of the field wire leads of the repeater. Connect the other pair of field wire leads to a Telephone TA-312( )/PT. Plug the battery connectors into their respective batteries. If a tone is heard on the handset, the repeater is operating.

4.9 Service conditions test.-

4.9.1 Temperature.- The repeater, in canvas bag, shall be subjected to the temperature cycle shown on Standard MIL-STD-169. During this test the batteries shall be placed outside the temperature chamber and connected to the repeater by means of long leads. Measurements shall be made at steps 4 and 8.

4.9.2 Moisture-resistance test.-

4.9.2.1 Test conditions.-

a. Do not remove equipment from the humidity chamber for measurements.

b. Start measurements not more than 5 minutes after power is applied to the equipment. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.9.2.2 Test procedure.- The repeater, in canvas bag, shall be tested as follows:

a. Dry at $130^{\circ} \pm 5^{\circ}F$ for 24 hours.

b. Condition at $77^{\circ} \pm 5^{\circ}F$ and 40 to 50 percent relative humidity for 24 hours.

c. Take measurements as specified in 4.9.2.3.

d. Subject to continuous cycling for a total of five 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to MIL-STD-170. The measurements specified in 4.9.2.3 shall be made during periods shown on the drawing.

e. After cycling has been completed, condition the equipment for 24 hours at $77^{\circ} \pm 5^{\circ}F$ at 40 to 60 percent relative humidity. No repair or replacement of parts shall be made. The equipment shall meet full specification performance for those measurements specified in 4.9.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.9.2.3 Performance.- Measurements made during test and specified performance during cycling shall conform to the electrical requirements of Section 3.

4.9.2.4 Failure.- If any component fails to meet the performance specified in 4.9.2.3 during cycling or fails subsequently after cycling it does not pass the test.

4.9.3 Altitude test.- The equipment shall be placed in an altitude chamber at normal conditions of temperature, pressure, and humidity, and shall be tested to determine compliance with electrical requirements. The pressure shall then be reduced to 20 inches of mercury and stabilized for 2 hours. The equipment shall again be tested. The pressure shall then be lowered to 11 inches of mercury and the chamber maintained at this pressure for another 2-hour period. The pressure shall then be raised to 29.9 inches of mercury and tested again. There shall be no degradation of performance in the second and third measurements, from those established in the first test.

4.9.4 Bounce test.- The equipment in its canvas bag shall be placed on the table of the package tester as made by L.A.B. Corp., Skaeneatles, N.Y., or equal, and shall be constained from horizontal motion of more than 2 inches by suitable wooden fences. The package tester, shafts in phase, shall be operated at a speed of 285 rpm $\pm$1%, for a total of 3 hours. During each 1/2 hour period of the test, the bag (which contains equipment) shall rest on a different face.

4.9.5 Shock test: drop.- The equipment, in its canvas bag, shall be dropped a distance of 48 inches on each corner, edge and face (total of 26 drops). Drops shall be made from a quick-release hook; and Acme Drop Tester, or equal; a Conbur Tester (10 degree inclined plan), or equal; or a basket-type pendulum tester. The floor or barrier receiving the impact shall be of 2 inch fir, backed by concrete or a rigid steel frame.

4.10 Procurement inspection of preparation for delivery.- The contractor shall perform the inspection specified by 4.10.1 and 4.10.2 to demonstrate compliance with specified requirements. However, this does not relieve the contractor of responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government---at its discretion---may perform all or part of the inspection specified in 4.10.1 and 4.10.2, to verify the contractor's compliance with specified requirements. (The amount of such verification inspection will depend on the extent to which the contractor's inspection procedures and records insure that the equipment on contract meets the specified procurement inspection. Also see 6.4. When Standard MIL-STD-105 specifies action by the Government, the Government may authorize the contractor to perform any of such action except that responsibility for acceptance rests with the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

4.10.1 Preservation and packaging.- Inspection of preservation and packaging shall be as specified in Specification MIL-P-116. Classification of defects shall be as shown on table IV.

TABLE IV

Classification of Defects for Preservation, Packaging and Marking

Major	Minor
1. Use of improper or defective material.	1. Item not properly blocked or braced with the unit package to prevent movement.
2. Quantity in unit package not as specified.	2. Packaging material damaged.
3. Incorrect packaging method applied.	3. Any item of marking information other than 7 thru 9 omitted, incorrect, or illegible.
4. Cushioning or padding omitted.	
5. Cushioning inadequate for the physical and mechanical protection of the item.	
6. Unsealed, punctured, or improperly sealed barrier bag, wrap or envelope.	
7. Stock number omitted, incorrect, or illegible.	
8. Nomenclature omitted, incorrect, or illegible.	
9. Marking of quantity of items in package omitted, incorrect, or illegible.	
10. Different stock numbered items in the same unit package.	

4.10.2 Packing and marking of exterior containers.- Packing and marking of exterior containers shall be given visual inspection for the defects listed below and to determine conformance with the approved process sheet furnished by the contractor as required by the contract. This inspection shall conform to the Appendix to Standard MIL-STD-105. Inspection level L-8 shall be used for normal inspection and L-6 for reduced inspection. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R-1. The AQL for major defects shall be four percent and the AQL for minor defects shall be ten percent. Classification of defects shall be as shown in table V.

TABLE V

Classification of Defects for Packing and Marking

Major	Minor
1. Use of improper or defective material.	1. Unsealed carton.
2. Quantity of pack not as specified.	2. Defective taping or sealing of carton.
3. Gross weight in excess of specified amount.	3. Any other box defect which may be considered minor by definition of Standard MIL-STD-105.
4. Box closure not as specified.	
5. Type, grade, class and style of the shipping container not as specified.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:13Z
Check the source to verify that this is the currentversion before use.

6. Strapping omitted.
7. Strapping inadequate or incorrectly applied.
8. Items not adequately blocked, braced, or cushioned within the shipping container to prevent movement or damage.
9. Shipping documents or packing list omitted.
10. Stock number omitted, incorrect, or illegible.
11. Nomenclature omitted, incorrect, or illegible.
12. Marking of quantity of items in pack, omitted, incorrect, or illegible.
13. Destination marking omitted, incorrect, or illegible.
14. Service designation (color marking) omitted.
15. Special marking or labeling (when required) omitted.
16. Overseas code marking omitted, incorrect, or illegible.

4. Any item of required marking information other than 10 thru 16 listed under major defects omitted, incorrect, or illegible.

4.10.2.1 Inspection lot.- A lot for visual inspection of the pack shall be all completed packs which are identical and will be submitted for acceptance at one time.

4.10.2.2 Procedure in case of failure.- If an inspection lot fails, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken. If the contractor and Government inspector cannot agree on the effectiveness of the corrective action, the matter shall be referred to the contracting officer for resolution.

4.10.2.3 Disposition of nonconforming product.- Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with the requirements of Standard MIL-STD-105 for disposition of rejected product. When submitted for acceptance, such product shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault. The required information shall be presented to the Government when the product is submitted and shall become the property of the Government.

4.11 Rough handling test (preparation for delivery). When rough handling test in accordance with Specification MIL-P-116 is required by the contract, the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

Test of 4.8 - - - - Operation.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A. Telephone, Repeater TA-287( )/G shall be preserved, packaged and tested in accordance with the procedures specified for the designated methods as prescribed in Specification MIL-P-116 and described herein.

5.1.1.1 Instruction sheet. Each instruction sheet shall be packaged Method IC-3, as follows: Inclose each technical manual within a close-fitting, type II, class B bag, conforming to Specification MIL-B-117. Heat seal bag to effect closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

5.1.1.2 Telephone, Repeater TA-287( )/G. Each repeater shall be packaged Method IC-5 as follows: Wind each lead around the repeater. Place each repeater within canvas carrying bag. Fill all voids with flexible, single face corrugated fiberboard, type II, conforming to Specification LLL-F-291. Close case and secure fastenings. Place each case with contents, within a close-fitting, regular slotted style, class 2, W6c, box, conforming to Specification PPP-B-636. Box closure shall be effected by sealing all joints and seams with water resistant, pressure-sensitive tape, conforming to Specification PPP-T-76.

5.1.2 Level C. Telephone, Repeater TA-287( )/G shall be packaged in accordance with commercial practice and in a manner that will afford protection against corrosion, deterioration and physical damage, during direct shipment to the first receiving activity.

5.2 Packing.

5.2.1 Level A. A quantity of Telephone, Repeater TA-287( )/G shall be packed within a wirebound wood; wood cleated fiberboard; wood cleated plywood or nailed, wood box, conforming to the requirements of Specification PPP-B-585, class 3, PPP-B-591 (Overseas type), PPP-B-601 (Overseas type) or PPP-B-621, class 2, respectively. Fabricate the box to fit the contents snugly. The gross weight of any shipping container shall not exceed 200 pounds. Box closure shall be in accordance with the applicable box specification or the appendix thereto.

5.2.1.1 Metal strapping. Shipping containers shall be strapped, with flat steel strapping, in conformance with the requirements of the appendix of the container specification, only for direct shipment to ports.

5.2.2 Level B. Telephone, Repeater TA-287( )/G shall be packed as specified in 5.2.1 except that the boxes shall be domestic type or class. No strapping required.

5.2.3 Level C. Telephone, Repeater TA-287( )/G shall be packed for shipment in a manner conforming to the requirements of Uniform Freight Classification No. 4 and Consolidated Freight Classification, Rule 21 for rail shipment, National Motor Freight Classification No. A-3 and No. 14 for truck shipment, Parcel Post Regulations, and the regulations of other carriers as applicable to the mode of transportation employed at lowest transportation rate.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL-STD-129.

6. NOTES

6.1 Intended use. Telephone Repeater TA-287( )/G is intended for use on Field Wire WD-1( )/TT.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Level of packaging and level of packing required for shipment. (Level A or Level B).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

c. The specific paragraphs of section 5 which are applicable to the particular procurement.

d. Preproduction inspection:

(1) Two samples of each item cited in section 1 are generally required so that lengthy environmental tests can be completed on one sample while complete performance measurements can be made on the second sample.

(2) Preproduction pack(s) as follows:

(a) Makeup of pack(s).
(b) Number of each kind of pack to be submitted.
(c) Inspection to be performed thereon--including rough handling test, which will not be performed as procurement inspection.
(d) Five copies of process sheet, using format shown on Drawing SC-C-33073 and accompanied by such drawings, sketches, and other data as may be necessary to completely describe the procedures followed in fabrication of the preproduction pack(s) and to identify the items therein. These data should be submitted to the contracting officer with the preproduction pack.
(e) A packaging technician from the procuring agency will evaluate the preproduction pack(s).

e. Marking and shipping of samples.

f. Place of final inspection.

g. Technical literature required.

6.3 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TA-287( )/G. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Verification inspection. The amount of verification inspection (by the Government) will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product, and will normally be identified by the categories listed below:

a. Type A - The total of that inspection set forth in the Quality Assurance Provisions of this specification or the contract. Included in this category is that amount of inspection referred to as normal and tightened inspection by Military Standard 105.

b. Type B - That inspection set forth in the Quality Assurance Provisions of this specification or the contract reduced in amount under the reduced inspection provisions of Military Standard 105.

c. Type C - A reduced inspection procedure resulting in a material reduction in the amount of inspection set forth in the Quality Assurance Provisions of this specification. The amount of inspection is less than that provided for in type B and is based upon a consistently acceptable product resulting from a planned quality control system voluntarily employed by the contractor in the production of the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

6.5 Definition of Level B. Level B packaging requirements detailed herein are designed to furnish protection against corrosion, deterioration, and physical damage during domestic shipments; covered storage for a period of three years or less; and distribution within the continental limits of the United States.

6.6 Color of textiles. Standard samples of Olive Drab No. 7 may be obtained from the Commanding General, Philadelphia Quartermaster Depot, 2800 South Twentieth Street, Philadelphia 45, Pennsylvania. When requesting samples, indication should be given as to type of material concerned.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.