INCH-POUND

MIL-T-53055C(ME)
16 September 1991
SUPERSEDING
~~MIL-T-00053055B~~
22 January 1991
MIL-T-53055A (ME)
6 June 1989

MILITARY SPECIFICATION

TANK, 3000 GALLON AND 4600 GALLON FABRIC, COLLAPSIBLE, DRINKING WATER, SEMI-TRAILER MOUNTED

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two elastomeric coated fabric collapsible tanks for the transportation of drinking water. The 4600 gallon tank shall be transported on the M872 semi-trailer. The 3000 gallon tank shall be transported on the M871, M872, or M127A2C semi-trailer.

1.2 Classification. The tanks covered by this specification should be the following sizes (see 6.2 and 6.7):

3000 gallon.
4600 gallon.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5430

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-55057	-	Panel Wood/Wood Based; Construction and Decorative.
L-P-378	-	Plastic Sheet and Strip, Thin Gauge, Polyolefin.
FF-B-561	-	Bolt, (Screw), Lag.
FF-B-584	-	Bolt, Square Neck, Tee Head.
FF-N-836	-	Nut, Square, Hexagon Cap, Slotted, Castellated, Clinch, Knurled, and Welding.
FF-W-92	-	Washer, Flat (Plain).
TT-W-572	-	Wood Preservative, Water Repellant.
PPP-B-601	-	Boxes, Wood, Cleated Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lockcorner.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-C-1797	-	Cushioning Material, Resilient Low Density, Unicellular, Polypropylene Foam.
PPP-T-60	-	Tape, Packaging, Waterproof.

MILITARY

MIL-S-7916	-	Sealing Compound Thread and Gasket, Fuel Oil, and Water Resistant.
MIL-A-8625	-	Anodic Coatings for Aluminum and Aluminum Alloys.
MIL-C-20696	-	Cloth, Coated, Polyester or Nylon, Waterproof.
MIL-R-52255	-	Repair Kit and Repair Kit Components, for Collapsible Fabric Tanks, Drums, and Boats.

STANDARDS

FEDERAL

FED-STD-595	-	Colors Used in Government Procurement.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-731	-	Quality of Members for Containers and Pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

MIL-STD-1472	-	Human Engineering Design Criteria for Military Systems, Equipment, and Facilities.
MS27019	-	Coupling Assembly, Quick Disconnect, Cam-Locking Type.
MS27028	-	Coupling Half, Quick Disconnect, Cam-Locking Type, Cap, Dust, Type IX.
MS49000	-	Reducer, Male by Female and Female by Male, Quick Disconnect, Cam and Locking, Type XI.
MS49002	-	Reducer, EPT by Quick Disconnect, Cam-Locking Type, Female, Type XIII.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ME

13225E9096	-	Nozzle, Distribution, Water.
13225E9135	-	Hose Assembly, Rubber.
13225E9139	-	Swivel, Hose.

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development and Engineering Center, ATTN: STRBE-FSH, Fort Belvoir, VA 22060-5606.)

FOOD AND DRUG ADMINISTRATION (FDA)

Code of Federal Regulations, Title 49, 313.101-102.

Code of Federal Regulations, Title 21, Part 177.2600, Chapter I.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal Agency responsible for issuance thereof.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TECOM

TOP 2-2-610 - 18 July 1980 - Side Slope and Gradeability.

(Application for copies should be addressed to the US Army Test and Evaluation Command, DRSTE-AD-M, Aberdeen Proving Ground, MD 21005.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

H35.1 - Aluminum, Alloy and Temper Designation Systems for.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN PUBLIC HEALTH ASSOCIATION, INC. (APHA)

Standard Methods for Examination of Water, parts 207 and 211B, paragraph 4.6.1.

(Application for copies should be addressed to the American Public Health Association, Inc., 1015 18th St, N.W., Washington, DC 20036.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
B 26 - Aluminum-Alloy Sand Castings.
B 85 - Aluminum-Alloy Die Castings.
B 108 - Aluminum-Alloy Permanent Mold Castings.

D 2000 - Rubber Products in Automotive Applications, Classification Systems for.
D 3953 - Strapping, Flat Steel and Seals.
D 4675 - Selection and Use of Flat Strapping Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WOOD PRESERVERS' ASSOCIATION (AWPA)

C1 - All Timber Products - Preservative Treatment by Pressure Processes.
C2 - Lumber, Timbers, Bridge Ties and Mine Ties - Preservative Treatment by Pressure Process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

C9 - Plywood - Preservative Treatment by Pressure Process.

(Application should be addressed to the American Wood Preservers' Association, P. O. Box 849, Stevensville, MD 21666.)

NATIONAL SANITATION FOUNDATION (NSF)

NSF Standard 61 - Drinking Water System Components - Health Effects

(Application for copies should be addressed to National Sanitation Foundation, 3475 Plymouth Rd, P.O. Box 1468, Ann Arbor, Michigan 48106.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or military standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The tank shall consist of an elastomeric coated multi-ply fabric or multi-ply cord with fittings, flatbed cloth (optional), repair items, hose, tiedown straps and hardware, carrying sling, duffel bag, and accessories (see figure 5).

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Medical requirements.

3.3.1 Potability. The liner and all surfaces that contact drinking water shall conform to the Code of Federal Regulations, Food and Drugs, title 21, chapter 1, part 177.2600 for contact with food (the compounds listed in title 21, chapter 1, part 177.1020, 177.1030, 177.1050 or 177.1480 shall not be acceptable materials) or shall be either tested or listed as approved for use with potable water by the National Sanitation Foundation (NSF), Underwriters Laboratory, or Safe Water Additives Institute in accordance with NSF Standard 61.

3.3.2 Taste and odor. The tank shall conform to the APHA Standard Methods for the Examination of Water and Wastewater for taste and odor. The material shall not impart odor to chlorinated water such that the threshold odor number exceeds two. The material shall not impart taste to chlorinated water such that the taste rating scale exceeds four (see 4.5.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

3.4 Material. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.4.1 Material deterioration prevention and control. The tanks shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the tank may be exposed.

3.4.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and subcomponents, and shall make information available, upon request, to the contracting officer or designated representative.

3.4.3 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the tank may be newly fabricated from recovered materials to the maximum extent practicable, provided the tank produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the tanks.

3.4.4 Inner liner rubber compound. The liner rubber compound shall be a solid, noncellular rubber compound conforming to 3.3, capable of withstanding storage at ambient temperatures from +160 °F to -25 °F.

3.4.5 Outer cover rubber compound. The outer cover rubber compound shall conform to ASTM D 2000, composition M3BC610A14C12F17G21.

3.4.6 Alloys of tank fittings. Alloy and temper designations of wrought aluminum alloys and aluminum alloys in the form of castings shall be in accordance with ANSI H 35.1. Cast aluminum alloy shall conform to ASTM B 85, UNS A14130, UNS A13600 or UNS A05180 for die castings; ASTM B 108, UNS A03560-T6 for permanent and semipermanent mold castings; or ASTM B 26, UNS A13560-T6 or UNS A07120-T5 for sand castings. Corrosion resisting steel conforming to ASTM A 167, UNS S30400 may be used.

3.4.7 Protective coatings. Aluminum alloy tank fittings shall be anodized in accordance with MIL-A-8625, type II, class 2, dyed to approximate tank color. The minimum thickness shall be at least 0.0004 inches (10 micrometers).

3.5 Tank performance.

3.5.1 4600 gallon tank. The tank shall be capable of being completely filled while secured on the M872 trailer. The tank shall be capable of safely transporting between 4570 and 4700 gallons of water. The tank shall be drained by gravity in 30 minutes or less without the use of a pump

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(see 4.5.2.5). The tank and components shall withstand folded storage for 20 years at ambient temperatures from +160 °F to -25 °F without damage or leakage when subsequently filled with water (see 4.5.2.3 and 4.5.2.4). The tank shall be capable of filling at +125 °F to +32 °F ambient temperature. The tank shall be designed to transport the potable water at 5 ±1 psig pressure. The tank color shall approximate color chip 33446 of FED-STD-595. The tank shall withstand a hydrostatic test pressure of 15 psig for 20 minutes without any leakage, blistering, peeling, delamination, slippage, fabric damage, or any sign of deterioration (see 4.5.2.2 and 4.5.2.8).

3.5.2 3000 gallon tank. The tank shall be capable of being completely filled while secured on the M872 trailer, M871 trailer, and M127A2C trailer. The tank shall be capable of transporting between 3000 and 3090 gallons of water. The tank shall be drained by gravity in 30 minutes or less without the use of a pump (see 4.5.2.5). The tank and components shall withstand folded storage for 20 years at ambient temperature from +160 °F to -25 °F without damage or leakage when subsequently filled with water (see 4.5.2.3 and 4.5.2.4). The tank shall be capable of filling at +125 °F to +32 °F ambient temperature. The tank shall be designed to transport the potable water at 5 ±1 psig pressure. The tank color shall approximate color chip 33446 of FED-STD-595. The tank shall withstand a hydrostatic test pressure of 15 psig for 20 minutes without any leakage, blistering, peeling, delamination, slippage, fabric damage, or any signs of deterioration (see 4.5.2.2 and 4.5.2.8).

3.5.3 Road travel.

3.5.3.1 Highway. The tanks, when completely empty or when full, (3000 or 4600 gallons) shall be capable of travel of at least 55 miles over smooth, hard surface primary roads at sustained speeds up to 55 miles per hour (mph) without shifting, leaking, or any sign of deterioration (see 4.5.2.6).

3.5.3.2 Cross country. A full 3000 gallon tank shall be capable of travel over unimproved roads and open, rolling, and hilly cross-country terrain at speeds up to 30 mph without shifting, weakening, leaking, or any sign of deterioration (see 4.5.2.7).

3.5.3.3 Gradeability. A full 3000 gallon tank and vehicle system (see 3.12) shall be able to negotiate grades up to 30 percent both in forward and reverse travel, and be able to brake to full stop and hold steady on the grade without shifting, leaking, or any sign of deterioration (see 4.5.2.7).

3.5.3.4 Side slope performance. A truck and trailer (see 3.12) carrying a full 3000 gallon tank with 5 ±1 psi internal pressure shall be capable of controlled steering while running a sine-wave pattern on the horizontal length of a 30 percent grade side slope without the tank shifting, leaking, or showing any sign of deterioration (see 4.5.2.7).

3.6 Accessories. The 4600 gallon tank shall be furnished with accessory items 1 through 6. The 3000 gallon tank shall be furnished with accessory

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

items 1 through 11 (see figure 5). Items 1 and 4 shall approximate color chip 33446 of FED-STD-595.

Item		Conformance	Quantity
1.	Tiedown assembly.*	Code of Federal Regulation 49 CFR 393.100-102.	4 minimum plus 2 spare
2.	Suction hose, 10 ft. length, 4-inch diameter, cap and plug attached by chain.	(97403) 13225E9135-3	2
3.	Carrying sling used to place the tank in and out of the shipping crate.		1
4.	Duffel bag for tiedown assembly.		1
5.	Repair kit, for collapsible fabric tanks, drums, and boats, type II.	MIL-R-52255	1
6.	Adhesive repair kit. (Expiration date shall be marked on the adhesive containers(s).	Adhesives, patches, applicators, pouch, and instructions for 5 repairs.	1
7.	Reducer, female to male, cam-lock, 4-inch to 2-inch.	MS49000-17	1
8.	Reducer, EPT, cam-lock, female, Type XIII.	MS49002-9	1
9.	Swivel, hose, 1-1/2-inch.	(97403) 13225E9139-3	1
10.	Nozzle, distribution, potable water.	(97403) 13225E9096	1
11.	Suction hose, 10 ft. length, 2-inch diameter, cap and plug attached by chain.	(97403) 13225E9135-1	2

* The tiedown assembly for the 3000 gallon tank shall be compatible and interchangeable with the M871, M872, and M127A2C semi-trailers.

3.7 Identification marking. The tank shall be identified in accordance with MIL-STD-130 by means of an identification label. The label shall conform to 3.10 and shall be made of coating compound as specified in 3.4.5 and bonded to the tank. The following information shall be provided, using 1.0-inch (minimum) letters:

TANK, FABRIC, COLLAPSIBLE:
(specify) GALLONS, DRINKING WATER
NSN: (specify)
SERIAL NO: (specify)
PIN: (specify) (see 6.7)
MFR: (Mfr. name and location of plant)
DATE MANUFACTURED: (specify)
WEIGHT EMPTY: (specify approximate number of pounds)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

CONTRACT OR ORDER NO: (specify)
LOT: (specify)
SERVICE LIFE 5 YEARS
STORAGE LIFE 20 YEARS

3.8 Labeling. On the side and rear of the tank, in 4-inch lettering, the tank shall be permanently marked "Drinking Water" in black letters. On both sides of the tank shall be permanently marked in 2-inch red letters "Transport Tank Only When Completely Full or Empty. Remove Gauge When Transporting". These labels shall be visible when the tank is filled to its rated capacity or empty (see 3.10). Chafing patch locations shall be marked with 1-inch-high dashed lines which are labeled "Place Tiedown Strap Here" in black 1-inch letters (see 3.9.1 and 3.10). The tank shall be marked in 1-inch high black letters above the filler/discharge fitting "Fill tank to 5 psi." Labeling shall conform to 3.10.

3.9 Tank design.

3.9.1 Chafing patches. The tank shall have chafing patches to prevent the tiedown assembly from abrading the tank's outer surface. The chafing patches shall be located on the tank at the strap positions and shall approximate color chip 33446 of FED-STD-595. The width of the patches shall provide a tolerance of ±6 inches to accommodate semi-trailer tiedown slots.

3.9.2 Flatbed cloth. The flatbed cloth is an optional item (see 6.2). The cloth shall provide a protective barrier between the tank and the semi-trailer flatbed. The cloth shall conform to the requirements of MIL-C-20696, type II, class I with all exposed edges of the coated cloth sealed. The cloth color shall approximate color chip 33446 of FED-STD-595. The cloth shall extend a minimum of 4 inches from the footprint of a tank when filled to its rated capacity. The cloth shall be capable of being fastened down to the semi-trailer or the tiedown assembly.

3.9.3 Filler/discharge assembly. The tank shall be furnished with a four-inch filler/discharge assembly, consisting of a four-inch gate valve and a pressure gauge. The filler/discharge assembly shall be attached to the right side of the rear end of the tank. The other end of the assembly shall have a male coupling half in accordance with MS27019 with a dust cap captured by chain in accordance with MS27028. The four-inch gate valve control shall be labeled to indicate the functional result (ie., open, close, etc.). The pressure gauge shall be located in line between the gate valve and the tank. The pressure gauge shall be between the gate valve and the tank. The pressure gauge shall be capable of being attached and removed from the assembly when the tank is empty and when the tank is filled to its rated capacity. A minimum of one-inch clearance shall exist between the pressure gauge and the tank when filled to its rated capacity. The pressure gauge shall be calibrated for operation up to 15 psi and graduated in increments from 0 to 15 psi. All exterior surfaces of the filler/discharge assembly, with the exception of the pressure gauge, shall approximate color chip 33446 of FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

3.9.4 Bleed valve. The tank shall be equipped with a valve for bleeding air from the tank to improve the stability of the tank during transport. The bleed valve shall be flush with the tank fabric, or designed so as to prevent snagging. The bleed valve shall be capable of being manually opened and closed with finger torque.

3.9.5 Inspection and cleaning. The tank shall be capable of internal inspection and internal cleaning.

3.9.6 Compound, thread sealing. All threaded connections of the metal fittings shall be sealed with sealing compound conforming to MIL-S-7916.

3.10 Human factors engineering. The tank shall conform to Human Factors Engineering Design Criteria as described in MIL-STD-1472: general requirements (4.1, 4.2, 4.4g, 4.4m, 4.5, 4.6, 4.8, and 4.9), labeling (5.5), design for maintainer (5.9), and hazards and safety (5.13.1 and 5.13.5.2) as applicable.

3.11 Workmanship. All metal parts shall be clean and free of sand, dirt, scale, and flux. Surfaces shall be smooth with edges rounded or beveled. The inside and outside of the tank shall be clean and free of foreign materials.

3.12 Government loaned property. Unless otherwise specified (see 6.2 and 6.4), the Government will make an appropriate trailer available to the contractor for use in the first article road and cross-country tests (see 3.5.3).

Item No.	Description	Quantity
1.	Trailer (see 3.5.1 or 3.5.2 for the appropriate trailer.)	1

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in 4.5.1. The presence of one or more defects shall be cause for rejection of the first article.

4.3.2 First article tests. The first article shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection of the first article. The first article shall not be destroyed. Destructive tests will be performed on identical samples of materials.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling shall be in accordance with MIL-STD-105. Sample size shall be determined by table I and table IIa of MIL-STD-105 using general inspection level II. A lot shall be accepted when zero defects are found, and rejected when one or more defects are found.

4.4.2 Examination. Each complete tank assembly shall be examined in accordance with table I of 4.5.1. Any nonconformance revealed by the examination shall be cause for rejection of the tank.

4.4.3 Testing.

4.4.3.1 Individual tanks. Every tank shall be tested in accordance with 4.5.2.8. Any failure shall be cause for rejection.

4.4.3.2 Test. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.2. A lot shall consist of not more than 50 tanks of the same size or one months production, whichever condition is achieved first.

4.5 Examination procedure.

4.5.1 Examination. The tanks shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

TABLE I. Examination schedule.

Examination number	Examination description	Requirement paragraph
101.	Liner and all surfaces that contact drinking water made from unacceptable materials.	3.3.1
102.	Materials not as specified.	3.4, 3.4.4, 3.4.5
103.	Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.	3.4.1
104.	Used, rebuilt, or remanufactured components, pieces or parts incorporated in the tanks.	3.4.3
105.	Contractor does not have documentation available for identification of material, material finishes or treatments.	3.4.2
106.	Alloys of tank fittings not as specified.	3.4.6
107.	Protective coatings not as specified.	3.4.7
108.	Exterior color of tank not as specified.	3.5.1, 3.5.2
109.	Accessories not as specified.	3.6
110.	Identification label not as specified.	3.7
111.	Labeling not as specified.	3.8
112.	Chafing patches not as specified.	3.9.1
113.	Flatbed cloth not as specified.	3.9.2
114.	Filler/discharge assembly not as specified.	3.9.3
115.	Bleed valve not as specified.	3.9.4
116.	Tank not capable of internal inspection or cleaning.	3.9.5
117.	Thread sealing not as specified.	3.9.6
118.	Human factors engineering not as specified.	3.10
119.	Workmanship not as specified.	3.11

4.5.2 Tests.

4.5.2.1 Taste and odor. A sample of the inner lining material used in the construction of the tank will be used as a specimen for this test. The specimen shall be immersed for not less than 70 hours at 73 °F ±3 °F in odor-free water having 0.2 ppm total available chlorine at the start of the 70-hour test. The specimen shall be large enough to expose 36 sq cm of compound to 1 liter of chlorinated water. The water shall be tested for taste and odor in accordance with Standard Methods for Examination of Water and Wastewater of the American Public Health Association parts 207 and 211B. The rating panel shall include at least one Government representative. Nonconformance to 3.3.2 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

4.5.2.2 Hydrostatic test. Samples selected in accordance with 4.4.3.2 shall be hydrostatically tested at a constant pressure of 15 psig for 20 minutes. Failure to hold pressure or any evidence of leakage, blistering, peeling, delamination, or slippage shall constitute failure of this test (see 3.5.1 and 3.5.2).

4.5.2.3 Low temperature. A complete tank shall be folded or rolled to the size suitable for placing in the shipping container and then placed in a low temperature environment of -25 °F, ±2 °F, for a period of 24 hours. The environmental temperature shall be maintained at -25 ±2 °F, and the tank shall be slowly unfolded in not less than 15 minutes nor more than 30 minutes. The tank shall then be filled to its rated capacity. Leaking, flaking, cracking, separation of the coated fabric, or any other sign of damage shall constitute failure of this test.

4.5.2.4 High temperature. The procedure for the high temperature test shall be the same as that specified in 4.5.2.3, except that the temperature shall be at 160 °F, ±2 °F for a period of 24 hours. The environmental temperature shall then be decreased to 130 °F, and the tank shall be slowly unfolded in not less than 15 minutes nor more than 30 minutes. Leaking, flaking, cracking, flow, separation of the coated fabric, or any other sign of damage shall constitute failure of this test.

4.5.2.5 Drainage test (3000 and 4600 gallon tanks). The tank shall be filled with water to its rated capacity and then gravity drained through the filler/discharge assembly. The 3000 gallon tank shall be filled to 3045 ±45 gallons and the 4600 gallon tank shall be filled to 4635 ±65 gallons. The total length of time to completely gravity drain the tank shall not exceed 30 minutes. No more than one percent of the water shall remain in the tank after it has completely drained. (Completely drained is defined as that time at which water ceases to flow from the tank.)

4.5.2.6 Highway test. The highway test will cover 55 miles over improved primary and secondary roads at speeds up to and including 55 mph. A filled 3000 gallon tank shall have 3045 ±45 gallons of water at 5 ±1 psi. A filled 4600 gallon tank shall have 4635 ±65 gallons of water at 5 ±1 psi. During the road test perform the following:

a. Make normal and maximum pedal effort stops at 5 mph increments from 5 to 55 miles per hour. During this test, the filled tank (3000 or 4600 gallons) shall not shift forward or affect vehicle stability in any way. The retaining straps shall not loosen, shift, or break.
b. Make a 360 degree turn with a radius of 50 feet at a speed of 10 mph. The filled tank (3000 or 4600 gallons) shall not shift position or affect vehicle stability. Nonconformance to 3.5.3 shall constitute failure of this test.
c. Any breakage or leakage of the tank or accessories shall constitute failure of this test.
d. At the conclusion of the highway test the tank surface shall be visually inspected for chafing marks caused by the tiedown assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

Any visible chafing of the tank fabric shall constitute failure of this test.

4.5.2.7 Cross country road test (3000 gallon tank only). The cross country road test shall cover 25 miles over bumpy, hilly, unimproved roads at speeds up to and including 30 mph. The filled tank shall not shift. The retaining straps shall not loosen, shift, or break. A filled 3000 gallon tank shall have 3045 ±45 gallons of water at 5 ±1 psi. During the cross country test perform the following:

a. Drive the vehicle over roadway V-ditches not less than 36 inches wide and 16 inches deep. Negotiate the ditches at least 1 time perpendicular and at least 1 time at an angle of 45 degrees to the direction of travel. The filled tank shall not shift or surge enough to make the vehicle unstable.
b. Run gradeability and side slope tests in accordance with TECOM TOP 2-2-610 dated 18 July 80 (excluding tests pertaining only to the tractor). Nonconformance to 3.5.3.2, 3.5.3.3 or 3.5.3.4 shall constitute failure of this test.
c. Any breakage or leakage of the tank or accessories shall constitute failure of this test.
d. At the conclusion of the cross country road test, the tank surface shall be visually inspected for chafing marks caused by the tiedown assembly. Any visible chafing of the tank fabric shall constitute failure of this test.

4.5.2.8 Air leakage. Pressurize the tank with air to 0.50 psi ±0.025 psi, internal air pressure. Allow tank to stand for 0.50 hours. Then adjust the air pressure to 0.50 psi ±0.025 psi. Then, using a soap and water solution, examine all the tank fabric, fittings, and external seams for leakage. Any evidence of air leakage shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article packaging inspection. When first article packaging inspection is required (see 6.2), the first article pack shall be examined for the defects listed in table II. The presence of one or more defects shall be cause for rejecting the first article pack.

4.6.2 Quality conformance inspection of packaging.

4.6.2.1 Unit of product. For the purpose of inspection, a completed tank that has been prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling shall be in accordance with MIL-STD-105. Sample size shall be determined by table I and table IIa of MIL-STD-105. A lot shall be accepted when zero defects are found, and rejected when one or more defects are found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

Insert:

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the defects listed in table II. Any failure shall be cause for rejection.

TABLE II. Packaging examination schedule.

No.	Defect	Preservation level and requirement paragraph.		
		A	B	C
120.	Tiedown assembly not preserved as specified.	5.2.1.1.1		5.2.2
121.	Hose assemblies not preserved as specified.	5.2.1.1.2		5.2.2
122.	Carrying sling not preserved as specified.	5.2.1.1.3		5.2.2
123.	Preserved accessories not positioned and cushioned inside duffel bag as specified.	5.2.1.1.4		5.2.2
124.	Filled duffel bag not closed and secured as specified.	5.2.1.1.4		5.2.2
125.	Repair components not preserved as specified.	5.2.1.1.5		5.2.2
126.	Reducers not preserved as specified.	5.2.1.1.6		5.2.2
127.	Swivel not preserved as specified.	5.2.1.1.7		5.2.2
128.	Nozzle not preserved as specified.	5.2.1.1.8		5.2.2
129.	Flatbed cloth not preserved as specified.	5.2.1.2		5.2.2
130.	Tank not dusted with appropriate antisticking compound as specified.	5.2.1.4		5.2.2
131.	Tank not folded or rolled and secured in a compact bundle as specified.	5.2.1.4		5.2.2
132.	Consolidation not as specified.	5.2.1.5		5.2.2
133.	Lumber and plywood not treated with wood preservative and dried as specified.	5.3.1.1		
134.	Carriage bolts, lag screws, nuts, and washers not as specified.	5.3.1.2	5.3.2	
135.	Plywood not as specified.	5.3.1.2.1	5.3.2	
136.	Cleats not as specified.	5.3.1.2.2	5.3.2	
137.	Skids not as specified.	5.3.1.2.3	5.3.2	
138.	Fabrication of shipping container panels not as specified.	5.3.1.2.4	5.3.2	
139.	Assembly not as specified.	5.3.1.2.5	5.3.2	
140.	Anti-abrasion provisions not as specified.	5.3.1.3	5.3.2	5.3.3
141.	Marking not as specified.	5.4	5.4	5.4
142.	Special marking for handling preservative treated wood not as specified.	5.4.1		

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the current version before use.

5.1 First article pack. Unless otherwise specified (see 6.2), the contractor shall furnish a first article pack for examination within the time frame specified (see 6.2), to prove prior to the start of production packaging, that the applied preservation, packing and marking comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government. The first article pack may utilize either the first article model or a production model. When the first article model is utilized, and the Government requests a comparison between the first article model and a production model, any preservation and packing shall be removed by the contractor at no expense to the Government.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2). Preservative materials and their application shall not adversely affect the potability of the water to be stored in the tanks.

5.2.1 Level A.

5.2.1.1 Accessories (see 3.6).

5.2.1.1.1 Tiedown assembly. The tiedown assembly shall be folded or coiled and secured to form a compact bundle.

5.2.1.1.2 Hose assembly. Hose assemblies shall have the ends sealed with caps or plugs. Hose assemblies shall not be coiled or bent when packed in the shipping crate.

5.2.1.1.3 Carrying sling. The carrying sling shall be used to place the tank into and out of the shipping crate. It shall be placed such that it is available for removing the tank from the crate at depot or in the field.

5.2.1.1.4 Duffel bag. The tiedown assembly as specified in 5.2.1.1.1 shall be positioned within the duffel bag. Cushioning material shall be applied, as applicable, to prevent movement and damage to the contents. The bag shall be closed and secured by the means provided.

5.2.1.1.5 Repair kits. Each repair kit component (item 5 of 3.6) shall be preserved in a bag in accordance with the level A requirement of MIL-R-52255. The bags shall be sealed and marked in accordance with the documents referenced therein. The adhesive repair kit (item 6 of 3.6) shall be protected with cushioning as specified in 5.2.1.1.6 then marked for identification.

5.2.1.1.6 Reducers. The reducers shall be individually wrapped with cushioning material conforming to PPP-C-843, type II, class B, and held in place with tape conforming to PPP-T-60, type IV. After wrapping, the reducers shall be marked for identification.

5.2.1.1.7 Swivel. The swivel shall be protected with cushioning as specified in 5.2.1.1.6 then marked for identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.2.1.1.8 Nozzle. The nozzle shall be protected with cushioning as specified in 5.2.1.1.6 then marked for identification.

5.2.1.2 Flatbed cloth (see 3.9.2). The flatbed cloth shall be dusted with a talc or other antisticking compound then folded and secured to form a compact bundle (see 6.2).

5.2.1.3 Filler/discharge assembly (see 3.9.3). The filler/discharge assembly shall be sealed with the dust cap. The pressure gauge shall be removed from the assembly and protected with cushioning as specified in 5.2.1.1.6, then marked for identification.

5.2.1.4 Tank. Each tank shall be dusted with a talc or other antisticking compound to prevent adhesion to itself. The talc or antisticking compound shall not adversely affect potable water. The tank shall be laid flat then folded or rolled to form a loose bundle that will allow enough room in the crate to repackage the tank in the field. The bundle shall be secured with carrying sling.

5.2.1.5 Consolidation. For the 4600 gallon tank the pressure gauge and repair kits shall be consolidated together in a close-fitting box conforming to PPP-B-636, class weather resistant, grade as applicable, style optional. For the 3000 gallon tank the pressure gauge, repair kits, reducers, swivel, and nozzle shall be consolidated together in a close-fitting box conforming to PPP-B-636, class weather resistant, grade as applicable, style optional. Additional cushioning shall be provided, as applicable, to prevent movement and damage to the contents. Box closure shall be method V in accordance with the appendix to the box specification.

5.2.2 Level C. Each complete tank, including the accessories, flatbed cloth, filler/discharge assembly, and tank shall be preserved as specified for level A except that the boxes shall be domestic class.

5.3 Packing. Each complete tank, preserved as specified in 5.2, shall be packed in accordance with the requirement for level A, level B, or level C as specified (see 6.2).

5.3.1 Level A. When level A packing is specified (see 6.2) the following special considerations shall be afforded this product because of an anticipated extended period of storage under unfavorable environmental conditions.

5.3.1.1 Wood preservation (see 6.6). All lumber and plywood used in the construction of the exterior crates/boxes shall be treated with wood preservative in conformance with composition C or D of TT-W-572. The following additional conditions must be satisfied:

a. Treatment with composition C shall result in a minimum retention of 0.040 pounds of copper per cubic foot of lumber/plywood as defined in the applicable standard(s) referenced in C1, C2, and C9 of the AWPA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

b. After treatment with either composition, the material shall be dried to a moisture content of 19 percent or less.

5.3.1.2 Exterior containers/shipping containers. Exterior/shipping containers shall be snug-fitting boxes conforming to PPP-B-601, overseas type, style A, type 3 load, except for the following requirements. Carriage bolts, lag screws/bolts, nuts and washers shall conform to the following:

CARRIAGE BOLTS	-	FF-B-584, type I, class 1, style A
LAG SCREWS/BOLTS	-	FF-B-561, type I, grade B
NUTS	-	FF-N-836, type I or II, style I or 4
WASHERS	-	FF-W-92, type A, grade I, class A

5.3.1.2.1 Plywood. All plywood shall be in accordance with A-A-55057, group B. The plywood shall be interior type, bonded with exterior (waterproof) glue, grade CD.

5.3.1.2.2 Cleats. All lumber for the cleats shall comply with the quality requirements of MIL-STD-731 for class 2 - Structural (members with moderate stress), except that wane is not acceptable. The cleat sizes shall be nominal 1 inch x 4 inches and nominal 2 inches x 4 inches with minimum dimensions for each as shown therein.

5.3.1.2.3 Skids. All lumber for the skids shall comply with the quality requirements of MIL-STD-731 for class 2 - Structural (members with moderate stress), except that wane is not acceptable. Skids shall be nominal 4 inches x 4 inches. Group I wood species shall not be used for the skids.

5.3.1.2.4 Fabrication. Each panel of the shipping container shall be double sheathed with plywood. The inside plywood shall be 0.25 inches thick and the outside plywood sheathing shall be 0.50 inches thick. The outside sheathing shall be attached to the applicable cleats with the fasteners driven through the C side of the plywood and clinched on the exposed side of the cleat. The inside sheathing shall then be attached to the panel with the fasteners driven through the wood parts in the sequence of the C side of the 0.25-inch plywood, to cleat, to 0.50-inch plywood. The sizes of the fasteners, the positioning of the fasteners and the clinching of the fasteners shall be as specified in PPP-B-601; however, care shall be exercised so that the positioning of such fasteners does not interfere with the lag screws/bolts and carriage bolts required to assemble the top, sides, ends and bottom panels together. Clinching of the fasteners shall not be permitted on any inside surface of the container panels.

5.3.1.2.4.1 Side panels. The side panels shall utilize nominal 1-inch x 4-inch lumber for the cleats (see 5.3.1.2.2). The positioning of the edge cleats, and intermediate cleats when required, shall be as specified for the sides in PPP-B-601. The size of the side panel shall be such that its length (the longest dimension) is the same as the outside length of the box. The width of the side panel shall be such that it is the same as the inside depth of the box plus the thickness of the double sheathed bottom panel, (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.3.1.2.4.2 Top panel. The top panel shall utilize nominal 2-inch x 4-inch lumber for the cleats (see 5.3.1.2.2). The positioning of the edge cleats, and intermediate cleats when required, shall be as specified for the top in PPP-B-601. The size of the top panel shall be as specified therein for style A; that is, the length and width of the panel shall be the same as the outside length and outside width of the box (see figures 1 and 2).

5.3.1.2.4.3 End panels. The end panels shall utilize nominal 2-inch x 4-inch lumber for the cleats (see 5.3.1.2.2). The positioning of the edge cleats, and intermediate cleats when required, shall be as specified for the ends in PPP-B-601. The size of the end panel shall be the same as specified therein for style A; that is, the length and width shall be the same as the inside width and inside depth of the box, (see figure 1).

5.3.1.2.4.4 Bottom panel. The bottom panel shall utilize 2-inch x 4-inch lumber for the cleats (see 5.3.1.2.2). The positioning of the edge cleats, and intermediate cleats when required, shall be as specified for the bottom in PPP-B-601 except that the through edge cleats shall run parallel with the box length and such cleats shall be the same length as the outside length of the box. The size of the bottom panel shall be as specified therein for style A except that the width of the bottom panel shall be the same as the inside width of the box, (see figure 1).

5.3.1.2.4.5 Skids. Skids (see 5.3.1.2.3), shall be applied to the bottom panel of each box, running parallel with and extending the full outside width of the box. A bevel 45 degrees (±5 degrees) shall be applied to the bottom third portion of the skid ends. The skids shall be set back from the end of the box a distance of not less than 3 inches or more than 1/6 of the box length. Each box shall be provided with a minimum of 2 skids with additional skids being provided when the distance between the inside edges of the skids exceeds 48 inches. The positioning of the additional skids shall divide the area between the end skids into units of equal space. Additional intermediate cleats shall be incorporated into the bottom panel at time of fabrication to assist in the attachment of the skids and to offer full support to the skids. Each skid shall be fastened to the bottom panel, with 0.375 inch diameter carriage bolts that are 5.25 inches long (+0.00 inches, -0.25 inches). The bottom panel shall be positioned so that it is set back from the ends of the skids a distance that is equal to the thickness of the box side panels. The holes for the carriage bolts shall be the exact diameter of the bolt. Each hole shall be counterbored on the underside of the skid so that 3 full threads (+3, -0) extend beyond the washer and nut when the nut has been properly tightened. The nut shall be tightened so that the bolt head is drawn into the plywood and cleat to prevent the bolt head from becoming a snagging hazard on the inside of the box; however, no portion shall extend beyond the bottom of the skid when tightened. After tightening the nuts, the threads of the bolt extending beyond the nut shall be painted with a suitable metal primer or similar material. The bolts shall be centered at 6.50 inches (+0.25 inches) from each end of the skid with additional bolts positioned in a staggered pattern, as practicable, so that the distance between their center-lines shall be no more than 16 inches (+0.25 inches) and no less than 8 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

(+0.25 inches). Each skid shall be slotted/notched sufficiently to provide clearance for strapping. Figures 1, 2 and 4 give details of skid application.

5.3.1.2.5 Assembly. The box panels shall be joined together with lag screws/bolts and flat washers. Entry holes and lead holes shall be provided in each box panel for proper assembly as follows:

5.3.1.2.5.1 Entry holes. Entry holes, the same size as the lag screws, shall be provided through each applicable flat panel surface. The holes shall be set back from the edges of that flat surface to provide the edge distance necessary for the lag screws to be centered on the nominal 1-inch, or as applicable the nominal 2-inch, cleat thickness of the joining a panel. The entry holes for the 0.25-inch diameter lag screw for joining a panel to a nominal 1-inch thick cleat shall be centered at 0.875 inch from the edge of the flat panel. The entry holes for the 0.375-inch diameter lag screw for joining a panel to a nominal 2-inch thick cleat shall be centered at 1.25 inches from the edge of the flat surface (see figures 1, 2, 3 and 4).

5.3.1.2.5.2 Lead holes. Lead holes for the threaded portion of the lag screw shall be provided in each applicable panel edge. The holes shall be drilled only to the depth necessary to accommodate the penetration of the threaded portion of the lag screw. The lead holes for the 0.25 inch diameter lag screw shall be 0.1875 inch in diameter. The lead holes for the 0.375 inch diameter lag screws shall be 0.25 inches in diameter. The lead holes shall provide the same edge distance as specified in 5.3.1.2.5.1 for entry holes.

5.3.1.2.5.3 Lag screw application. The lag screws shall be turned in their holes the full length of the screw. They shall not be driven in by hammer or by any other similar means. If for any reason the thread in the wood is stripped when the lag screws are placed, the lag screw shall be removed and placed in a new hole near the old position. One flat washer shall be used under the head of each screw.

5.3.1.2.5.4 Fastening bottom assembly to end panels. The bottom assembly shall be fastened to each end panel with a minimum of 4 lag screws 0.375 inch in diameter by 5 inches in length. The positioning of each screw shall be as shown in figure 1.

5.3.1.2.5.5 Fastening side panels to end panels. The side panels shall be fastened to the end panels with 0.375-inch diameter lag screws that are 4 inches long. The screws shall be positioned as shown in figure 2.

5.3.1.2.5.6 Fastening of side panels to bottom assembly. The side panels shall be fastened to the bottom assembly with 0.375 inch diameter lag screws that are 4 inches long. The screws shall be positioned as shown in figure 2.

5.3.1.2.5.7 Fastening top panel to side panels. The top panel shall be fastened to the side panels with 0.25-inch diameter lag screws that are 5 inches long. The screws shall be positioned as shown in figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.3.1.2.5.8 Fastening top panel to end panels. The top panel shall be fastened to the end panels with 0.375-inch diameter lag screws that are 5 inches long. The screws shall be positioned as shown in figure 3.

5.3.1.2.5.9 Strapping. Strapping of the assembled box shall be in accordance with ASTM D 3953, type 1 or 2, zinc-coated, size as applicable and ASTM D 4675.

5.3.1.3 Anti-abrasion provisions. To prevent abrasion, all interior surfaces of the shipping container that will contact the tank and tank components, shall be lined with a layer of scrap tank fabric, cushioning material conforming to PPP-C-1797, or polyethylene film conforming to L-P-378, type I, class 1, with a minimum thickness of 6 mils. The material shall be applied in such a manner that it does not interfere with the removal of the container top, sides and ends as a joined one piece assembly or as individual panels. The means of attaching the material shall not create a hazard within the container that could possibly damage the contents. As an alternative, the complete tank, preserved as required in 5.2.1 through 5.2.2, shall be individually loosely wrapped with the anti-abrasion material. The manner of wrapping shall provide a minimum of one layer of material around the tank to prevent direct contact with other components and the inside surfaces of the shipping containers.

5.3.2 Level B. Each tank, preserved as specified in 5.2, shall be packed for level B in the same manner as specified for level A in 5.3.1 except that the lumber and plywood preservation requirements of 5.3.1.1 shall be omitted.

5.3.3 Level C. Each tank, preserved as specified in 5.2, shall be individually packed in a close-fitting box conforming to PPP-B-601, domestic type, style A or PPP-B-621, class 1, style 2. Beveled skids shall be applied to the box bottoms in accordance with the applicable box specifications. In order to prevent abrasion, the box shall be loosely lined with polyethylene film conforming to L-P-378, type I, class 1, having a minimum thickness of 0.006 inches. Box closure shall be in accordance with the box specification or the appendix thereto and the strapping shall be as specified for level A (see 5.3.1.2.5.9) except it may be zinc-coated.

5.4 Marking. In addition to any special or identification marking required by the contract or purchase order, each complete tank shall be marked in accordance with MIL-STD-129. Other special markings are as follows:

5.4.1 Marking for handling of treated wood. Each box constructed of treated lumber and plywood, shall, as applicable, be marked on an exterior surface in a prominent position with instructions advising involved personnel of any precautions to be exercised in the handling of the treated lumber. Such instructions shall include recommended limitations in the use and disposal of the treated lumber and shall be in the format developed by the treated wood industry's Consumer Awareness Program (CAP) as approved by the Environmental Protection Agency (EPA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

5.4.1.1 Methods of marking. The instructions required in 5.4.1 shall be applied to the shipping container in the manner specified in MIL-STD-129 for stenciling or labeling.

5.4.1.2 Alternative method. As an alternate, such instructions may be as preprinted matter to be included with the packing list in the exterior packing list envelope. When the instructions are placed in the envelope, a suitable area immediately adjacent to the envelope shall be marked with the words, "INSTRUCTIONS FOR HANDLING TREATED WOOD INSIDE PACKING LIST ENVELOPE", with an arrow pointing to that envelope.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The semi-trailer mounted tank is intended to haul potable water in areas where normal water transport is not available. It provides the M872, M871, and M127A2C trailer the capability to haul potable water (see 3.5.1 and 3.5.2 for the appropriate trailer.) The tank is intended to provide 5 years service life and 20 years storage life.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is required for inspection and approval and number of units required (see 3.2).
d. Size of tank (see 1.2 and 6.7).
e. When a flatbed cloth is required (see 3.9.2).
f. When Government loaned property is not required (see 3.12).
g. When a first article pack is not required (see 5.1).
h. Time frame for furnishing a first article pack, when required (see 5.1).
i. Level of preservation or packing required (see 5.2 and 5.3 respectively).
j. Any special marking (see 5.4.1).
k. When first article packaging inspection is required (see 4.6.1).

6.3 First article. When a first article inspection is required, the items should be preproduction models. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article test results. The first article will be the last tank delivered.


6.4 Government loaned property. The contracting officer should arrange to lend property listed in 3.12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

6.5 First article pack. Any changes or deviations of the production pack from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack, and mark the tanks in accordance with this specification.

6.6 Wood preservatives (see 5.3.1.1). The intent of the wood preservative applications specified in 5.3.1.1 is to prolong the serviceability of the wooden shipping containers. Compositions C and D of TT-W-572 can offer reliable protection for periods up to thirty years against decay and wood-destroying organisms provided such treated containers are not stored in direct contact with the ground.

6.7 Part or Identifying (PIN). The PIN to be used for tanks acquired to this specification is created as follows:

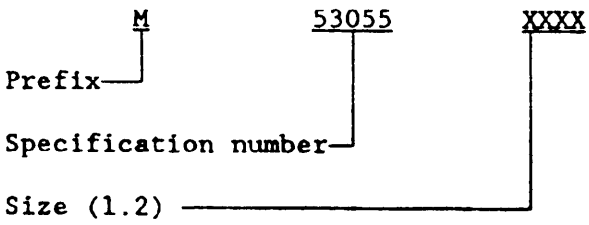

Example: M53055-3000 - 3000 Gallon Tank

6.8 Subject term (key word) listing.

Bladder
SMFT
Trailer-mounted

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Review:
DLA - CS

Preparing activity:
Army - ME

Project 5430-A218

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

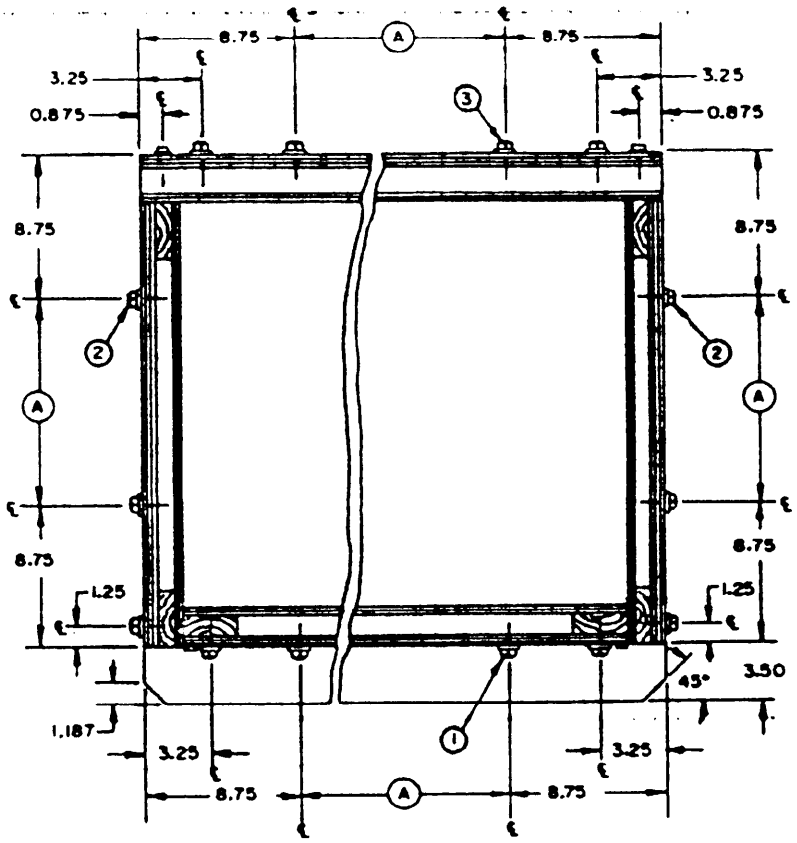


NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS (A) BETWEEN INTERMEDIATE LAG SCREWS SHALL BE NOT LESS THAN 8 INCHES OR MORE THAN 16 INCHES.
3. FIGURE SHOWS FASTENING OF:
   - (1) BOTTOM ASSEMBLY TO END PANEL.
   - (2) SIDE PANEL TO END PANEL.
   - (3) TOP PANEL TO END PANEL.

FIGURE 1. End View of Box

X-4707A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

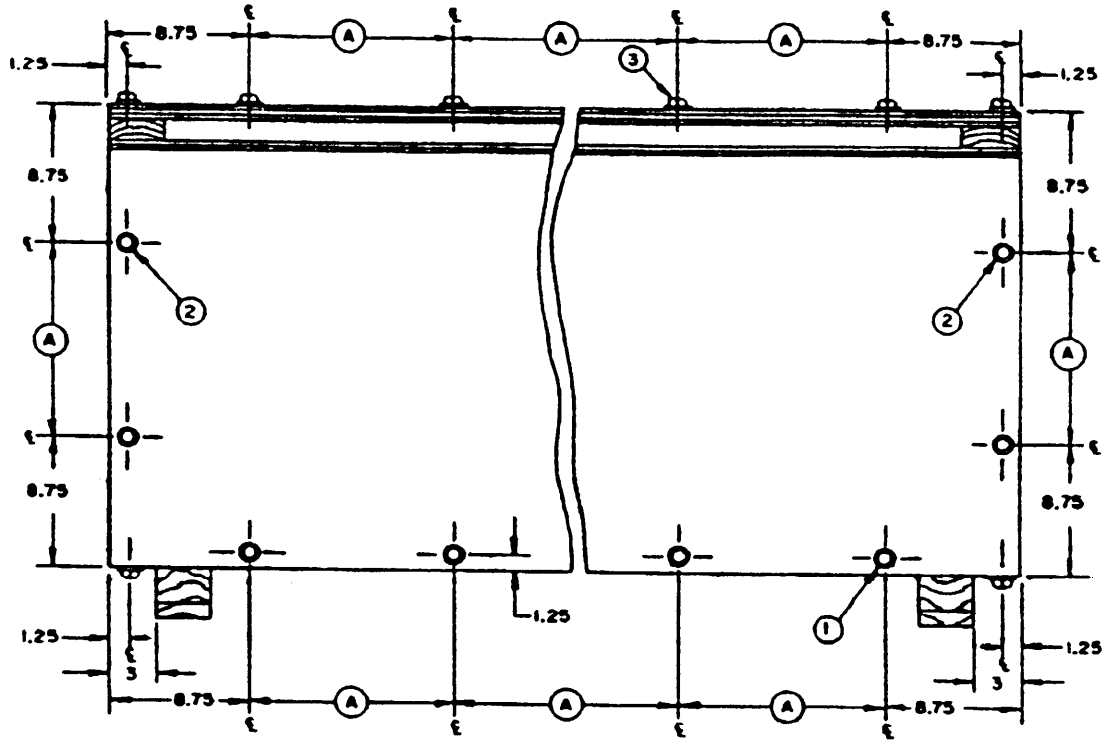


NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS (A) BETWEEN INTERMEDIATE LAG SCREWS SHALL BE NOT LESS THAN 8 INCHES OR MORE THAN 16 INCHES.
3. FIGURE SHOWS FASTENING OF:
   - (1) SIDE PANEL TO BOTTOM PANEL.
   - (2) SIDE PANEL TO END PANEL.
   - (3) TOP PANEL TO SIDE PANEL.

FIGURE 2. Side View of Box

X-4708B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

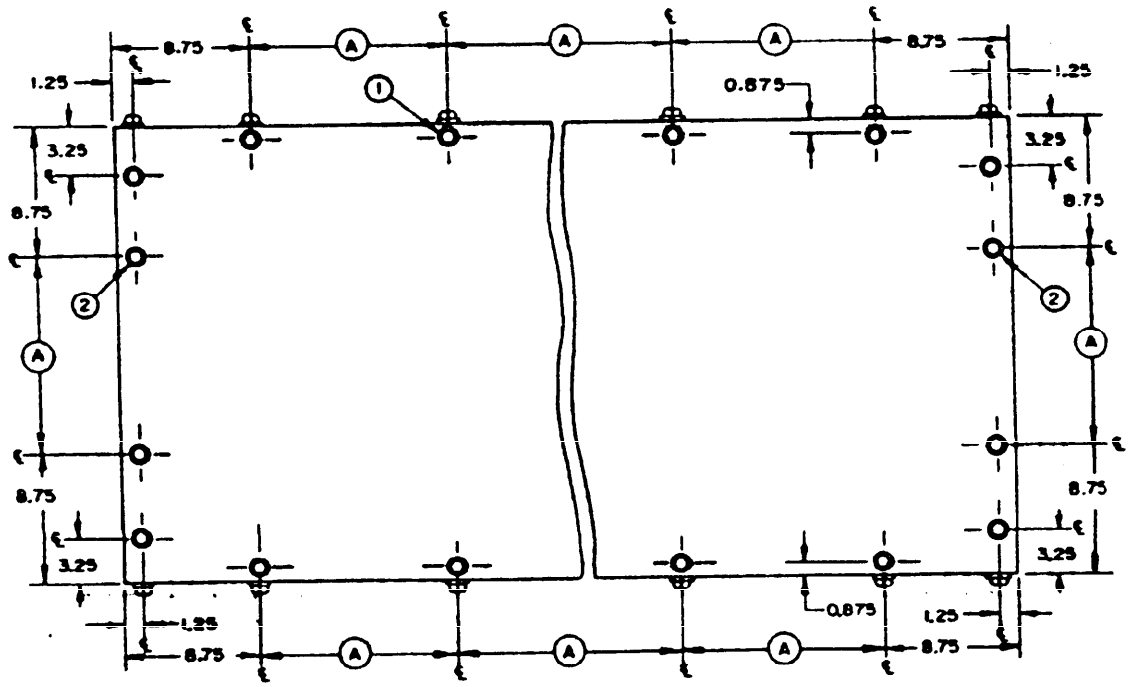

MIL-T-53055C


NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS (A) BETWEEN INTERMEDIATE LAG SCREWS SHALL BE NOT LESS THAN 8 INCHES OR MORE THAN 16 INCHES.
3. FIGURE SHOWS FASTENING OF:
   - (1) TOP PANEL TO SIDE PANEL.
   - (2) TOP PANEL TO END PANEL.

FIGURE 3. Top View of Box

X-4709A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:12Z
Check the source to verify that this is the current version before use.

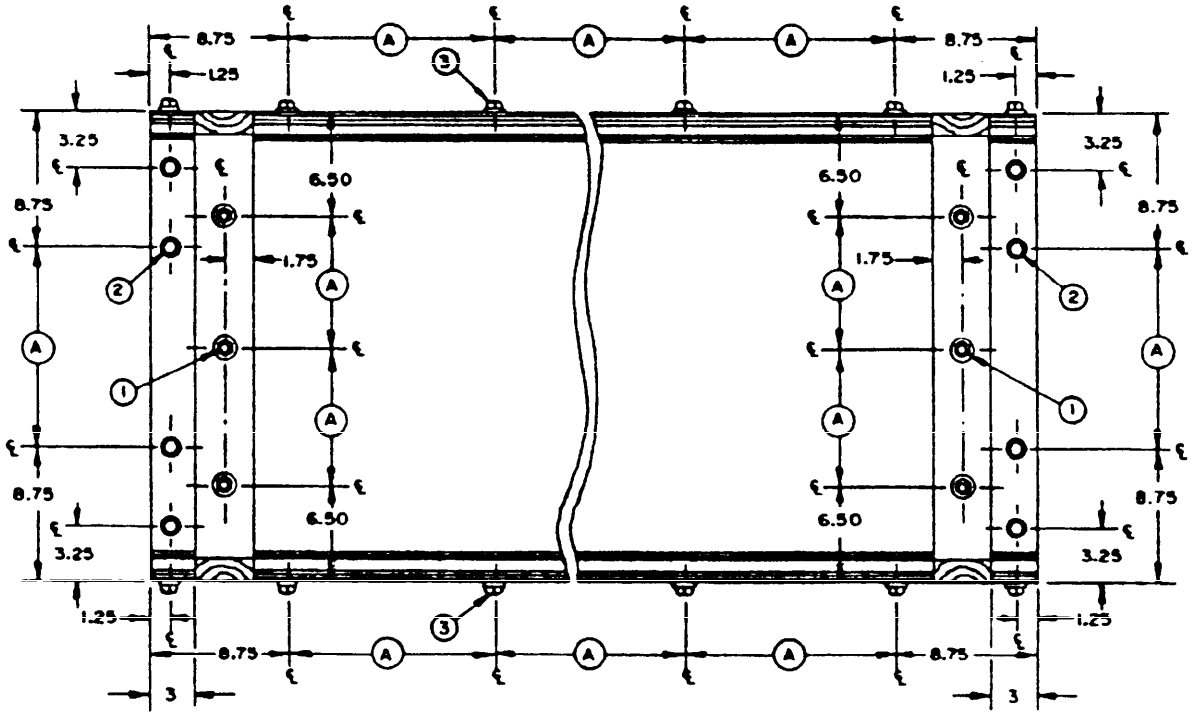

NOTES:


1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS (A) BETWEEN INTERMEDIATE LAG SCREWS OR CARRIAGE BOLTS SHALL BE NOT LESS THAN 8 INCHES OR MORE THAN 16 INCHES.
3. FIGURE SHOWS FASTENING OF:
   - (1) SKID TO BOTTOM PANEL.
   - (2) BOTTOM PANEL TO END PANEL.
   - (3) SIDE PANEL TO BOTTOM PANEL.

FIGURE 4. Bottom View of Box

X-4710A

MIL-T-53055C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

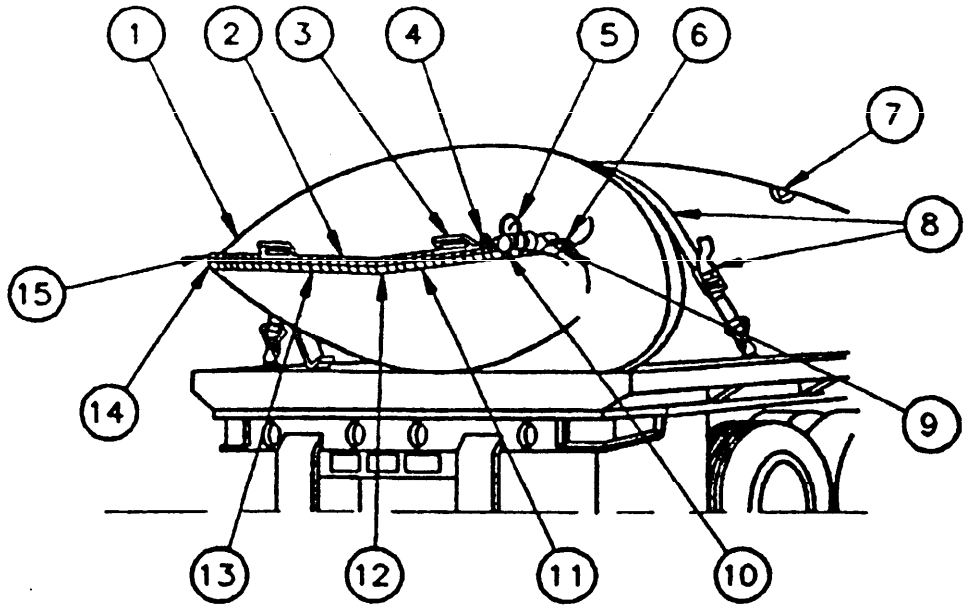


ITEM	QTY	DESCRIPTION
1	1	TANK, COLLAPSIBLE
2	27	CLAMP, TOP
3	2	GRIP, HAND
4	1	VALVE, GATE, 4"
5	1	GAGE, PRESSURE
6	2	CLAMP, TOP END, RIGHT HAND
7	1	VALVE ASSY, RELIEF
8	4	BELT ASSY (RATCHET TAKE-UP, EACH END)
9	2	CLAMP, BOTTOM END, RIGHT HAND
10	1	ADAPTER, FEMALE, NPT, 4"
11	41	SCREW, CAP, HEX HD, 1/2"-13 X 2 1/2" L
12	33	CLAMP, BOTTOM
13	41	WASHER, FLAT, 1/2"
14	2	CLAMP, BOTTOM END, LEFT HAND
15	2	CLAMP, TOP END, LEFT HAND

FIGURE 5. Tank with hardware and tie-down assembly. Optional design.

X-5019

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

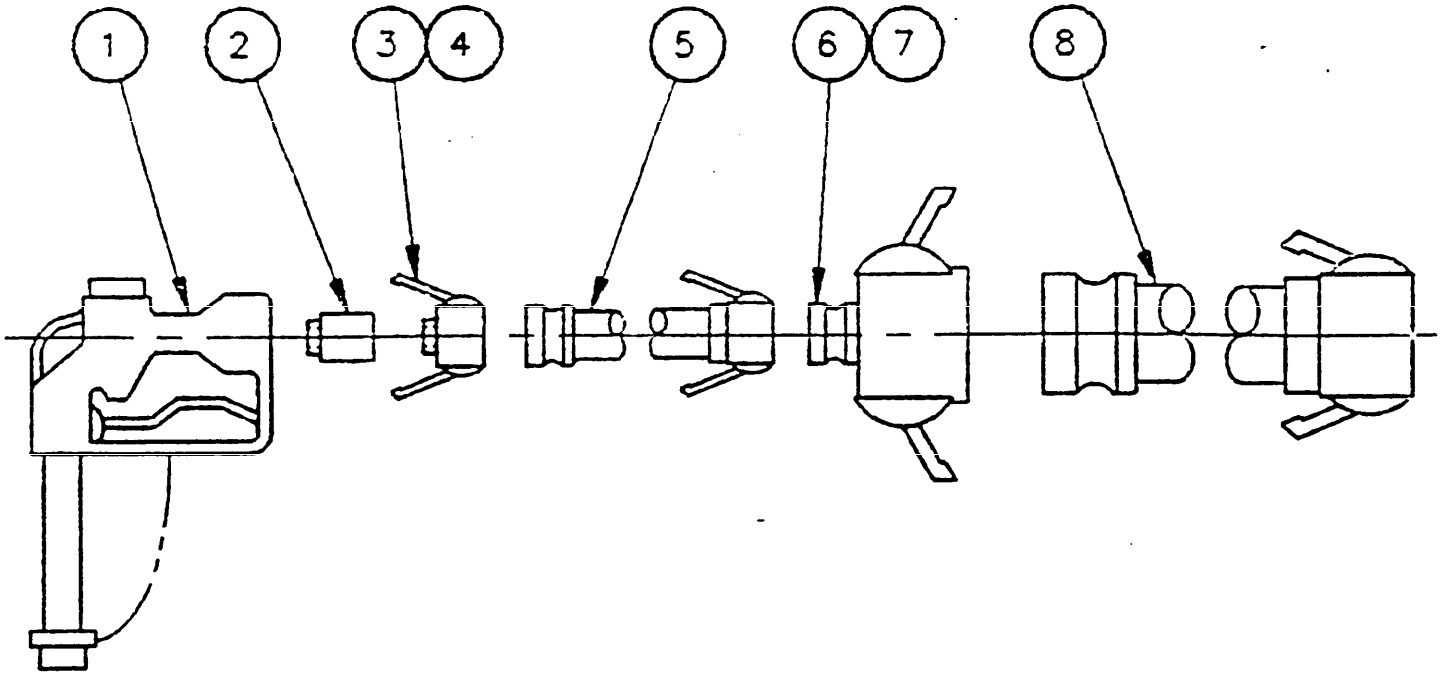

ITEM	QTY	DESCRIPTION
1	1	NOZZLE, DISTRIBUTION, WATER, 1 1/2"
2	1	SWIVEL, HOSE, EPT X IPT, 1 1/2"
3	1	REDUCER, EPT X QDISC, FEMALE, 1 1/2" X 2"
4	1	GASKET-COUPLING HALF, QDISC, 2" NOM SIZE
5	1	HOSE ASSEMBLY, SUCTION, 2" SIZE, 10 FT L
6	1	REDUCER, MALE X FEMALE, QDISC, 2" X 4"
7	1	GASKET-COUPLING HALF, QDISC, 4" NOM SIZE
8	1	HOSE ASSEMBLY, SUCTION, 4" SIZE, 10 FT L

FIGURE 6. Fitting accessories.

X-5020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-53055C(ME)	91/09/16

3. DOCUMENT TITLE
Tank, 3,000 Gal & 4600 Gal Fabric, Collapsible, Drinking Water, Semi-Trailer Mounted

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial: (703) 664-5717 (2) AUTOVON: 354-5717
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: STRBE-TSE Ft. Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 20260402 01:04:12Z
Check the source to verify that this is the most current version.