MIL-C-60181(MU)
AMENDMENT 3
25 March 1968
SUPERSEDING
AMENDMENT 2
10 October 1967

MILITARY SPECIFICATION

CONTAINER, SHIPPING, REUSABLE: 10539223

This amendment forms a part of Military Specification MIL-C-60181(MU), dated 2 March 1965.

Paragraph 2.1: Delete: "MIL-A-5090 Adhesives, Heat Resistant, Airframe Structural, Metal to Metal."

Paragraph 3.3.3.2: Delete in entirety and substitute the following:

"3.3.3.2 Bonding of extrusions.- The sealing extrusions shall be attached to the container shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterford, N. Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure tight joint. Minimum cure time for sealant is twenty-four (24) hours. The sealing extrusions shall be tool rolled and crimped around the periphery to assure positive attachment to container shells."

* Delete: "Figures 1, 3 and 4" and substitute attached "Figures 1, 3 and 4."

* The outside margin has been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A032

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

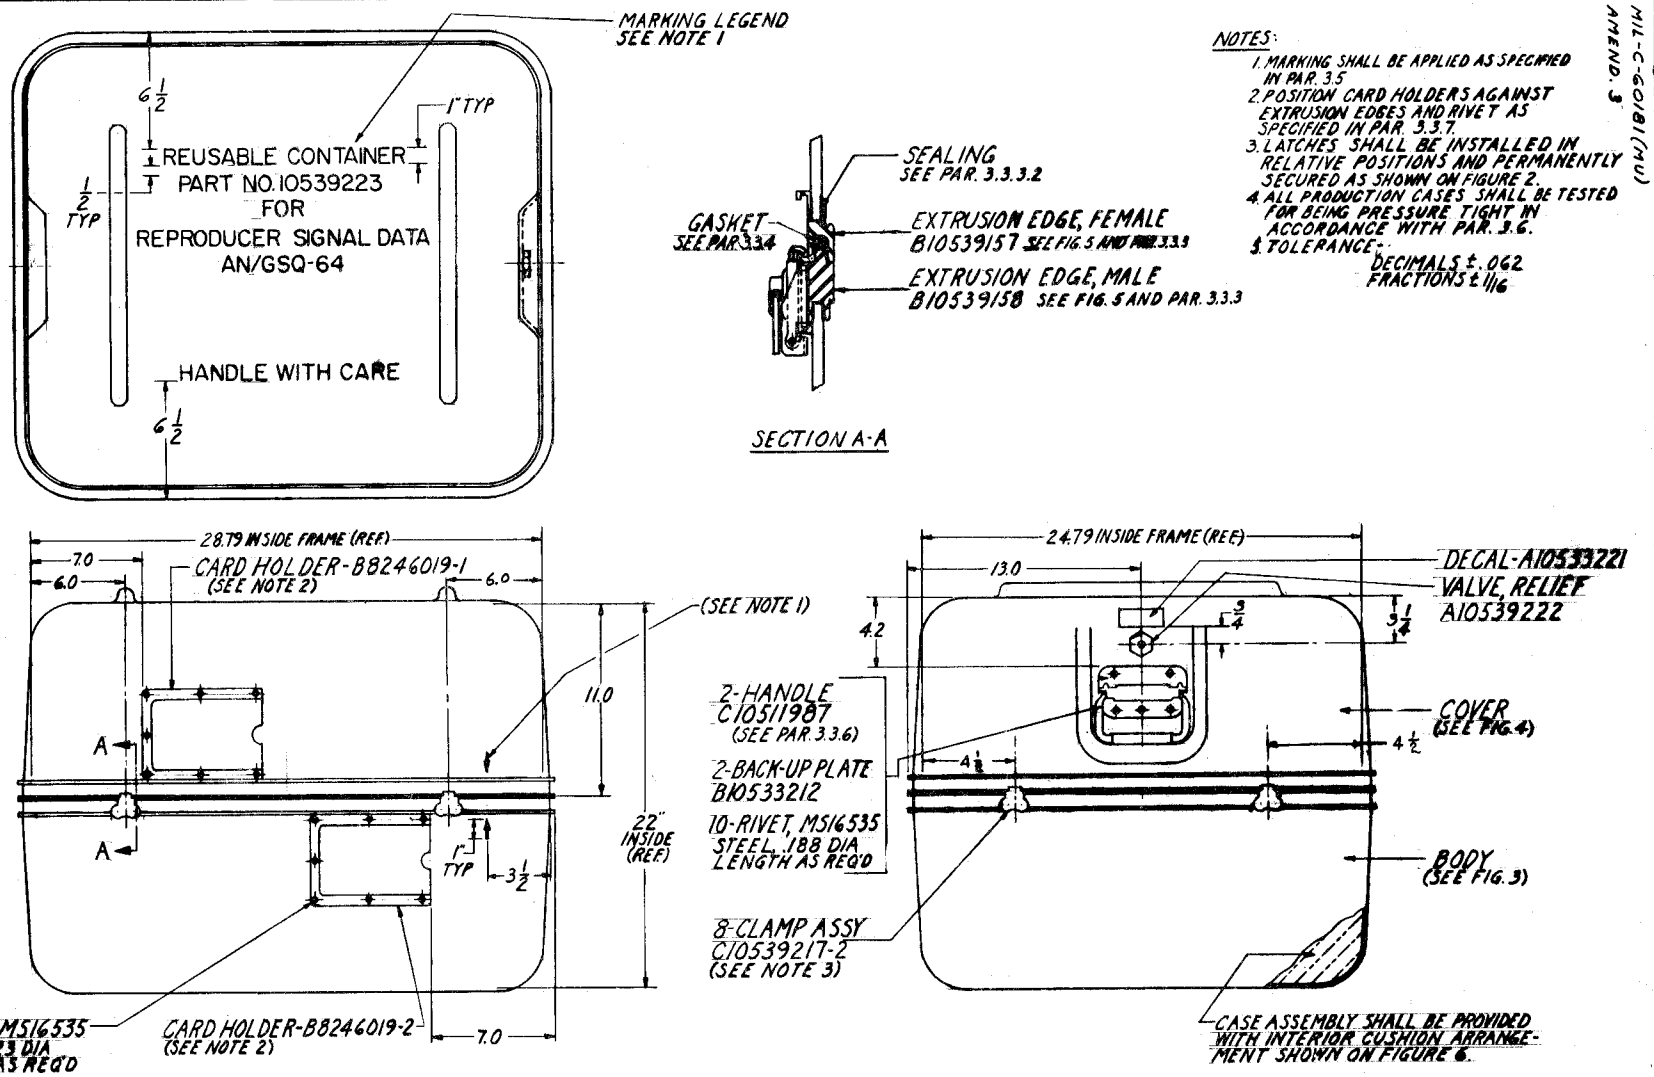



FIGURE 1- CASE ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 202610-23T00:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20264-237T00:14Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2 MIL-C-60181
STARTING THICKNESS .250±.005
COLOR-OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
FORMED THICKNESS .120 +.020 -.010
2. TOLERANCE-
DECIMALS ±.062
ANGLES +1° -0°

SUGGESTED MATERIAL SOURCES:
U. S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

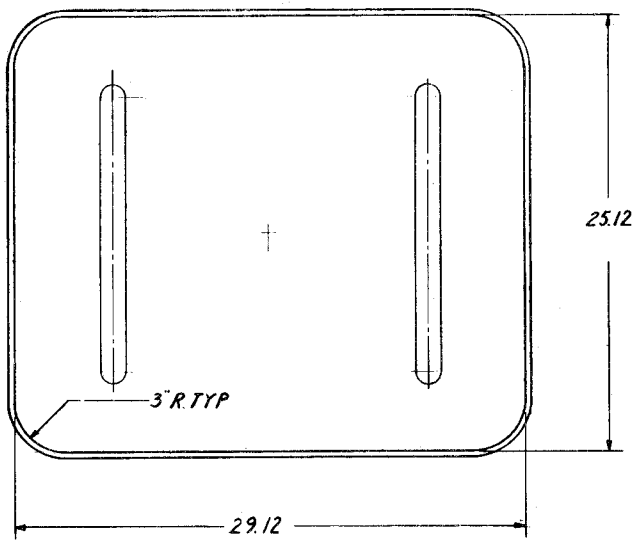

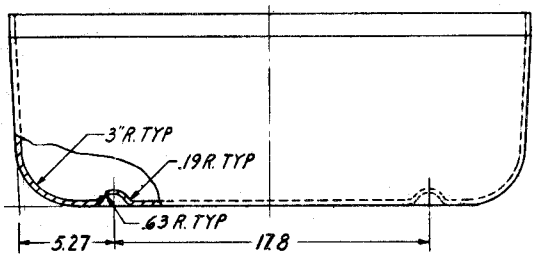

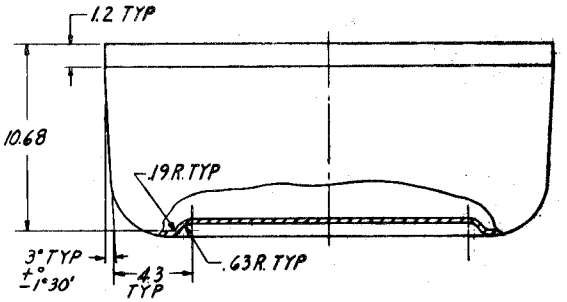
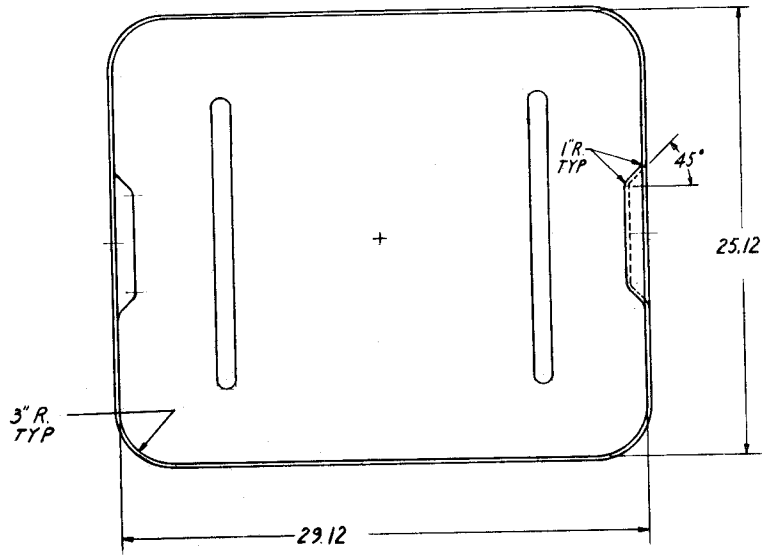



FIGURE 3 - SHELL, BODY

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2 MIL-C-60181
STARTING THICKNESS .250 ± .005
COLOR- OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
FINISH- HAIRCELL GRAIN (EXTERIOR SURFACE)
HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
FORMED THICKNESS .120 +.020 −.010
2. TOLERANCES- DECIMALS ± .062
ANGLES +1° −0°

DECIMALS ± .062
ANGLES ±1°

SUGGESTED MATERIAL SOURCES:
U. S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492



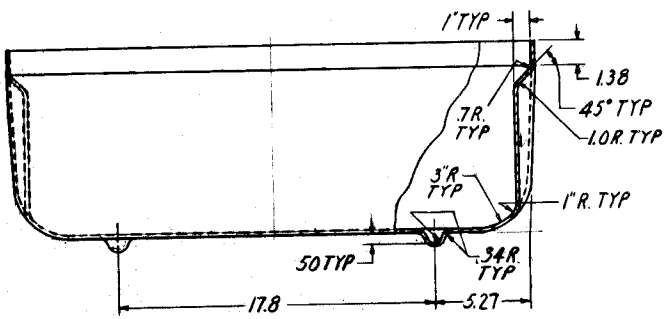

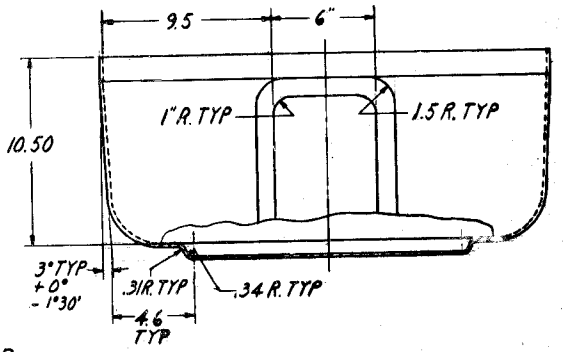


FIGURE 4- SHELL, COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.