MIL-C-60297(MU)
AMENDMENT 5
15 July 1973
SUPERSEDING
MIL-C-60297(MU)
AMENDMENT 4
5 January 1973

MILITARY SPECIFICATION

COUNTER, TIME INTERVAL: 10547200

This amendment forms a part of Military Specification MIL-C-60297(MU), dated 18 June 1970.

Page 3, paragraph 3.8: Delete and substitute the following:

"3.8 Performance.- The assembly shall be operable when supply voltages are applied as follows:

21.0 ± 0.5 VDC applied to Pin L of Socket 25J1
7.0 ± 0.5 VDC applied to Pin E of Socket 25J1."

Paragraph 3.8.1.1: Line 7: Delete "±0.3 VDC" and substitute "±.5 VDC"; Line 8: Delete "±0.2 VDC" and substitute "±.5 VDC".

Paragraph 3.8.1.2: Delete "2.0 ± 0.3" and substitute "3.0 ± 1.0".

Paragraph 3.8.1.3: Delete "25J2" and substitute "25J1". Make this same change wherever 25J2 is specified.

Paragraph 3.8.1.3: Delete "3.0 ± 0.1 VDC" and substitute "4.0 ± .2 VDC".

Paragraph 3.8.2.1: Delete "135 ± 5" and substitute "120 ± 20".

Paragraph 3.8.3: Delete "21 ± 1" and substitute "20"; delete "7.2 ± 0.2" and substitute "7".

Paragraph 3.9.a: After the word "with" add the following: "Connector 10540745 on".

Paragraph 3.9.b: Delete and substitute the following: "Connector 10547278 from the counter shall interface with Connector 10547279 on the display panel."

* Paragraph 4.6.2: Delete "Procedure II" and substitute "Procedure I".

* Paragraph 4.6.3: Delete fourth sentence and substitute "The vibration test shall be performed in accordance with Figure 514-1 Curve C of MIL-STD-810 except double amplitude shall not exceed .036 inch".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

Paragraph 4.6.5.1: Delete "27 VDC" and substitute "21 VDC"; delete "9 VDC" and substitute "7 VDC".

Paragraph 4.6.5.3: Delete "3 volts through a 1.0 K ohm resistor" and substitute "4 volts".

Paragraph 4.6.5.4.1: Delete "TP 22" and substitute "TP 12"; delete "135 ± 5" and substitute "120 ± 20".

Paragraph 4.6.5.4.3: Delete "0235" and substitute "250"; delete "0635" and substitute "700"; delete "1035" and substitute "1100"; delete "2035" and substitute "2100"; delete "3035" and substitute "3130".

Paragraph 4.6.5.4.4: Delete "3V through a 1 K ohm resistor" and substitute "4 volts".

Page 14, Figure 1: Delete "27V" and "9V" and substitute "21VDC" and "7 VDC".

Page 14, Figure 1: Change 25J2-U:

25J2-U WAS

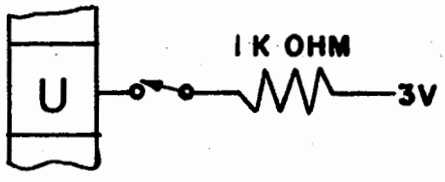

25J2-U NOW



* The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1240-A520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.