[METRIC]
A-A-2087D
November 3, 1993
SUPERSEDING
A-A-2087C
December 10, 1991

COMMERCIAL ITEM DESCRIPTION

DESK ATTACHMENT, L-UNIT (OFFICE, TRADITIONAL STYLE)

The General Services Administration has authorized the use of this Commercial Item Description in preference to Interim Federal Specifications AA-D-001107, AA-0-00240, and AA-D-00191.

Scope. This Commercial Item Description covers desk L-units which are part of a traditional line of metal office furniture.

Salient characteristics. These characteristics concisely describe the essential physical and functional/performance features of the commercially available item.

Design. The desk L-units shall be traditional style, metal furniture designed for heavy duty, commercial office use.

Types, classes, and styles.

Type I - Clerical L-unit 1015 mm W X 455 mm D X 750 mm H
Type II - Secretarial L-unit 1015 W mm X 455 mm D X 645 mm H

Class 1. Panel end (no pedestal)
  Style A - Right hand attachment
  Style B - Left hand attachment
Class 2. Pedestal with three storage drawers
  Style A - Right hand attachment
  Style B - Left hand attachment
Class 3. Pedestal with one storage and one file drawer
  Style A - Right hand attachment
  Style B - Left hand attachment
Class 4. Pedestal with secretarial insert
  Style A - Right hand attachment
  Style B - Left hand attachment

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:19Z
Check the source to verify that this is the currentversion before use.

NOTE: 1. Height shall be measured with glides fully retracted.
2. Unless otherwise specified, the tolerance on dimensions shall be ±25 mm.
3. The plus tolerance on the width dimension shall be 105 mm.

General construction.

Top. Steel construction reinforced with channels or other formations extending the full length of the top for maximum rigidity. Top edges shall have a binding strip. The top shall be covered with decorative high pressure laminated plastic. Alternatively, the top may be particleboard with high pressure laminated plastic face and a backing sheet to produce a balanced sandwich construction. A protective edging shall be around the entire top and the color shall be gray similar to the gray enamel finish (self-edging, not allowed). The white leather laminated plastic top shall match GSA Standard Sample No. FSS-L-01001. Alternatively, the manufacturer may provide his equivalent commercial white leather laminated plastic subject to contracting officer approval.

Pedestals. Pedestals shall be reinforced by vertical uprights. Suspension case rails shall be secured to the vertical uprights.

Drawers. The drawers shall have stops to prevent accidental removal but allow removal without the use of tools. The minimum inside clear dimensions shall be as specified in Table I. File, and storage drawers shall be welded construction with double wall drawer fronts. The storage drawer body shall be constructed to accommodate partitions. Each storage drawer shall have a minimum of two (2) partitions. The storage drawers shall be suspended on telescoping ball bearing slides, rollers, or nylon glides. The slides, glides, or rollers shall promote smooth quiet operation and prevent metal to metal contact between suspension members. The file drawers shall be on full progressive suspensions or telescoping ball bearing slides. The file drawer shall have a spring-activated follower block which operates smoothly. Bumpers shall cushion drawer stops in both closed and extended positions. The center drawer shall contain a convenience tray and a locking mechanism controlling all drawers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

TABLE I Drawer dimensions

Drawer types	Minimum inside clear dimension		
	Width	Height	Depth
Storage drawers	300 mm	110 mm	315 mm
File drawers	300 mm	250 mm	370 mm
Half-Height Storage Drawers	300 mm	50 mm	370 mm

Secretarial insert. The secretarial insert shall have a stationery rack. It shall not be capable of unintentional removal from its pedestal. The front of the rack shall be designed to facilitate access to the stationery.

Hardware. Polished finish anodized aluminum or die cast metal with polished chrome finish.

Legs. Shall be attached to the under side of the pedestal or end panel. Alternatively, end panels, full panel to floor, with glides may be substituted for legs. The legs shall be equipped with adjustable glides to permit adjustment of L-unit height and leveling. Alternatively, the manufacturer may provide his commercial glides, subject to contracting officer approval.

Attachment bracket. Each L-return shall be furnished with a bracket complying with Figure 1, and the two M6 X 19 mm or 1/4-20 X 3/4 inch low profile, slotted head, machine screws with nuts and lock washers. The L-return shall be capable of intermembering with a Type I, Class 3 desk made to A-A-2086C.

Finish. Baked enamel with color Fed. Std. No. 595 - Gray (26134). Alternatively, the manufacturer may provide his equivalent commercial gray baked enamel finish subject to contracting officer approval.

Identification label. The label shall have the contractor's name or trademark, contract number, National Stock Number (if specified), and month, and year of manufacture legibly marked in dark ink. The label shall be located on the inside of knee space, near the top and back of the pedestal. The label shall not be removable by hand without defacement after being affixed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

for four hours.

Workmanship. The workmanship shall be of the quality to produce finished attachments, acceptable in appearance, function and serviceability and to prevent potential hazard to personnel or their clothing.

Quality assurance provisions. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein. Sampling for inspection shall be performed in accordance with MIL-STD-105, unless an equal or better plan is approved by the contracting officer or his/her representative. A lot shall consist of units of one type, class, style, and color. The sample shall be one each. Inspection levels and AQL's shall be as follows:

For fit, finish and all other workmanship - Level II, AQL 6.5 defects per hundred units.

For packaging, packing, and marking, - Level S-2, AQL 4.0 percent defective.

Any failure to meet the dimensions, color, identification label or performance requirements shall cause rejection of the lot.

Performance.

ANSI/BIFMA. Each desk shall comply with the requirements of BIFMA Desk Products Standard X5.5-1989, with the following exceptions.

Exceptions to BIFMA American National Standard X5.5-1989. Sections 13.2.2, 13.2.3, 14, 15, 16, 17, 18, and 19 are not applicable.

NOTE: 1 - Testing in accordance with Section 4 and 5 shall be conducted with the L-return attached to a desk in accordance with CID A-A-2086C, using brackets described in A-A-2086C and herein.

Regulatory requirement. The offeror/contractor is encouraged to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Standards. The issues of ANSI/BIFMA X5.5, MIL-STD-105, and Fed. Std. No. 595, in effect on the date of the solicitation shall be used to determine compliance with the stated requirements.

Notes.

Ordering options. Purchasers should specify type, class, style, and color.

Plastic laminate panel. A sample panel of the decorative plastic laminate sheet is available from the General Services Administration, Federal Supply Service, National Furniture Center, Engineering Division, Washington, DC 20406.

Color panel. A sample of the baked enamel finish referenced in Fed. Std. No. 595 is available from the General Services Administration, Business Center, Federal Supply Service, Washington, DC 20407 or the Business Service Center in the nearest General Services Administration Regional Offices.

Federal standards. Federal Standard No. 595 is available from the General Services Administration Business Service Center in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

ANSI/BIFMA standard. Copies of the ANSI/BIFMA Standard X5.5 are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.


MIL-STD-105. Copies of MIL-STD-105 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.


Source: https://assist.dla.mil -- Downloaded: 202610-26T08:19Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

This drawing describes one leg of an L-shaped bracket intended for use in joining a 1500 mm single pedestal desk with a secretarial or clerical L-unit.

The other leg, where the bracket is fastened to the desk or L-unit should be the manufacturers own design.

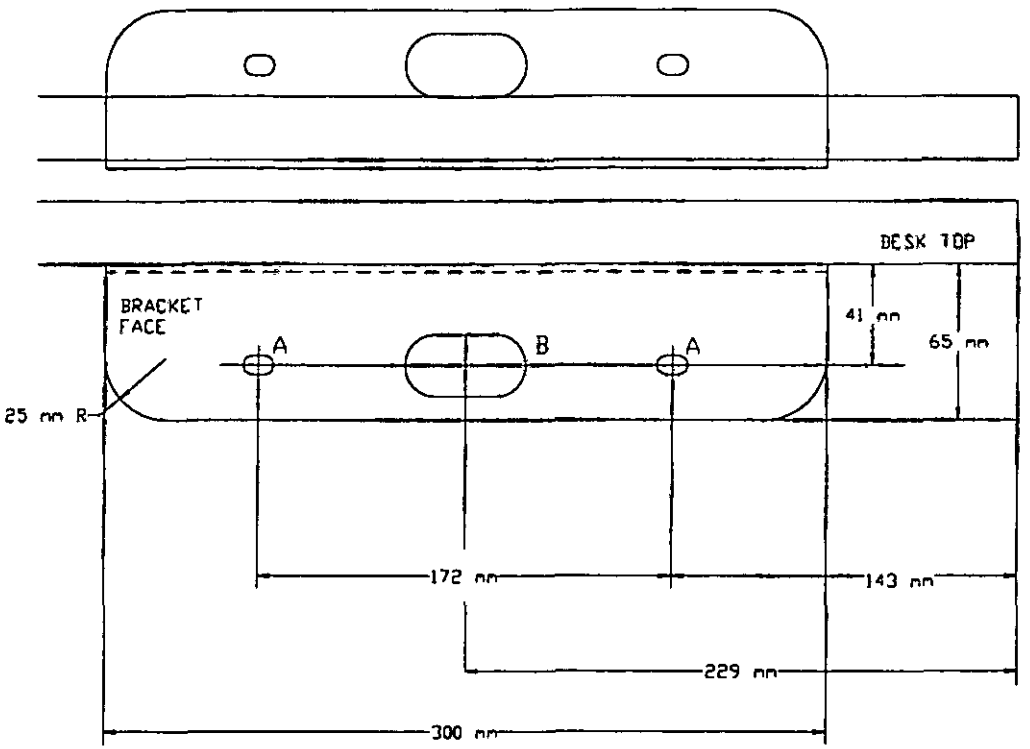

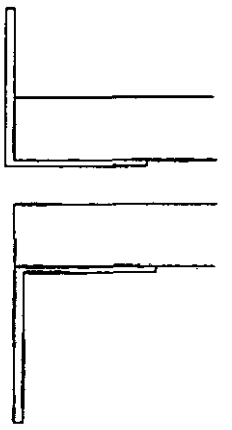

DESK ATTACHMENT BRACKET
MATERIAL - 1.9 mm STEEL

NOTES:
A - 8mm x 13mm slot
B - 25mm x 50mm slot

Tolerance on dimensions: ± 1 mm

Figure 1
Desk attachment bracket

A-A-20870