[INCH-POUND]

A-A-2748A
June 29, 1992
SUPERSEDING
A-A-2748
April 8, 1992

COMMERCIAL ITEM DESCRIPTION

ENVELOPE, TRANSLUCENT

The General Services Administration, Federal Supply Service, has authorized the use of this Commercial Item Description.

CLASSIFICATION:
This description covers the requirements for translucent envelopes used as a protector of postage stamps, in the following sizes:

Size	1.	9 1/2" X 11"
Size	2.	4 1/2" X 11"
Size	3.	4" X 7"

I. SALIENT CHARACTERISTICS:

A. Construction: Envelopes shall be of side seam construction with overlapping flaps of either inside or outside design adhering to Figure 1 of this Commercial Item Description. There shall be an ungummed square flap on the long dimension. The seam adhesive shall be of such quantity and consistency as to provide firmly bonded seams without curling the envelope. The sealed seams shall not adhere to the inside of the envelope. Dimensions shall conform to Table 1.

B. Paper used in the fabrication of the envelopes shall be translucent glassine. The minimum basis weight of the paper shall be 30 lbs. (24 X 36 - 500) $\pm$ 5%, tested in accordance with TAPPI method T-410.

C. The glassine paper shall have a minimum average bursting strength of 18 points; the tear resistance shall be 12 grams minimum average in the weakest direction; and the total machine direction plus cross direction shall be 25 grams minimum average when tested in accordance with TAPPI methods T-403 and T-414, respectively.

D. Testing for grease resistance shall be conducted in accordance with Tappi method T-454. The paper shall withstand penetration for an average of not less than 900 seconds, with no individual test less than 600 seconds.

E. The glassine paper shall be made from clean, bleached, chemical wood pulp and such additives necessary to conform to the requirements of this Commercial Item Description. The paper shall be untreated, transparent, grease and scuff resistant.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

FSC 7530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

F. Printing: Printing shall be as specified in the contract or order. The envelopes shall accept printing and ink writing without feathering, smearing, or penetrating to the reverse side.

G. Workmanship: The glassine envelopes shall be clean and free from pinholes, tears, cuts, sharp creases, wrinkles, folds, and ink smears. The glassine envelopes shall be cleanly cut without nicks or ragged edges and shall be free from any other defects which may adversely affect their utility for the purpose intended, or their appearance.

II. QUALITY ASSURANCE:

A. Responsibility for Inspection - Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

B. Each lot of glassine envelopes shall be inspected for conformance to the requirements of this Commercial Item Description. For inspection purposes, a lot shall consist of all waxed wrapping paper manufactured under the same conditions. Sampling and acceptance shall be in accordance with TAPPI T400 for paragraph 1; and MIL-STD-105 for paragraphs 2, 3 and, 4.

1. **Physical Properties and tests** - Shall be inspected in accordance with all the requirements of referenced specifications and standards.

PHYSICAL PROPERTY	METHOD	REQUIREMENT LOCATION
Basis Weight	TAPPI T410	Para. IB
Bursting Strength	TAPPI T403	Para. IC
Tear Resistance	TAPPI T414	Para. IC
Grease Resistance	TAPPI T454	Para. ID

2. **Dimensional Characteristics** - Inspection Level S-1 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one package.

3. **Visual Characteristics** - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 2.5 percent defective. The sample unit shall be one package.

4. **Packaging, Packing, Marking, and Palletization** - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

III. PACKAGING, PACKING, LABELING, MARKING, AND PALLETIZATION:

Packaging, packing, labeling, marking and, palletization shall be as specified in the contract or order.

IV. REGULATORY REQUIREMENTS:

The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, Resource Conservation and Recovery Act, to the maximum extent practicable.

V. REFERENCED DOCUMENTS:

The issue of each document in effect on the date of the solicitation or invitation to bid shall be used to determine compliance with these requirements.

TAPPI test methods are available from:

Technical Association of the Pulp and Paper Industry
Technology Park/Atlanta, P.O. Box 105113
Atlanta, GA 30348
(404) 446-1400

MIL-STD-105 is available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Public Law 94-580, Resource Conservation and Recovery Act, is part of U.S. Code, Title 42, and is available from:

The Congressional Sales Office
U.S. Government Printing Office
Washington, D.C. 20402

VI. ORDERING DATA:

A. Ordering activities should specify the size, printing, packaging, packing, labeling, marking and, palletization requirements.

CIVIL COORDINATING ACTIVITY:

USPS

PREPARING ACTIVITY:

GSA-FSS

MILITARY INTEREST

NONE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

TABLE 1.

size	A WIDTH	B HEIGHT	C FLAP	D OPENING	E SIDE FLAP
1	11"	9 1/2"	2"	9"	1"
2	11"	4 1/2"	1 1/2"	4"	1"
3	7"	4"	1 1/2"	3 7/8"	3/4"

TOLERANCES = +/- 1/16"

FIGURE 1.

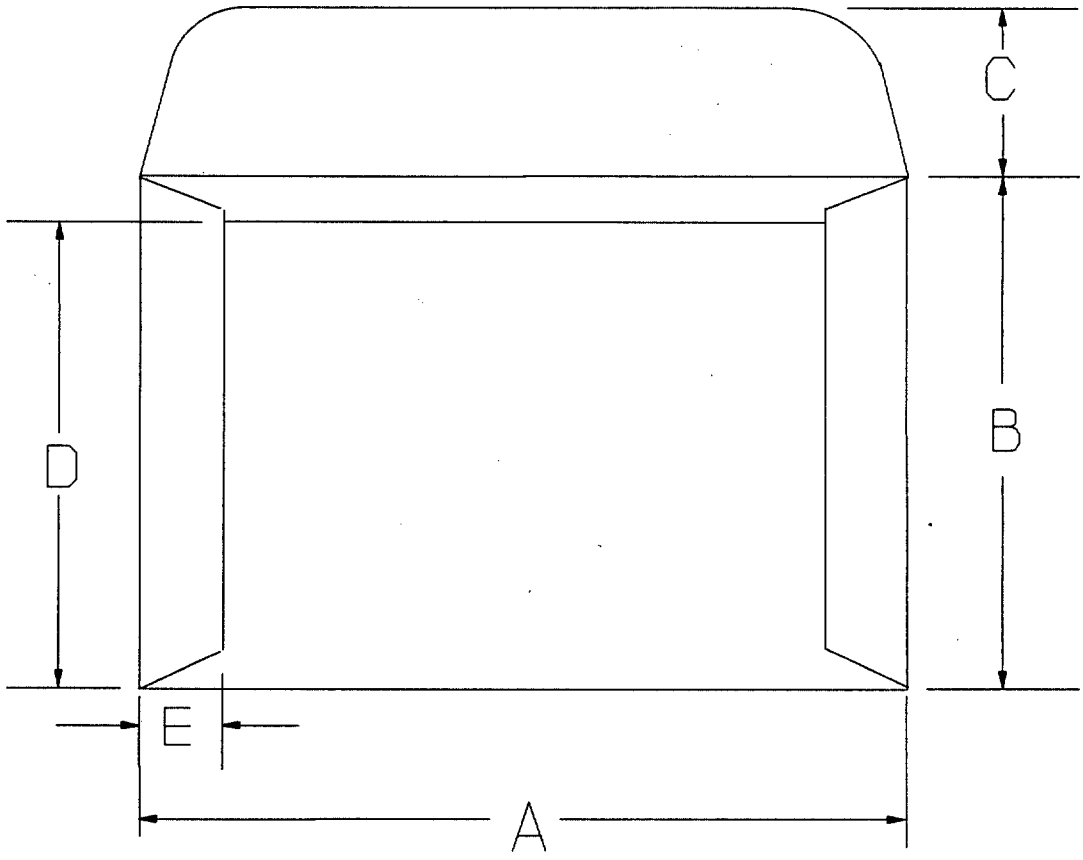

NOTE: THE FLAP AND SIDE FLAP ANGLES ILLUSTRATED ARE FOR REFERENCE PURPOSES ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.