[METRIC]
A-A-2984
February 6, 1996
SUPERSEDING
PPP-C-58B
JANUARY 13, 1972

COMMERCIAL ITEM DESCRIPTION

CAN, TELESCOPE TOP

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE:

This specification covers the requirements for cylindrical, paperboard, liquid-tight food containers, with reinforced set-in bottom and outside fitting cover (see figure I).

2. SALIENT CHARACTERISTICS:

Cans in accordance with this commercial item description shall be of the following types and sizes as specified (see 6.2)..

Type I - Plain (unlined)
Size A - 0.47 liter (16 ounces)
Size B - 0.95 liter (1 quart)

Type II - Lined
Size B - 0.95 liter (1 quart)
Size C - 1.9 liters (2 quarts)
Size D - 3.8 liters (4 quarts)

2.1 Material. The material used for constructing paper cans furnished under this commercial item description shall conform to the applicable requirements specified hereinafter, and shall be free from any defects which may impair serviceability or proper functioning under service conditions.

2.1.1 Adhesive. The adhesive used for bonding shall be of a suitable type, free from objectionable odor.

2.1.2 Paperboard. The paperboard used for constructing cans shall be heavy white sulfate board. The material shall be able to take the adhesive without penetration through the sheet.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Engineering Branch, New York, NY 10278.

FSC 8110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

2.1.3 Covers. The covers shall be manufactured from stock of the same material as the body. The material shall withstand forming into covers without cracking and shall be able to retain shape of cover after drying. Fit shall be sufficiently tight so that cover will not fall off by its own weight when empty container is held in an inverted position.

2.1.4 Thickness of paperboard.. The wall thickness of the body and cover, shall be not less than 0.66 mm (0.026 inch) and the cover disc not less than 0.43 mm (0.017 inch) or as specified in contract or order (see 6.2).

2.1.5 Type II only. Liners used shall not exhibit any reaction with the contents. Moisture and grease-resistant and anti-corrosive liners, such as parchment, plastic coated glassine, aluminum foil, duplex Kraft, cellulose acetate, polyethylene and others are available commercially and may be specified in contract or order (see 6.2).

2.2 Fabrication. Body for tubes shall either be spirally or convolutely wound and shall be constructed of materials as specified under 2.1.

2.2.1 Butt joints. All plies of spirally wound tubes shall be wound with butt joints whose maximum gap shall not exceed 1.59 mm (1/16 inch).

2.2.2 Seams. The seams on convolutely wound tubes shall be tapered or beveled so as to form a smooth seam.

2.2.3 Inside diameter. Tolerance on inside diameter shall be plus or minus 0.79 mm (1/32 inch).

2.2.4 Inside length. Tolerance on inside length shall be plus 9.5 mm (3/8 inch), minus zero.

2.3 Design and construction. Design and construction of all types of cans and their closures shall conform to figure 1, which shall form a part of this commercial item description.

2.4 Liquid Tightness Test. The can filled with water which has been strongly colored with ink and the cover tightened shall be inverted on a sheet of white blotting paper for 15 minutes. There shall be no discoloration of the paper or leakage in any form.

2.5 Workmanship. All containers shall be manufactured in accordance with best commercial practice. The finished article shall be clean, free of foreign matter, and free from any defects which may affect the appearance or serviceability, such as surface scuffing, inadequate adhesion between plies, ragged joints or burrs on inside edge and other defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIREMENTS:

All material shall conform with the Federal Food, Drug and Cosmetic Act as amended and Regulations Promulgated Thereunder. Supplier must submit evidence of compliance to that effect.

4. QUALITY ASSURANCE PROVISIONS:

4.1 Contractor Certification - The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Suppliers are encouraged to use quality control (QC) techniques that exhibit control over their processes (e.g. (Statistical Process Control) SPC techniques) as defined in American National Standards Institute (ANSI) Z1.1, Z1.2 and Z1.3/ American Society for Quality Control (ASQC) B.1, B.2 and B.3 that systematically reduce excess variations. Objective evidence shall be available that demonstrates overall measurement adequacy, techniques and controls. These techniques shall ensure quality levels equal to, or greater than, those cited in applicable technical document or, herein.

4.3 End item inspection/testing may be used by the offeror or the Government representative, as a means to determine the effectiveness of the in process quality controls. In process controls shall not be substituted for end item performance testing.

4.4 For those characteristics for which there are no such controls, or for end item performance test, lot by lot sampling for inspection/test shall be required. Sampling shall be in accordance with the American National Standards Institute (ANSI)/ American Society for Quality Control (ASQC) Z1.4, Sampling Procedures and Tables for Inspection by Attributes.

4.5 An inspection lot shall consist of all like items submitted for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 percent defective. The supplier must provide objective evidence (tests and inspection records) that the presented material meets the requirements of the sampling plan as indicated above.

5. PACKAGING:

Preservation, Packaging, Packing, Labeling, and Marking shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

6. NOTES:

6.1 Addresses for obtaining copies of referenced documents:

The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this commercial item description to the extent specified herein:


6.1.1 Sampling Procedures and Tables for Inspection by Attributes can be obtained from American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title, number and date of this commercial item description.
(b) Quantity required.
(c) Type and size (see 2).

6.4 NSN LIST:

8110-00-292-4382
8110-00-687-8448
8110-00-754-2601
8110-00-754-2602
8110-00-754-2603

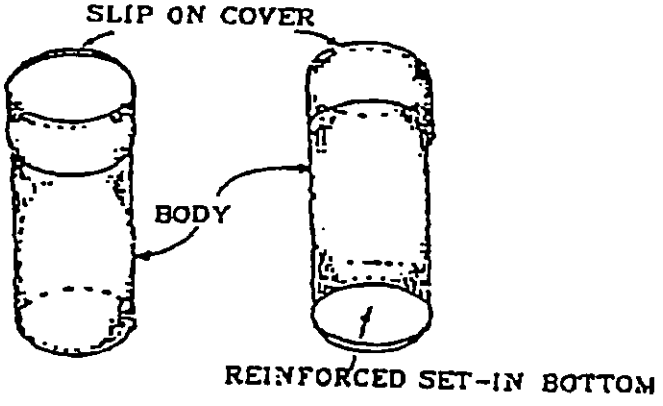

CAN, TELESCOPE TOP

FIGURE 1

Military Coordinating Activity

Army - GL

Preparing Activity

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.