[INCH-POUND]
A-A-3020
June 25, 1996

COMMERCIAL ITEM DESCRIPTION

HANDLES, FILE, WOOD.

The General Services Administration has authorized the use of this Commercial Item Description for procurement of Type II specified in NN-H-106 for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers handles for use on files.

2. CLASSIFICATION.

2.1 Classification. The handles covered by this Commercial Item Description are of the following sizes:

Size 1 - (small)
Size 2 - (medium)
Size 3 - (large)

3. SALIENT CHARACTERISTICS.

3.1 Design. The file handles shall be of a white birch, hickory, maple, or beech wood. The file handles shall be smoothly finished. The file handle shape and design shall be similar to Figure 1. The length of the file handle shall be 4 to 5-1/2 inches as specified in Table I and shall allow for comfortable handgripping. The small end of the handle shall be equipped with a metal ferrule made of 22 gage steel minimum with a protective plating or an equally effective device designed to prevent the file handle from splitting. The file handle shall be drilled to accept the tangs of files of size 1 (3 to 6 inches in length); size 2 (6 to 10 inches in length); and size 3 (10 to 14 inches in length). Each file handle shall be drilled axially to half its length with a tolerance of ± 3/8 inch. The diameter of the drilled hole for the tang end shall be as specified in Table I.

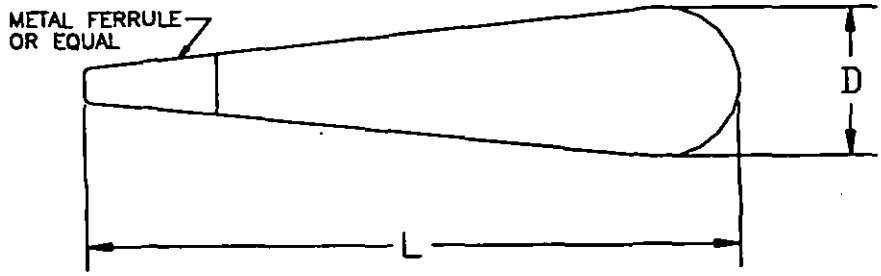


Figure 1. Type II, file handle.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Washington, DC 20406.

Distribution Statement A. Approved for public release; distribution is unlimited. FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

TABLE I. File handle

Size	Diameter of handle D + 1/4 (Inches)	Overall Length L + 1/8 (Inches)	Suitable for files of the following lengths (Inches)	Diameter of drilled hole for tang end ± 1/32 (Inch)
1 (Small)	1	4	3 - 6	1/8
2 (Medium)	1-1/4	4-1/2	6 - 10	11/64
3 (Large)	1-5/16	5-1/2	10 - 14	5/16

3.2 Moisture content. The moisture content of the file handles shall not exceed 15 percent.

3.3 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.4 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:28Z
Check the source to verify that this is the currentversion before use.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

5.5 Moisture content. A random sample of handles shall be selected from each lot to verify compliance with the moisture content specified in 3.2. ANSI/ASQC Z1.4 , Inspection Level S-3, Acceptable Quality Level (AQL) 6.5, shall be used to determine the size of the sample and the acceptance and rejection numbers. An electrical moisture meter or other equally suitable method shall be used to determine moisture content. Any handle in the sample having a moisture content in excess of 15 percent shall be rejected.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) When applicable, the specific type, styles, classes, sizes, etc., as specified in the Commercial Item Description.
(d) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling inspection is required and the applicable lot sampling requirements.

For example, the following typical lot sampling requirements would be specified in the contract:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be X-Y (e.g., S-2) with an Acceptable Quality Level of X.Y (e.g., 4.0), expressed in terms of defects per hundred units.

or

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the currentversion before use.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be X-Y with an Acceptable Quality Level of X.Y, expressed in terms of defects per hundred units.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection Level shall be X-Y with an Acceptable Quality Level of X.Y, expressed in terms of defects per hundred units.

(g) What options as specified in the Commercial Item Description are to be contractually required, if any. For example: a case is to be furnished with each item.
(h) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the types, classes, and sizes specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	SIZE
5110-00-263-0342	1
5110-00-263-0349	2
5110-00-263-0341	3

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.