AA-C-00295a(GSA-FSS)
February 11, 1963
Interim Revision of
Fed. Spec. AA-C-295
August 5, 1955

INTERIM FEDERAL SPECIFICATION

CHAIRS, ROTARY, STEEL, TUBULAR

SPECIAL PURPOSE

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington 25, D. C., based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized Federal agencies to use this Interim Specification as a valid exception to Federal Specification AA-C-295, dated August 5, 1955.

1. SCOPE AND CLASSIFICATION

1.1 Scope.- The tubular steel, rotary armless chairs covered by this specification are of but one type and are intended for groups of typists, telephone or machine operators, draftsmen and for similar personnel or areas where some degree of posture is required, but where it is not necessary to match other items of standard equipment. The class 1, size 1 chair is a fully adjustable posture chair.

1.2 Classification

1.2.1 Class and size.- The chairs shall be of the following classes and sizes as specified in the invitation for bids:

Class 1.- Non-tilting seat, tilting adjustable back.
  Size 1. - Standard base.
Class 2.- Non-tilting seat, non-tilting adjustable back.
  Size 1. - Standard base
  Size 2. - Intermediate base.
  Size 3. - High base.

PSC - 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

1.2.2 Color of finish.- The color of the chairs shall be Grey Color No. 26134 of Federal Standard 595.

(Color chip No. 26134 Gray, of Federal Standard 595 is obtainable from Business Service Center, General Services Administration, Federal Supply Service, Washington 25, D. C. or from Business Service Center of the nearest GSA Regional Offices).

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications, standards and other publications of the issues in effect on date of invitation for bids, form a part of this specification; to the extent specified herein.

Federal Specifications:

FF-C-82 - Casters, Swivel, Chair
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-529 - Enamel, Alkyd, Semi-gloss
UU-T-111 - Tape; Paper, Gummed (Sealing and Securing).
CCC-A-700 - Artificial Leather. Cloth, Coated, Vinyl Resin (Upholstering)
CCC-F-66 - Fabrics, Upholstery.
PPP-B-631 - Boxes, Wood, Nailed and Lock Corner
PPP-B-636 - Box, Fiberboard
PPP-C-843 - Cushioning Material Cellulosic
PPP-T-45 - Tape, Gummed, Paper, Reinforced

Federal Standards:

Fed. Std. No. 102 - Preserving, Packaging and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Use).
Fed. Std. No. 124 - Color of Painted Metal General Office Furniture
Fed. Std. No. 595 - Colors.
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE.

Military Specifications:

MIL-W-12332 (ORD) Welding, Resistant. Spot and Projection for Fabricating Assemblies of Low-Carbon Steel.
MIL-L-10547 - Liners, Case, Water-proof
MIL-R-17252 - Rubber, Cellular (Bonded Shredded).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U. S. Military Property.

(Copies of Military Specifications and Standards required by the Contractor in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following publication, of the issue in effect on date of invitation for bids, forms a part of this specification.

Consolidated Classification Committee Publication:

Consolidated Freight Classification Rules.

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois).

Steel Products Manual, Carbon Steel Sheets.

(Copies may be obtained from the American Iron and Steel Institute, 350 Fifth Avenue, New York 1, New York.)

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified (see 6.1.1) before production is commenced a sample of the finished commodity and each component part shall be submitted or made ready for approval of the contracting officer or his authorized representatives for inspection and tests as specified in section 4 to determine compliance with this specification. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification.

3.2 Material.- Material shall conform in all respects to the requirements as hereinafter specified. Materials not definitely specified shall be suitable in every respect for the purpose intended. All materials shall be new and unused and free from defects which may affect serviceability or appearance of the finished product.

3.2.1 Steel.- All steel parts shall be cut, stamped, or die-formed from steel sheets and steel tubing. Sheet steel shall be of a mild furniture stock and shall be free from rust, scale, and other imperfections. All steel tubing shall be seamless, butt-welded, or continuously seam-welded. The gage numbers specified for the steel chair parts are the Manufacturers' Standard Gage for Steel Sheets. The decimal equivalent of the steel thickness is subject to the established standard tolerances or ordering limits.

3.2.2 Rubber-

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.2.1 Bonded shredded foam.- The bonded shredded foam shall be made of new synthetic or natural rubber foam that is dry, free from coagulation, excessive flesh and other foreign materials, and shall conform to type II, class 2, condition medium, as specified in Military Specification MIL-R-17252, except that each seat cushion shall be molded. The molded shredded foam cushions for the seats shall be 2 inches thick before application and the shredded foam for back pads shall be die cut from 1-inch-thick sheet stock before application. Dimensional tolerances shall be as specified in military specification MIL-R-17252.

3.2.2.2 Foam latex.- When specified and removable seat and back covers are to be furnished, the pads shall be foam latex. The seat pad shall be 2 inches thick (commercial tolerance) and the back pad shall be 1 inch thick (commercial tolerance). The foam latex for seat pads shall be grade RC-25 and grade RU-20 shall be used for back pads, as specified in ASTM Specification Designation D1055-59T.

3.2.3 Upholstery.- Unless otherwise specified, upholstery covers shall be type IV, number 12 of CCC-F-66. When specified, upholstery covers shall be of a quality not lower than class 2 of CCC-A-700. The finish shall be that of simulated top-grain leather and the color shall be approximately the color of the chair frame.

3.2.4 Hardware.

3.2.4.1 Chair control.- The chair controls shall provide for raising and revolving all chair seats either in the base or in the spider and shall also provide for tilting of the backs of all class 1 chairs. All chair controls shall have readily accessible malleable cast iron or steel knobs or handwheels having a wellformed finger grip for easy adjustment. The mechanism shall be positive and non-binding in its height adjustment so that a sudden jar, revolving, or constant load for 8 hours of 200 pounds will not change the height of the seat. All spider parts shall be designed to meet the tests specified in 4.4 and may be made of pressed steel, malleable cast iron or aluminum. The spider shall be secured to the seat at not less than four places and shall have sufficient spread to insure proper balance and safety. Alternatively, the seat pan as specified in 3.4.1 and the spider may be a one unit permanent mold aluminum casting. When revolving action is in the spider, the spindle mounting shall be a metal tube or bracket and shall extend down and around the spindle not less than 2 inches, and shall have a seat not less than 1/4 inch thick, on which the spider shall revolve. The mounting shall be continuously welded or riveted in place making a strong, well balanced, easily revolving unit. When revolving takes place in the base, the spindle shall be continuously welded or riveted to the spider and shall have a press-fit bracket or machined part extending down and around the spindle not less than 7/8 inch. The spindle shall be 1 inch (minus 0.005 inch) in diameter steel rod, and shall provide for height adjustments at not more than 3/4 inch intervals over a span of not less than 3 inches. The back tilt adjustment for class 1 chairs shall be a spring tension or rubber torsion tilt unit to control and insure the proper tilt tension of the back.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

The back tilt tension adjustment bolts shall not be supported by the seat pan but the support must be a part of the chair control. The tilt shall have a positive safety stop which shall prevent the chair back from tilting more than 17 degrees from the initial forward position should there be any failure or breakage of the tilt unit. The spring shall be properly tempered and be of sufficient size and number of coils so that when the tension is adjusted to the normal position and the back tilted against the stop, the spring will not have reached full compression.

3.2.4.2 Casters.- The casters shall be type I, class 1 or class 2, style A, Size B, and wheel composition material 1 in accordance with FF-C-82.

3.2.4.3 Glides.- Glides shall be properly nickel or chromium plated or polished stainless steel and shall be of the live-rubber cushioned and spring steel expansion or rubber expansion type that can be firmly secured to each leg but may be removed without special tools for replacement. There shall be no metal to metal contact of glide base and chair leg after the glides are applied and the glides shall be not less than 1-1/16 inch diameter with a substantially flat bottom. The base shall be of stamped steel and hardened after forming to not less than 15 N 85 Rockwell or equivalent on comparable scale. The base shall have properly curled edges to contain and retain the rubber cushion which shall fill the inside of the base and extend not less than 5/32 inch above the top edges.

3.2.4.4 Bolts, nuts and lockwashers.- Bolts, nuts and lockwashers shall be zinc or cadmium plated.

3.2.5 Enamel.- The enamel shall conform to class B of TT-E-529 and the color shall be in accordance with Fed. Std. No. 124.

3.3 General construction.

3.3.1 Design.- The figures 1 through 4 illustrate the general appearance and typical construction of the chairs required. The area of the seat and back shall be not less than the areas shown in the figures, (as taken from over-all measurements) and shall be proportioned for adequate comfort. Adjustments for seat height and for both vertical and horizontal positioning of the back shall be provided. Low seat height position for size 1 chairs and range of vertical and horizontal back adjustments for all sizes of chairs shall be the manufacturer's standard commercial practice.

3.3.2 Welding and brazing.- All welding shall accomplish rigid joints, in true alignment. Welds shall be sound, without porosity, and shall be ground smooth to present a finished appearance.

3.3.2.1 Fusion welding.- Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal (steel) deposits from an external source.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.2.2 Spot welding.- Spot welds shall not be closer to the edge of either adjoining member than 1/2 the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.4.4. All exposed spot or projection welds shall be filled and ground smooth.

3.3.2.3 Brazing.- Brazing is the joining of metals with the aid of a filler metal of a different composition. The melting point must be above 800 degrees farenheight. Brazing method shall be GASFLUX, using nickle Bronze rod (nickle content 9.5% tensil strength 70,000-75,000 PSI) acetylene, and oxygen (or propane) gasses.

3.3.3 Bending of tubes.- The tubes shall have true and even curves without flattening, crushing, or crimping that will affect the strength or appearance of the tubes.

3.4 Assembly of parts.- The assembly of metal parts shall be by fusion welding and brazing to achieve maximum strength. Jigs shall be used to insure proper alignment of parts during welding. When necessary, mechanical joints shall be made with solid steel rivets, or with bolts, nuts, and lockwashers. Hinge joints of tubing shall be supported on both sides of the tube.

3.4.1 Seat pan.- The seat pan shall be of steel or aluminum designed to withstand the test specified in 4.4. The seat pan shall be embossed, saddle shaped, or ribbed for increased strength and comfort and shall be perforated for ventilation. Seat pans formed without an apron shall have an extruded rubber bumper all the way around to eliminate all sharp edges and provide ample protection from cutting the upholstery cover under hard service conditions.

3.4.2 Back pan.- The back pan shall be contour shaped to fit the occupants back and shall be formed of one or more thicknesses of steel. The inner pan shall have rolled flanged edges and the outer pan shall be shaped to closely fit inside the flange of the inner pan and shall be secured by four screws or an equally secure method approved by the contracting officer. The pan to which the mounting is secured shall be not less than 20 gage (0.0359 inch) steel, and the other pan shall be of not less than 24 gage (0.0239 inch)steel. A single thickness pan of not less than 16 gage (0.0598 inch) steel having a concealed rubber bumper extrusion around the entire edge will also be acceptable.

3.4.3 Base.- The base shall be constructed of not less than 1 inch outside diameter 16 gage (0.0598 inch), or 1-1/4 inch outside diameter 18 gage (0.0478 inch) steel tubes. The four legs shall be at right angles to each other and shall start vertically from the floor, then curve inward to the center hub to which the legs shall be welded and reinforced to withstand the tests described in 4.4. The bottom of the legs shall be designed to rigidly pressure grip and tightly secure the caster sockets as specified in 3.2.4.2 or to secure the glides as specified in 3.2.4.3. The center hub and leg reinforcement shall be of not less than 16 gage (0.0598 inch) steel or cast malleable metal of equal strength, and shall be designed to eliminate sharp edges that might cause injury or soil clothing or shoes.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

The center hub shall have an accurately reamed or burnished spindle housing. Legs secured to malleable cast hubs shall be continuously welded to the leg socket or the legs may be cast into the hub in a secure manner. If the revolving action takes place in the hub, the housing shall be not less than 3 inches long and shall have a flat smooth bearing surface not less than 3/16 inch wide for the chair control thrust bearing. If the revolving action takes place in the spider, the housing shall be not less than 2-1/2 inches long. Provision shall be made for securing the chair iron to the base which will permit removing the spindle from the housing when required.

3.4.4 Back frame.- The back frame shall provide for positive adjustment, both vertically and horizontally, of the back rest so that it may be easily positioned and fixed at the correct individual posture without the use of tools. The back frame shall be either tube construction forming a double post or one piece construction of a single spring steel flat bar, that will not twist or take on a permanent deformity.

3.4.5 Application of upholstery.- The upholstery covers shall be attached to the seat and back in a manner to insure smooth surfaces and even, well-rounded edges and unless otherwise specified may be either permanently attached with adhesive and spring clips, or removable by using picture frame wire as a draw string and a coil spring to maintain tension on seat covers and the wire securely tied for the back covers. The covers shall not contact unprotected sharp or hard edges of the seat or back pan. The method of attachment shall be completely free from hazardous surfaces or devices and shall prevent slippage and excessive wear of the covers after continual heavy use. All seams shall be of type 301 or type 401 stitching as described in Fed. Std. No. 751, all other edges shall be either hemmed or folded to double thickness at securing areas.

3.5 Detail requirements.

3.5.1 Class 1, size 1 chair.- The class 1, size 1 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 1 and as specified herein. The chairs shall withstand the tests as described in 4.4.

3.5.1.1 Base.- The base shall be as specified in 3.4.3 and shall be equipped with casters as specified in 3.2.4.2.

3.5.1.2 Chair control.- The chair control shall be as specified in 3.2.4.1 and shall have the back tilt adjustments.

3.5.1.3 Seat.- The seat pan shall be as specified in 3.4.1 and shall be rigidly secured to the chair control as specified in 3.2.4.1. The molded shredded foam cushion as specified in 3.2.2.1 or foam latex as specified in 3.2.2.2 shall be cemented to the seat pan, and shall overlap all edges of the seat pan not less than 1/2 inch except where the rubber extrusion bumper is used, then the padding shall overlap the pan not less than 1/8 inch to provide sufficient fullness of cover. The seat shall be covered as specified in 3.4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.5.1.4 Back.- The tilting back frame shall be as specified in 3.4.4, and shall be mounted to the chair control and provide for a firm mounting of the back rest. The back pan shall be as specified in 3.4.2 and shall be flexibly mounted to the back frame so that it will rock with the occupant's back but will stay in a vertical position when the chair is unoccupied. The shredded foam back pad as specified in 3.2.2.1 or foam latex as specified in 3.2.2.2 shall be cemented to the back pan and shall overlap all edges not less than 1/2 inch to accomplish well-rounded and padded edges, except where rubber extrusion bumper is used when the padding shall overlap all edges not less than 1/8 inch. The back pad shall be covered with the upholstery material as specified in 3.2.3 and applied as specified in 3.4.5.

3.5.2 Class 2, size 1 chair.- The class 2, size 1 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 2 and as specified herein. The chairs shall withstand the tests as described in 4.4.

3.5.2.1 Base.- The base shall be as specified in 3.5.1.1 for class 1, size 1, chairs.

3.5.2.2 Chair control.- The chair control shall be as specified in 3.2.4.1 for class 2 chairs and shall not provide for tilting back adjustment.

3.5.2.3 Seat.- The seat construction shall be as specified in 3.5.1.3.

3.5.2.4 Back.- The back shall be as specified in 3.5.1.4 except that it is non-tilting.

3.5.3 Class 2, size 2 chair.- The class 2, size 2 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 3 and as specified herein. The chairs shall withstand the tests as described in 4.4.

3.5.3.1 Base.-The base shall be as specified in 3.4.3 and shall be equipped with glides as specified in 3.2.4.3 and in addition shall have a foot ring of not less than a 3/4 inch diameter 20 gage (0.0359 inch) steel tube riveted, welded or brazed to each of the four legs for a foot rest and additional support for the base legs.

3.5.3.2 Chair control.- The chair control shall be the same as specified in 3.2.4.1 for class 2 chairs and shall not provide for tilting back adjustment.

3.5.3.3 Seat.- The seat shall be the same as specified in 3.5.1.3.

3.5.3.4 Back.- The back shall be as specified in 3.5.1.4 except that it is non-tilting.

3.5.4 Class 2, size 3 chair.- The class 2, size 3 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 4 and as specified herein. The chairs shall withstand the tests as described in 4.4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

3.5.4.1 Base.- The base shall be as specified in 3.4.3 and shall be equipped with glides as specified in 3.2.4.3 and in addition shall have a foot ring of not less than 3/4 inch diameter 20 gage (0.0359 inch) steel tube riveted, welded or brazed to each of the four legs for a foot rest and additional support for the base legs.

3.5.4.2 Chair control.- The chair control shall be the same as specified in 3.2.4.1 for class 2 chairs and shall not provide for tilting back adjustment.

3.5.4.3 Seat.- The seat shall be the same as specified in 3.5.1.3.

3.5.4.4 Back.- The back shall be as specified in 3.5.1.4 except that it is non-tilting.

3.6 Pretreatment and finishing

3.6.1 Pretreatment.- All ferrous metal parts of the chairs shall be treated for enameling in accordance with type I or type II of TT-C-490.

3.6.2 Enameling.- Chairs treated as specified in 3.6.1 shall be coated with enamel as specified in 3.2.5. The enamel shall be baked for not less than 45 minutes at 250 degrees F. or equivalent time-temperature cycle and the dry film thickness shall be not less than 1.0 mil. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film or no film, and separation of color. Finish panels shall withstand the test specified in 4.4.3.

3.7 Identification marking.- Unless otherwise specified, each chair shall be marked in a plain, permanent, and inconspicuous manner with the year of manufacture, and with the manufacturer's name or trade mark of such known character that the source of manufacture may be readily determined. When specified, items shall be marked in accordance with MIL-STD-130.

3.8 Workmanship.- The details of construction, including design, joining, assembly, filling, covering, finishing and marking shall be in strict accordance with the detail requirements of this specification. Any of the above details which are not specified or shown in the figures, shall be in accordance with first class commercial metal chair practices. Finished chairs shall be neat and shall be free from any defects that affect the appearance or which might affect the serviceability of the chairs, the safety of the user. Chairs which are dimensionally out of proportion, with seats that extend beyond the base so far as to cause a possibility of tipping over when in use, will not be accepted.

4. QUALITY ASSURANCE PROVISION

4.1 Inspection responsibility.- The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.2 Sampling for inspection and acceptance.- Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection.- In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2.1.1 Process examination.- Examination shall be made of the following operations to establish that no deviation is made from the indicated requirements. Wherever a deviation is noted, correction shall be made. Failure to make immediate correction may cause rejection of affected end item lots.

a. Pretreatment before finish material is applied as specified in 3.6.1.

b. Baking time of enamel as specified in 3.6.2.

c. Method of application, drying time, and temperature conditions of finishes as specified in 3.6.2.

4.2.2 End item inspection.

4.2.2.1 Visual examination.- Examination of the chairs shall be in accordance with the classification of defects and acceptable quality levels (AQL's) specified in table I. The lot size shall be expressed in units of chairs for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one complete chair.

TABLE I. - Classification of defects in accordance with MIL-STD-105

Examination	Defects	Major	Minor
Finish Enamel	Wrong color, type or not uniform	X	
	Peeling, blistering flaky or other poor adhesion.	X	
	Tacky (not dry to touch)		X
	Stain, dirt, overspray or other discoloration.	X	
	Runs, wrinkles. sags or cracks		X
	Touch-up not neat		X
	Foreign matter-embedded in finish	X	
	Scratches, abrasions, chips, dents, nick or bruise		X
	Area of no coating	X	
	Area of thin coating		X
	Wrong kind	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. - (Cont'd)

Examination	Defects	Major	Minor
Hardware	Omitted, peeled, blistered, flaky, or other poor adhesion stained, tarnished or discolored.		X
	Casters not type specified	X	
	Bolts, nuts and lockwashers not plated		X
Workmans and Construction	Parts missing or damaged affecting use	X	
	Welds missing or not sound (broken, cracked, burnt through, poor fusion, etc.)	X	
	Welds not ground smooth, protrudes or pits not filled (outside only)		X
	Spot welds not properly spaced or not of required member		X
	Sharp edges or projection that may cause injury or tear clothing.	X	
	Dimension not within tolerance		X
	Tubes where bent not true and even	X	
	Seat and back pads not later foam under removable covers when specified	X	
	Seat and back pads not of density specified		X
	Covers not artificial leather or fabric as specified	X	
	Rubber bumpers under covers missing	X	
	Base tubes not size or thickness specified	X	
	Back frame does not provide for adjustment, horizontally and vertically	X	
	Adjustment of seat and back height not as specified or easily made		X
	Class 1 chair without back tilt adjustment	X	
	Identification marking missing incomplete, illegible or not permanent		X

4.2.2.2 Dimensional examination.- Inspection will be made of chairs for compliance with dimensions specified including thickness of metal and film thickness. Any dimension not within tolerance specified shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.2.2.3 Inspection levels and AQL's- The acceptable quality levels (AQL's) expressed in defects per hundred units, and inspection levels shall be as follows:

	Inspection levels	AQL's
For examination in Table I Major	II	2.5
For examination in Table I Total	II	10.0
For examination in 4.2.2.2 (1 class)	L3	10.0

4.2.2.4 Dimensional examination.- The units assembled for visual examination (see 4.2.2.2) shall be examined for defects in dimensions. Any deviation from specification requirements shall constitute a defect. The acceptance number shall be one.

4.3 Examination of preparation for delivery.- An examination will be made to determine that packaging, pack and marking, as required by section 5 of this specification, are complied with. Defects will be scored in accordance with Table II below. The sample unit shall be one shipping container. The lot size shall be the number of containers in the inspection lot.

TABLE II.- Classification of defects in accordance with MIL-STD-105

Examination	Defect
Marking	Incorrect; illegible; of improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate securing of casters and padding of perimeter edges.

4.4 Tests.

4.4.1 Base tests.

4.4.1.1 With casters and glides removed, and the base placed on a surface plate, test the base for rock. A 5/64 inch feeler gage shall not enter between any leg and surface plate.

4.4.1.2 Remove spindle and chair frame and insert suitable diameter shaft to fit the spindle bearing without play. The shaft shall extend at least 12 inches above the bearing top. Measure error in perpendicular using square. Error should not exceed 1/8 inch in the 12-inch length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.4.1.3 Replace spindle and chair frame and with the base resting on the surface plate, measure from bottom of chair seat at each front corner to the surface plate. The variation in measurement shall not exceed 1/8 inch.

4.4.1.4 Base loading test.- Remove casters and spindle and chair frame and place the base supported only at the caster sockets, in universal tester and apply a load of 1,150 pounds. The base shall withstand the load without any metal fractures or weld failures and the permanent distortion shall not exceed 1/8 inch. Dimensions for distortion shall be taken vertically between the test apparatus platen and the top of the spindle bearing. A certified test report from an independent accredited laboratory may be accepted as sufficient evidence for compliance with this test. The base used in this test shall be available for inspection.

4.4.2 Completed chair test, except with casters or glides removed.

4.4.2.1 With the chair adjusted to its minimum height clamp the base to the floor. The seat shall not rock in any direction more than 1/8 inch, at the outermost bottom edge of the seat at any point. This test applies to all classes and sizes of chairs.

4.4.2.2 Drop test.- A bag of sand weighing not less than 200 pounds and not more than 22 inches in diameter shall be dropped once into the center of the seat from a height of 6 inches. The permanent distortion shall not exceed 1/4 inch. Dimensions to be taken from the floor to the bottom of the seat pan. The drop test shall be made with the seat height set 1-1/2 inches above the minimum seat height adjustment.

4.4.2.3 Back and tilt test for all chairs.- The chairs shall be clamped to the floor in an upright position by a bar across the front edge of the seat, and the legs shall be restrained from moving. A spring dynamometer or an equally effective device shall be attached to the top of the back frame and a back pull applied normal to the slope of the back at all times. The chairs shall withstand a load test of 75 pounds without a permanent distortion of more than 1/4 inch.

4.4.3 Finish test for steel panels.- A 20 gage steel panel prepared in accordance with 3.6 shall be bent at room temperature around a 1/4 inch rod to 180°, without cracking, flaking or loss of adhesion of the enamel.

4.4.4 Spot welds.- Spot welds shall meet the peel test specified in 4.2.4 of Specification MIL-W-12332 (ORD) and button diameter shall conform to Table II as specified therein.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packing.- Preservation and packing shall be level A, B, or C as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

5.1.1 Level A Packaging.- When specified, each chair shall be reduced to its minimum dimension, and packaged in a way to prevent movement. Legs, backs, frames, foot rings, etc shall be cushioned at all points of contact with the shipping container. Cushioning material shall conform to PPP-C-843 and shall be securely tied in place. All seats shall be covered with paper having a minimum basic weight of 60 pounds per ream (24 by 36 - 500) and shall be secured in place with paper tape conforming to class 2 UU-T-111.

5.1.2 Level B Packaging.- When specified each chair shall have the surfaces of legs, arms, rails, back rests, seats, etc. as applicable to the item, protected by suitable cushioning material where items packed together would contact each other or the shipping container, or where items packed individually would contact or be contacted by the shipping container.

5.1.3 Level C Packaging.- Unless otherwise specified chairs shall be packaged according to manufacturers regular commercial practice to assure safe delivery of chairs at destination.

5.2 Packing.- Packing shall be Level A, B or C as specified (see 6.1)

5.2.1 Level A Packing.- Each chair packaged as specified in 5.1 shall be packed in a corrugated fiberboard carton conforming to PPP-B-636, full overlap style, except that length of the outer flaps shall be not less than the inside of the box minus 1 inch. Each box shall be fabricated from double-faced corrugated fiberboard having a minimum bursting strength of 275 p.s.i. All flaps of the box shall be securely sealed with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps. All seams shall be sealed by application of 3 inch wide gummed tape conforming to class 2 of UU-T-111.

5.2.2 Level B Packing.

5.2.2.1 Swivel (rotary) chairs shall be packed one per shipping container, with casters removed and packaged in a drawstring fabric bag. The bag shall be securely fastened to the rotary mechanism in a manner to prevent accidental detachment. Where assembly may be made on unpacking with out use of tools, the chairs may be shipped knocked-down to that extent only. Otherwise, the chairs shall be packed in "assembled" condition with the chairs in the lowest rotary position.

5.2.2.2 Shipping containers shall be of fiberboard and conform to requirements of PPP-B-636, Type I, class 1, style FOL or CSSC optional, and shall be of 275 p.s.i. (minimum) burst test fiberboard. Closure shall be in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

5.2.2.3 Alternatively, a style RSC container of 275 p.s.i. burst test fiberboard complying with PPP-B-636, and fitted with top and bottom full width and length pads of 275 p.s.i. test corrugated fiberboard may be used. Closure of the RSC box shall be by application of suitable adhesive over not less than 50-per cent of the area of contact between flaps and application of a 3-inch wide strip of reinforced, gummed paper tape conforming to type I or II of PPP-T-45 over the top and bottom center seams of the closed box, strips to extend over ends of seams down on end panels not less than 3-inches.

5.2.3 Level C.- Chairs preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations or other carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civilian agencies.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123 and as specified in 5.3.3.

5.3.2 Military requirements.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129 and as specified in 5.3.3.

5.3.3 Additional marking.- In addition to the marking specified herein arrows or prominent marks shall be placed on the sides of each shipping container to indicate the position in which the container shall be handled during shipment. The word "UP" shall be placed at the point of the arrows in letters at least 2 inches in height.

The front panel of each shipping container shall be plainly marked as follows:

UP FURNITURE UP
FRAGILE. HANDLE
WITH CARE

Top panels shall be plainly marked as follows:

FURNITURE
FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Definitions (see section 5).- Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.

6.1.1 Ordering data.- Procurement documents should specify the following:

(a) Class and size of chairs required (see 1.2.1)
(b) If shredded foam or foam-latex cushions are required (see 3.2.2.1 and 3.2.2.2)
(c) Type of upholstery material required (see 3.2.3)
(d) If preproduction sample is not required (see 3.1)
(e) If fixed or slip covers are required (see 3.4.3)
(f) If special marking is required (see 3.7 and 5.3)
(g) Whether packaging and packing levels A, B, or C is required (see 5.1 and 5.2)

6.2 Transportation Description.

6.2.1 Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Chairs, metallic, revolving, not otherwise indexed by name. (Indicate setup or knocked-down)
Carload minimum weights:


In cars 40'9" or less in length, inside measurements - 10,000, 12,000, 15,000, 18,000 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements - 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Motor:

Chairs, metallic, revolving, not otherwise indexed. (Indicate setup or knocked-down)
Truckload minimum weights - 10,000, 12,000, 15,000 18,000. 22,000 and 30,000 pounds, subject to Rule 34, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

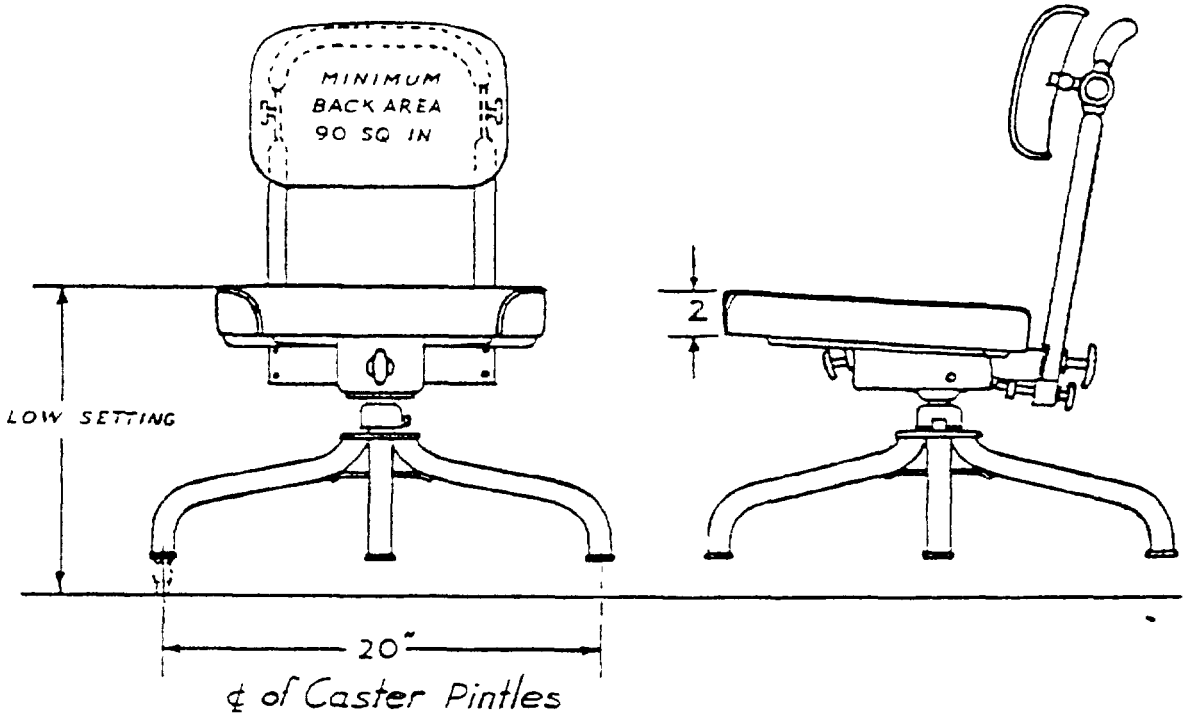




ALL DIMENSIONS ARE MINIMUM


CLASS I

SIZE 1

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

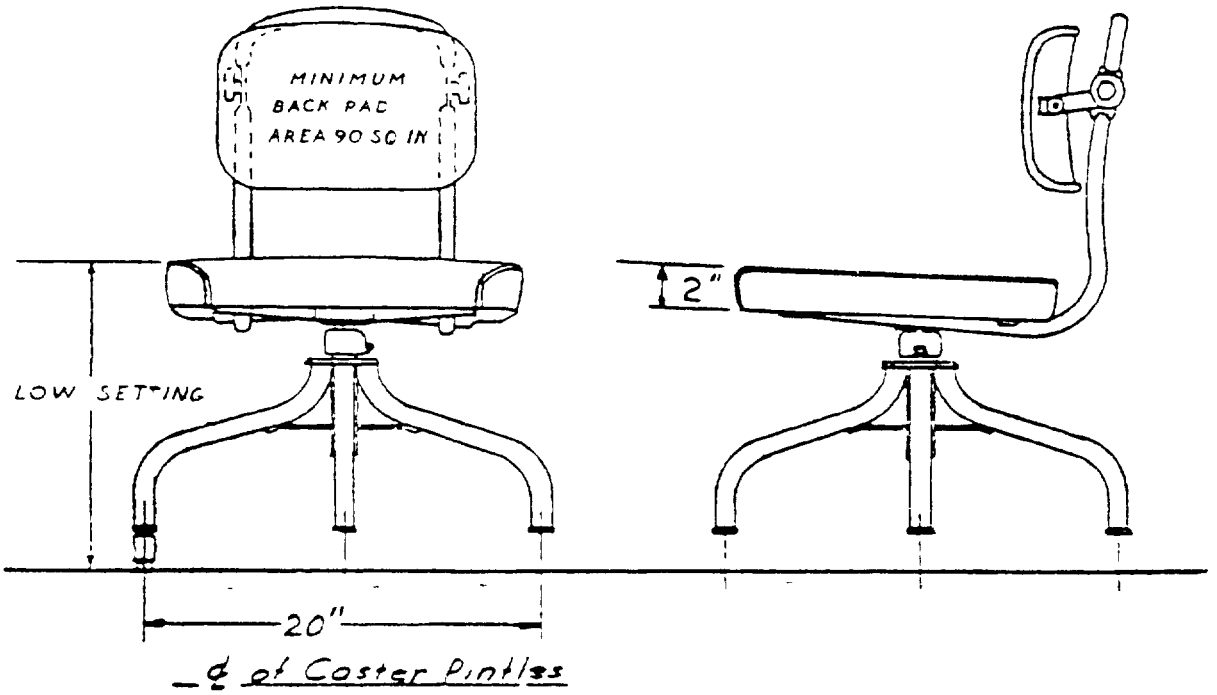

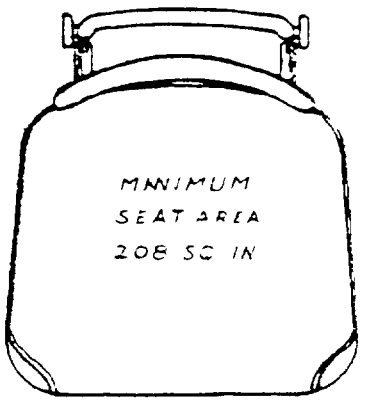


ALL DIMENSIONS ARE MINIMUM

CLASS 2

SIZE 1

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

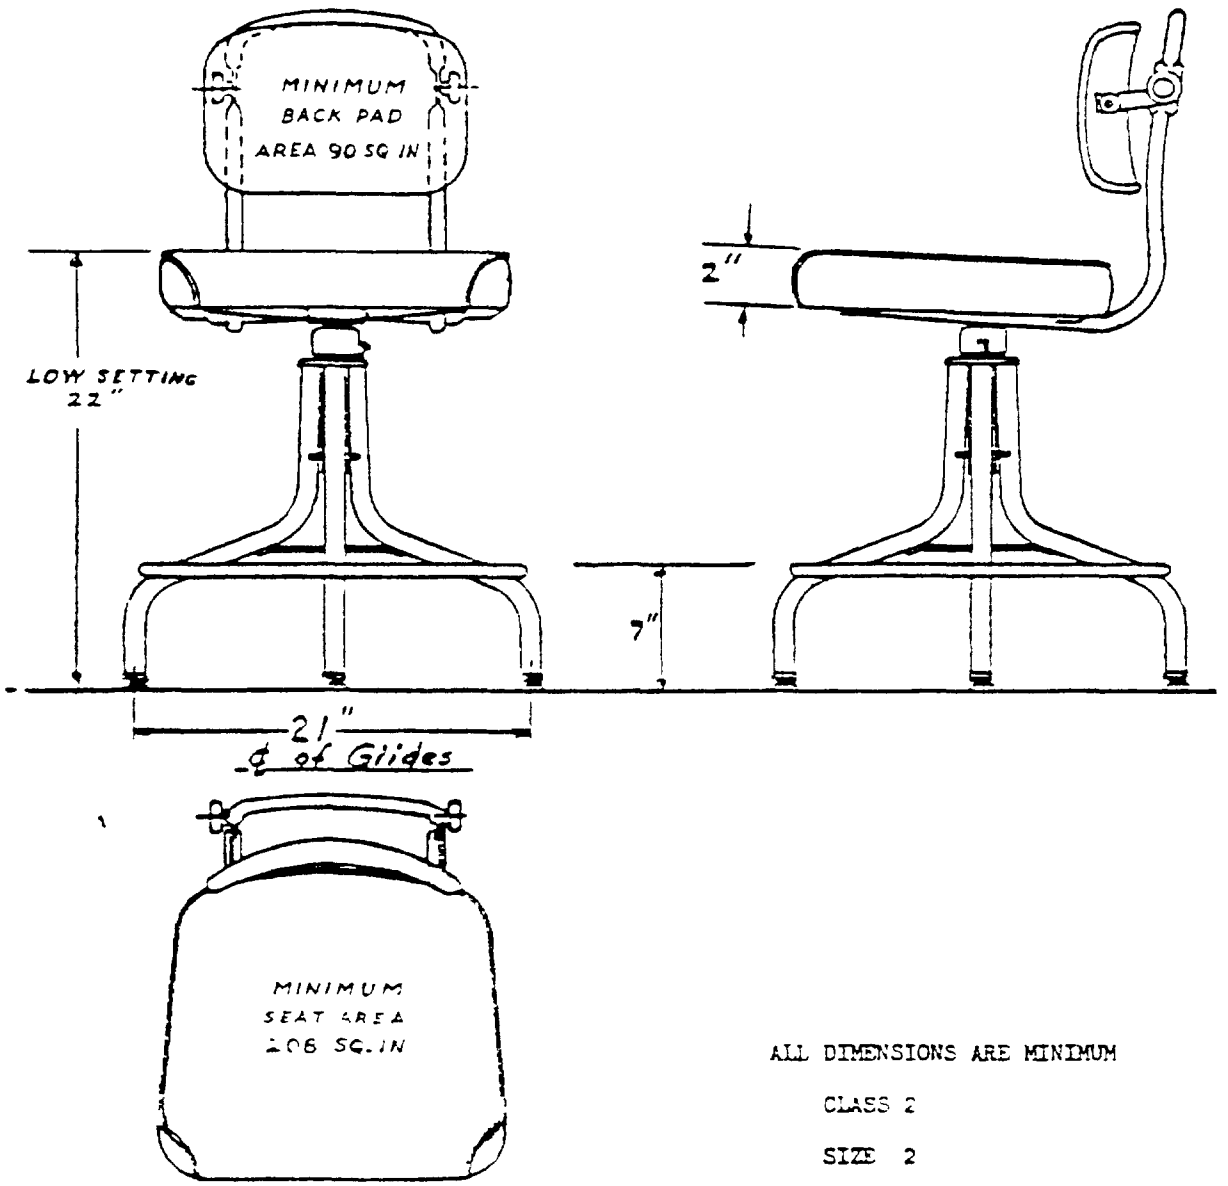


ALL DIMENSIONS ARE MINIMUM

CLASS 2

SIZE 2

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

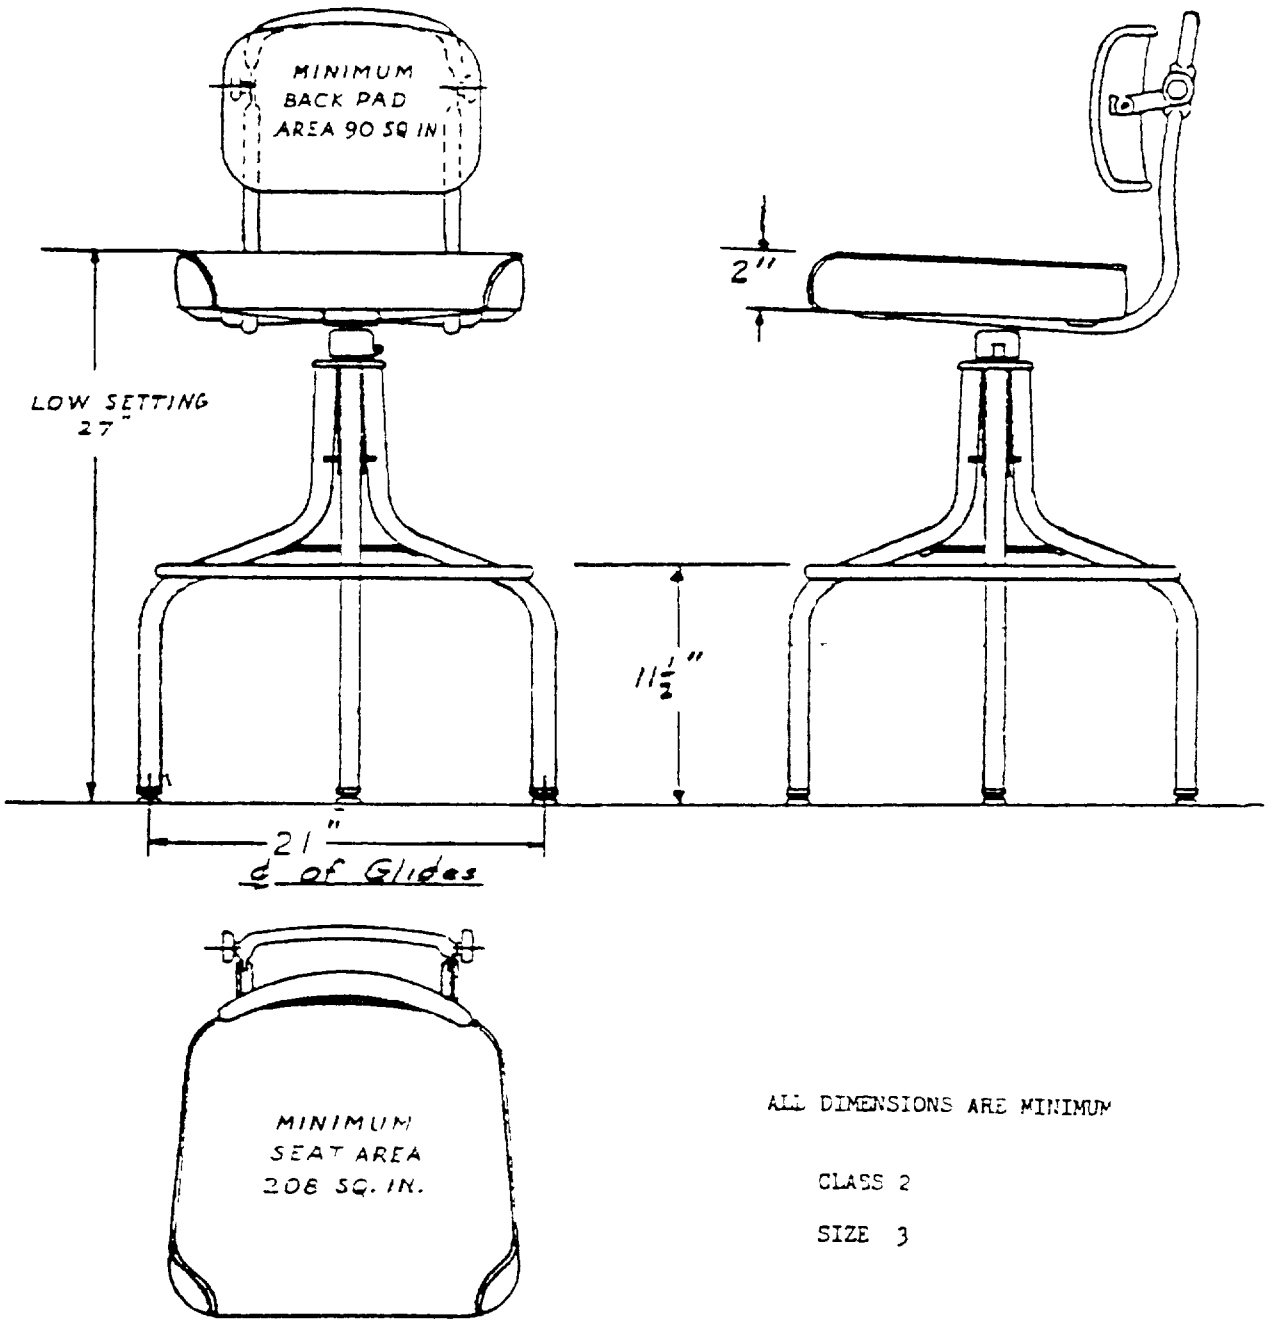

ALL DIMENSIONS ARE MINIMUM

CLASS 2

SIZE 3

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

21/22

ADDENDUM

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C

(Single copies of this specification and other, product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D C., Atlanta, Chicago, Kansas City Mo , Dallas, Denver San Francisco and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.