AA-0-00225(GSA-FSS)
AMENDMENT-7
September 29, 1976
SUPERSEDING
AMENDMENT-6
August 5, 1974

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, EXECUTIVE, COMBINATION METAL AND WOOD

SETTEE, SECTIONAL UNIT (WITHOUT ARMS)

This amendment was developed by the Federal Supply Service, General Services Administration, Washington, DC, 20406, based upon currently available technical information. The General Services Administration has authorized the use of this amendment as a part of Interim Federal Specification AA-0-00225(GSA-FSS) dated April 27, 1964.

PAGE 1

1.2.1, delete entire paragraph and substitute the following:

"1.2.1 Type, Sizes, and classes. The settees shall be of the following type, sizes, and classes, as specified (see 6.2):

Type I - Settee (without arms).
Size 1 - 28 inches wide.
Size 2 - 48 inches wide.

Class 1 - Leather.
Class 2 - Fabric.
Class 3 - Artificial leather."

2.1: Under Federal Specifications:

Delete: "CCC-T-191 - Textile Test Methods."
"MMM-A-100 - Adhesive, Animal Gelatine".
"MMM-A-125 - Adhesive, Casein Type, Water and Mold Resistant".
"MMM-A-188 - Adhesive, Urea-Resin Type (Liquid and Powder)".

Add: "CCC-A-680 - Artificial Leather (Cloth Coated), Vinyl Resin, Expanded Layer, (Upholstery)."

PAGE 2

Under Federal Standards:

Delete: "Fed. Std. No. 102 - Preservation, Packaging and Packing Levels."
Add: "Fed. Test Method Std. No. 191 - Textile Test Methods".

Under Military Specifications:

Add: "MIL-C-7769 - Cushion Material, Uncompressed Bound Fiber for Packaging."

Under Military Standards:

Line 3, delete "MIL-STD-130 - Indentification Marking for U.S. Military Property". Line 4, after "MIL-STD-171" delete remainder of line and substitute "Finishing of Metal and Wood Surfaces."

Under Commerical Standards:

Add "Product Standard PS 13-69, Uncored Slab Urethane Foam for Bedding and Furniture Construction."

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

2.2, below line 9, add the following:

"ASTM D 905 - Standard Method of Test for Strength Properties of Adhesive in Shear by Compression Loading."

"ASTM D 1564-71 - Testing Slab Flexible Urethane Foam.

2.2, delete from "Uniform Freight" etc. to "Illinois".

PAGE 3

3.2.1, Table I, under column titled "Kind of adhesives": Delete lines 1 through 8 and substitute "Any adhesive that will develop an average block shear strength of not less than 2,800 pounds per square inch (p.s.i.) when tested as specified in ASTM D 905 1/ 2/ 3/."

Below Table I, add the following footnotes:

"1/ The following modifications apply when testing casein-type adhesive. The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 p.s.i., and the test blocks shall be held under pressure for at least four hours.

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ Whenever a specimen fails at a load of less than 2,800 p.s.i. and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 p.s.i. or higher, the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 p.s.i."

Paragraph 3.2.2.1:

Line 2: Delete "one" and "Solid".

Line 3: After "hackberry" add the following:

"Unexposed component parts shall be constructed of either one piece of wood or from full-length glued-up stock. There shall be no open joints in the completed component parts. Tests specified in 4.5.1 shall be performed daily on a minimum of 5 representative glued-up component parts. Glue joints shall show at least 85 percent wood failure."

PAGE 4

Paragraph 3.2.4.1, line 1: Delete "or FF-S-00190(COM-NBS)".

Paragraph 3.2.4.3, line 8: Delete "lacquered" and substitute "liquor".

Add the following new paragraph 3.2.5.3:

3.2.5.3 Urethane foam. The prime polyurethane foam shall not contain any filler material, be Grade USU 34 or Grade USU 27 as specified and shall conform to the requirement herein when tested as specified in the applicable sections of ASTM Method D1564-71.

Physical properties of polyurethane foam

Property	Requirement	
	Seat 3-5 inches thick	Back
25 percent Indentation	34 ± 3	27 ± 3
Indentation load ratio (65 percent/25 percent); min.	1.9	1.9
Original Compression set 22 hr./158 degrees F., 90 percent deflection, percent max.	15%	15%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Physical properties of polyurethane foam

Property	Requirement: Seat 3-5 inches thick	Back
Steam Autoclave Test (condition B)		
Percent change in 25 percent comp. load deflect; percent max.	-20%	-20%
Comp. set 22 hrs./158 degrees F. 90 percent deflect; percent max.	20%	20%
Fatigue test (procedure A)		
25 percent indentation load ratio loss; percent max.	30%	30%
Thickness loss percent max.	5%	5%
Rebound Resilience		
prime polyurethane	45%	45%
Density, Pounds per Cu./ft.	3.0 ± .3	2.0 ± .2

NOTE: Preceding properties are based upon standard 4 inch slab stock, commercial tolerance allowed. (as specified in 3.3.2 of Product Standard PS-13-69)

Paragraph 3.2.6.3 Cord, jute welting. Delete entire paragraph and substitute the following:

"3.2.6.3 Weltless double-needle edge. The double-needle edger shall consist of single stitching of the boxing to the top and bottom panels of the cushion. The material shall be folded back from the single stitch seams. Then it shall be double stitched 3/8 inch apart equally speced from the center seam for a neat appearance. The back of the seam is reinforced with a cotton double-needle tape ½ inch wide. The tape is attached during the double-needle stitching. Stitches shall be 5 to 7 per inch."

PAGE 5

Paragraph 3.2.6.8, delete entire paragraph and substitute the following:

"3.2.6.8 Nonwoven fabric and wadding. The nonwoven fabric and wadding shall consist of new materials with or without a binder. The thickness shall be either ¼ or ½ inch (approximately) as specified herein. The minimum weight shall be 1¼ or 1-3/4 ounces per square foot for the ¼ and ½ inch thick nonwoven fabric and wadding, respectively, when tested as specified in method 5041 of Fed. Test Method Std. No. 191, except that the weight shall be reported in ounces per square foot to the nearest 0.1 ounce. The compression set shall be less than 10 percent of its measured thickness when tested as specified in 4.4.3.3 of MIL-C-7769."

Paragraph 3.2.6.10, line 2 delete "as specified (see 6.2)" and substitute the following:

Claret - FSS-X-00001
Ebony - FSS-X-00002
Aquamarine - FSS-X-00003
Saddle - FSS-X-00004
Gold Dust - FSS-X-00005
Yellow - FSS-X-00006
Pine Green - FSS-X-00007
Tangerine - FSS-X-00008 (see 6.2)."

Paragraph 3.2.6.11, line 4 delete "of CCC-T-191" and substitute "5100 of Fed. Test Method Std. No. 191".

Paragraph 3.2.6.11, line 6 delete "as specified (see 6.2)" and substitute the following:

Red Green - FSS-F-02001
Black - FSS-F-02002
Blue - FSS-F-02003
Beige - FSS-F-02004
Gold Brown - FSS-F-02005
Gold Blue - FSS-F-02006
Olive & Blue Green - FSS-F-02007
Brown, Orange, Blue - FSS-F-02008 (see 6.2)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.6.11, line 8 delete "Specification CCC-T-191" and substitute "Fed. Test Method Std. No. 191".

After paragraph 3.2.6.11, add the following new paragraph:

"3.2.6.12 Artificial leather. The artificial leather shall conform to class 2, treatments (a) 1 and (b) of CCC-A-680. The finish shall be that of simulated top grain leather and the color shall be:

Red	-	FSS-V-02001	Tan	-	FSS-V-02005
Black	-	FSS-V-02002	Gold	-	FSS-V-02006
Blue	-	FSS-V-02003	Mint Green	-	FSS-V-02007
Saddle	-	FSS-V-02004	Tangerine	-	FSS-V-02008 (see 6.2)".

After paragraph 3.2.6.12, add the following new paragraph:

"3.2.6.13 Spunbonded polyethylene and polypropylene sheet fabric. The spunbonded polyethylene sheet fabric shall weigh not less than 1.15 ounce per square yard when tested as specified in Method 5041 of Fed. Test Method Std. No 191. The Spunbonded polypropylene sheet fabric shall weigh not less than 2 ounces per square yard when tested as specified in Method 5041 of Fed. Test Method Std. No. 191."

Paragraph 3.2.7.1: Delete entire paragraph and substitute the following:

"3.2.7.1 Zinc plating. Zinc plating shall be in accordance with 5.1 (Inorganic finishes), finish number 1.9.2.1 of MIL-STD-171. The final finish shall be bright."

Paragraph 3.2.7.2: Delete entire paragraph and substitute the following:

"3.2.7.2 Chromium plating (satin). Chromium plating shall be in accordance with class 1, type II of QQ-C-320. The copper plus nickel undercoat on the steel base shall conform to class 1, type III (KS) of QQ-N-290. Alternatively, nickel only my be used for the undercoat in which case the minimum thickness shall be 0.001 inch. Chromium plating with discolored streaks or not uniform in appearance will not be accepted."

Paragraph 3.2.8, line 4: Delete "one" and substitute "15/16".

Paragraph 3.3.1.1: Dimensions.

Size 1 and size 2 height, delete "31-3/4" and substitute "33½".

Size 1 and size 2 depth, delete "30½" and substitute 31½".

After paragraph 3.3.1.1, add the following new paragraphs:

"3.3.1.2 Tolerances. The following tolerances will be permitted, except where otherwise indicated herein:

3.3.1.2.1 Overall Tolerances. Overall width, depth, and height-plus or minus ½ inch Height of Seat-Plus or minus ½ inch.

3.3.1.2.2 Component tolerances. Dimension of any solid wood part plus or minus 1/16 inch Dimension of any metal part plus or minus 1/8 inch".

Paragraph 3.3.2 Wood Frame Construction for Seat and Backs.

Line 2: Delete "solid".

Line 5: Delete "1½ and substitute "1-3/4".

Line 6: Delete "1½ amd substitute "1-3/4".

Line 6: Delete "2½" and substitute "3½".

Line 7: Delete "2½" and substitute "3½".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

shall be affixed under the top of the stand and shall not be the label

Line 9, beginning with the sentence "wood strips" delete the entire paragraph and substitute the following "wood strips 1-1/16 inch thick by 2 inches wide shall be glued and secured to front, back and side rails with No. 10 woodscrews 1-3/4 inches long. The corners of all seat frames shall be reinforced by diagonal corner braces. The braces shall be accurately fitted, glued and secured by not less than two No. 9 screws in each end and set at right angles to the frame members and penetrating the frame not less than 3/4 of an inch. Frames over 36 inches shall have at least one cross stretcher each for the seat and back."

Paragraph 3.3.4 Application of webbing for seat frame. Delete entire paragraph and substitute the following:

"3.3.4 Application of webbing for seat frame. "Webbing, specified in 3.2.6.9, shall be interlaced using 5 strips front-to-back and 5 strips side-to-side on size 1, and 9 strips front-to-back and 5 strips side-to-side on size 2." The webbing shall be stapled to the inside of the frame with not less than four staples as specified in 3.2.4.3.

Paragraph 3.3.4.1: Delete entire paragraph and substitute the following:

"3.3.4.1 Application of inside back webbing. Webbing, specified in 3.2.6.9, shall be interlaced using 5 strips top-to-bottom and 4 strips side-to-side on size 1 and 9 strips top-to-bottom and 4 strips side-to-side on size 2. The webbing shall be secured to the top and center rails and back post wood strips by staples. There shall be a minimum of three staples, specified in 3.2.4.3, in each webbing end."

Paragraph 3.3.5 Seat and back desk padding. Delete entire paragraph and substitute the following: Dacron-wrapped polyurethane seat and back cushions. Seat cushion filling shall consist of 3 inch polyurethane foam as specified and wrapped on top and three sides with 1 inch thick dacron. All dacron shall be bonded to the foam with adhesive. Back cushion filling shall be 2½ inch polyurethane foam as specified and wrapped in 1 inch thick dacron on the face of the cushion.

Paragraph 3.3.6.1 Upholstery covering. Delete lines 1 and 2 and substitute the following: "The upholstering material for the settees shall be as follows (see 1.2.1 and 6.2):

Class 1 - Settees shall be upholstered in leather specified in 3.2.6.10. One sewn seam will be permitted on the outside back and top back and top back border. Skived seams formed by the use of adhesive may be used under the following conditions:

a. The number of such seams shall be kept to the minimum necessary for the pattern.

b. The skived seam shall be practically invisible, including color compatibility of adjoining pieces, when viewed from a distance of twelve feet.

c. The strength of the skived seams shall be such that they will withstand normal upholstering application without evidence of peeling or separation.

Class 2 - Settees shall be upholstered in fabric specified in 3.2.6.11.

Class 3 - Settees shall be upholstered in artificial leather specified in 3.2.6.12."

Paragraph 3.3.6.2 Seat cushion. Delete entire paragraph and substitute the following:

"The cushion cover shall be weltless double-needle edge construction as specified in 3.2.6.3 and be buttonless biscuit tufts. Size 1 shall have 4 buttonless biscuit tufts and size 2 shall have 8 buttonless biscuit tufts. The cover shall be applied over the polyurethane wrapped as specified in 3.3.5 and shall be attached to a two inch by ¼ inch plywood frame placed inside the seat cushion and stapled through the rubber webbing from underneath into the plywood frame. A 3/16 inch polyurethane foam slab stack shall be applied to the side and front rails before tacking or stapling the cover to the seat frame."

Paragraph 3.3.6.3 Back cushion. Delete entire paragraph and substitute the following:

"The back cushion cover shall be applied over polyurethane wrapped as specified in 3.3.5 with buttonless biscuit tufts and weltless double-needle edge construction, and applied to the back frame in the same manner as the seat cushion as specified in 3.3.6.2.

Paragraph 3.3.6.4 Outside back. Delete first sentence entirely. Line 2, after 3.2.6.6 add "or spundonded polyethylene sheet fabric as specified in 3.2.6.12."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Third sentence, delete entire sentence and substitute "A layer of cotton felt, specified in 3.2.6.7, or ½ inch thick nonwoven fabric and wadding, specified in 3.2.6.8, shall be applied over the burlap, or spunbonded polyethylene or polypropylene sheet fabric as specified in 3.2.6.12."

At end of paragraph, add "Alternatively, cardboard tacking strip may be used in lieu of metal tacking strip across the top only."

Paragraph 3.3.6.5, line 2, after "down" and "Alternatively, black spunbonded polyethylene or polypropylene sheet fabric, specified in 3.2.6.12 may be used in lieu of cambric."

Paragraph 3.3.7 Metal base frame. Delete entire paragraph and substitute the following: "Each settee shall be furnished with a metal base consisting of legs 1 inch square fabricated of the steel specified in 3.2.8. The rails and stretchers shall be 3/4 by 1½ inch rectangular 16 gauge. The 1 inch square legs shall be continuously fusion welded to the tubular rails along the intersection of the joint of the rails and the inside corner of the leg. In addition the leg shall be continuously fusion welded to the lower (3/4 inch wide) ends of the rails. The metal base shall be provided with 3 screw holes along the width and 4 along the depth for attaching the base to the seat rails. The exposed joints of the junction of the face ends of the rails and inside faces of the legs may be either continuously fusion welded or brazed. All steel components exposed to view in normal use of this item shall be chrome plated and satin finished as specified in 3.2.7.2. Each leg shall be tapped to receive glides specified in 3.2.8 and having a threaded stem not less than 3/16 inch.

Paragraph 3.3.8. Delete entire paragraph and substitute the following:

"3.3.8 Indentification marking. Each settee shall permanently and legibly marked in an inconspicuous place with the specification number, Federal Stock Number, contract number, date of manufacture, and the manufacturer's name or trademark, so that the source of supply may be readily determined.

Section 4 delete "SAMPLING, INSPECTION, AND TEST PROCEDURES" and substitute "QUALITY ASSURANCE PROVISIONS".

Paragraph 4.1, 4.1.1, 4.1.2, and 4.1.3 Delete in their entirety and substitute the following:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements."

After paragraph 4.4.3.2, add the following new paragraph:

"4.5 Test Method.

4.5.1 Edge-glued joint test. A chisel test on edge-glued joints shall be conducted as follows:

A. Place a sample component with an edge-glued joint end wise on a bench or other solid object.

B. Take a chisel, wider than the thickness of the member being tested, and carefully align it on the glue joint on the upper end of the member.

C. With the chisel being held firmly in a vertical position, strike it sharply with a mallet or hammer so as to split the member longitudinally. Care should be exercised to insure that the force of the blow is directed to the glue line. The resulting split should reveal a failure of the glue line or in the area adjacent to it.

D. Inspect the glue joint area to determine the kind of failure and estimate the amount of wood failure.

Paragraph 5.1, delete entire paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 6.2, delete entire paragraph and substitute the following:

"6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, size, and class required (see 1.2.1).
(c) Upholstery cover required, if other than specified in (b).
(d) When preproduction samples not required (see 3.1).
(e) Color of leather upholstery when applicable (see 3.2.6.10).
(f) Color of fabric upholstery when applicable (see 3.2.6.11).
(g) Color of artificial leather when applicable (see 3.2.6.12).
(h) Level of packaging and packing and packing required (see 5.2 and 5.3).
(i) Marking requirements (see 5.4)."

Paragraph 6.4 and 6.4.1, delete in their entirety.

Delete figures 1, 2, and 3 and substitute new figures 1, 2, and 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

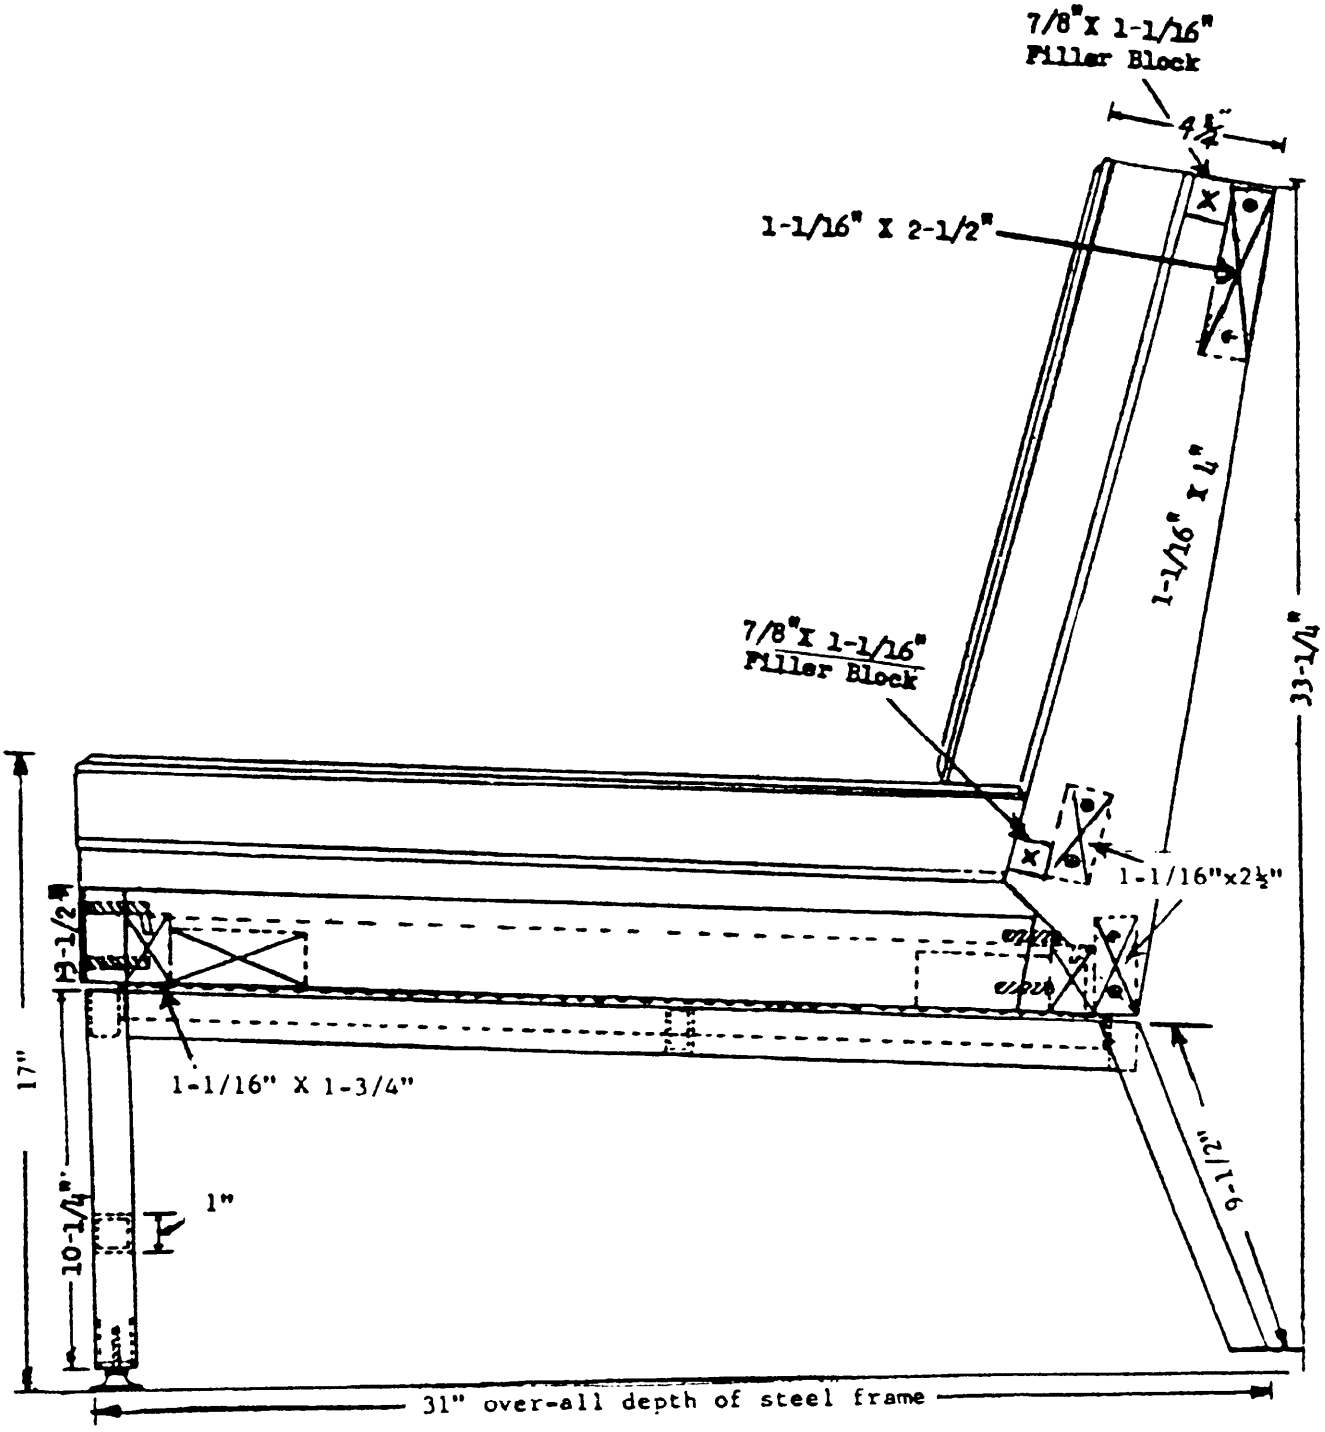


Figure 1. Settee, Sectional, Executive Office

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

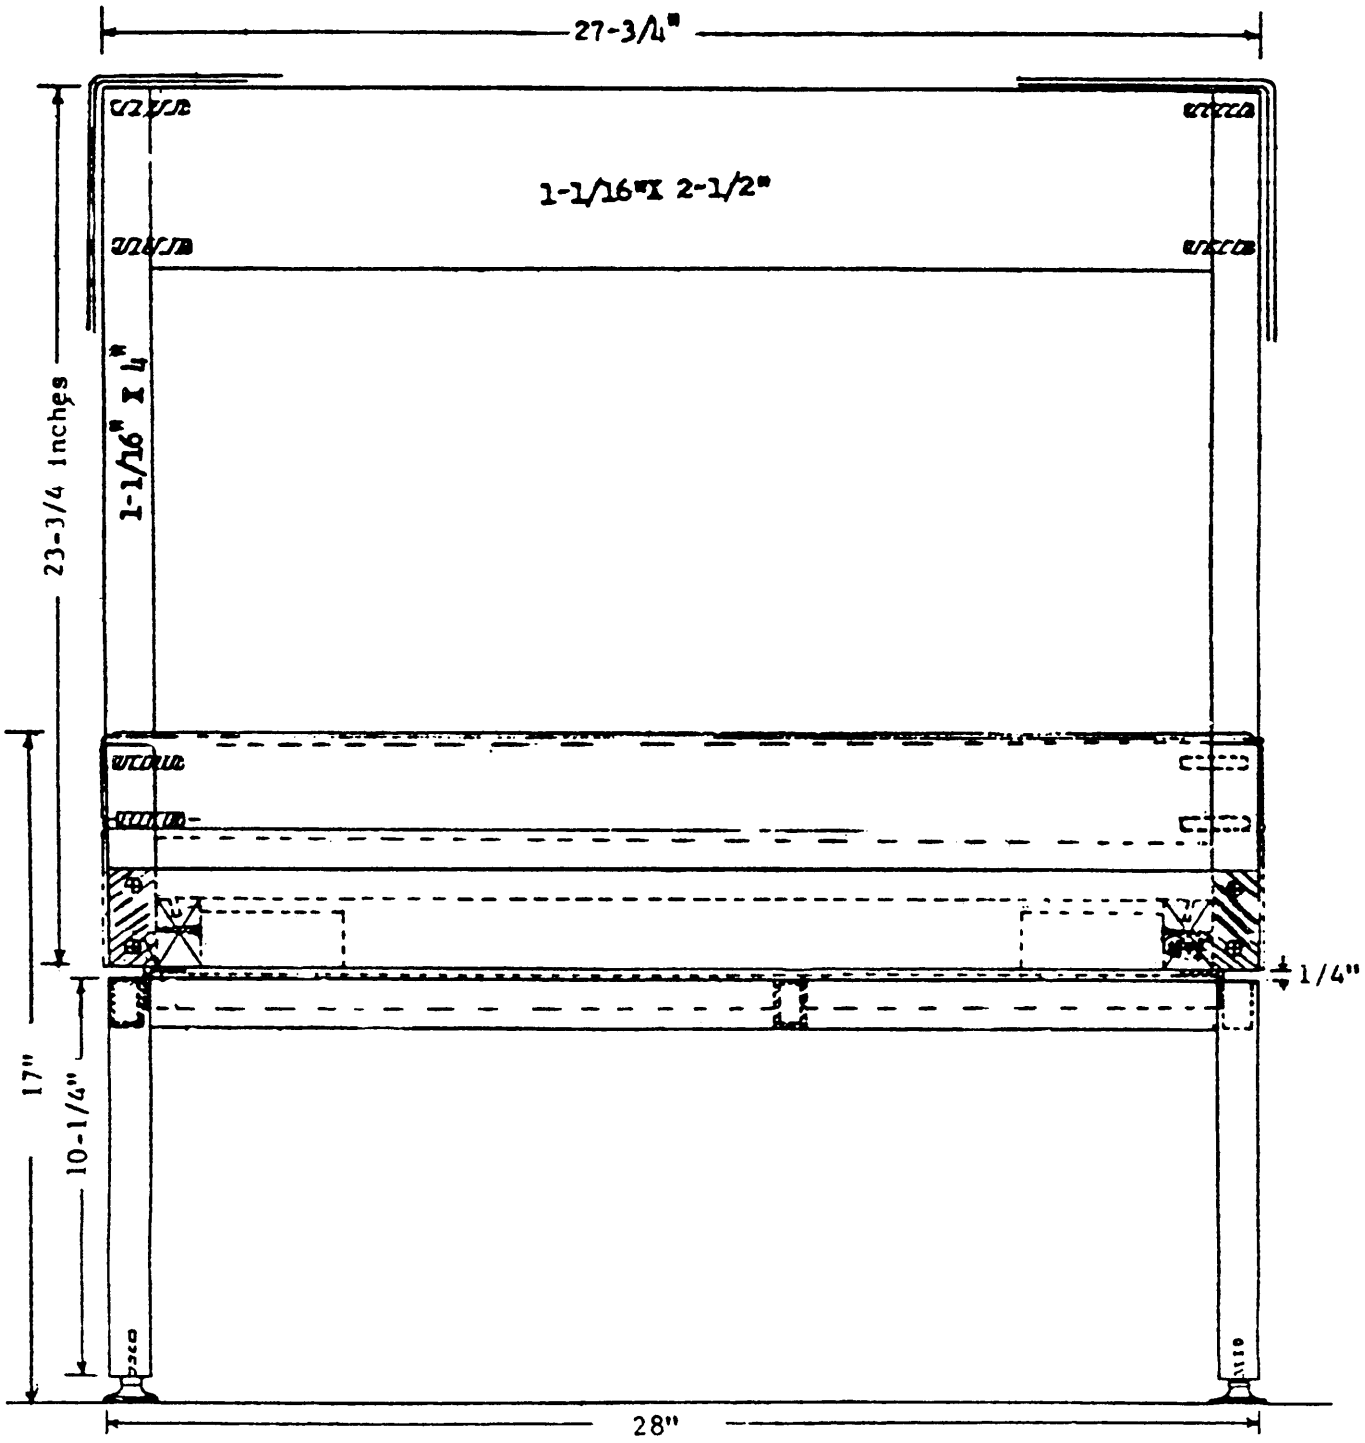


Figure 2. Settee, Sectional, Executive Office

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

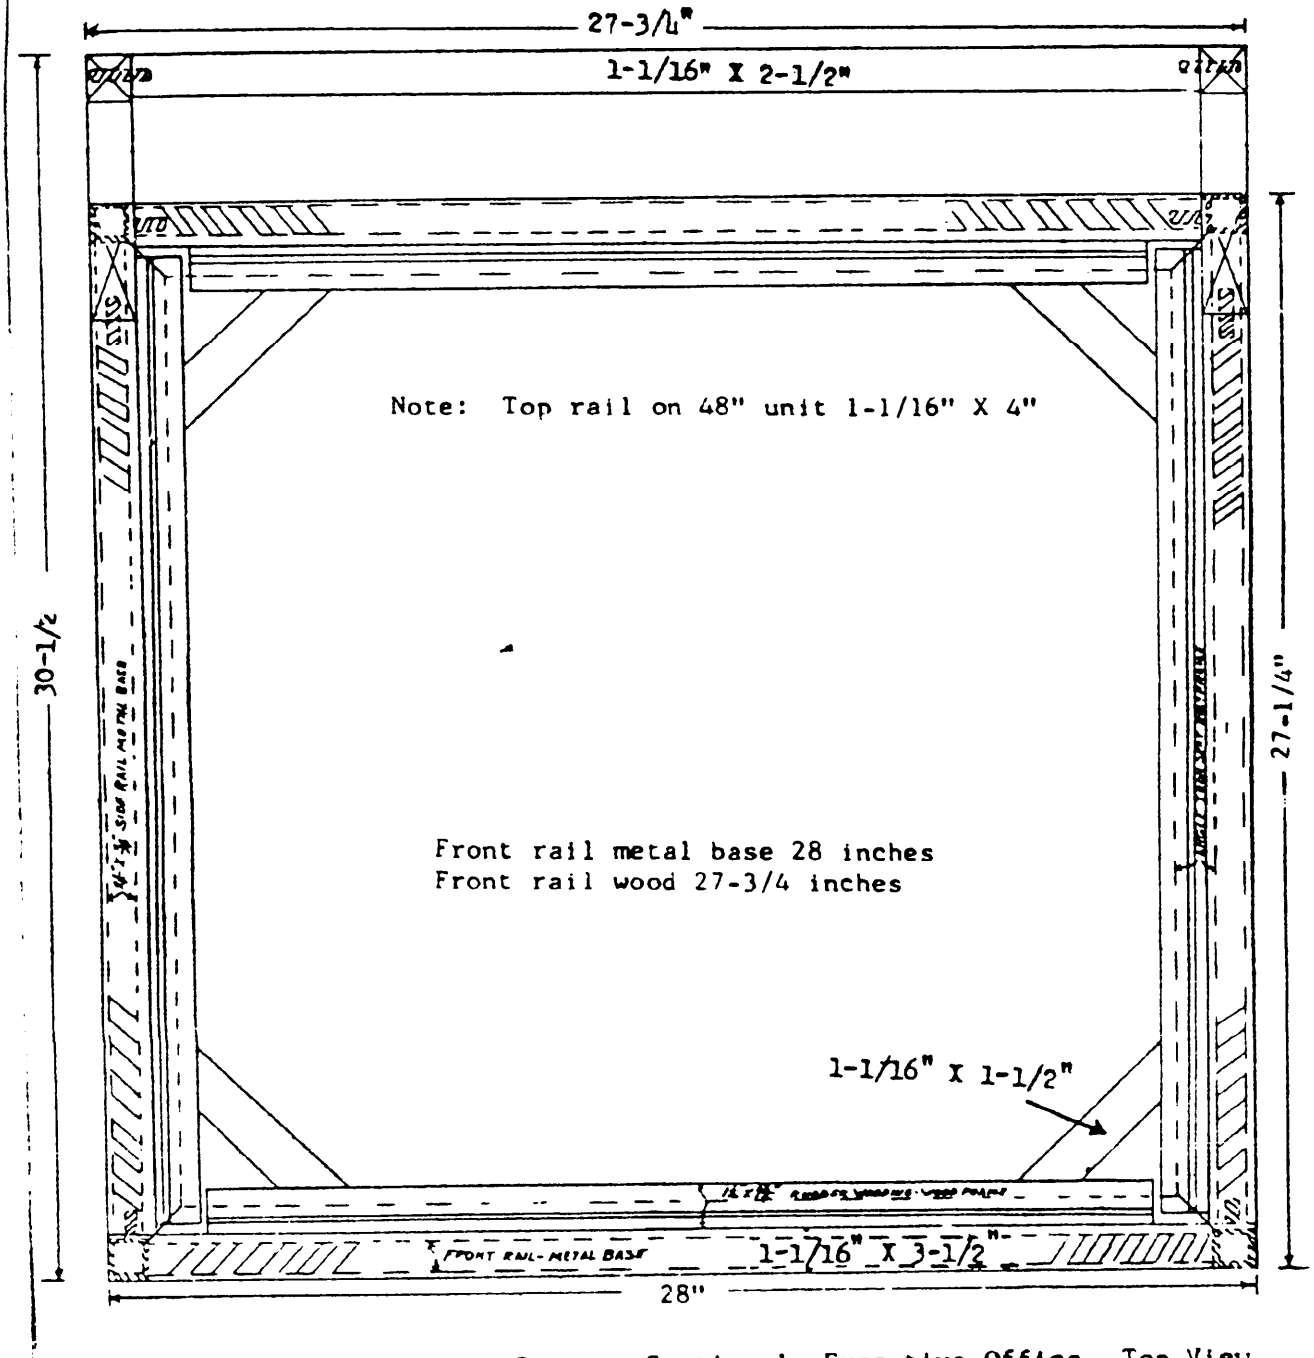


Figure 3. Settee, Sectional, Executive Office - Top View

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.