[METRIC-SI]
AA-O-00230/3D (GSA-FSS)
July 2, 1993
INTERIM REVISION
FED. SPEC. AA-O-230/3C
July 21, 1989

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: COSTUMER, EXECUTIVE TYPE, WOOD, TRADITIONAL (DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the Furniture Commodity Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-230/3a, dated October 7, 1964.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for executive office knockdown (KD) costumer. General requirements and other information pertaining to the costumer will be found in AA-O-230/GEN , Office furniture, Executive, Type, Wood, Traditional (General Specification).

1.2 Classification. The costumer covered by this specification shall be of one type and size as shown in the figures.

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards, of the issue in effect on date of invitation for bids, which form a part of this specification, are listed in 2.1 of AA-O-00230/GEN hereinafter called the General Specification (G.S).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 (G.S).

3. REQUIREMENTS

3.1 Materials. Materials used in construction of the costumer shall be as shown specified in the applicable paragraphs in the General Specification (see table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Materials index

Component	AA-O-00230/GEN Par No.	Component	AA-O-00230/GEN Par No.
Adhesive	3.1.2 Gen. Spec.	Wood seasoning	3.1.4.3 G.S.
Lacquer	3.1.3 G.S.	Face hardware	3.1.5.1 G.S.
Wood Species	3.1.4.1 G.S.	Nail glides	3.1.5.2. G.S.
Solid wood requirements	3.1.4.2 G.S.	Other hardware	3.1.5.3 G.S.

3.2 Construction. General construction requirements for costumer components shall be as specified in the applicable paragraphs in the General Specification (see table II).

TABLE II. Construction requirements index

Component	AA-O-00230/GEN Par No.	Component	AA-O-00230/GEN Par No.
Tolerances	3.2.2 Gen. Spec.	Dowels	3.2.5 G.S.
Joinery	3.2.4 G.S.	Built-up stock	3.2.6 G.S.

3.2.1 Design. The design of the costumer shall be as shown in figure 1.

3.2.2 Shaft. The shaft shall be made up of two parts, joined at the middle with a minimum M-7 x 89 mm hanger bolt and minimum 19 mm long internal and external threaded insert as shown in figure 2. Both parts shall be made either of solid or built-up stock which shall be carefully matched with other parts of the costumer for color and wood grain pattern. The shaft shall be reeded as shown in figure 1 and 5. Four hat and coat hooks (see 3.1.5.1 G.S and figure 5) shall be attached to the top of the shaft with two 22 mm brass screws and positioned as shown in figure 1.

3.2.3 Base. The base shall consist of two crossed supports, four filler pieces, four braces, and four feet. The crossed supports shall be 540 mm L x 63 mm W x 32 mm T, and lap-joined at the center. The filler pieces shall be securely glued to the cross supports at their intersection. The assembly shall be shaped and molded as shown in figures 1, 2, 3, 4 and 5. The braces shall be shaped and molded as shown in figures 3 and 4. The braces shall be glued and doweled or tenoned to the shaft, and glued and screwed to the cross supports. The feet shall be turned as shown in figure 4 and shall be glued and doweled to the cross supports. A 9 mm x 76 mm lag screw, with flat washer shall be used to secure the base to the shaft.

3.3 Finishing. See 3.3.1 G.S., 3.3.2 G.S., and 3.3.3 G.S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.4 Identification marking. See 3.4 G.S.

3.5 Workmanship. See 3.5 G.S.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in section 4 of the General Specification and as specified herein.

4.2 Assembly examination. An examination of the assembly of the costumer shall be made. The lot size shall be units of costumers. Defects shall be recorded in accordance with table III. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G.S. (Note: Unassembled constumers selected by the Government inspector shall be fully assembled by the contractor. The inspector shall witness the assembly and shall observe the ease of assembly and fit of components.)

TABLE III. Assembly defects

Examine	Defects
Costumer assembly	Two members do not fit flush to each other. Members will not tighten together, i.e., threads stripped, threaded insert loose. Shaft not straight when assembled.


5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. Each costumer shall be furnished K.D. and shall be packaged, packed and marked as specified in the solication.


6. NOTES

6.1 Intended use. The executive office, traditional costumer is designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agenices. They should compliment the traditional decor of any executive area when used with other pieces within the group.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

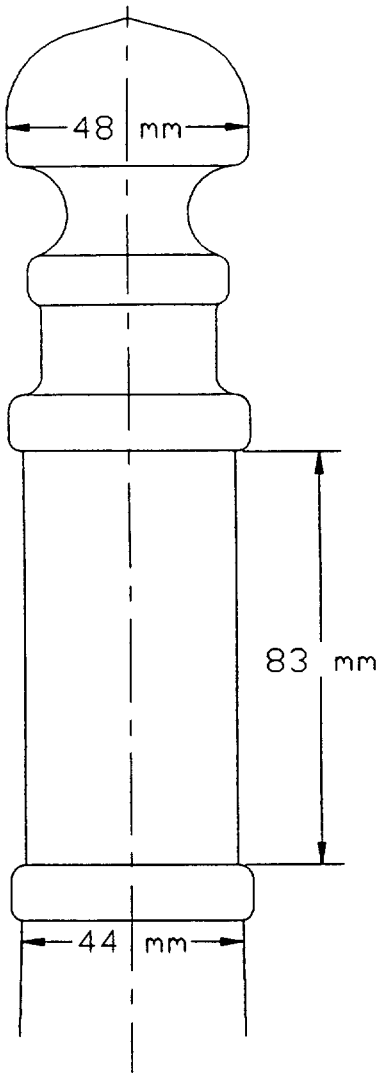

DETAIL OF TOP

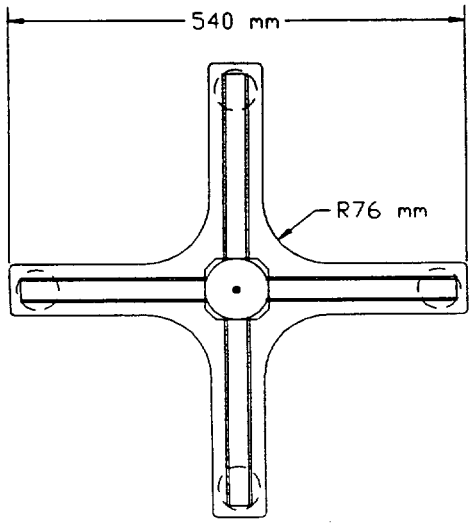

VIEW C-C

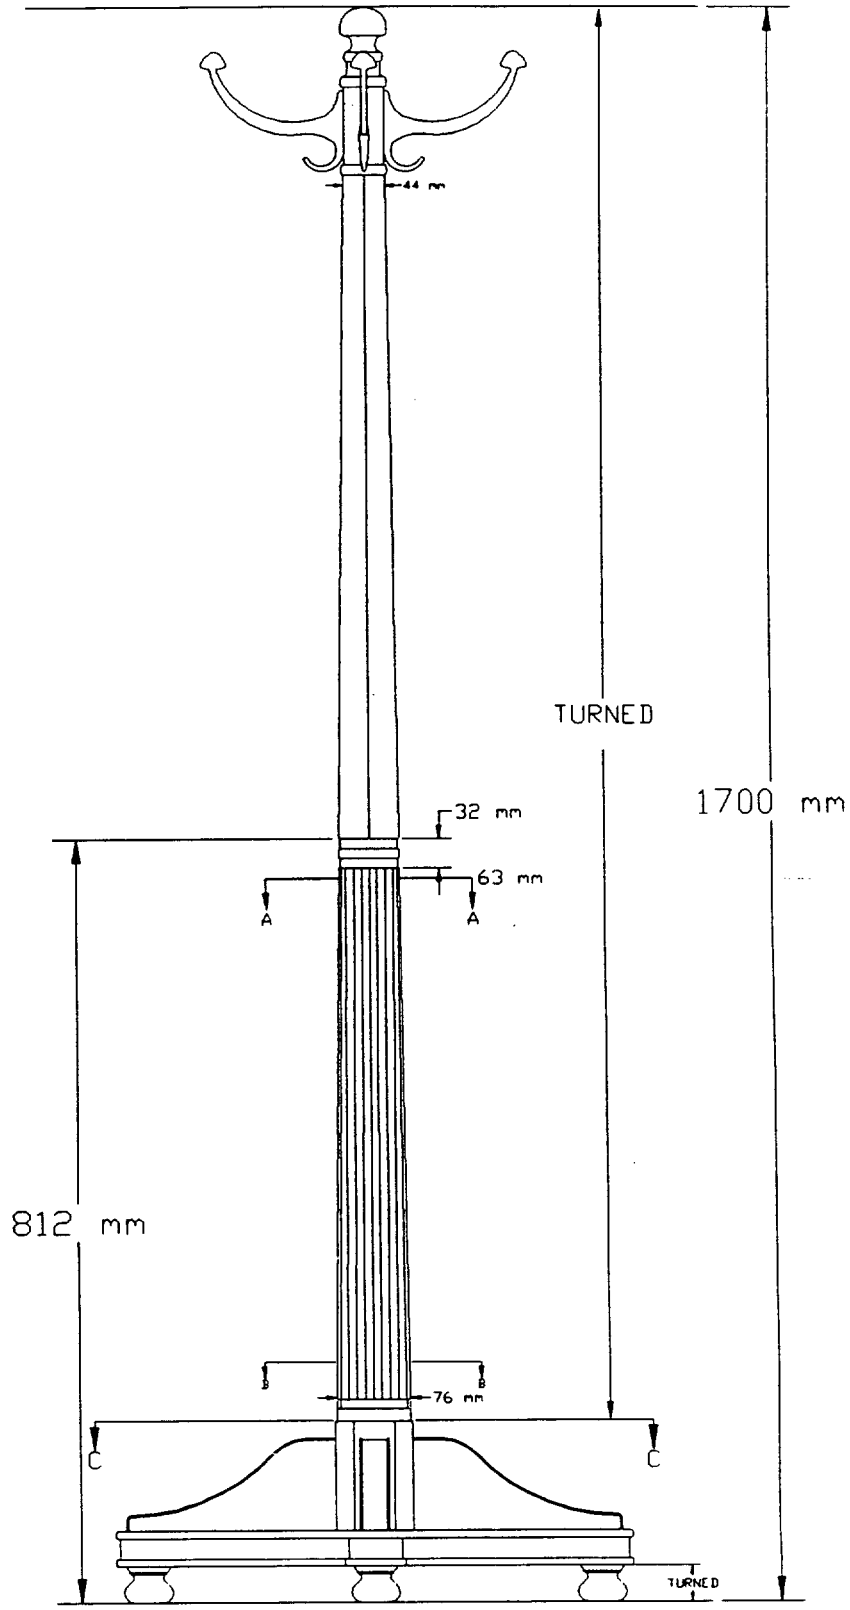


FIGURE 1 COSTUMER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

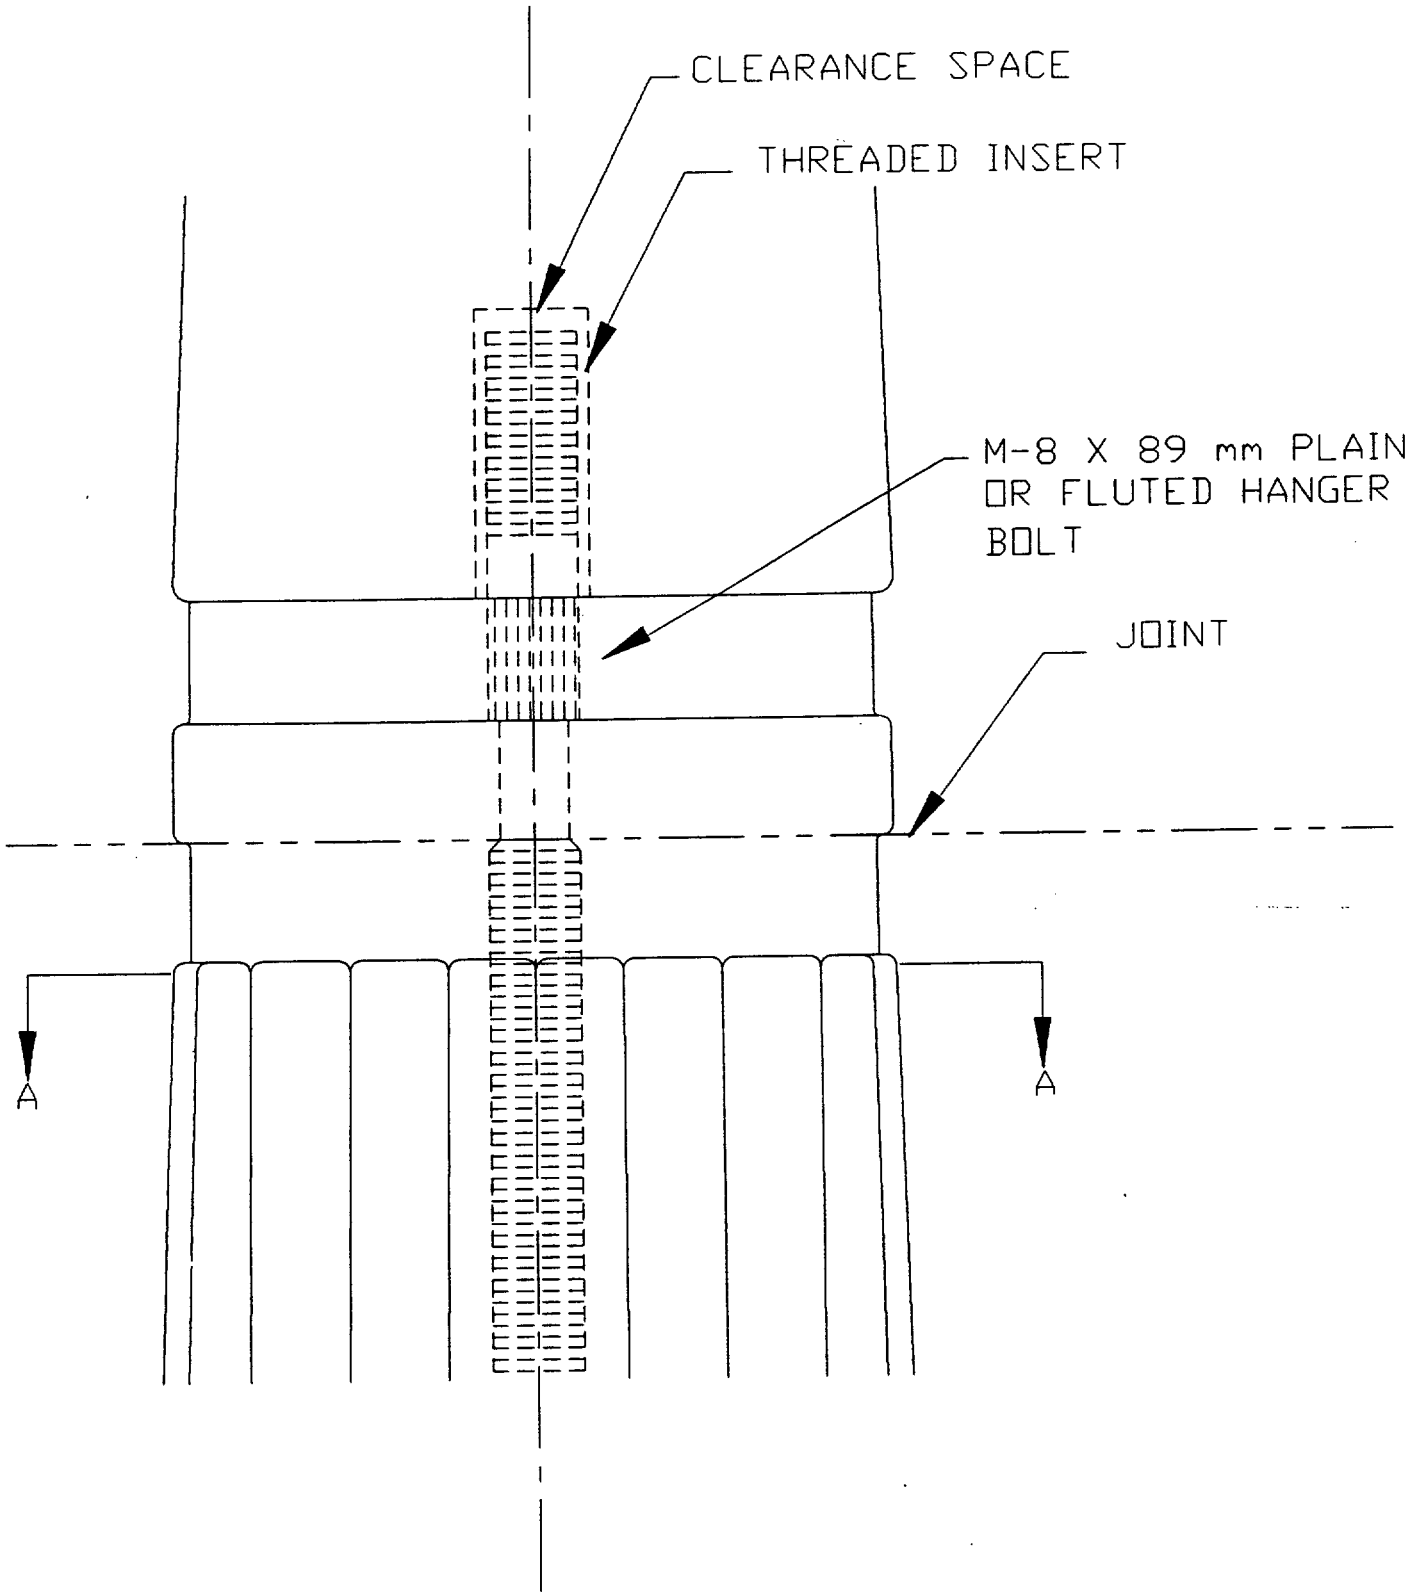


FIGURE 2
CENTER JOINT SECTION OF SHAFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

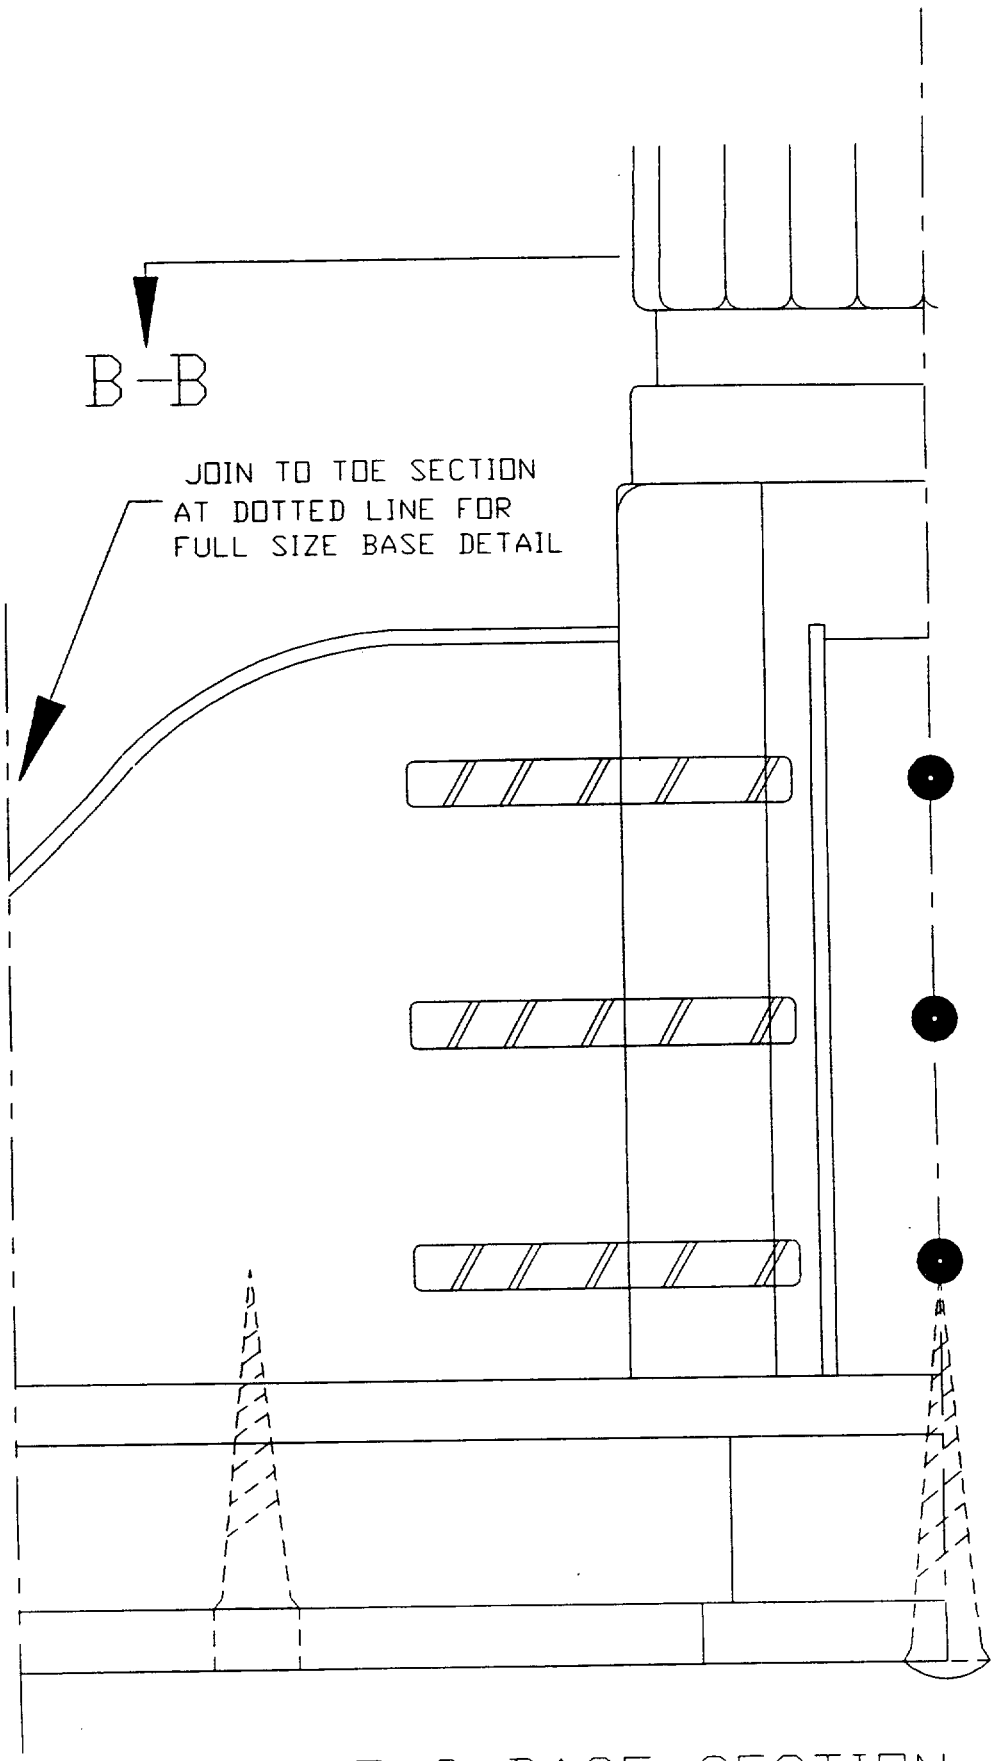


FIGURE 3 BASE SECTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

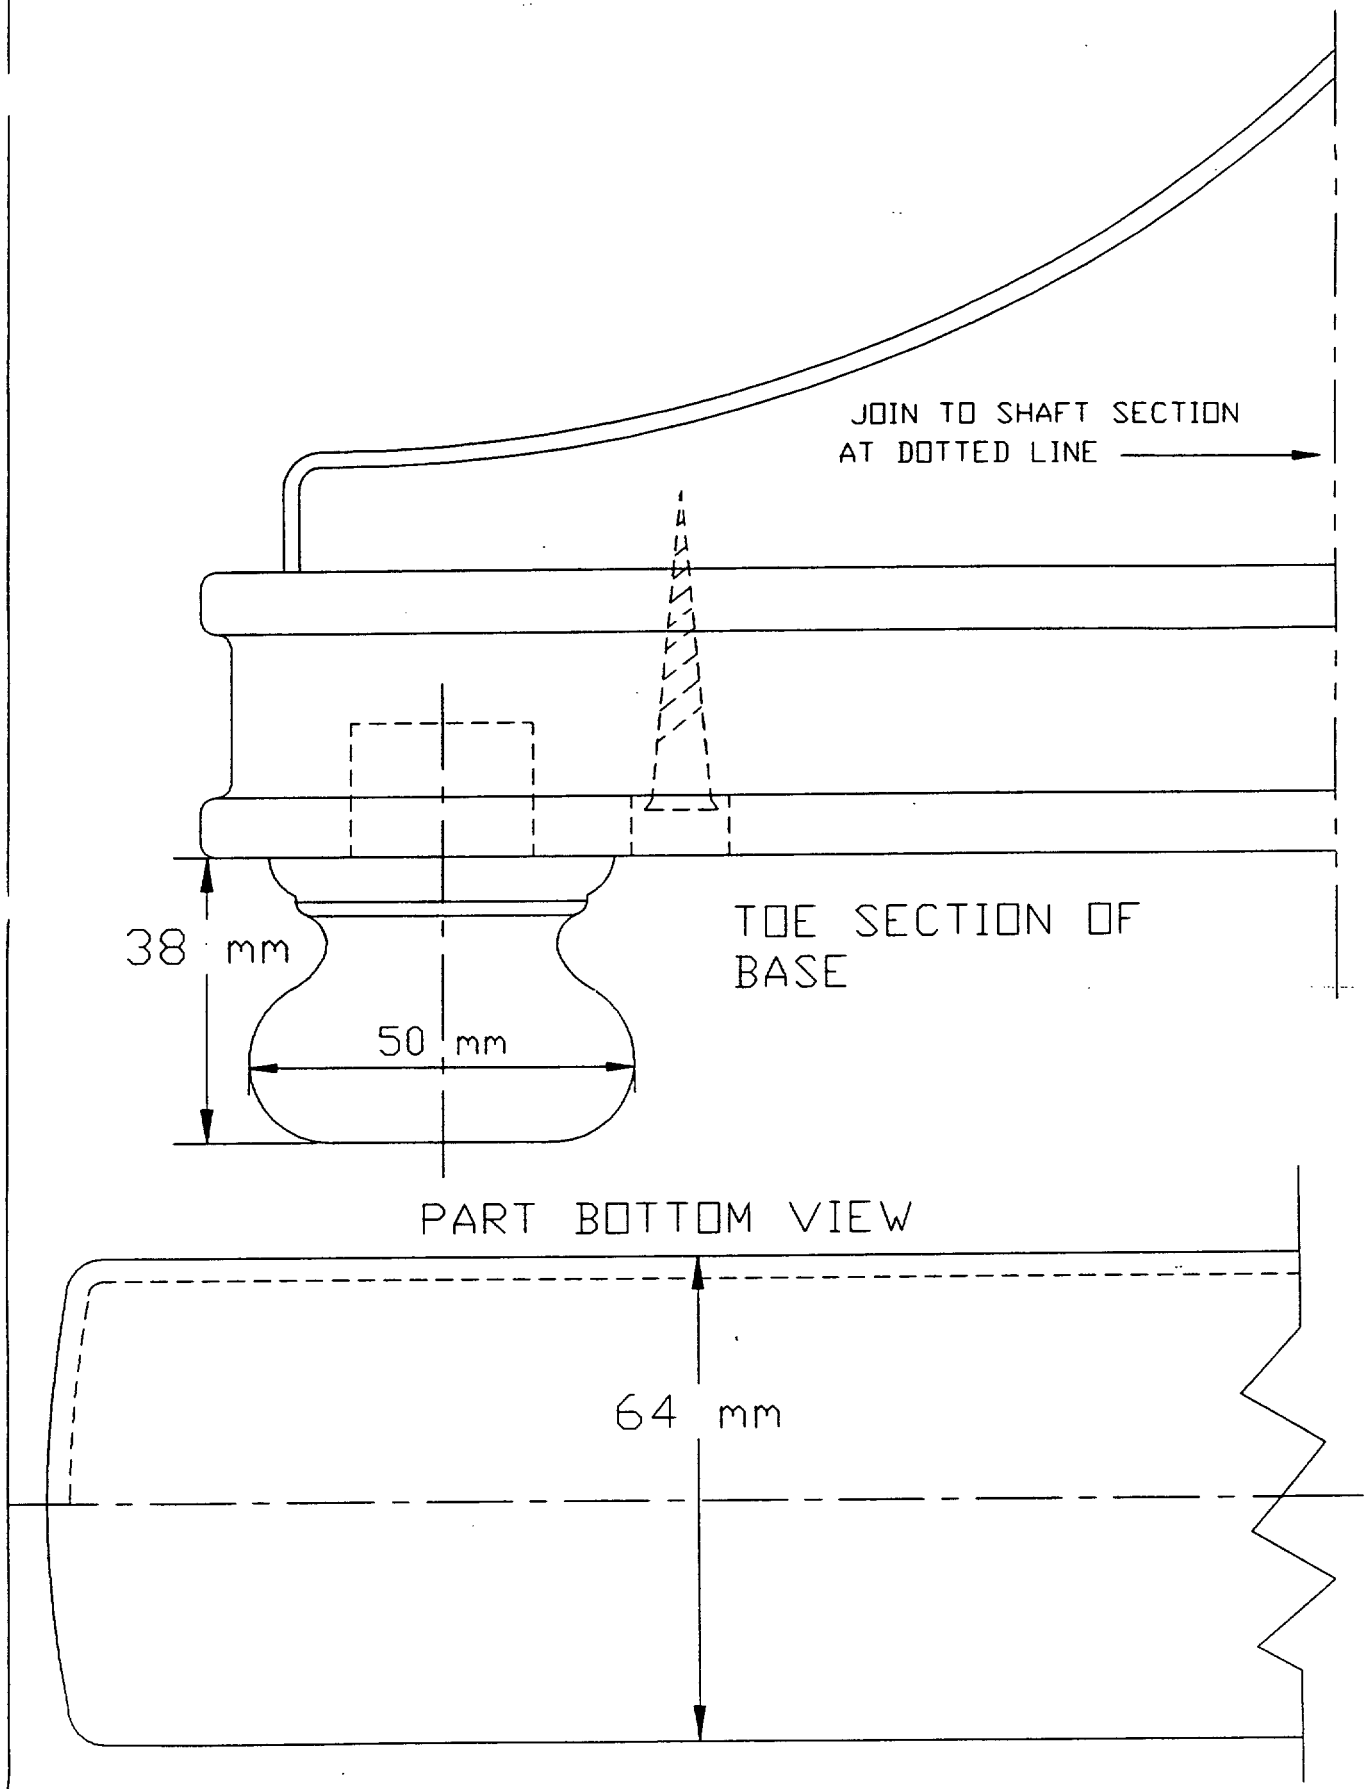
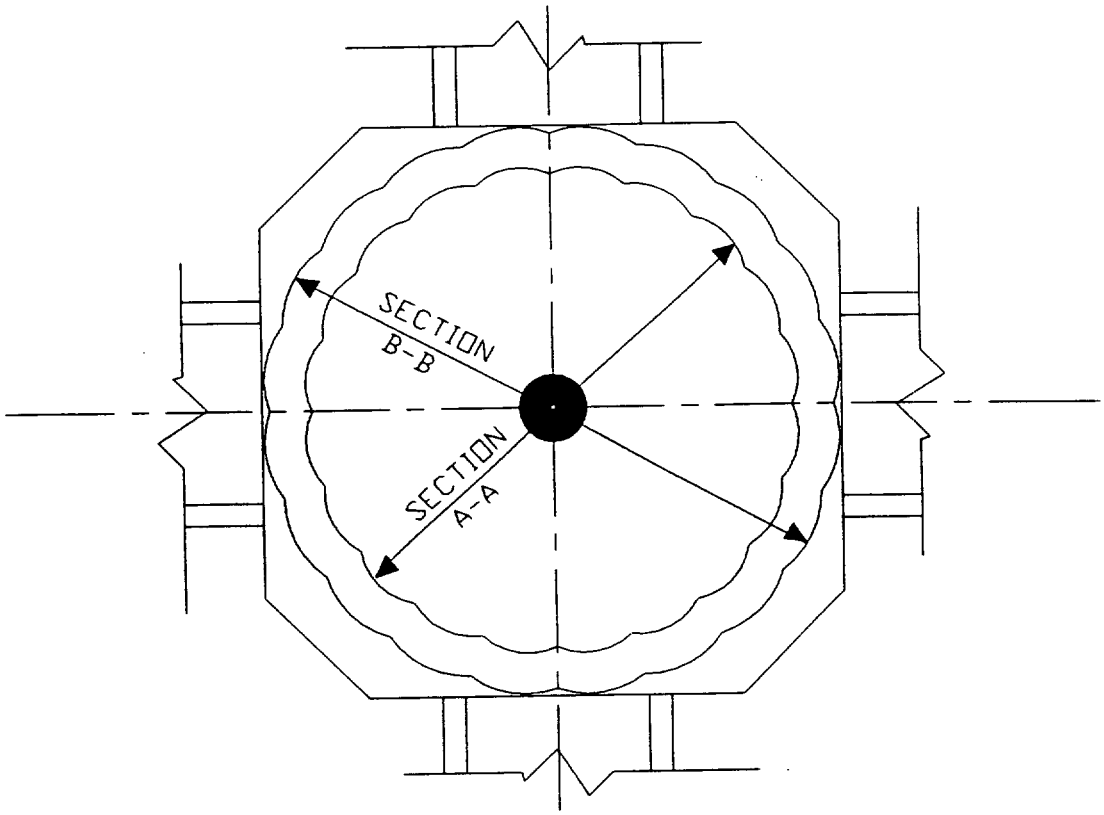


FIGURE 4 BASE SECTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.



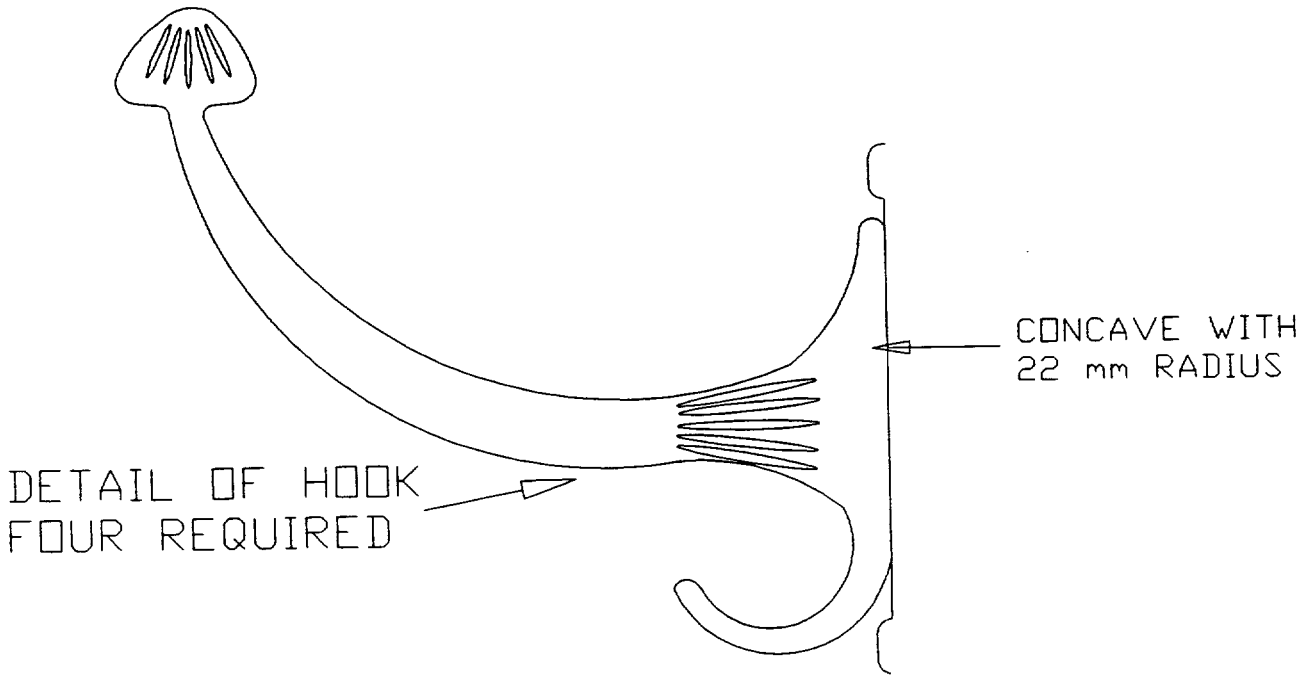


FIGURE 5 SHAFT CROSS SECTION AND HOOK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.