INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE TABLES, EXECUTIVE TYPE, WOOD, TRADITIONAL (DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-230/5a, dated October 7, 1964

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements in traditional design for executive office tables. General requirements and other information pertaining to the tables will be found in AA-O-00230/GEN, Office Furniture, Executive Type, Wood, Traditional (General Specification).

1.2 Classification. The executive office tables covered by this specification shall be of the following types, classes, and sizes as specified (see 6.4).

1.2.1 Types, classes, and sizes

Type I - Occasional tables.
- Class 1 - Telephone table (with fixed shelf and one drawer), 26 inches by 26 inches by 26-1/2 inches high.
- Class 2 - End table.
  - Size 1 - 26 inches by 14 inches by 22 inches high (without fixed shelf).
  - Size 2 - 26 inches by 18 inches by 22 inches high (with fixed shelf).
- Class 3 - Coffee table, 60 inches by 20 inches by 16 inches high.

Type II - Conference tables
- Class 1
  - Size 1 - 48 inches by 30 inches by 30 inches high (one drawer).
  - Size 2 - 72 inches by 36 inches by 30 inches high (two drawers).
- Class 2 - Four drawers.
  - Size 1 - 84 inches by 42 inches by 30 inches high.
  - Size 2 - 96 inches by 48 inches by 30 inches high.
  - Size 3 - 120 inches by 48 inches by 30 inches high.
  - Size 4 - 144 inches by 48 inches by 30 inches high.

Note The table heights do not include glides.

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards, of the issues in effect, on date of invitation for bids, which form a part of this specification, will be found in 2.1 of AA-O-00230/GEN hereinafter called the General Specification (G.S.).

2.2 Other publications The documents which form a part of this specification are listed in 2.2 (G S.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials used in the construction of the tables shall be as specified in the applicable paragraphs in the General Specification (see table I)

TABLE I. Materials index

Component	AA-O-00230/GEN Par. No.	Component	AA-O-00230/GEN Par No
Adhesive	3.1.1 Gen. Spec	Particleboard	3.1 4.6 G.S.
Wood species	3.1 4.1 G.S.	Face hardware	3.1.5.1 G.S.
Solid wood requirements	3.1.4.2 G.S.	Nail glides	3.1 5.2.1 G.S
Wood seasoning	3.1 4.3 G.S.	Adjustable glides, regular	3.1.5 2.2 G S
Hardwood plywood	3.1 4.4 G.S.	Adjustable glides, HD	3 1 5.2.3 G.S.
Good grade (1) veneer	3.1.4.5 G.S.	Other hardware	3.1.5.4 G.S.

3 1 1 Glides Glides for all type I tables shall be nail type (3 1 5 2 1 G.S) Adjustable glides, regular type (3.1 5.2.2 G.S) shall be used on type II, class 1 tables. Adjustable glides, HD type (3 1 5 2.3 G.S.) shall be used on type II, class 2 tables

3.1.2. Hanger bolts, nuts, and washers Hanger bolts for type I tables shall be 1/4 inch minimum diameter and for type II tables, 3/8 inch minimum diameter. All hanger bolts shall penetrate not less than one-half the diagonal thickness of the leg Washers shall be minimum 1/16 inch thick by 7/8 inch in diameter Nuts shall be square or hex type

3.1.3 Bumper strip. Bumper strip shall be moulded of resilient vinyl in the shape shown in figure 12 Color shall match walnut finish as closely as possible

3.1.4 Ferrules. The ferrules shall be case brass in the designs and sizes shown in figure 5 and other applicable figures Height of ferrules shall be in proportion to leg size. All edges shall be slightly eased Ferrules shall fit legs tightly with no play and shall be secured with two oval-headed brass screws on the inside of the leg.

3 2 Construction. General construction requirements for tables shall be as specified in the applicable paragraphs of the General Specification (see table II)

TABLE II Construction requirements index

Requirement	AA-O-00230/GEN Par No	Requirement	AA-O-00230/GEN Par. No.
Tolerances	3.2.2 Gen. Spec.	Tops	3 2 6 G.S
Direction of grain	3.2 3 G.S.	Dust shields and bottoms	3 2 8 G S
Joinery	3.2.4 G S	Built-up stock	3 2 13 G S
Drawer construction	3 2.5 G.S.		

3 2.1 Tops. Tops shall be minimum 5-ply hardwood plywood (3 1.4.4 G.S.) with solid moulded edges and corners as shown in applicable figures Thickness and dimensions of tops and width of boarder veneers for each table shall be as specified in table III Grain direction of top veneers shall be as indicated in applicable figures.

3 2 2 Legs. Legs shall be either solid or built up stock (3.2 13 G.S.) A panel of highly figured walnut or highly figured African or Hondural mahogany, 1/28 inch thick minimum, shall be glued to the two exposed sides of the legs as shown in the applicable figures. All corner legs shall be reeded on the two outside faces as shown in the applicable figures with the number of reeds as indicated in table III All legs shall be milled to fit inside the brass ferrules (3.1 4) The number of legs required for each table and their dimensions shall be as specified in table III

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.3 Drawers. Materials and construction shall conform to 3.2.5 G.S. unless otherwise specified herein. Drawer fronts shall have applied moulded edges as shown in figures 9 and 10. The back, sides, and front shall all be the same height and flush at the top edges. Top edge of drawer sides shall be coved to within 1 1/2 inches of the front and back end. Drawer bottom shall be minimum 3-ply (3.1.4 4 G S) 1/4 inch thick Each drawer shall be fitted with a convenience tray of the design shown in figure 9. The tray shall be neatly fitted and float on wood blocks screwed to the drawer bottom. Quantity of drawers required for each table and their dimensions shall be as specified in table III.

3.2.4 Drawer bearer frame. Each drawer shall be supported by rails and frame members as illustrated in applicable figures. A dust panel (3.2.8 G.S.), completely enclosing the opening under the drawer, shall be tenoned into frame members.

3.2.5 Knock-down (KD) construction. All tables, except type I, class 1 and type I, class 2, size 2 shall be KD construction. All pilot holes shall be accurately drilled to match bolt or screw holes in adjoining parts. Hanger bolts shall be screwed into the legs with an adequate amount of the bolt protruding to enable it to penetrate through the nut a minimum of 1/8 inch and firmly secure the adjoining member. Washers and nuts shall be placed on each bolt. All knock-down table legs shall have one hanger bolt except type II, class 2, which shall have two in each leg

3.3 Detailed construction. The tables covered by this specification shall be constructed as shown in the applicable figures and as specified herein and be of the dimensions for tops, legs, and drawers as shown in table III.

3.3.1 Type I, class 1 table The type I, class 1 tables shall be as shown in figure 1 and as specified herein

3.3.1.1 Tops. See 3.2.1.

3.3.1.2 Aprons. The aprons shall be 3/4-inch thick, 5-ply plywood (3.1 4.4 G.S.), 3 1/4 inches wide. The aprons shall be joined to the legs with mortise and tenon joints. The mortise shall be not less than 1/2 inch deep, and the tenons shall be not less than one-third the thickness of the rails or less than 1/4 inch. The aprons shall be secured to the top by four steel angle brackets, fastened by 3/4-inch No. 10 screws. Each side of the angle bracket shall be not less than 3/4 inch long by 1/8 inch thick. Alternatively the aprons shall be secured to the top with 3/4- by 3/4-inch solid wood cleats (3 1.4 1 G.S). The cleats shall be screwed two ways into the apron and into the top and shall be thoroughly glued to the apron Rails shall be not less than 3/4 inch thick and shall be grooved for the dust panel End rails shall be 2 1/4 inches wide and shall support the drawer. The front and back rails shall be 1 5/8 inches wide. The end and back rails shall be secured to the aprons by screws as shown in figure 2, and the front rail shall be tenoned into the legs. Alternatively the rails and dust panel may be omitted and the drawer supported by an upper shelf. The upper shelf shall be 3/4-inch thick, 5-ply plywood (3 1.4.4 G.S.). The upper shelf shall be secured to the aprons by the same method as rails and as shown in figure 2. All rails (shelf) shall be faced with a moulding as shown in figure 2 which shall be mitred around the legs.

3.3.1.3 Drawer. See 3.2.3.

3.3.1.4 Drawer side guides. The drawer side guides shall be solid wood (3.1.4.1 G.S.). The guides shall be not less than 3/8 inch thick by 9/16 inch wide and shall extend along the drawer side not less than two-thirds of the depth of the drawer, and shall be secured to the bearer by glue and nails

3.3.1 5 Fixed shelf. The fixed shelf for the type I, class 1 and the type I, class 2, size 2 tables shall be not less than 3/4 inch thick and be of the same construction as the tops except that the border veneers will not be required. The edges of the shelf shall be shaped as shown in figure 2. The shelf shall be housed into the legs not less than 1/2 inch and secured by counter-sunk screws into the leg from the underside of the shelf The shelf opening shall be 4 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.1.6 Legs. See 3.2.2.

3.3.2 Type I, class 2 tables. The type I, class 2 tables shall be as shown in figure 4 and constructed as herein specified.

3.3.2.1 Tops See 3.2.1.

3.3.2.2 Aprons. The aprons and method of securing them to the top shall be as specified in 3.3.1 2 except the width of the apron shall be 2 1/2 inches and the moulding shall be applied to the bottom edge of the apron as shown in figure 6. The aprons shall butt-join the legs and a corner brace shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than 3/4 inch thick and of the same width as the aprons and shall be secured to the aprons by glue and screws. The screws shall be not less than 1 1/4 inch No. 8, and shall be set at right angles to the aprons.

3.3.2.3 Fixed shelf (size 2 table). See 3.3.1.5.

3.3.2.4 Legs Legs shall conform to 3.2.2 The legs shall be secured to the aprons by a hanger bolt (3.1.2).

3 3 3 Type I, class 3 table The type I, class 3 table shall be as shown (in part) in figure 7 and constructed as herein specified.

3.3.3.1 Tops. See 3 2.1.

3 3 3 2 Aprons. Aprons and method of attaching them to the top shall be as specified in 3.3 I.2 except that the width of the apron shall be 3 inches, and the moulding shall be applied to the bottom edge of the apron as shown in figure 6. The aprons shall butt-join the legs and a corner brace shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than 3/4 inch thick.. The corner brace shall be the same width as the aprons and shall be secured to the aprons with glue and not less than two screws at each joint. The screws shall be not less than 1 1/4 inch by No. 8 and shall be set at right angle to the aprons.

3.3.3.3 Legs. Legs shall conform to 3.2.2. The legs shall be secured to the aprons by a hanger bolt (3.1.2).

3.3 4 Type II, class 1. The type II, class 1 tables shall be as shown in figure 8 and as specified herein.

3 3 4 1 Tops. See 3.2.1.

3.3 4 2 Aprons. Aprons shall be 3/4-inch thick hardwood plywood (3.1.4.4 G.S.). The front and back aprons shall be 3 1/4 inches wide and shall have a 2-1/8-inch wide by 3/4-inch thick wood rail and moulding below the apron as shown in figure 10. The rail shall be secured to the apron with 1 1/2-inch No. 8 countersunk screws. The end aprons shall be 4 inches wide and shall have a moulding applied to the lower edge of the apron face as shown in figure 10. The apron shall butt join the legs without tenons. Corner braces shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than 3/4 inch thick and the same width as the aprons and shall be secured to the aprons by glue and not less than two 1 1/4-inch No. 8 screws at each joint. The aprons shall be secured to the top with No. 10 screws counterbored at an angle into the aprons or with angle brackets (3.3.1.2). Screws shall penetrate the top 7/8 inch minimum and shall be spaced not over 16 inches apart.

3 3 4.3 Drawers. See 3.2.3.

3 3 4 4 Drawer bearer frame. Frame shall conform to figures 8, 9, and 10 and paragraph 3.2.4 Stretchers shall be tenoned 3/8 inch deep into the aprons and reinforced with full-length glue blocks. Stretchers shall be attached to the top in the same manner as the aprons. Drawer bearers shall be 3/4 inch thick by 2 inches wide Each drawer bearer shall be glued to the drawer stretcher and reinforced with three 1 1/2-inch No 8 countersunk screws Drawers shall be aligned with wood side guides (3 3 1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Dimensions (in inches)

Type Class Size	Top								Legs				Drawers			
					Overhang (from legs)					Size				Face		Depth not less than
	Ht.	W.	D.	Th	Fr & Bk.	Ends	Length of corner chamfer	Border	No. Req	Top	Bottom	No. Reeds	No. Req.	Width	Height	
Type I																
Class 1	26 1/2	26	26	3/4	5/8	5/8	-	1 1/2	4	1 3/4	1	3	1	21 1/4	3 1/4	18
Class 2																
Size 1	22	26	14	3/4	5/8	5/8	-	1 1/2	4	1 5/8	1	3	-	-	-	-
Size 2	22	26	18	3/4	5/8	5/8	-	1 1/2	4	1 5/8	1	3	-	-	-	-
Class 3	16	60	20	1 1/8	7/8	1 3/4	1 3/8	2	4	2	1	3	-	-	-	-
Type II																
Class 1																
Size 1	30	48	30	1 1/8	7/8	1 3/4	1 3/4	3	4	2 1/4	1 1/2	4	1	22	3 1/4	20
Size 2	30	72	36	1 1/8	1 1/4	2 1/2	2	3	4	2 1/2	1 3/4	4	2	22	3 1/4	16
Class 2																
Size 1	30	84	42	1 3/8	1 1/2	3	2 1/2	3 1/2	5	2 3/4	2	5	4	22	3 1/4	16
Size 2	30	96	48	1 3/8	1 3/4	3	2 1/2	3 1/2	5	2 3/4	2	5	4	22	3 1/4	18
Size 3	30	120	48	1 3/8	2 1/4	4	3	4	5	3	2 1/4	6	4	22	3 1/4	18
Size 4	30	144	48	1 3/8	2 1/4	4	3	4	5	3	2 1/4	6	4	22	3 1/4	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.4.5 Legs. Legs shall conform to 3.2 2. The legs shall be secured to the aprons with a hanger bolt (3.1.2).

3.3.5 Type II, class 2. The type II, class 2 (four drawer) tables shall be as shown in figures 11 and 12.

3.3 5.1 Tops. See 3.2.1.

3.3 5 2 Aprons. The aprons, method of attachment to top, and corner braces shall be as specified in 3.3 4.2 except that all aprons shall be 3 1/4 inches wide and the rail shall be applied to aprons on all four sides. The decorative moulding shall be omitted, and a bumper strip shall be applied to the rail as shown in figure 12. The rail and bumper strip shall butt-join the legs

3.3 5 3 Drawers See 3.2 3.

3.3 5.4 Drawer bearer frame and center stretchers. Two center stretchers shall run lengthwise and be spaced to receive and secure the center leg. The center stretchers shall have spacer blocks as shown in figure 11 and shall be tenoned 3/8 inch deep into the aprons and reinforced with full length glue blocks. Drawer stretchers shall be as specified in 3 3.4 4 and shall be tenoned into the center stretchers and reinforced with full length glue blocks Center and drawer stretchers shall be secured to the top in the same manner as the aprons TThe drawer bearers, side guides, and dust frame shall conform to 3 3 4 4.

3.3.5 5 Legs The four corner legs shall conform to 3.2 2 The legs shall be secured to the aprons with a hanger bolt (3 1 2) The center leg shall be reeded (see table III) on the faces towards the drawers The center leg shall fit between the two center stretchers and shall be secured to the stretchers with two 3/8-inch bolts in staggered positions.

3.4 Finishing See 3.3.1 G S , 3.3.2 G.S , and 3 3 G S.

3.5 Identification marking. See 3 4 G.S.

3.6 Workmanship. See 3.5 G S

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in section 4 of the General Specification and as specified herein

4.2 Assembly examination. An examination of the assembly of the KD tables shall be made. The lot size shall be units of tables. Defects shall be recorded in accordance with table IV Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G.S

TABLE IV Assembly defects

Examine	Defects
Attachment of legs to table	Hanger bolt does not align properly with hole in corner brace. Fit of leg with top and aprons not tight Legs not perpendicular to aprons.

5. PREPARATION FOR DELIVERY

5 1 Packaging, packing, and marking Tables shall be furnished in set-up knocked-down condition as specified in 3 3.10 Each table shall be packaged, packed and marked in accordance with PPP-P-1877 Packaging shall be level A, B, or C as specified (see 6.2) packing shall be level A, B, or C as specified (see 6 2) and marking shall be for civil agencies or military activities as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.2- Palletization. Knocked-down tables with a length of 48 inches or more and width of 30 inches or more shall be palletized in accordance with the palletization requirements of PPP-P-1877 for tables, knocked down Tables packed in accordance with the level C packing requirements of PPP-P-1877 shall not be palletized.

6. NOTES

6.1 Intended use. The executive office type tables in traditional styling covered by this specification were designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies The tables should compliment the traditional decor of executive areas when used with other furniture items within the group


6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following

(a) Title, symbol, and date of this specification.
(b) Title, symbol, and date of the General Specification.
(c) Type, class, and size, if applicable.
(d) Level of packaging and packing.
(e) Marking requirements
(f) When palletization is not required

GSA DC 01805*9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 1 — Telephone Table.
Type I, Class 1.

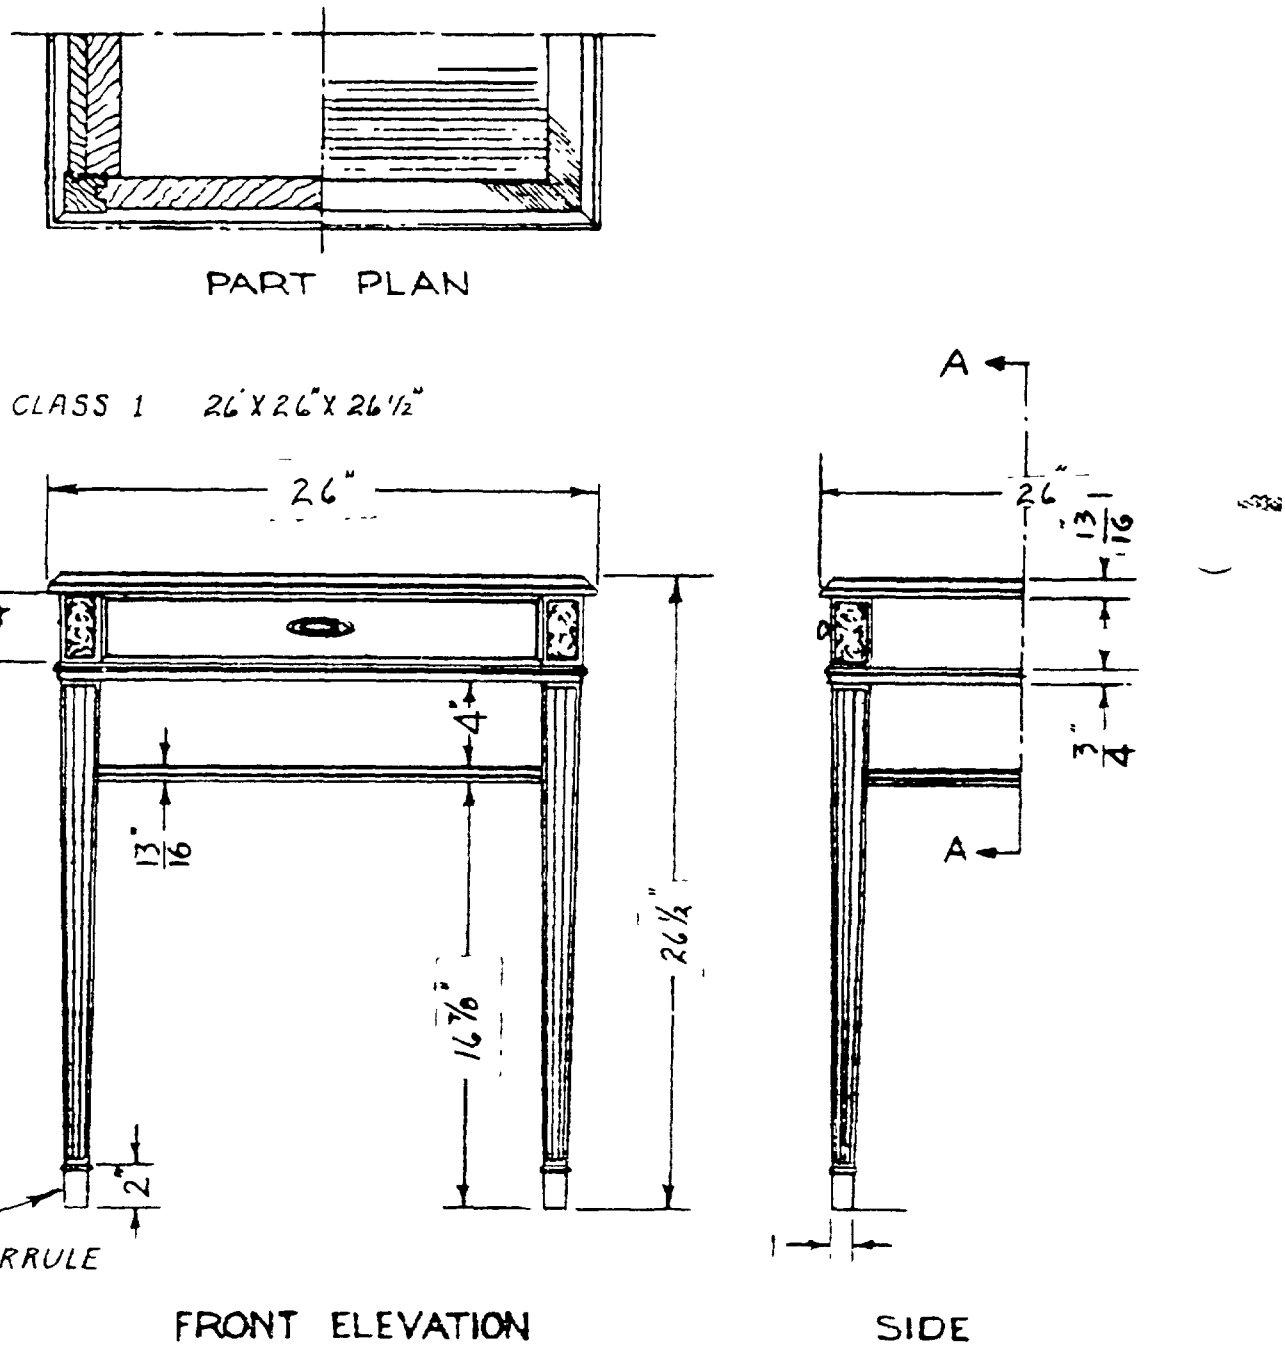


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


Figure 2 Leg Section, A-A, B-B, and C-C

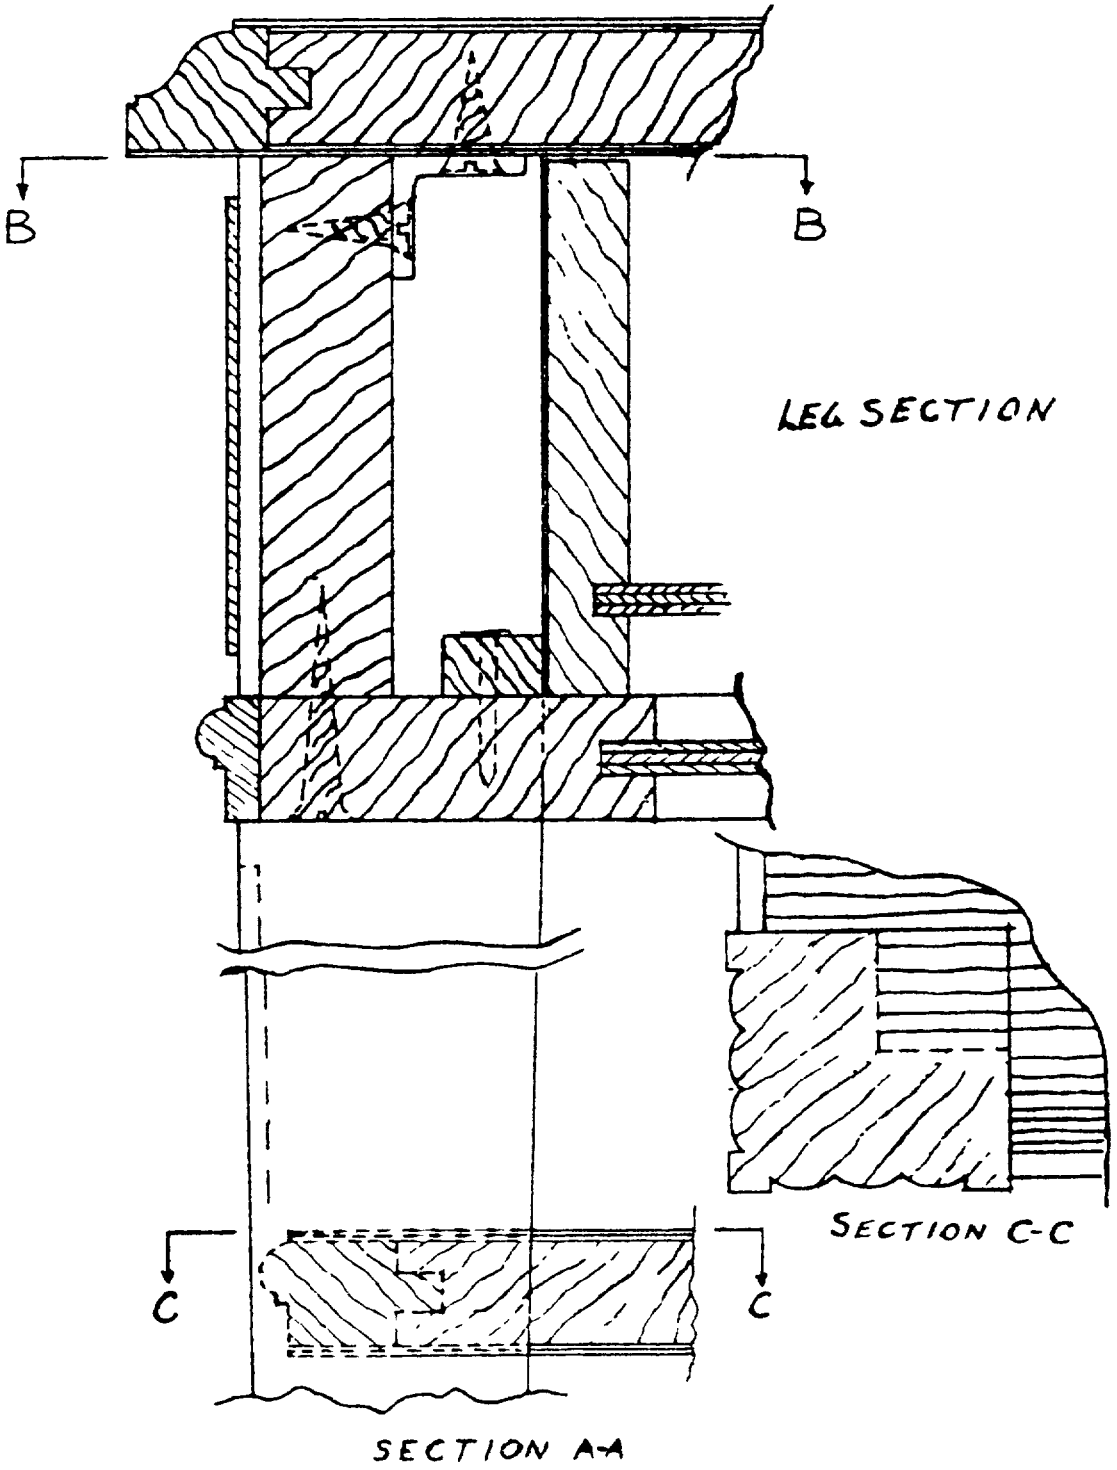

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


Figure 3 Section B-B and Pull

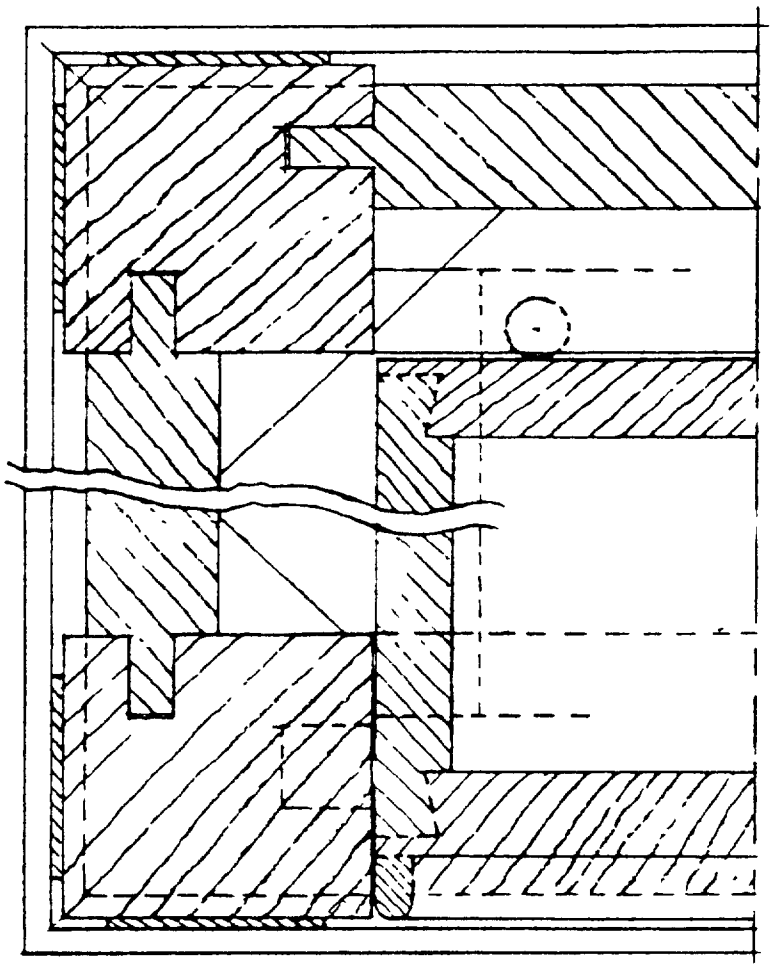

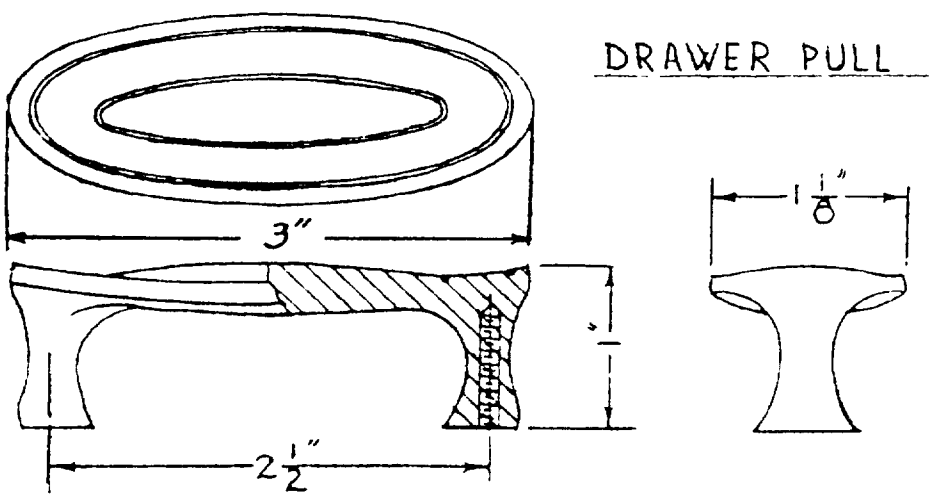


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 4 End Table
Type I, Class 2, Size 1

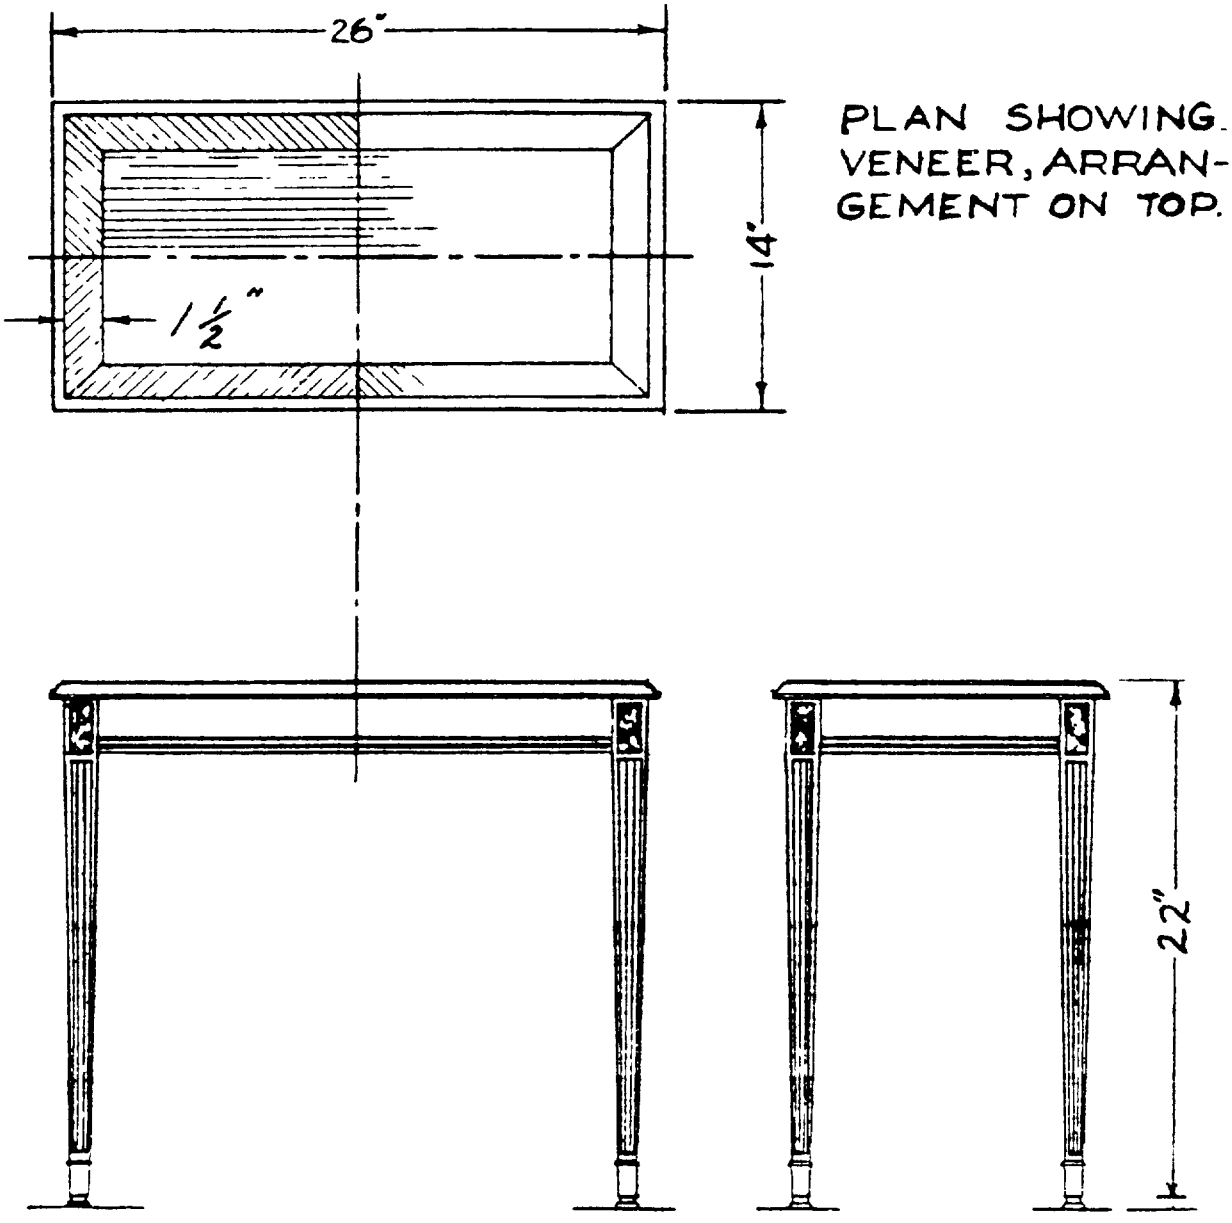


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5 Corner and Leg Section

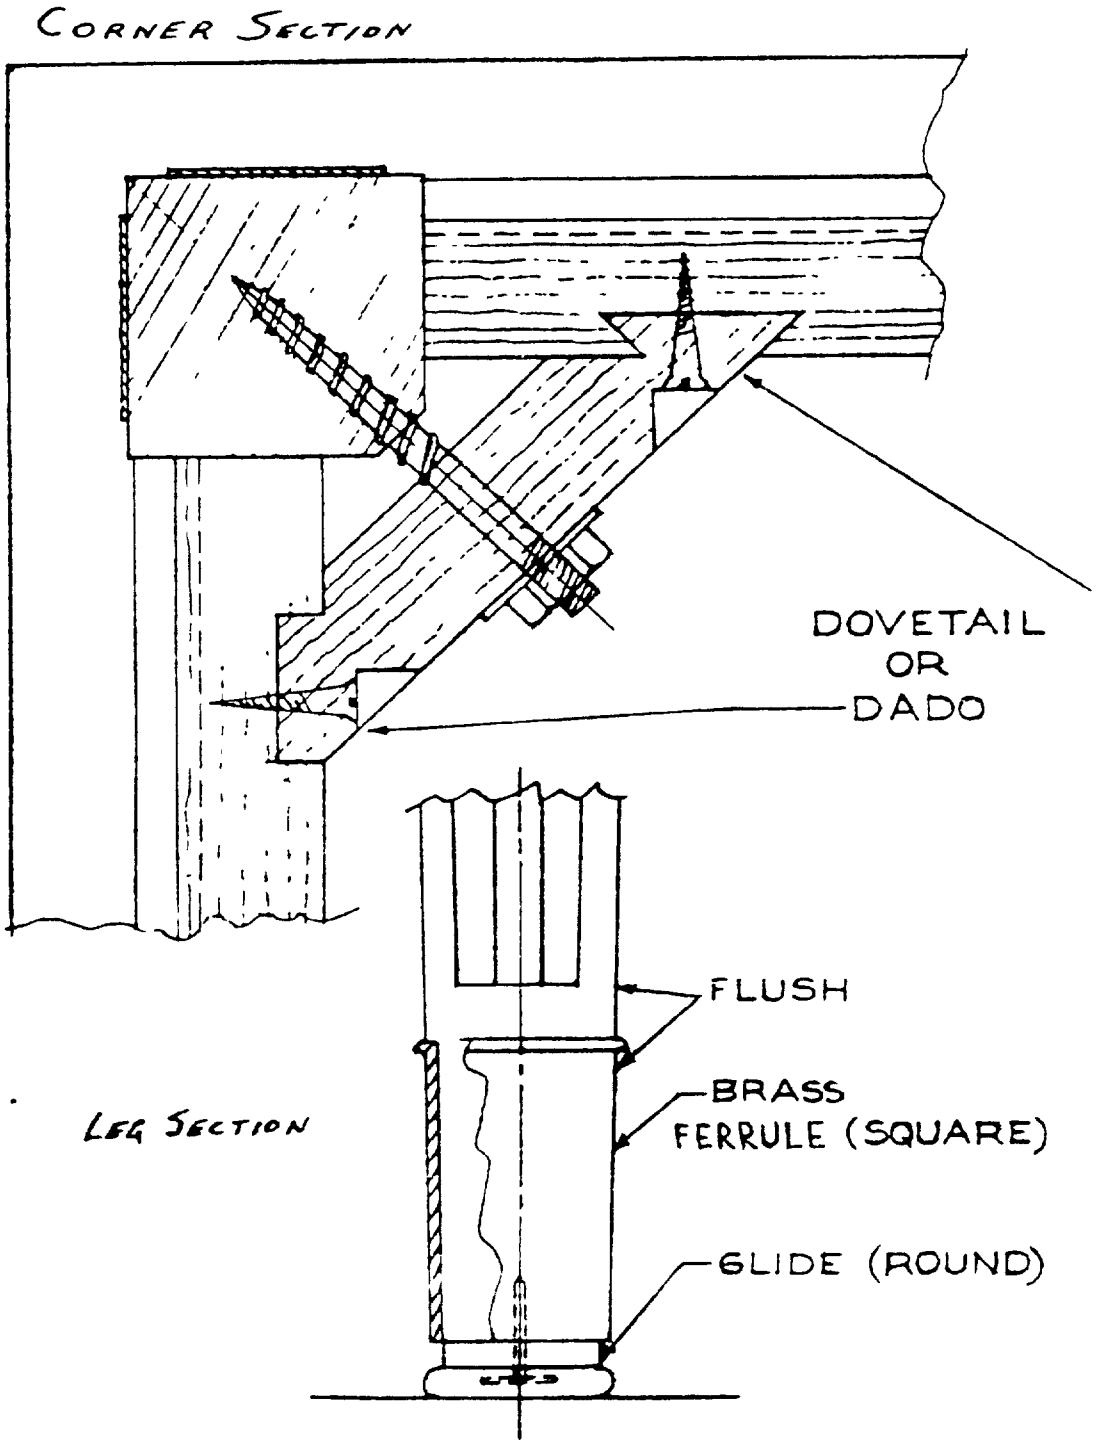


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 6 Corner Section

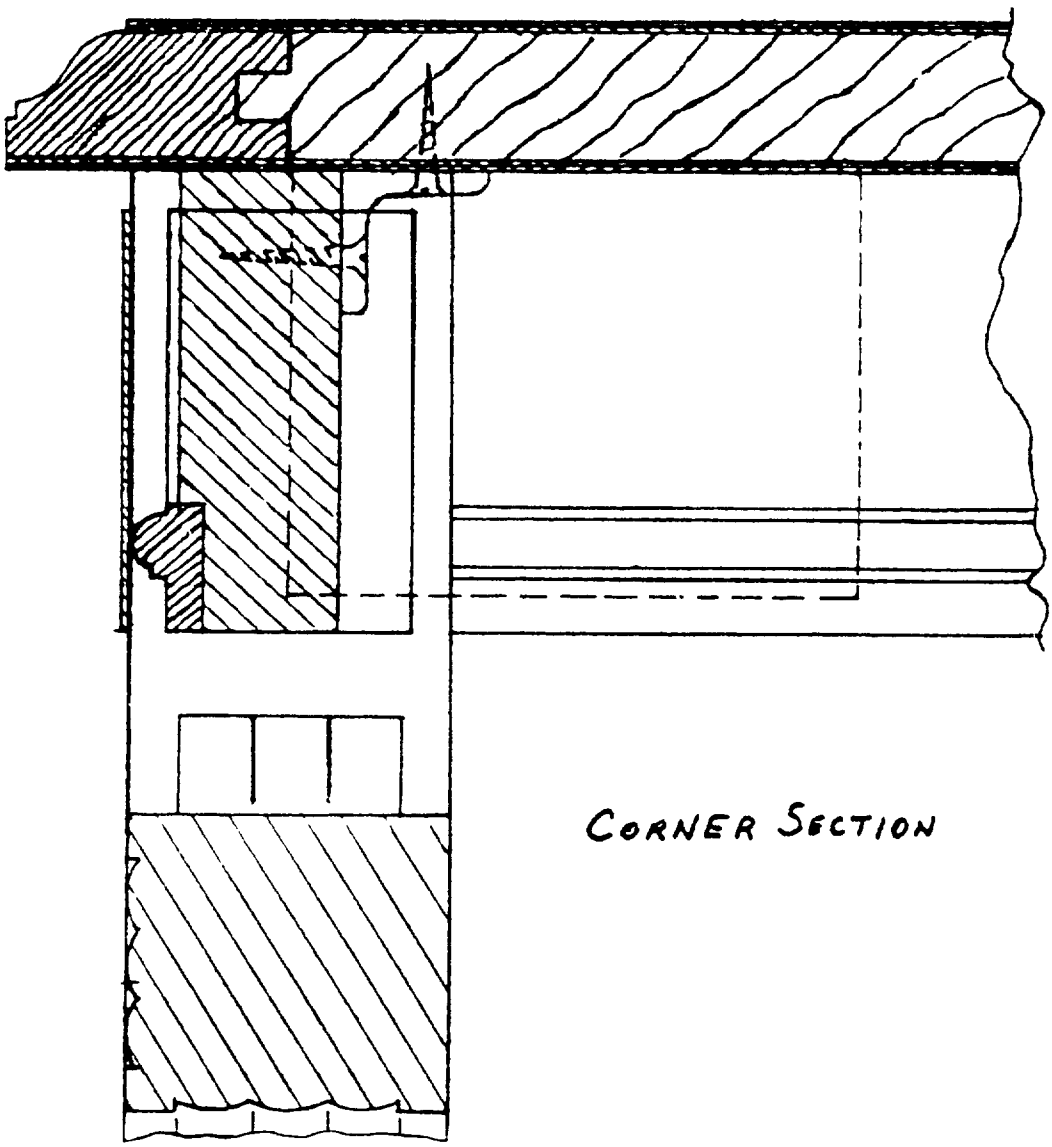


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 7 Coffee Table, TYPE I CLASS 3

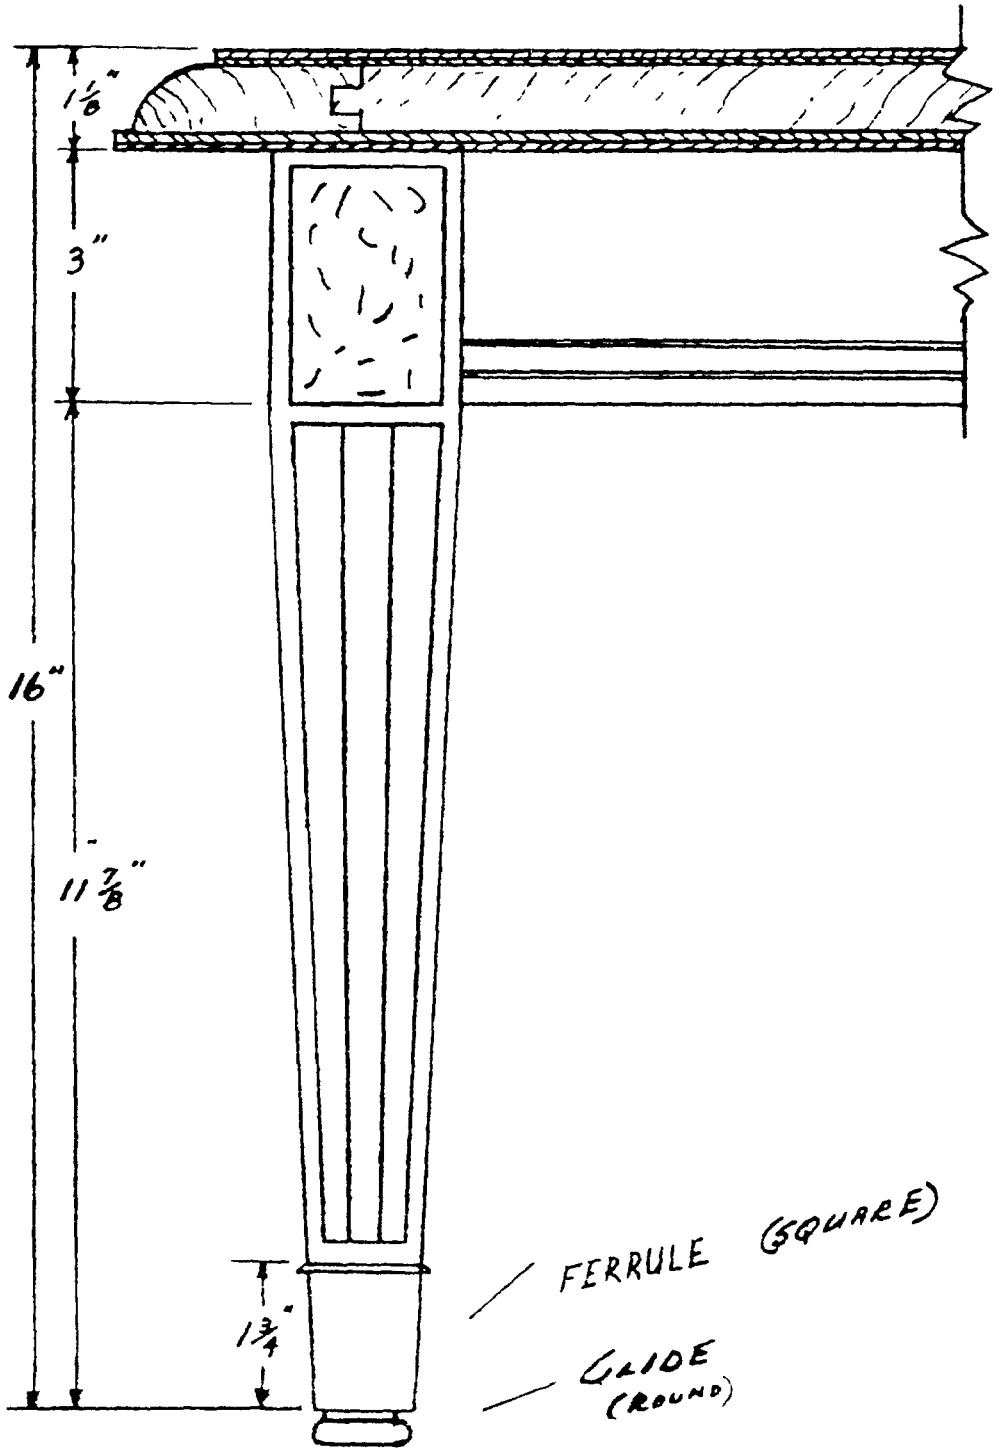


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 8 Top Plan and Front Elevation

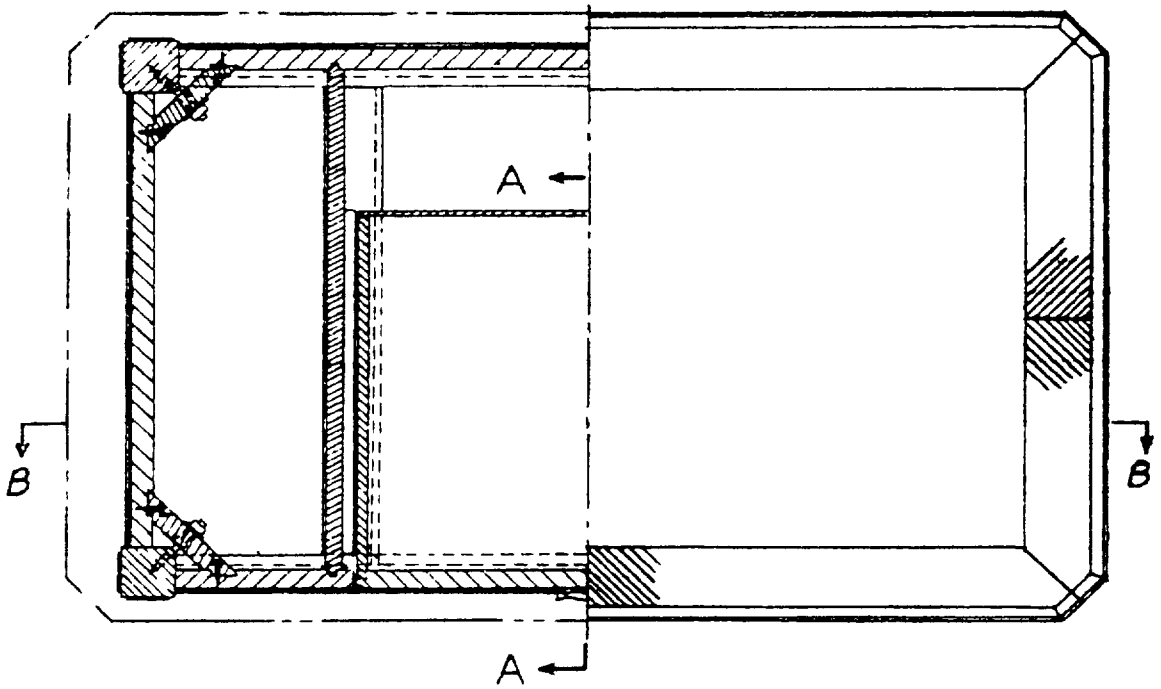


PART PLAN - TOP

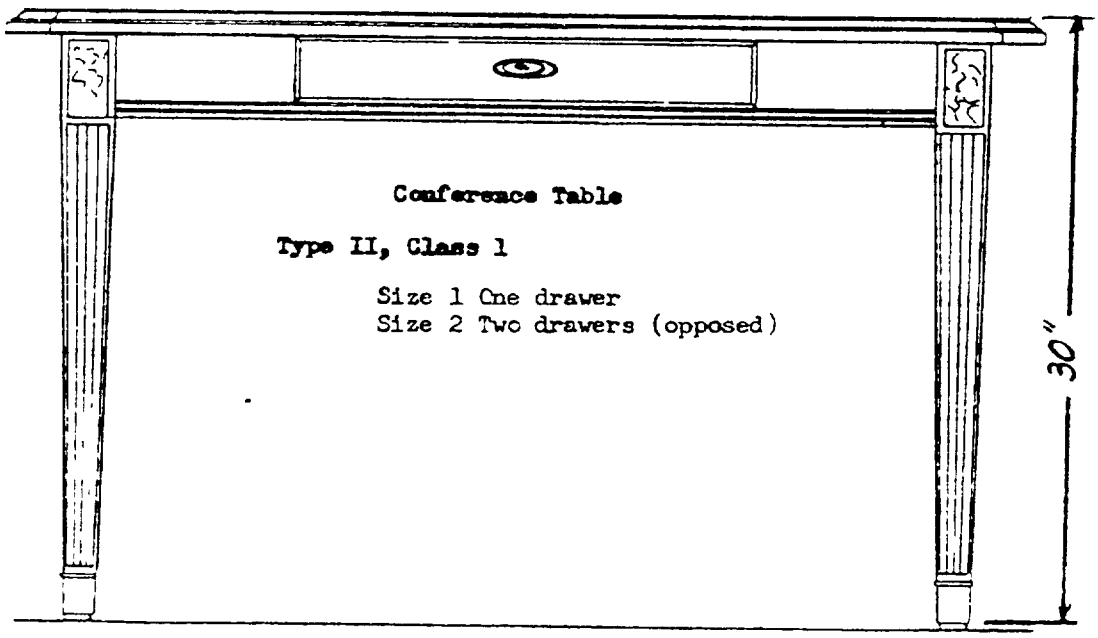


FRONT ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


Figure 9 Drawer, Tray Detail and Side Elevation

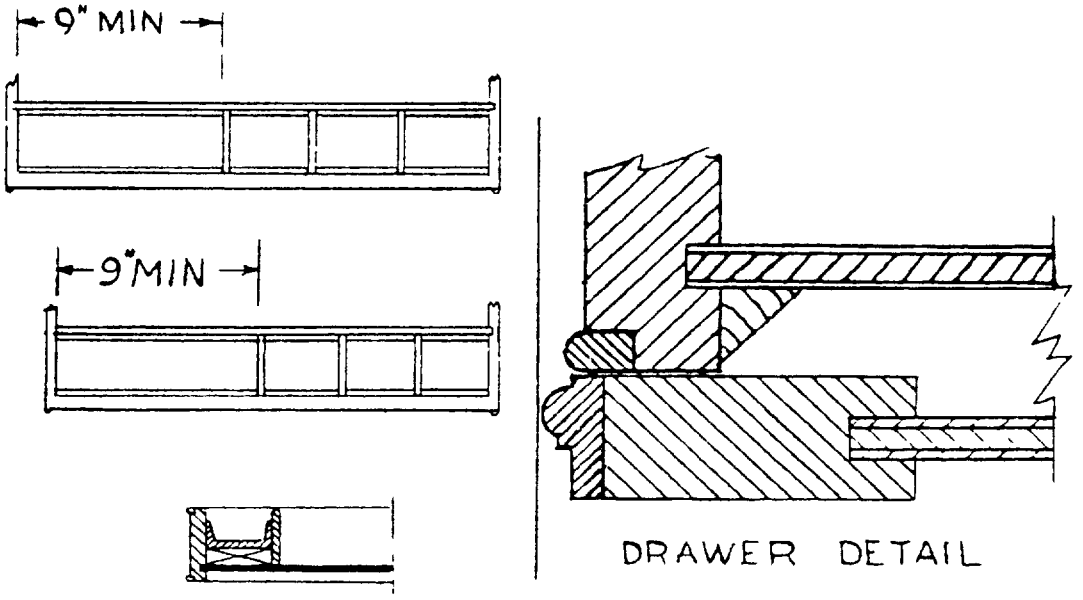

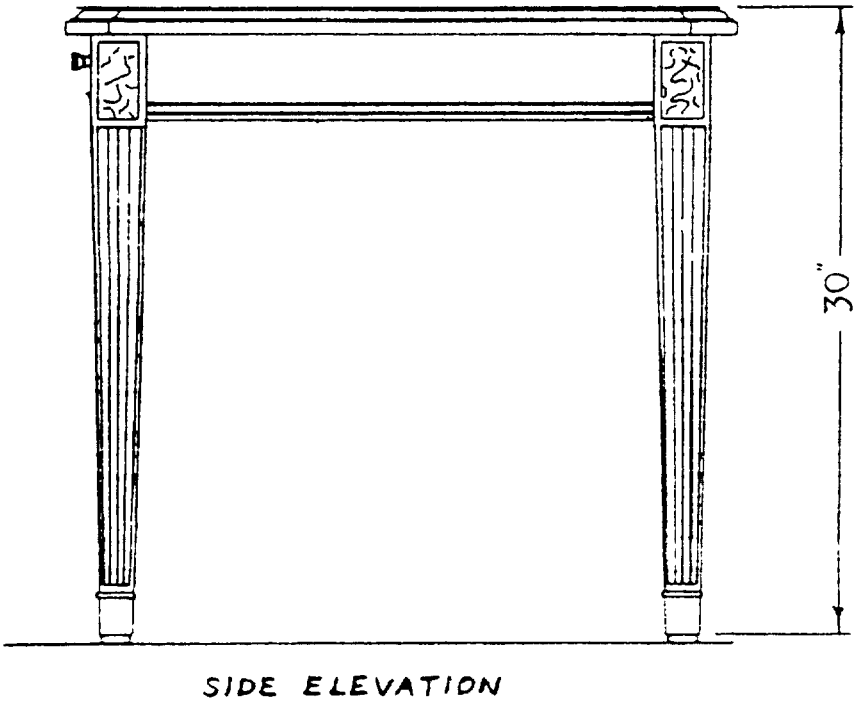


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 10 Drawer Detail

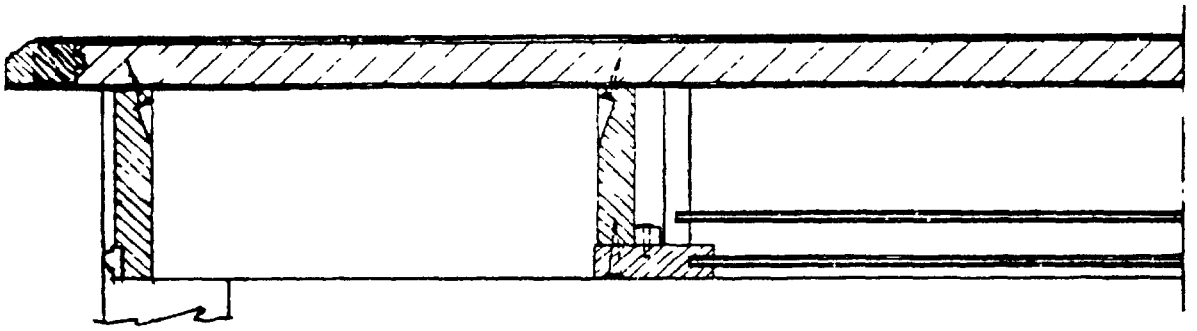


SECTION B-B

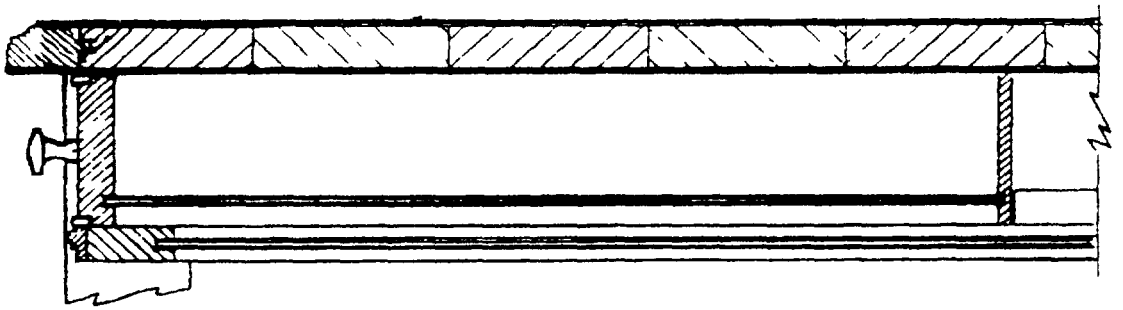

SECTION A-A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 11 Part Top Plan and Front Elevation

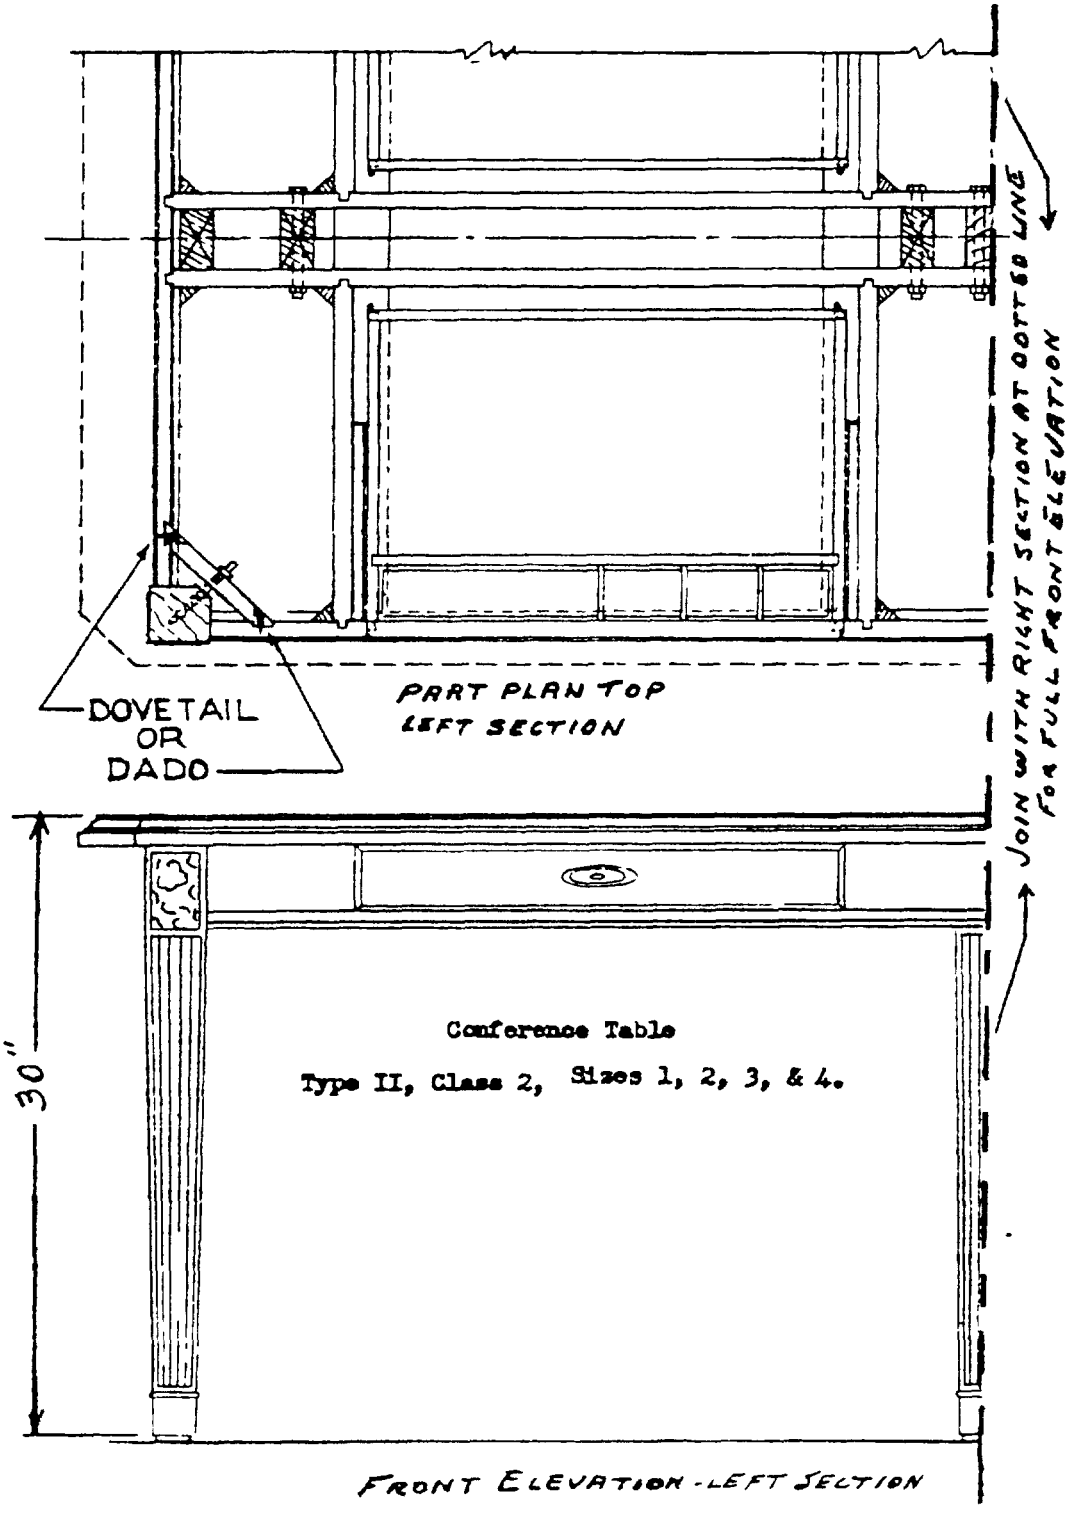


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 12 Part Top Plan and Front Elevation

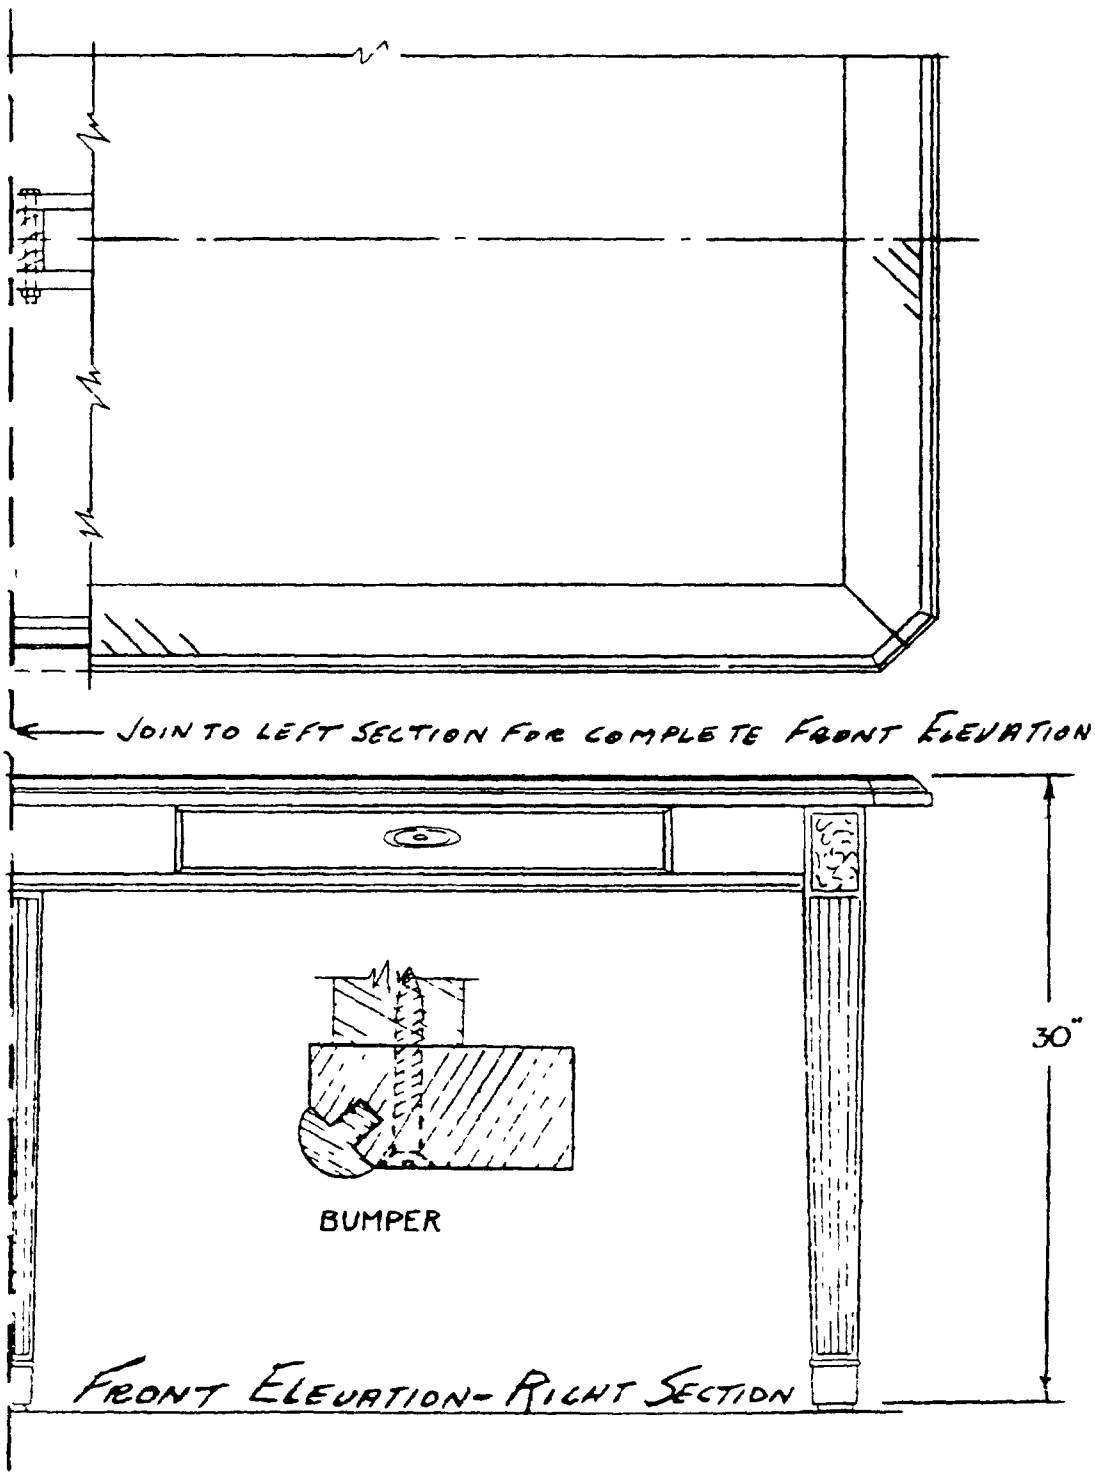


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure, 13 Edge Band and Top Section

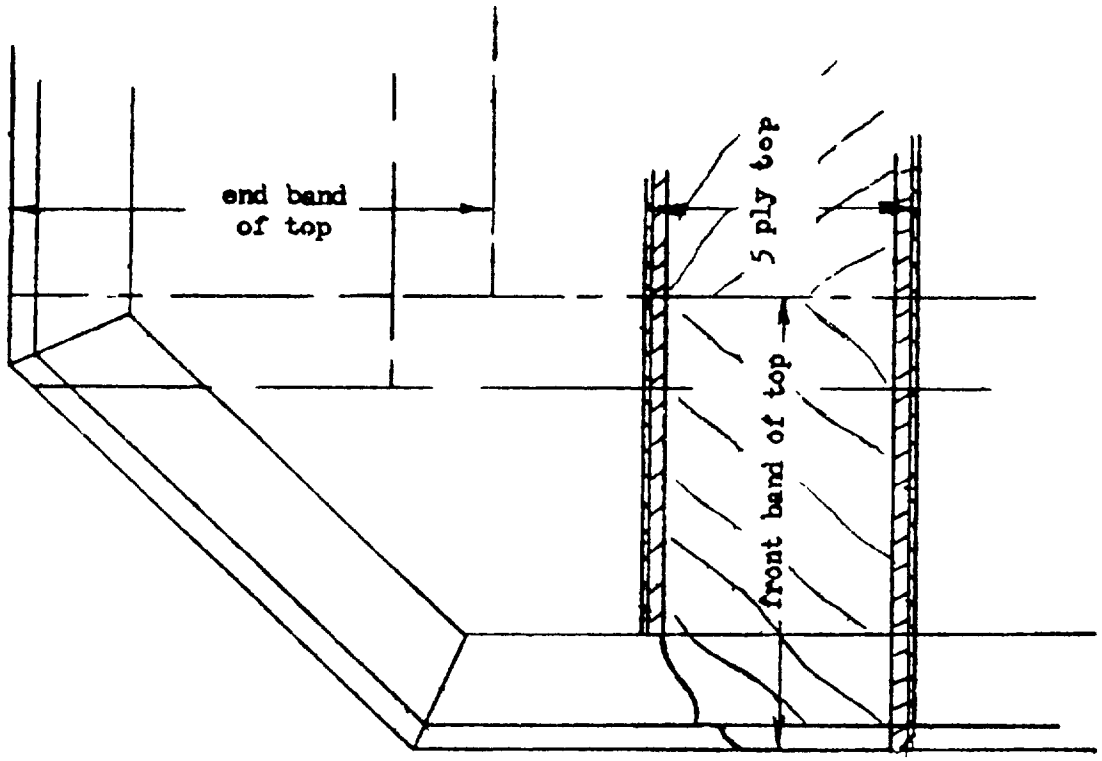

All edge bands shall be of solid wood (see 3.1.4.2 G.S.)

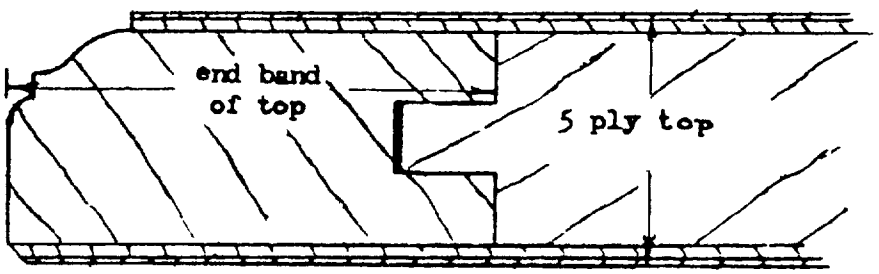

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.