AA-O-00230/6B (GSA-FSS)
June 15, 1979
INTERIM REVISION OF
Fed. Spec. AA-O-230/6a
October 7 1964

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE CREDENZA, EXECUTIVE OFFICE, WOOD, TRADITIONAL
(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-230/6a, dated October 7, 1964.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements in traditional design for an executive office credenza. General requirements and other information pertaining to the credenza will be found in AA-O-00230/GEN, Office Furniture, Executive type, Wood, Traditional (General Specification).

1.2 Classification. The credenza covered by this specification shall be of one type and size as shown in the figures Dimensions shall be 72 inches wide by 18 inches deep by 30 inches high (not including glides).

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards, of the issues in effect on date of invitation for bids, which form a part of this specification, will be found in 2.1 of AA-O-00230/GEN hereinafter called the General Specification (G.S.).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 (G.S.).

3. REQUIREMENTS

3.1 Materials. Materials used in the construction of the credenza shall be as specified in the applicable paragraphs in the General Specification (see table I).

TABLE I. Materials index

Component	AA-O-00230/GEN Par. No.	Component	AA-O-00230/GEN Par. No.
Adhesive	3.1.1 Gen. Spec.	Face hardware	3.1.5.1 G.S.
Wood species	3.1.4.1 G.S.	Locks	3.1.5.1.1 G.S.
Solid wood requirements	3.1.4.2 G.S.	Strike plate	3.1.5.1.2 G.S.
Wood seasoning	3.1.4.3 G.S.	Adjustable glides, regular	3.1.5.2.2 G.S.
Hardwood plywood	3.1.4.4 G.S.	Shelf standards & supports	3.1.5.3 G.S.
Good grade (1) veneer	3.1.4.5 G.S.	Other hardware	3.1.5.4 G.S.
Particleboard	3.1.4.6 G.S.		

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2 Construction. General construction requirements for the credenza shall be as specified in the applicable paragraphs of the General Specification (see table II).

TABLE II. Construction requirements index

Requirement	AA-O-00230/GEN Par. No.	Requirement	AA-O-00230/GEN Par. No.
Tolerances	3.2.2 G.S.	Posts	3.2.9 G.S.
Direction of grain	3.2.3 G.S.	Patterned base apron	3.2.10 G.S.
Joinery	3.2.4 G.S.	Base supports	3.2.11 G.S.
Drawer construction	3.2.5 G.S.	Base mitre joints	3.2.12 G.S.
Tops	3.2.6 G.S.	Built-up stock	3.2.13 G.S.
Dust shields and bottoms	3.2.8 G.S.		

3.2.1 Design. Design of the credenza shall be as shown in the figures.

3.2.2 Drawers. Materials and construction shall conform to 3.2.5 G.S. unless otherwise specified herein. Drawer fronts shall have applied moulded edges. Top edge of drawer sides shall be coved to within 1 1/2 inches of the front and back end. Drawers shall be minimum 20 inches wide, 4 inches high by 14 inches deep. Each drawer shall run on a center guide. The female portion shall be securely glued and stapled to the drawer bottom and the male portion shall be securely glued and screwed to the front and back rails. Dust panels (3.2.8 G.S.) shall be tenoned into drawer bearer rails and front and back rails under both drawers.

3.2.3 Top. Top shall be minimum 5-ply hardwood plywood (3.1.4.4 G.S.), 1 3/8 inches thick with solid moulded edges and corners as shown in figure 5. Width of boarder veneers shall be 2 1/2 inches. The top shall be positioned and attached as specified in 3.2.6 G.S. Top shall be flush to the face of the back posts and extend 5/8 inch beyond the posts on the other three sides.

3.2.4 Doors. Doors shall be minimum 5-ply plywood (3.1.4.4 G.S.), 3/4 inch thick. All four edges shall be banded (3.1.4.4 G.S.) before the application of the moulded edges. The doors shall have a pull (3.1.5.1) as shown in figure 1 and shall have a lock (3.1.5.1.1 G.S.) and strike plate (3.1.5.1.2 G.S.). Clearance around doors shall be 1/16 to 3/32 inch.

3.2.5 Adjustable shelf. Each cabinet compartment shall be provided with one 3/4-inch thick, 5-ply lumber core plywood (3.1.4.4 G.S.) shelf. The frong and two side edges shall be banded (3.1.4.4 G.S.). Shelf standards and supports (3.1.5.3 G.S.) shall be mounted in each compartment.

3.2.6 Fixed shelf. A 3/4-inch thick, 5-ply lumber core plywood (3.1.4.4 G.S.) shelf shall be mounted above the knee space, between the two cabinet compartments. Each end of the shelf shall be attached to the inside of the end panels with a 3/4- by 3/4-inch, 15-inch long screw/glue cleat. The front edge of this cleat shall be tapered two ways. The back edge of the shelf shall be attached to the back panel with a full length 3/4- by 3/4-inch screw/glue cleat. The shelf opening shall be 4 1/8 inches.

3.2.7 Cabinet compartment back panels. Back panels shall be minimum 5-ply (3.1.4.4 G.S.) 3/4-inch thick plywood and shall comply to figure 2. Panels shall be recessed 1/16 inch below the outside face of the back posts, securely screwed to the compartment bottom panel and attached to the top as specified in 3.2.6 G.S.

3.2.8 Center back panel. Center back panel shall be minimum 5-ply (3.1.4.4 G.S.) 3/4-inch thick plywood and shall comply to figure 2. Panel shall be tenoned into the back posts and shall be recessed 1/16 inch below the outside face of the back posts. These tenon joints shall be reinforced with 3/4- by 3/4-inch screw/glue cleats which shall extend from the bottom of the fixed shelf to the bottom of the panel. These cleats are to be made of exposed solid wood (3.1.4.1). A shaped moulding (see figure 2) shall be glued and screwed to the inside bottom edge of the center back panel. Screw heads shall be darkened to blend with surrounding finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.9 End panels. End panels shall be minimum 5-ply (3.1.4.4 G.S.) 3/4-inch thick plywood. Panels shall be tenoned into the front and back corner posts. Grain direction and head moulding shall comply with figures 2 and 3.

3.3.10 Cabinet compartment bottom panel. Panel shall be minimum 5-ply (3.1.4.4 G.S.) 3/4-inch thick plywood.

3.3.11 Posts. Posts shall conform to 3.2.9 G.S. and shall be 1 3/8 inches square. The inside front posts and the outside front corner posts shall be chamfered and reeded as shown in figure 3. The back corner posts shall be chamfered 1/8 inch.

3.3.12 Patterned base apron. Apron shall conform to 3.2.10 G.S., 3.2.11 G.S., and 3.2.12 G.S. An apron shall be applied on three sides of each cabinet compartment as shown in figures 1, 2, and 4.

3.4 Finishing. See 3.3.1 G.S., 3.3.2 G.S., and 3.3 G.S.

3.5 Identification marking. See 3.4 G.S.

3.6 Workmanship. See 3.5 G.S.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in section 4 of the General Specification and as specified herein.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. Each credenza shall be packaged, packed, and marked in accordance with PPP-P-1877. Packaging shall be level A, B, or C as specified (see 6.2). Packing shall be level A, B, or C as specified (see 6.2) and marking shall be for civil agencies or military activities as specified (see 6.2).

5.2 Palletization. Unless otherwise specified (see 6.2), credenzas shall be palletized in accordance with the palletization requirements of PPP-P-1877 for credenzas. Credenzas packed in accordance with the level C packing requirements of PPP-P-1877 shall not be palletized.

6. NOTES


6.1 Intended use. The executive office type credenza in traditional styling was designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. The credenza should compliment the traditional decor of any executive area when used with other furniture items within the group.

6.2 Ordering data. Purchasers should exercise [illegible] desired option herein and procurement documents should specify the following:

(a) Title, symbol, and date of this specification.
(b) Title, symbol, and date of the General Specification.
(c) Level of packaging and packing.
(d) Marking requirements.
(e) When palletization is not required.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 1 Credenza.

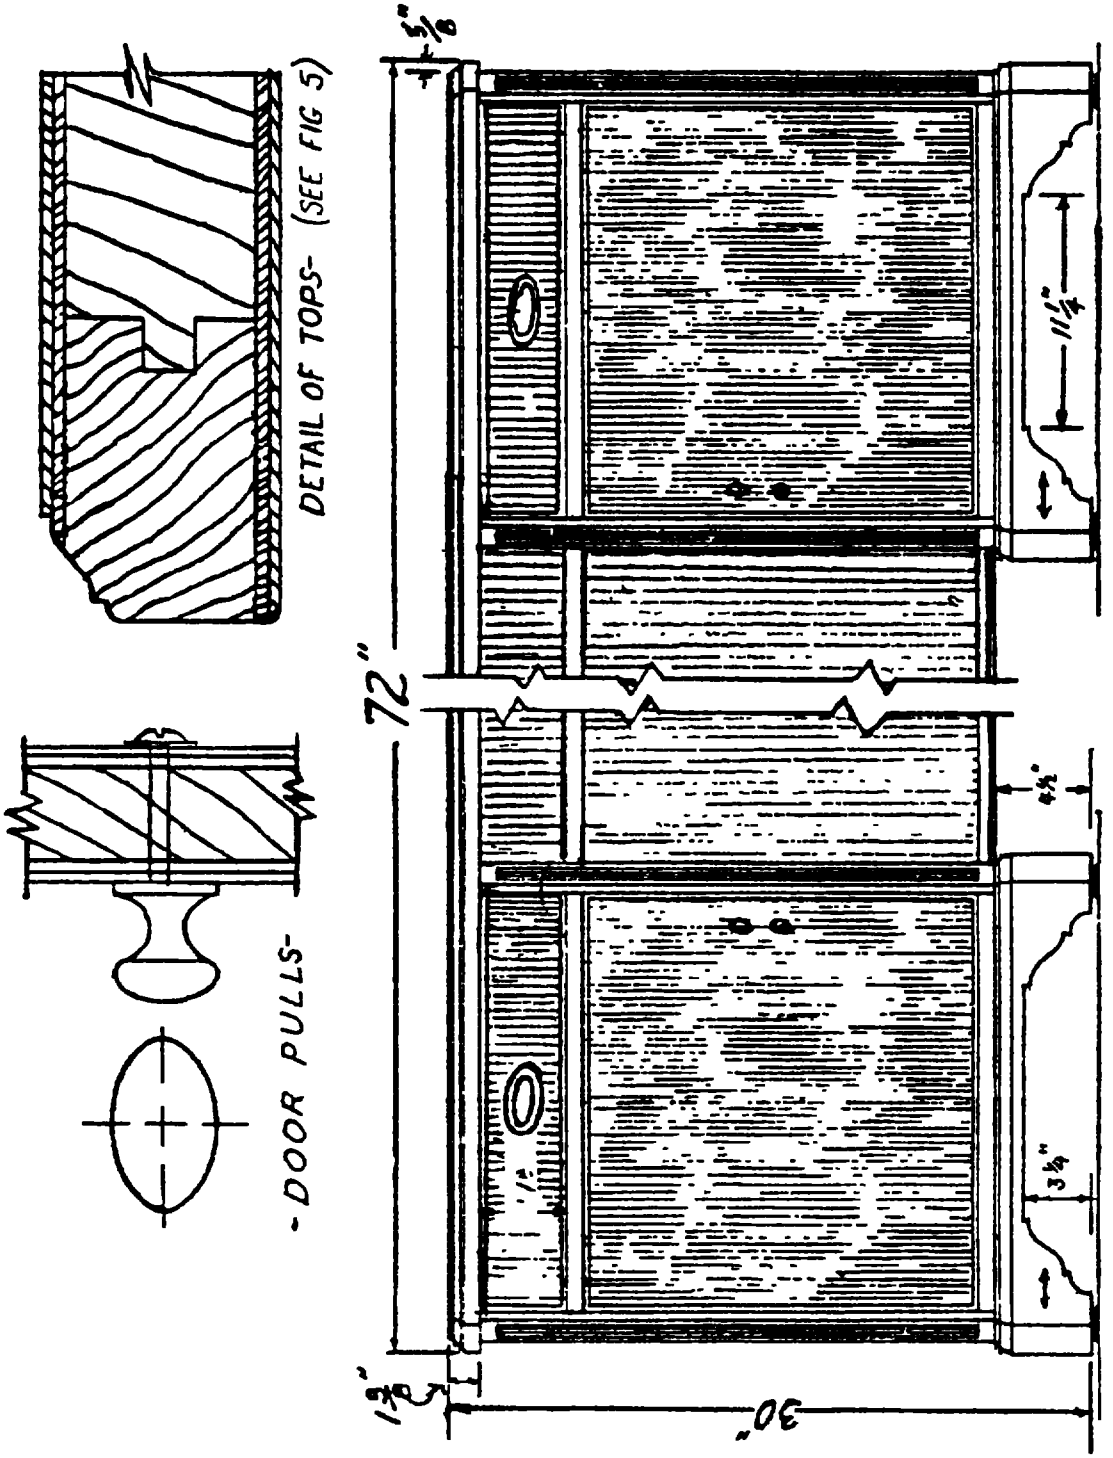


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE Side and Rear Elevation
Panel Moiding and Corner Section.

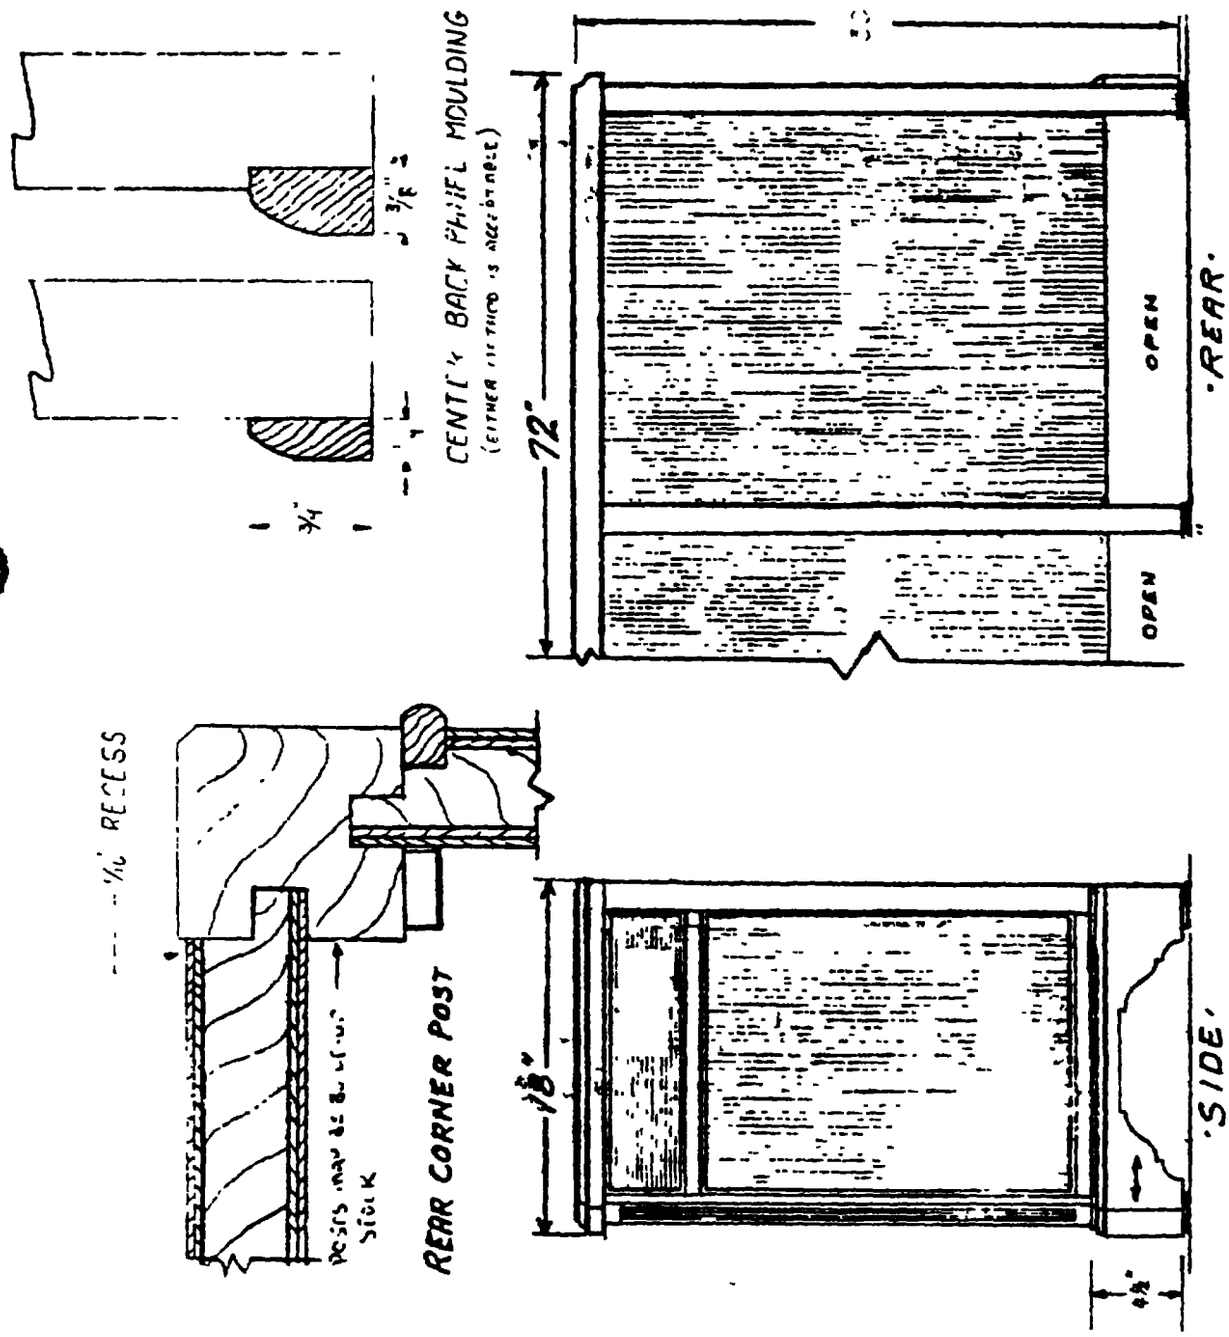


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 2 Corner Section and Pull.

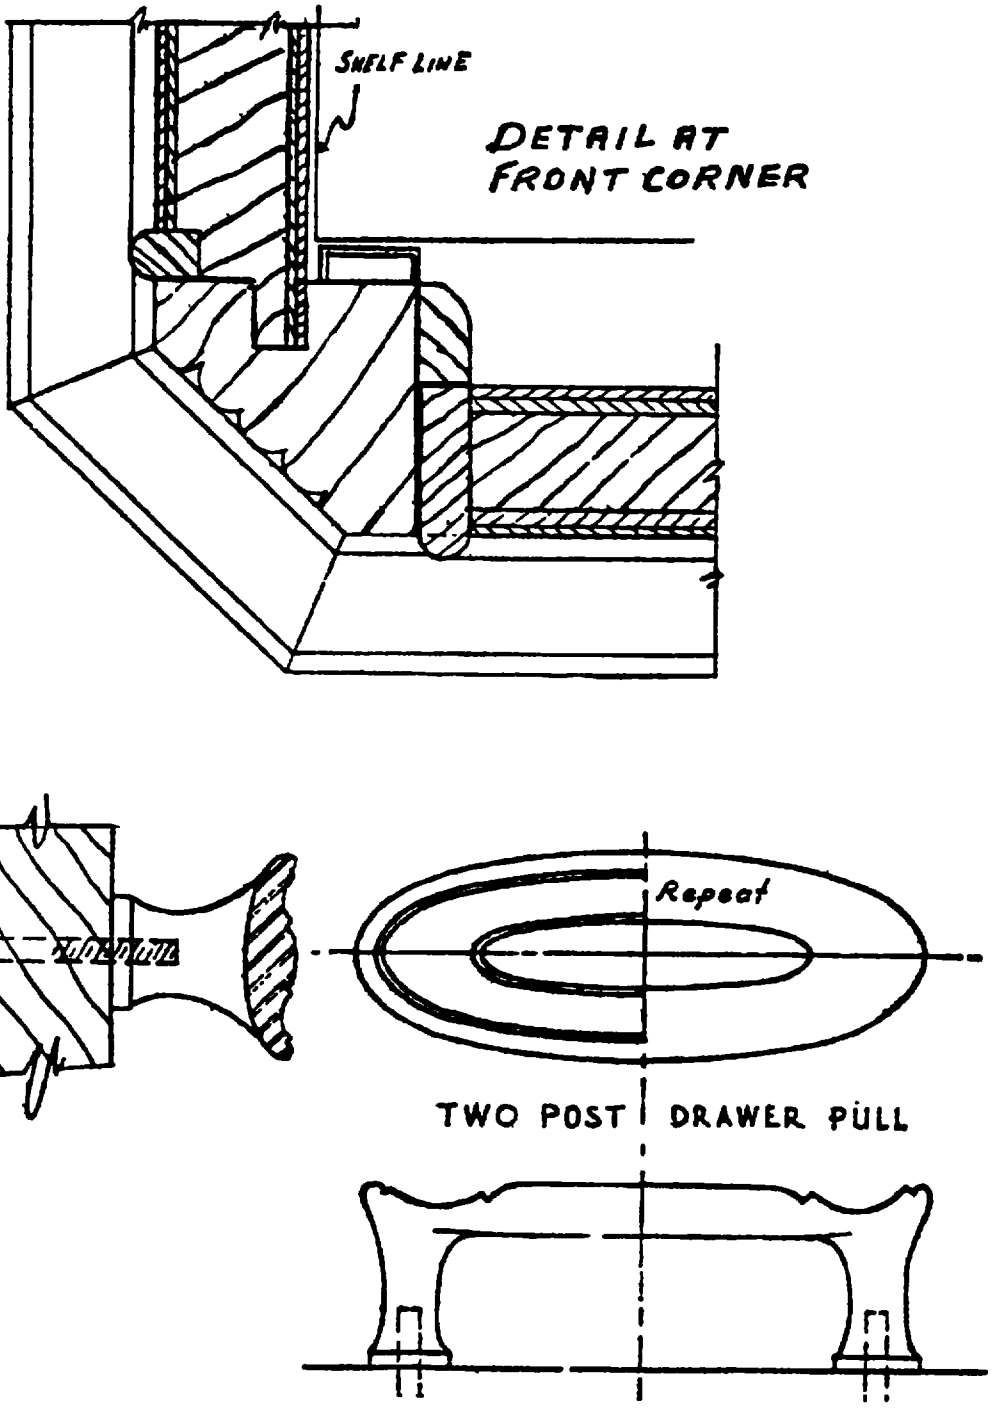


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 4 BASE APRON

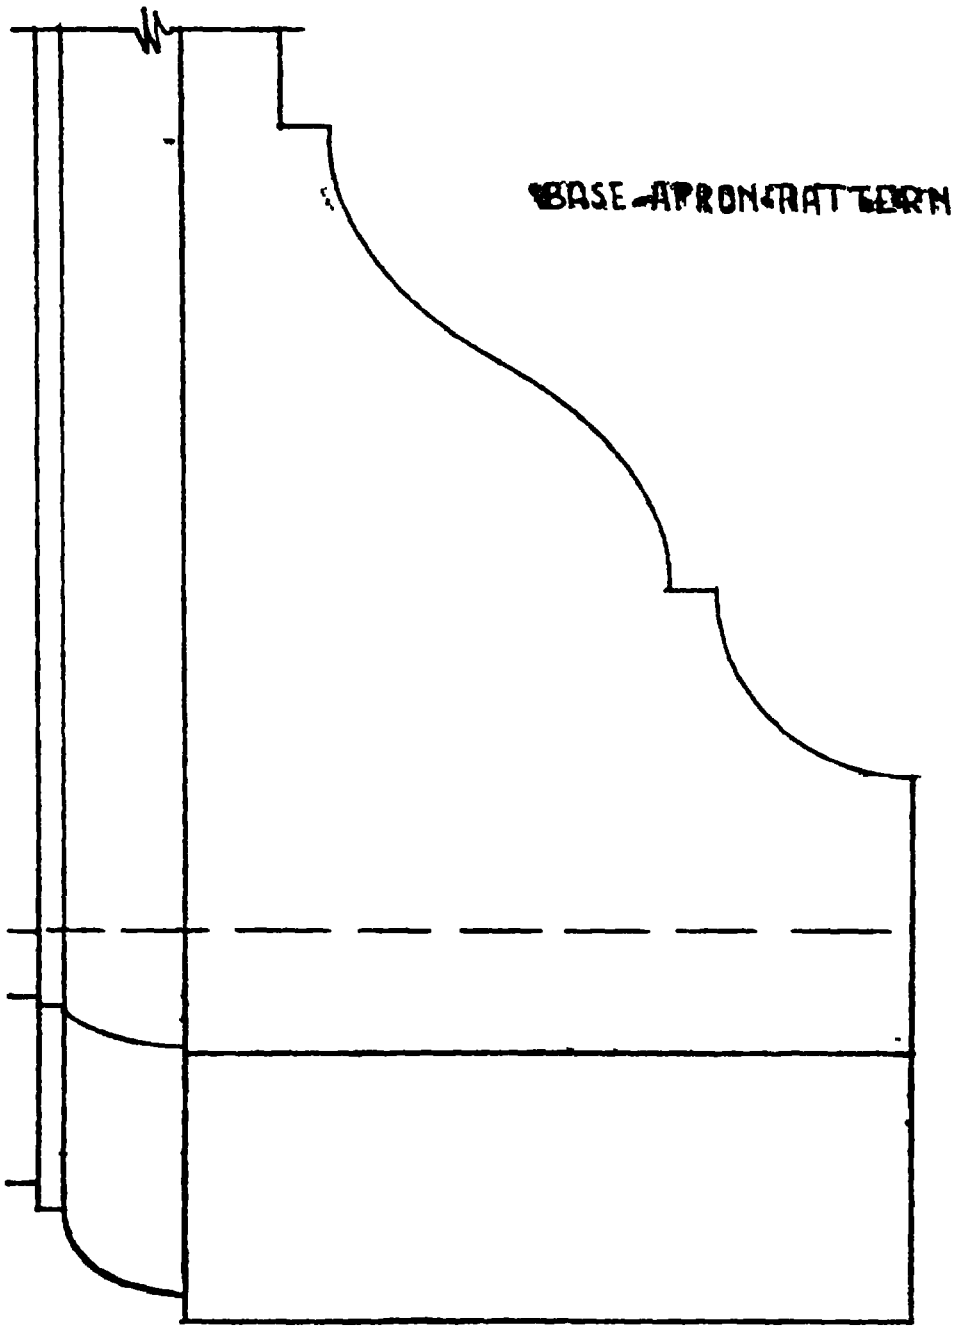

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

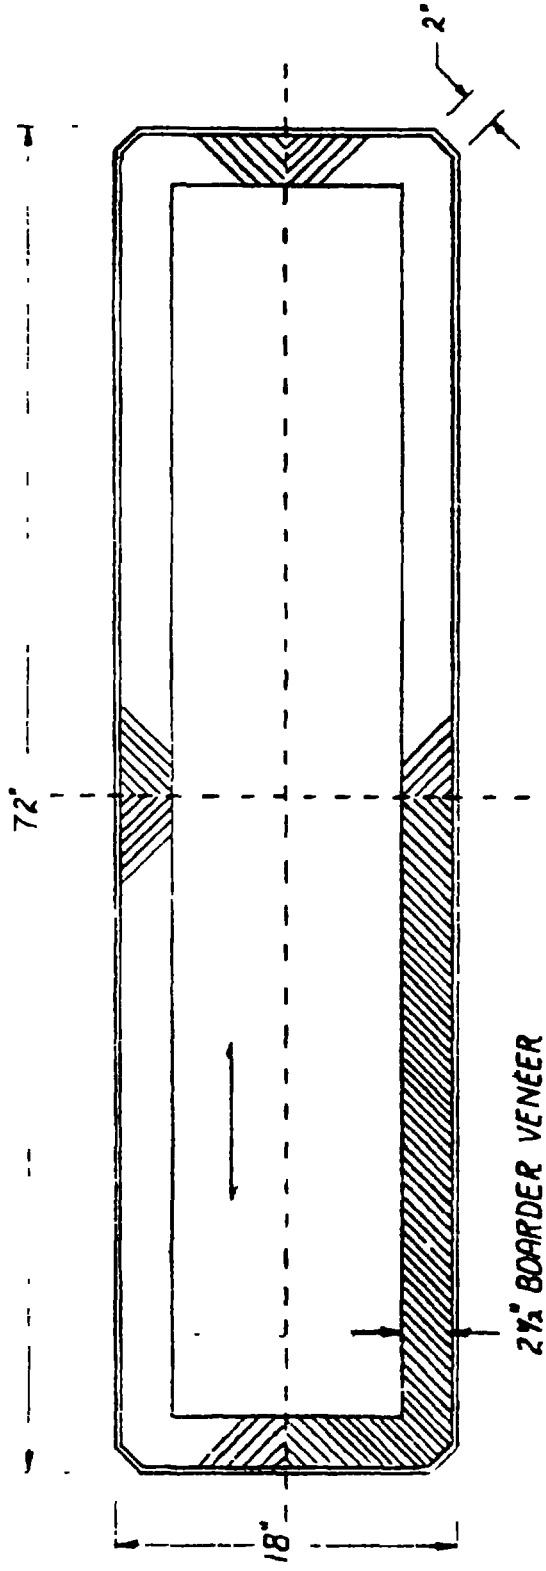

VIEW OF TOP

FIGURE 5 CREDENZA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.