AA-O-00235
January 31, 1962
SUPERSEDING IN PART
FED. SPEC, AA-F-791b
Dated October 25, 1937

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, STEEL, SECTIONAL

This interim Federal Specification is based upon currently available technical information, but has not been approved for promulgation as a regular Federal Specification. It is subject to modification, and pending its promulgation as a regular Federal Specification, it is for optional use by all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.- The sectional steel furniture covered by this specification includes a wide variety of drawer filing cabinets, bookcases, storage cabinets, bases and tops. All are designed to intermember in desired combinations to fill varied office needs. These sections or units as they are called hereinafter, may be used with unitized steel and other general office furniture in the formation of work stations tailored to a specific job.

1.2 Classification.

1.2.1 Types and Styles.- Sectional furniture shall be of the following types and styles, as specified in the invitation for bids.

Type I.- Full width, full depth units (3 inches wide, 25 inches deep).

Style A. Reducing board, unit 3/4 inch high (reducing from 25 inches to 17 or 13 inches). (Fig. 44)

Style B. Box drawer units.
Item 1. 2-drawer, 13-1/4 inches high. (Fig. 1)
Item 2. 4-drawer, 13-1/4 inches high. (Fig. 2)

Style C. Card index unit, 3 by 5 card size, 5-drawer, 6-5/8 inches high. (Fig. 8)

Style G. Legal size file unit, 2 drawer, 13-1/4 inches high. (Fig. (6)

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

Style H. Letter size file unit, 2-drawer, 13-1/4 inches high. (Fig. 7)

Style K. Map and plan unit, 4-drawer, 13-1/4 inches high. (Fig. 16)

Style L. Sliding reference shelf unit, 2-1/2 inches high. (Fig. 45)

Style M. Storage Units.
- Item 1. Hinged glass door type, 26-1/2 inches high (Fig. 34)
- Item 2. Hinged steel door type, 26-1/2 inches high (Fig. 34)

Style N. Top units, 2-1/4 inches high
- Item 1. Cornice - steel (Fig. 43)
- Item 2. Cornice - steel with linoleum (Fig. 43)
- Item 3. Cornice - steel with plastic (Fig. 43)

Style O. Base units.
- Item 1. Flat, 3 inches high (Fig. 39)
- Item 2. Leg, 9 inches high (Fig. 40)

Type II. Full width, intermediate depth units, (33 inches wide, 17 inches deep.)

Style A. Reducing board unit, 3/4 inch high (Reducing from 17 inches to 13 inches.) (Fig. 44)

Style B. Box drawer units.
- Item 1. 2-drawer, 13-1/4 inches high (Fig. 1)
- Item 2. 4-drawer, 13-1/4 inches high (Fig. 2)
- Item 3. 6-drawer, 13-1/4 inches high (Fig. 3)
- Item 4. 9-drawer, 13-1/4 inches high (Fig. 4)

Style C. Card Index units.
- Item 1. 3by 5 card size, 5-drawer, 6-5/8 inches high (Fig. 8)
- Item 2. 3 by 5 card size, 15-drawer, 13-1/4 inches high (Fig. 9)
- Item 3. 4 by 6 card size, 4-drawer, 6-5/8 inches high (Fig. 10)
- Item 4. 4 by 6 card size, 8-drawer, 13-1/4 inches high (Fig. 11)
- Item 5. 5 by 8 card size, 3-drawer, 6-5/8 inches high (Fig. 12)
- Item 6. 5 by 8 card size, 6-drawer, 13-1/4 inches high (Fig. 13)
- Item 7. 8 by 5 card size, 5-drawer, 13-1/4 inches high (Fig. 14)

Style D. Transportation request units, 4-drawer, 6-5/8 inches high (Fig. 5)

Style E. Check file units.
- Item 1. 3-drawer, 6-5/8 inches high (Fig. 15)
- Item 2. 6-drawer, 13-1/4 inches high (Fig. 19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Style F. Legal blank units.
Item 1. 9-drawer, 6-5/8 inches high (Fig. 18)
Item 2. 18-drawer, 13-1/4 inches high (Fig. 17)

Style G. Legal size file unit, 2-drawer, 13-1/4 inches high (Fig. 6)

Style H. Letter size file unit, 2-drawer, 13-1/4 inches high (Fig 7)

Style I. Money order application unit, 12-drawer, 13-1/4 inches high (Fig. 20)

Style J. Money order coupon unit, 12-drawer, 13-1/4 inches high (Fig. 21)

Style L. Sliding reference shelf unit, 2-1/2 inches high (Fig. 45)

Style M. Storage units.
Item 1. Disappearing glass door type, 13-1/4 inches high (Fig. 36)
Item 2. Disappearing steel door type, 13-1/4 inches high (Fig. 36)
Item 3. Sliding glass door type, 13-1/4 inches high (Fig. 32)
Item 4. Sliding steel door type, 13-1/4 inches high (Fig. 32)
Item 5. Sliding glass door type 26-1/2 inches high (Fig. 33)
Item 6. Sliding steel door type, 26-1/2 inches high (Fig. 33)

Style N. Top units, 2-1/4 inches high
Item 1. Cornice - steel (Fig. 43)
Item 2. Cornice - steel with linoleum (Fig. 43)
Item 3. Cornice - steel with plastic (Fig. 43)

Style O. Base units.
Item 1. Flat, 3 inches high (Fig. 39)
Item 2. Leg, 9 inches high (Fig. 40)
Item 3. Leg, 16 inches high (Fig. 41)

Type III. Full width, half depth units (13 inches wide, 13 inches deep)

Style N. Top unit, 2-1/4 inches high
Item 1. Cornice - steel (Fig. 43)

Style O. Base unit, leg, 10 inches high (Fig. 42)

Style P. Bookcase units
Item 1. Low unit with disappearing glass door, 12-3/4 inches high (Clear inside dimensions 31 inches wide, 12 inches deep, 9-1/2 inches high) (Fig. 35)
Item 2. Medium size unit with disappearing glass door 14-3/4 inches high (Clear inside dimensions 31 inches wide, 12 inches deep, 11-1/2 inches high (Fig. 37)
Item 3. High unit with disappearing glass door, 16-3/4 inches high (Clear inside dimensions 31 inches wide, 12 inches deep, 13-1/2 inches high) (Fig. 38)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

Type IV. Half width, full depth units, (16-1/2 inches wide, 25 inches deep)

Style A. Reducing board unit, 3/4 inch high (Reducing from 25 inches to 17 inches.) (Fig. 51)

Style G. Legal size file unit, 1-drawer, 13-1/4 inches high (Fig. 23)

Style H. Letter size file unit, 1-drawer, 13-1/4 inches high (Fig. 24)

Style N. Top unit, 2-1/4 inches high
- Item 1. Cornice - steel (Fig. 49)
- Item 2. Cornice - steel with linoleum (Fig. 49)
- Item 3. Cornice - steel with plastic (Fig. 49)

Style O. Base unit, leg, 9 inches high (Fig. 48)

Type V. Half width, intermediate depth units, (16-1/2 inches wide, 17 inches deep)

Style B. Box drawer unit, 1-drawer, 6-5/8 inches high with progressive suspension (Fig. 22)

Style C. Card index unit
- Item 1. 3 by 5 card size, 2-drawer, 6-5/8 inches high (Fig. 25)
- Item 2. 3 by 5 card size, 6-drawer, 13-1/4 inches high (Fig. 26)
- Item 3. 4 by 6 card size, 2-drawer, 6-5/8 inches high (Fig. 29)
- Item 4. 4 by 6 card size, 4-drawer, 13-1/4 inches high (Fig. 30)
- Item 5. 5 by 8 card size, 2-drawer, with 1 document drawer, 13-1/4 inches high (Fig. 31)

Style G. Legal size file unit, 1-drawer, 13-1/4 inches high (Fig. 23)

Style H. Letter size file unit, 1-drawer, 13-1/4 inches high (Fig. 24)

Style N. Top units

- Item 1. Cornice 2-1/4 inches high steel (Fig. 49)
- Item 2. Cornice 2-1/4 inches high steel with linoleum (Fig. 49)
- Item 3. Cornice 2-1/4 inches high steel with plastic (Fig. 49)
- Item 4. Flat 1 inch high steel (Fig. 50)
- Item 5. Flat 1 inch high steel with linoleum (Fig. 50)
- Item 6. Flat 1 inch high steel with plastic (Fig. 50)

Style O. Base units
- Item 1. Flat base 1-3/8 inches high (Fig. 47)
- Item 2. Closed base 3-5/8 inches high (Fig. 46)
- Item 3. Closed base 6-5/8 inches high (Fig. 46)
- Item 4. Leg base 9 inches high (Fig. 48)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

Style Q. Postal saving jacket unit, 3-drawer, 13-1/4 inches high. (Fig. 27)

Style R. Document unit, 3-drawer, 13-1/4 inches high. (Fig. 28)

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1 The following specifications and standards of the issue in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

L-P-00508 - Plastic sheet, Laminated, Decorative and Nondecorative.
DD-G-451a - Glass; Flat for Glazing Purpose.
QQ-P-416a - Plating, Cadmium (Electrodeposited)
QQ-Z-325 - Zinc, Plating (Electrodeposited)
TT-C-490 - Cleaning Method and pretreatment of Ferrous Suffaces for Organic Coatings.
LLL-L-354 - Linoleum; Desk Top

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipments. (Civilian Agencies)
Fed. Std. No. 595 - Color.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplement as issued, is for sale on a subscription basis by the Superintnedent of Documents, U. S. Government Printing Office, Washington 25, D. C.).

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purpose are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo;, Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U. S. Military Property.

(Copies of Military Specifications and Standards required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications: The following publications of the issue in effect on the date of invitation for bids, form a part of this specification.

Uniform Freight Classification Rules.

(Application for copies may be addressed to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois.)

Steel Products Manual, Carbon Steel Sheets.

(Application for copies may be addressed to the American Iron and Steel Institute, 350 Fifth Avenue, New York 1, N. Y.)

3. REQUIREMENTS

3.1 Material

3.1.1 Steel.- The steel sheets used in fabrication shall be of commercial quality cold rolled, stretcher leveled standard of flatness as defined in Table 24 of Steel Products Manual or roller leveled, cold rolled oil, or hot pickled and oiled, and shall withstand the bend test specified in 4.3.1. Cold rolled and stretcher or roller leveled steel shall be used for sides, backs, tops and drawer fronts or throughout. Hot rolled pickled and oiled steel shall be used for heavy interior structural parts where good welding is of primary importance. Cold rolled steel shall be used for drawer bodies, backs, partitions, and interior drawer fronts. The steel shall be bright, smooth, free from rust, scale, pits, scratches, laps, crimps, and buckles affecting strength or appearance. The gage numbers specified are as described in Table 5 of the Steel Products Manual, Carbon Sheet.

3.1.1.2 Linoleum.- The linoleum shall conform to the requirements of Federal Specification LLL-L-354 except that burlap or felt back may be used. The thickness of linoleum shall be not less than 0.075-inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

The linoleum color shall be as specified in 3.2.2.1.

3.1.1.3 Plastic sheet.- The plastic sheet shall conform to the requirements of Interim Federal Specification L-P-00508 (GSA-FSS), Style D, type I, grade HP, class 1, finish A. The plastic sheet shall be 0.062-inch thick with a plus or minus tolerance of 0.005-inch. The plastic sheet color shall be as specified in 3.2.2.2.

3.1.2 Hardware.

3.1.2.1 Bolts, Nuts, Screws, Levelers, Rods, Latches, Rollers.- All bolts, nuts, screws, levelers, rods, latches, and rollers for use in drawer suspension shall be of non-rusting metal or steel which is zinc or cadmium plated with any of the classes or types specified in Federal Specification QQ-Z-325 or QQ-P-416a. Rods may be of basic steel wire coppered.

3.1.2.2 Face hardware.- Face hardware shall be satin-finished anodized aluminum or type 430 corrosion-resistant steel or brushed chromium on steel or on die cast zinc, brass or bronze. Stamped hardware will not be permitted. The type and size of face hardware used for each unit shall be as specified herein and as shown on attached drawings.

3.1.2.2.1 Drawer pull.- The drawer pull shall be the design and dimensions shown in Detail Drawings. All surfaces and edges shall be ground smooth to eliminate roughness and sharp edges. The pull shall be securely attached with screws or nuts and lock washers which shall be surfaced mounted if attached to the inside of the drawer head or countersunk if mounted to the double wall of the drawer front.

3.1.2.2.2 Label holders.- The large and small label holders shall be the design and dimensions shown in detail drawings. All surfaces and edges shall be ground smooth to eliminate roughness and sharp edges. The label holders shall be secured to the drawer fronts by not less than two machine screws or by nuts and lock washers. Label holders shall accommodate without bend 2-7/8 inch by 1-3/4 inch label cards for large holders, and 2-1/8 inch by 1 inch for small holders.

3.1.2.2.3 Combination label holders and drawer pulls.- The combination label holders and drawer pulls shall be the design and dimensions shown on attached detail drawings. All surfaces and edges shall be ground smooth to eliminate roughness and sharp edges. The combination label holders and drawer pulls shall be secured to the fronts by not less than three machine screws or by nuts nuts and lock washers. Label holders shall accommodate without bending 2-7/8 inch by 1-7/16 inch label cards for the large holders, 2-1/8 inch by 1 inch for medium holders and 1-13/16 inch by 11/16 inch for small holders.

3.1.2.2.4 Door and guide rod knobs.- Door and guide rod knobs shall be of the design and dimensions as shown on attached detail drawings.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

A plus or minus tolerance of 1/16 inch is permitted on dimensions of knobs. Door knobs shall be attached with screws and lock washers. Guide rod knobs shall be threaded internally for attaching to guide rod.

3.1.3 Locks.- When specified in the invitation for bids, drawer units shall be supplied with paracentric key locks which shall have no less than four pin-tumblers and no less than 200 key changes. The face of the lock shall be of non-rusting metal or steel which is zinc or cadmium plated with any of the classes or types specified in Federal Specification QQ-Z-325 or QQ-P-416a. Two keys shall be supplied with each lock. When specified in the invitation for bids, an automatic locking device shall be supplied for units with two or more drawers locking all drawers in a unit. They shall be so constructed that a drawer left out can be replaced after a unit is locked without distorting the locking mechanism. Unless otherwise specified in the invitation for bids, all locks shall be of the same construction and design.

3.1.4 Cleaning.- All metal surfaces, except hardware, shall be cleaned and surface preparation processed in accordance with any of the grades or types specified in Federal Specification TT-C-490, Cleaning Methods and Pretreatment of Ferrous Surface for Organic Coatings.

3.1.5 Enamel: Enamel for the finishing shall be in accordance with manufacturers commercial practice, except the colors shall be as specified in 3.2.2 of this specification, and the enamel shall be baked for not less than 45 minutes at 300°F. or in accordance with the enamel manufacturer's directions. Enamel shall withstand the test specified in 4.3.2.

3.2 Construction.

3.2.1 Design.- All sectional units shall intermember with the standard Government sample established by the Federal Supply Service. The design, construction and dimensions shall be as specified herein and as shown in Paragraph 1.2.1 and attached drawing.

3.2.2 Color.

3.2.2.1 Linoleum.- The linoleum color shall be gray and shall match the standard linoleum color adopted by the Federal Supply Service, General Services Administration. Samples of the standard color of linoleum are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D. C., or from the Business Service Center of the nearest GSA Regional Office.

3.2.2.2 Plastic sheet.- The plastic sheet color shall be green and shall match the standard color adopted by the Federal Supply Service, General Services Administration. Sample panels of the color are obtainable, without charge, from the Business Service Center, Federal Supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Service, General Services Administration, Washington 25, D. C., or from the Business Service Center of the nearest GSA Regional Office.

3.2.2.3 Metal.- The color of the metal finish shall be Gray, Color No. 26134, of Federal No. 595. Sample panels of the standard color are obtainable, without charge from the Business Service Center, Federal Supply Service, General Services Administration, Washington 25, D. C., or from the Business Service Center of the nearest Regional Office.

3.2.3 Tolerances.- A plus or minus tolerance of 1/32 inch will be permitted on all dimensions shown on the attached drawings unless otherwise specified herein.

3.2.4 The steel used in the construction of all units shall be not less than the gages listed on the attached drawings.

3.2.5 Asembly.- The tops of units shall be spot welded to the flanges of the ends and back at points not greater than four inches apart. Flanges of the reinforcing channels on bottom assemblies shall be spot welded to the flanges of the ends or to bottom at points not greater than four inches apart. The 4 front and 4 back corners of all units shall be joined by fusion welding. These corners shall be filled in the front by fusion welding. This can be accomplished on either the outside or the inside of the cabinet. The partitions and ends and drawer fronts of all units shall be of double wall construction. The top and bottom of all drawer units shall be rigidly held together by wire brace rods to prevent spreading as shown on attached detail drawings. The units shall be assembled so that spotwelds shall not show on exposed portions. All surplus metal shall be filed off and the joints smoothly filed or ground to give units a finished appearance. The top corners of all drawers shall be neatly closed, fusion welded and ground smooth. The front and rear corners of the top units shall be neatly closed, fusion welded and ground smooth. The assembly of the base units shall be by spot welding or by fusion welding.

3.2.6 Interlocking device.- All units except top units shall be fitted with interlocking devices which will prevent tilting of the units when loaded drawers are extended or other pressure is exerted on stacks of units. Interlocking devices shall be as shown on the attached detail drawings.

3.2.7 Progressive suspensions.- Progressive suspensions shall be provided for Type I, Style G and H; Type II, Style G and H; Type IV, Style G and H; and Type V, Style B, G, and H.

Suspension slides shall be either of the progressive suspension type with side arm ball bearing rollers, or of the cradle type of progressive suspension with ball bearing rollers. The steel used in the construction of the case members shall be cold-rolled strip not less than 16-gage (0.0598) thick. Steel used in the construction of the suspension

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

intermediate, or floating member, shall be cold-rolled strip not less than 16-gage (0.0598) inch thick and shall be made rust-resistant by electro-galvanizing, cadmium or nickel plating, or by other equally effective processes. When cradle type suspension is used at least two tie members shall be furnished. The rear tie shall consist of an angle of not less than 16-gage (0.0598) inch thick and the front tie of a flat piece or angle of not less than 16-gage (0.0598) inch thick. Ties shall be joined to side arms by not less than two spot welds at each connection. The drawer slide shall be not less than 14-gage (0.0747) inch thick and shall be of cold-rolled steel having, after being formed to shape, a Rockwell hardness of not less than65 nor more than 85 on the B scale. The slides shall travel easily and smoothly with the drawer.

Free rolling rollers, balls, or fixed journal rollers of the ball bearing type shall be used to support the suspension and drawer. There shall be at least one main bearing roller in each slide having not less than 1/4 inch tread and not less than 7/8 inch in diameter. Rollers shall be accurately turned from cold-rolled steel and shall be case-hardened. The rollers and roller housing or retainer shall be assembled to the case members and suspensions by solid or tubular riveting or welding. When journaled rollers are used, each suspension shall have at least six of the ball bearing type and two of the stud bearing type. When free rollers or balls are used there shall be not less than ten to a suspension. Balls shall be not less than 3/8 inch diameter, hardened a nd polished, and so retained in concave races as to prevent dislocation or removal of balls unless suspension is dismantled.

3.2.8 Bail suspensions.- All drawer units not required to have progressive suspensions shall have bail suspensions. The drawer bail shall prevent the drawer from coming out without lifting the drawer front and shall be formed to brace and strengthen the drawer sides and bottom.

3.2.9 Compressors.- All drawers shall be equipped with a positive locking type compressor, easily adjustable and removable without the use of special tools. The compressor shall operate on eithef a compressor rod or in a compressor channel. The face of the compressor shall be the same size as the cards to occupy the drawer. All compressors shall have a spring tension type compressor.

3.2.10 Drawers.- Construction of drawers shall be as shown on attached drawings. Drawers shall be equipped with suitable stops to relieve the shock and deaden the noise and to prevent the drawers from dropping out when opened. The stops shall be so constructed that the drawers may be readily removed and replaced. Drawers shall not be permitted to stop against the back of the files.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.11 Drawer latches.- Drawer latches shall be furnished for each Type I, Styles G and H; Type II, Styles G and H; Type IV, Styles G and H, and Type V, Styles G and H. It shall be a readily controlled automatic drawer latch sufficiently strong to hold the loaded drawer in a closed position against a normal rebound, a tilt, or an uneven floor. The latching mechanism shall be guarded or concealed, eliminating hazard of torn clothing or scratched hands. The latch release button shall be of the material specified in 3.1.2.2 and shall be conveniently located near the drawer pull.

3.2.12 Base sections.- Base units shall be as shown on the attached drawings. The legs of leg base units shall be square and tapered, and closed on all sides. Bases shown in Fig. 46 and Fig. 47 shall have adjustable glides.

3.2.13 Doors.- Doors shall be closely fitted, run on metal tracks, and operate smoothly. Units with disappearing glass or steel doors including bookcase units shall be fitted with an equalizing attachment which shall not obstruct clear filing space. Units with sliding doors shall have concelaed sheaves at the bottom of the doors. Glass used in doors shall conform to Type B, Federal Specification DD-G-451a. The glass of disappearing or hinged glass doors shall be securely held in place with metal glazing strips and be provided with rubber cushions or channel shaped rubber to prevent it from rattling or shattering under service conditions. Glass sliding doors shall be unframed and swiped smooth on vertical edges. Knobs for use as handles shall be provided for all doors, except sliding doors which shall be provided with smooth indentations for use as finger grips.

3.2.14 Cabinets shall withstand tests specified in 4.3.

3.2.15 Linoleum top covering.- The top shall be covered with linoleum as specified in 3.1.1.2 which shall be cemented uniformly to the top by a cement recommended by the linoleum manufacturer. The cement shall be free of lumps or foreign matter.

3.2.16 Plastic top covering.- The top shall be covered with plastic sheet as specified in 3.1.1.3. The plastic sheet shall be bonded uniformly to the top by an adhesive recommended by the adhesive manufacturer for use with metal and shall be applied at a temperature recommended by the adhesive manufacturer to insure even adhesion. The steel top shall be preperly cleaned and prime painted prior to application of the adhesive. Adhesive shall be applied to both top and plastic sheet and dried to remove solvents. After the plastic has been applied to the steel top, pressure shall be applied within the range of 5 pounds per square inch minimum and 50 pounds per square inch maximum by a method which will not cause uneven adhesion over the top.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3 Finish.- All exterior and interior steel surfaces of the units, except hardware, shall be prepared in accordance with 3.1.4. All metal surfaces except hardware shall be enameled. The enamel shall conform to the requirements of 3.1.5. The minimum total finished film thickness on exposed enameled surfaces shall be not less than 1 mil. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film, and separation of color. Special attention shall be given to the bottoms and to the interior to insure that all surfaces are adequately protected against rust. Finish panels shall withstand the test specified in 4.3.3.

3.4 Identification marking.- Unless otherwise specified, each unit shall be permanently marked in a plain and legible manner with the specification number, the Federal Stock Number, the month and year of manufacture, and the contractor's name or trademark, and the contract order number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with Military Standard MIL-STD-130.

3.5 Workmanship.- The workmanship shall be of a quality to produce serviceable items of office furniture built to withstand hard daily usage. The construction, assembly and finishing shall be in strict accordance with the minimum requirements of this specification. The edges of all sheets and parts shall be properly formed to eliminate burrs or raw edges.

3.6 Preproduction smaple.- Unless otherwise specified before production is commenced, a sample of the finished commodity shall be submitted or made ready for approval of the contracting officer or his authorized representative for inspection and tests as specified in Section 4 to determine compliance with this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 General quality assurance provision.

4.1.1 Contractor inspection.- The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and service acceptable to the Government. Inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.1.2 Contfactor quality assurance system.- The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this specification. Results of all examinations and tests performed under the quality assurance system shall be made available to the Government. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by this specification and other documents referenced herein. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that an equivalent control is included in the approved quality assurance procedure. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of the detail specification will be used. The contractor shall notify the Government of and obtain approval for any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced herein.

4.1.3 Government verification.- All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an effect upon the quality of the product will be immediately called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered shall be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor shall designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection.- The cabinets shall be inspected to determine compliance with this specification, as to workmanship, materials, design, details of construction, hardware, finish, marking and packing. Inspection may be made at the factory by a representative of the Government at any time during process of manufacture, or at point of delivery.

4.3 Tests.

4.3.1 Bend test.- One longitudinal and one transverse bend-test specimen shall be cut from the sample section and bent cold, flat upon itself, without showing cracks or fracture. A slight granulation of the surface at the point of greatest deformation in the bend shall not be considered cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

4.3.2 Service tests.

4.3.2.1 Letter-size units.- The sample letter-size unit, referred to above, shall be bolted or otherwise secured in position and connected to atest machine which will operate the test drawer on its suspension. There shall be a means for adjusting the length of the stroke, a method to drive it at a rate not to exceed 20 cycles per minute, but it shall not in any way contribute to the support of the drawer. The suspension shall have no lubrication in addition to that applied at the start of test. The stroke of the machine shall be adjusted to coincide with the full inward and outward travel of the drawer relative to its case. The drawer to be tested shall be loaded with 60 pounds of typical filing material, equally distributed from front to rear. At the beginning of the test and at each increment of 10,000 cycles, a test shall be conducted to determine the force required to start the loaded drawer moving forward and to move to its full outward limit. This part of the test shall be conducted by passing a limp cord, tied to the center of the handle of the drawer, over a sheave, with the weight applied to its free end. The drawer shall be considered as having failed the service test if the drawer operating force exceeds 3-1/4 pounds to complete the forward stroke before or at 50,000 cycles. Should failure be perceptible during the increments of 10,000 cycles the apparatus should be stopped and load test conducted at that point.

4.3.2.2 Legal-size.- The sample legal-size unit shall be subjected to the identical test as described in paragraph 4.3.2.1 above.

4.3.3 Compressor holding test.- Units as described in paragraph 4.3.2.1 and paragraph 4.3.2.2 above shall be also subjected to the following test to determine ability of compressor to remain in its position. The apparatus or its equivalent as prescribed for the Service Test shall be set in motion, so that the machine shall operate at a speed of not more than 20 cycles per minute. The load as indicated above for the particular unit shall be placed in the drawer and held in position at the rear by the compressor. The location of the compressor shall be scratched on the bottom of the drawer and the machine made to operate 500 cycles. Upon completion, the position of the compressor shall be indicated by a similar scratch mark. The rearward movement of the compressor as a result of this test shall not exceed one-half inch as indicated by the distance, if any, between the two scratches.

5. PREPARATION FOR DELIVERY

5.1 Federal Standard No. 102.- Levels of packaging and packing protection and defined in Federal Standard No. 102. (For civilian agencies)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

5.2 Packaging.- Furniture units shall be packaged in accordance with level A, level B or level C, as specified in the contract or order (see 6.1).

5.2.1 Level A.- Furniture units shall be packaged as specified in invitation for bids.

5.2.2 Level B.- Furniture units shall be packaged as specified in the invitation for bids.

5.2.3 Level C.- Furniture units shall be packaged in accordance with manufacturer's commercial practice.

5.3 Packing.- Furniture units, packaged level A, B or C, shall be packed for level A, B, or C as specified in the contract or order (see 6.1).

5.3.1 Level A.- Furniture units shall be packed as specified in the invitation for bids.

5.3.2 Level B.- Furniture units shall be packed as specified in the invitation for bids.

5.3.3 Level C.- Furniture units shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carrier, at the lowest rate to point of delivery called for in the contract or purchase order.

5.4 Marking.

5.4.1 Civil agencies.- In addition to any special marking required by the contract or purchase order, marking of shipping containers shall be in accordance with Federal Standard No. 123.

5.4.2 Military agencies.- In addition to any special marking required by the contract or purchase order, marking of shipping container shall be in accordance with Military Standard MIL-STD-129.

6. NOTES

6.1 Ordering data.- Purchasers should exercise any desired options offered herein and should specify the following:

(a) Title, symbol, and date of this specification.
(b) Type required (see 1.2.1).
(c) Whether locks are required (see 3.1.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

6.2 Transportation Description.

6.2.1 Transportation descriptions and minimum weights applicable to this commodity are:

Rail: Filing cabinets, not otherwise indexed by name, steel. (Specify set-up, hollow or solid walls or knocked-down flat)

Carload minimum weights:
In cars 40'9" or less in length, inside measurements- 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.
In cars exceeding 40'9" in length, inside measurements - 16,000, 18,000, 21,000, 30,000 and 40,000 pounds.

Motor: Filing cabinets, not otherwise indexed, steel. (Specify set-up with hollow or solid walls or knocked-down flat)

Truckload minimum weights - 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 34, National Motor Freight Classification.

Rail: Bookcase, sectional, steel, set-up.

Carload minimum weights:
In cars 40'9" or less in length, inside measurements - 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.
In cars exceeding 40'9" in length, inside measurements - 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Motor: Bookcases, sectional, steel, set-up.

Truckload minimum weights - 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 34 National Motor Freight Classification.

Rail: Cabinets, storage, steel, not otherwise indexed by name, with glass. (Specify set-up or knocked-down)

Carload minimum weights:
In cars 40'9" or less in length, inside measurements - 10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds.
In cars exceeding 40'9" in length, inside measurements - 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Motor: Cabinets, storage, steel, with glass. (Specify set-up or knocked-down)

Truckload minimum weights - 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 34, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

33" WIDE UNITS WITH DRAWERS

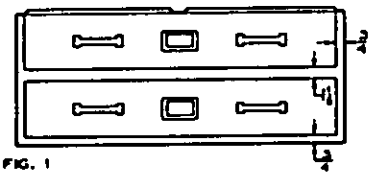


FIG. 1

BOX DRAWER UNIT
13-1/4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE		
	HIGH	9-1/4"
	WIDE	30-3/4"
	DEEP	15-7/8 OR 23-7/8"

SIDE DRAWER SUSPENSION
LARGE LABEL HOLDER

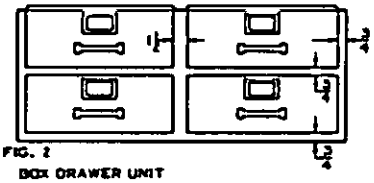


FIG. 2

BOX DRAWER UNIT
13-1/4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE		
	HIGH	9-3/8"
	WIDE	14-1/4"
	DEEP	15-7/8" OR 23-7/8"

SIDE DRAWER SUSPENSION
LARGE LABEL HOLDER

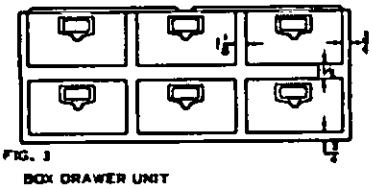


FIG. 3

BOX DRAWER UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	5"
	WIDE	9-1/8"
	DEEP	15-7/8"

CLOSED BACK SUSPENSION
LARGE PULL-LABEL HOLDER

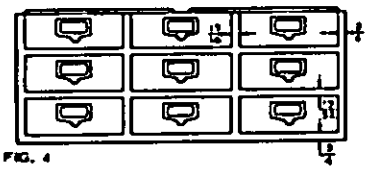


FIG. 4

BOX DRAWER UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	3-5/16"
	WIDE	9-1/4"
	DEEP	15-7/8"

CLOSED BACK SUSPENSION
LARGE PULL-LABEL HOLDER




FIG. 5

TRANSPORTATION REQUEST UNIT
6-5/8" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	4 - 1/8"
	WIDE	7-1/2"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER

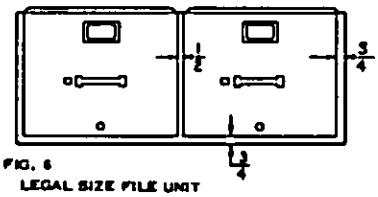


FIG. 6

LEGAL SIZE FILE UNIT
13-1/4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE		
	HIGH	11-3/16"
	WIDE	15-1/8"
	DEEP	15-3/4" OR 23-3/4"

PROGRESSIVE SLIDE SUSPENSION
LARGE LABEL HOLDER

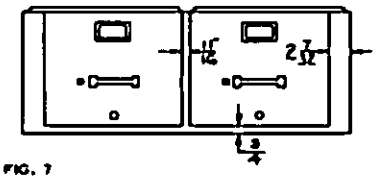


FIG. 7

LETTER SIZE FILE UNIT
13-1/4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE		
	HIGH	11-3/16"
	WIDE	12-1/4"
	DEEP	15-3/4" OR 23-3/4"

PROGRESSIVE SLIDE SUSPENSION
LARGE LABEL HOLDER



FIG. 8

3" BY 5" CARD INDEX UNIT
6-5/8" HIGH, 17" OR 25" DEEP

DRAWER INSIDE		
	HIGH	3-1/2"
	WIDE	5-1/8"
	DEEP	15-7/8" OR 23-7/8"

OPEN BACK RAIL SUSPENSION
MEDIUM PULL-LABEL HOLDER

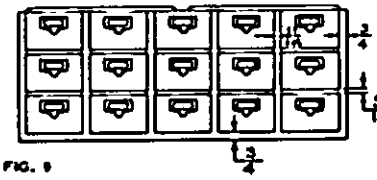


FIG. 9

3" BY 5" CARD INDEX UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	3-1/2"
	WIDE	9-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
MEDIUM PULL-LABEL HOLDER



FIG. 10

4" BY 6" CARD INDEX UNIT
6-5/8" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	4-5/8"
	WIDE	6-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER

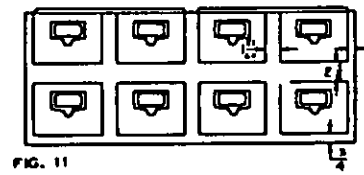


FIG. 11

4" BY 6" CARD INDEX UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	4-5/8"
	WIDE	6-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER




FIG. 12

5" BY 8" CARD INDEX UNIT
6-5/8" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	5-5/8"
	WIDE	8-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER

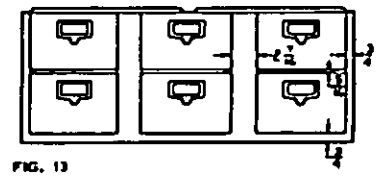


FIG. 13

5" BY 8" CARD INDEX UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	5-5/8"
	WIDE	8-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER

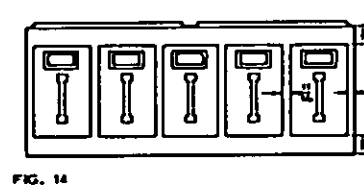


FIG. 14

8" BY 5" CARD INDEX UNIT
13-1/4" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	9"
	WIDE	5-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE LABEL HOLDER




FIG. 15

CHECK FILE UNIT
6-5/8" HIGH, 17" DEEP

DRAWER INSIDE		
	HIGH	4-7/8"
	WIDE	9-1/8"
	DEEP	15-7/8"

OPEN BACK RAIL SUSPENSION
LARGE PULL-LABEL HOLDER

Source: https://assist.dla.mil -- Downloaded: 20260426T11:39Z
Check the source to verify that this is the current version before use.

33" WIDE UNITS WITH DRAWERS

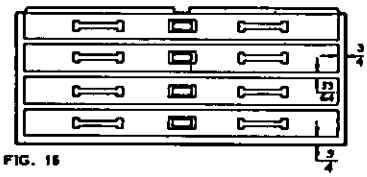


FIG. 16

MAP OR PLAN UNIT
13–1/ 4" HIGH, 25" DEEP

DRAWER INSIDE	HIGH	2–5/ 16"
	WIDE	30–3/ 4"
	DEEP	23–7/ 8"

CLOSED BACK W/ HOOD, SIDE SUSPENSION
SMALL LABEL HOLDER

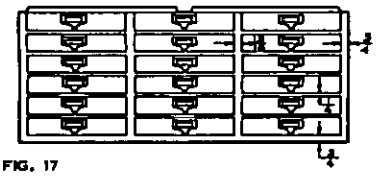


FIG. 17

LEGAL BLANK UNIT
13– 1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	1–1/ 2"
	WIDE	9–1/ 4"
	DEEP	15–7/ 8"

CLOSED BACK SUSPENSION
SMALL PULL–LABEL HOLDER




FIG. 18

LEGAL BLANK UNIT
6–5/ 8" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	1–1/ 2"
	WIDE	9–1/ 4"
	DEEP	15–7/ 8"

CLOSED BACK SUSPENSION
SMALL PULL–LABEL HOLDER

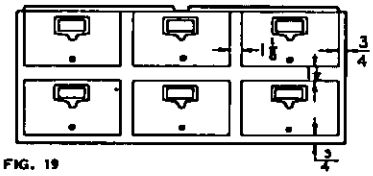


FIG. 19

CHECK FILE UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	4–7/ 8"
	WIDE	9–1/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
LARGE PULL–LABEL HOLDER

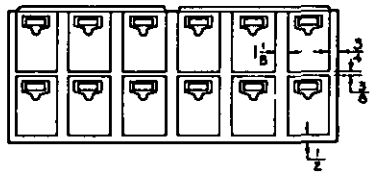


FIG. 20

MONEY ORDER APPLICATION UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	5–3/ 4"
	WIDE	3–5/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
MEDIUM PULL–LABEL HOLDER

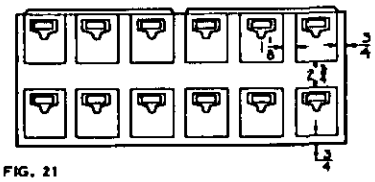


FIG. 21

MONEY ORDER COUPON UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	4–3/ 8"
	WIDE	3–5/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
MEDIUM PULL–LABEL HOLDER

16-1/2" WIDE UNITS WITH DRAWERS




FIG. 22

BOX DRAWER – STORAGE UNIT
6–5/ 8" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	5–1/ 2"
	WIDE	12–1/ 4"
	DEEP	16–1/ 8"

PROGRESSIVE SLIDE SUSPENSION




FIG. 23

LEGAL SIZE FILE UNIT
13–1/ 4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE	HIGH	11–3/ 16"
	WIDE	15–1/ 8"
	DEEP	15–3/ 4" OR 23–3/ 4"

PROGRESSIVE SLIDE SUSPENSION
LARGE LABEL HOLDER




FIG. 24

LETTER SIZE FILE UNIT
13–1/ 4" HIGH, 17" OR 25" DEEP

DRAWER INSIDE	HIGH	11–3/16"
	WIDE	12–1/ 4"
	DEEP	15–3/ 4" OR 23–3/ 4"

PROGRESSIVE SLIDE SUSPENSION
LARGE LABEL HOLDER




FIG. 25

3" BY 5" CARD INDEX UNIT
6–5/ 8" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	3–1/ 2"
	WIDE	5–1/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
MEDIUM PULL–LABEL HOLDER




FIG. 26

3" BY 5" CARD INDEX UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	3–1/ 2"
	WIDE	5–1/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
MEDIUM PULL–LABEL HOLDER




FIG. 27

POSTAL SAVING JACKET UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	8–15/ 16"
	WIDE	4–3/ 4"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
LARGE LABEL HOLDER




FIG. 28

DOCUMENT UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	11–15/ 16"
	WIDE	4–3/4"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
LARGE LABEL HOLDER




FIG. 29

4" BY 6" CARD INDEX UNIT
6–3/ 8" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	4–5/ 8"
	WIDE	6– 1/8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
LARGE PULL–LABEL HOLDER




FIG. 30

4" BY 6" CARD INDEX UNIT
13–1/ 4" HIGH, 17" DEEP

DRAWER INSIDE	HIGH	4–5/ 8"
	WIDE	6–1/ 8"
	DEEP	15–7/ 8"

OPEN BACK BAIL SUSPENSION
LARGE PULL–LABEL HOLDER




FIG. 31

5" BY 8" CARD INDEX UNIT
13–1/ 4" HIGH, 17" DEEP
DOC. DRAWER INSIDE
11–15/ 16" HIGH
4–3/ 4" WIDE
15–7/ 8" DEEP
5" BY 8" DRAWER INSIDE
5–5/ 8" HIGH
8–1/ 8" WIDE
15–7/ 8", DEEP
OPEN BACK BAIL SUSPENSION
LARGE LABEL HOLDER
LARGE PULL–LABEL HOLDER

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

33" WIDE BOOKCASES & STORAGE UNITS

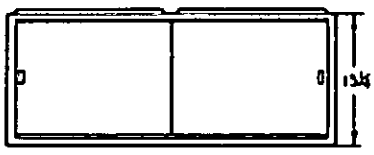


FIG. 32
17" DEEP—SLIDING DOORS—GLASS OR STEEL PANEL
INSIDE HIGH 11—3/4"
DEEP 16-1/4"

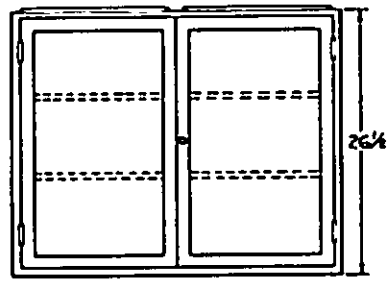


FIG. 34
25" DEEP—HINGED DOORS—GLASS OR STEEL PANEL, 2 ADJUSTABLE SHELVES
INSIDE HIGH 24—3/4"
DEEP 24—1/2"

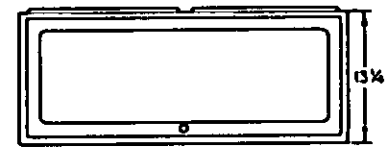


FIG. 36
17" DEEP—DISAPPEARING DOOR—GLASS OR STEEL PANEL
INSIDE HIGH 10—1/2"
DEEP 16—1/4"

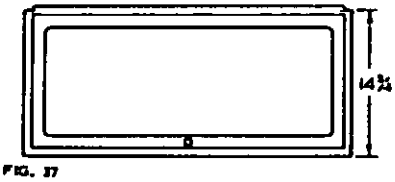


FIG. 37
13" DEEP—DISAPPEARING DOOR—GLASS PANEL
INSIDE HIGH 12"
DEEP 12—1/4"

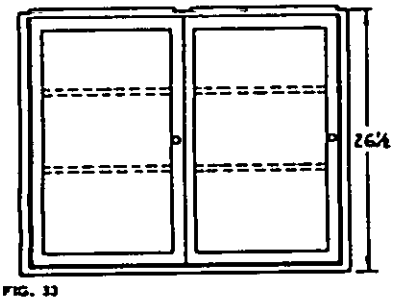


FIG. 33
17" DEEP—SLIDING DOORS—GLASS OR STEEL PANEL, 2 ADJUSTABLE SHELVES
INSIDE HIGH 23"
DEEP 13-1/4"

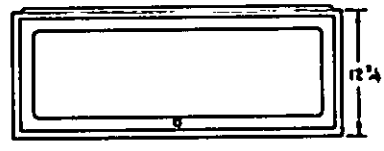


FIG. 35
13" DEEP—DISAPPEARING DOOR—GLASS PANEL
INSIDE HIGH 10"
DEEP 12—1/4"

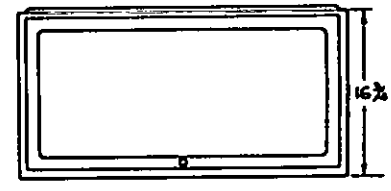


FIG. 38
13" DEEP—DISAPPEARING DOOR—GLASS PANEL
INSIDE HIGH 14"
DEEP12—1/4"

33" WIDE UNITS




FIG. 39
FLAT BASE 17" OR 25" DEEP

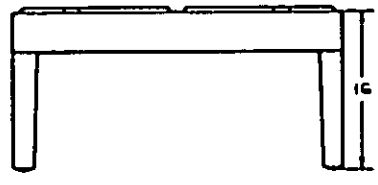


FIG. 41
LEG BASE 17" OR 25" DEEP




FIG. 43
TOP 13", 17" OR 25" DEEP




FIG. 45
LEG BASE 17" OR 25" DEEP




FIG. 42
LEG BASE FOR SECTIONAL BOOKCASES 13" DEEP




FIG. 44
REDUCING BOARD 17" OR 25" DEEP




FIG. 46
SLIDING REFERENCE SHELF 17" OR 25" DEEP

16-1/2" WIDE UNITS



FIG. 46
CLOSED BASE 17" DEEP




FIG. 48
LEG BASE 17" OR 25" DEEP




FIG. 50
TOP—FLAT 17" DEEP



FIG. 47
FLAT BASE 17" DEEP




FIG. 49
TOP 17" OR 25" DEEP





FIG. 51
REDUCING BOARD 25" DEEP


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:20Z
Check the source to verify that this is the current version before use.


DETAILS OF UNITS WITH DRAWERS

CUTAWAY OF TOP LOOKING DOWN

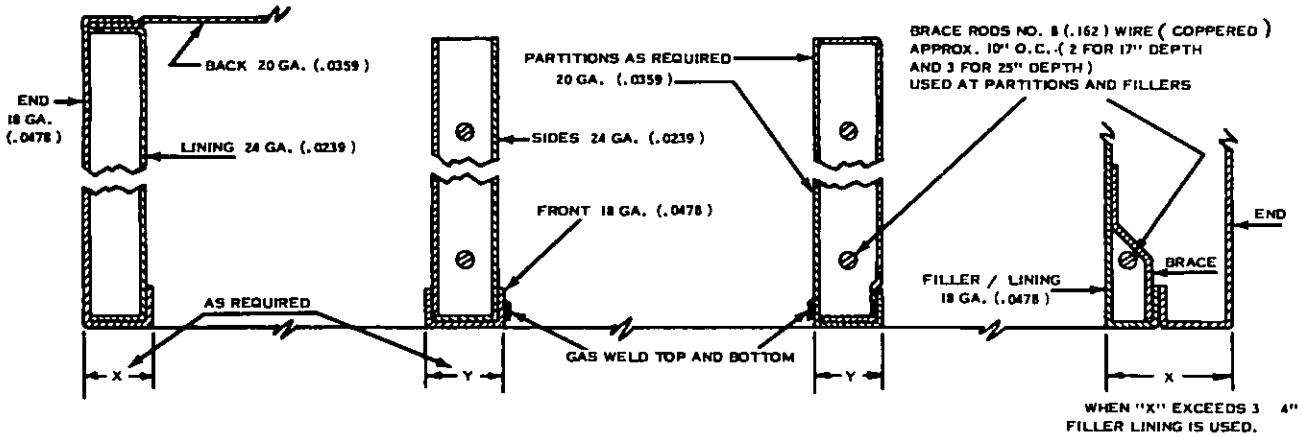


CUTAWAY OF FRONT

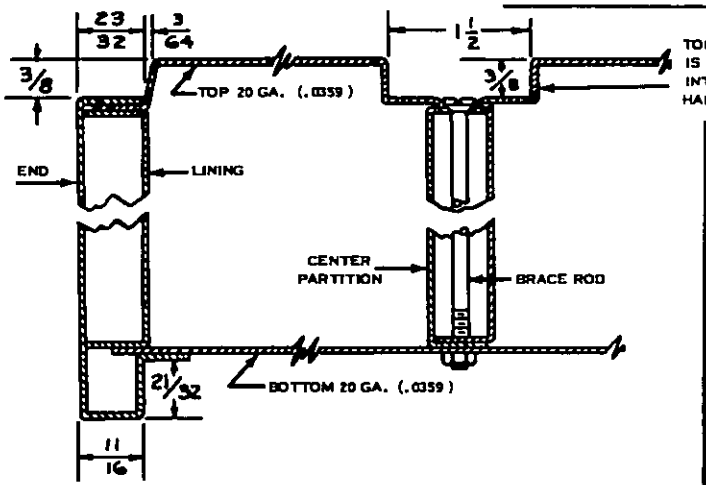

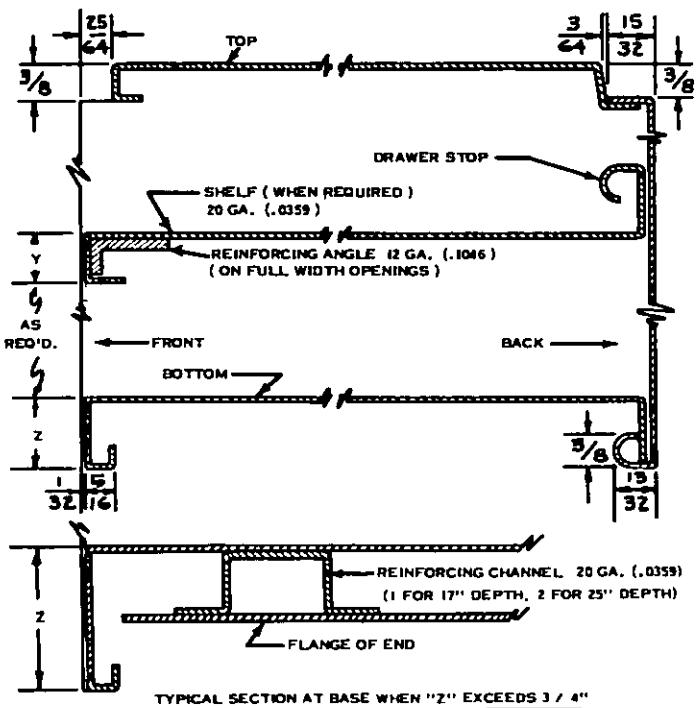


TYPICAL SECTION AT BASE WHEN "Z" EXCEEDS 3 / 4"

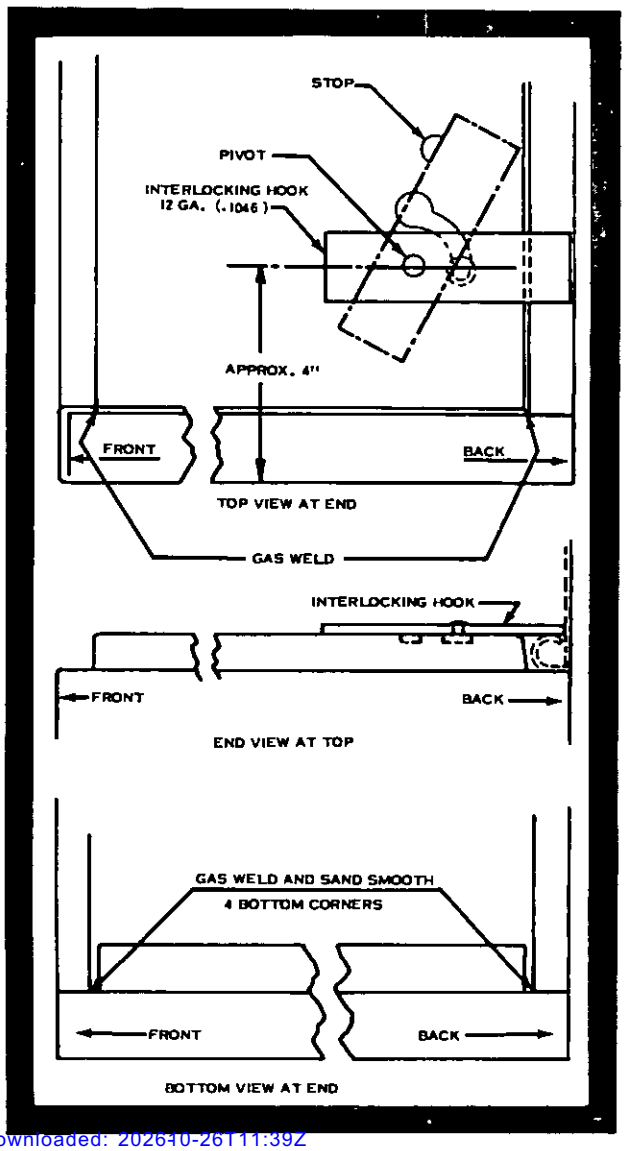


Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:39Z
Check the source to verify that this is the current version before use.


DRAWER DETAILS

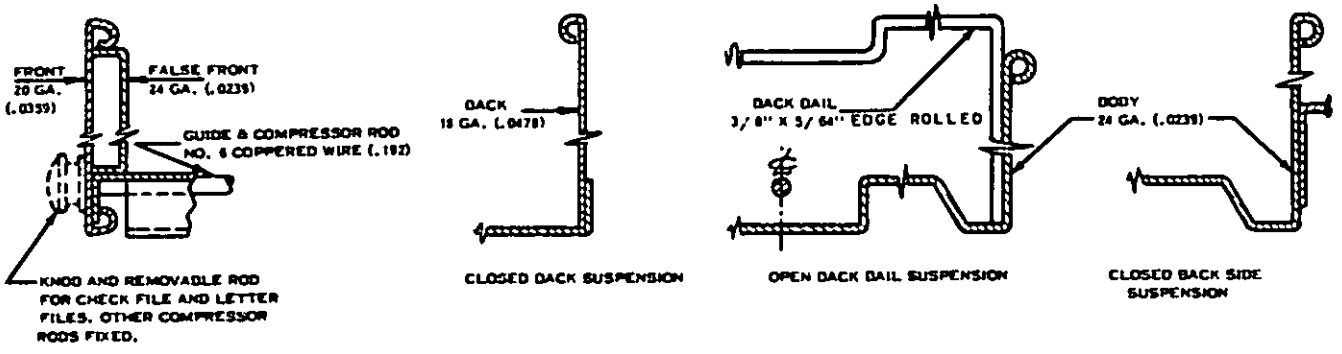


MAP OR PLAN DRAWER

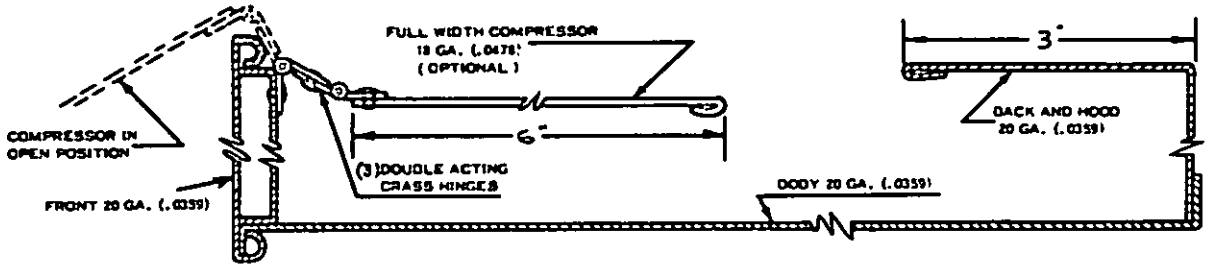

LETTER SIZE FILE DRAWER

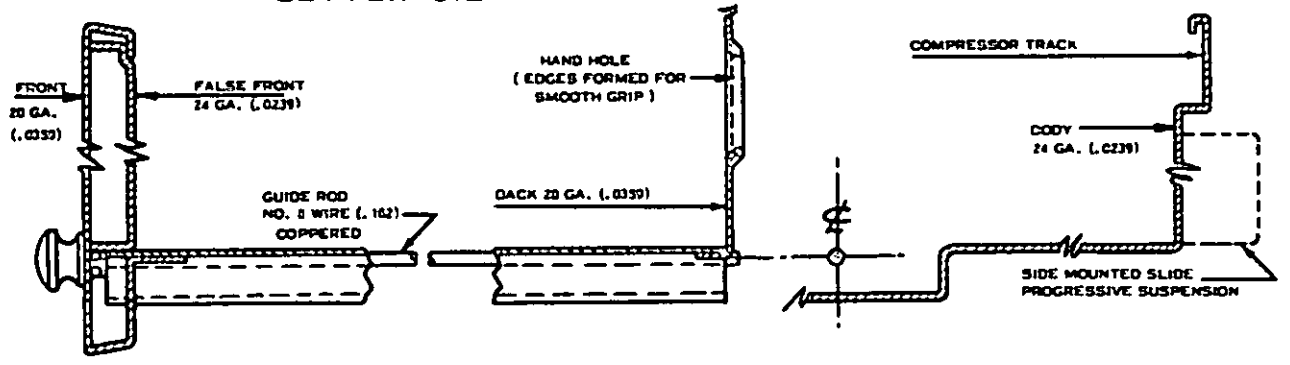


LEGAL SIZE FILE DRAWER

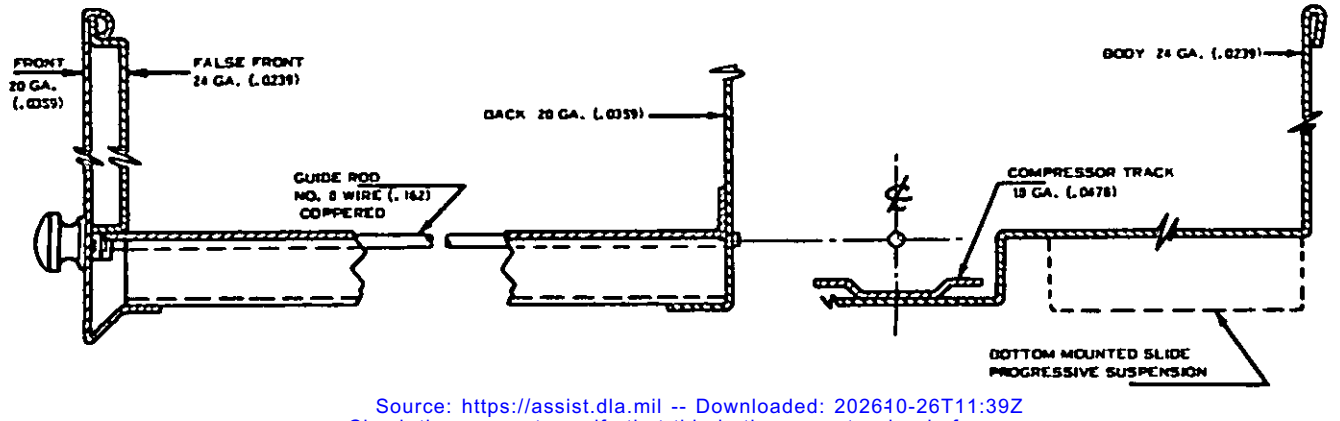

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.


PULLS, KNOBS & LABEL HOLDERS

PULL

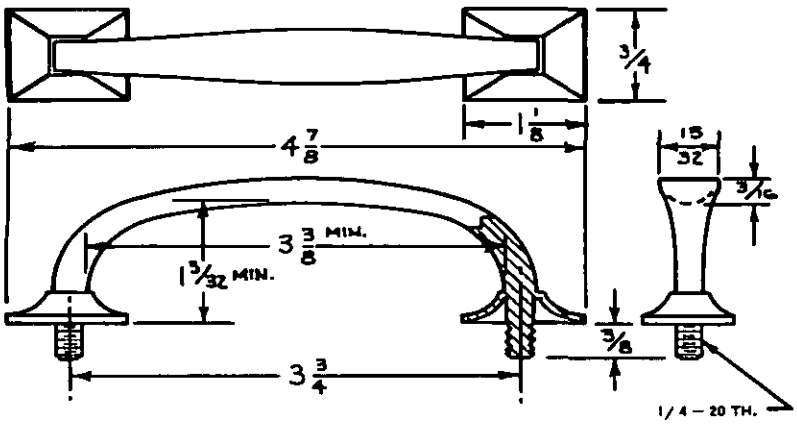


COMBINATION PULL & LABEL HOLDER


SMALL

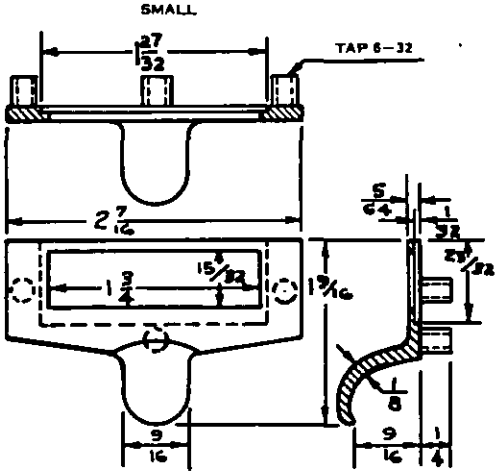


THUMB LATCH KNOB

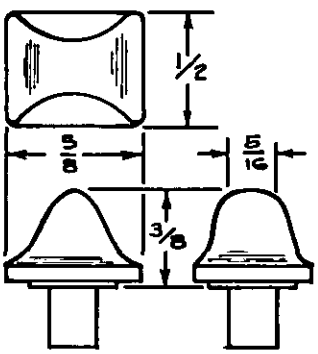


DOOR KNOB

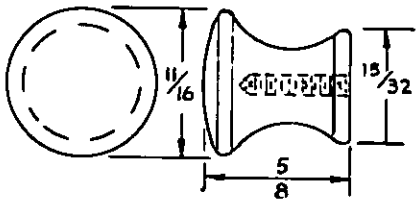

MEDIUM

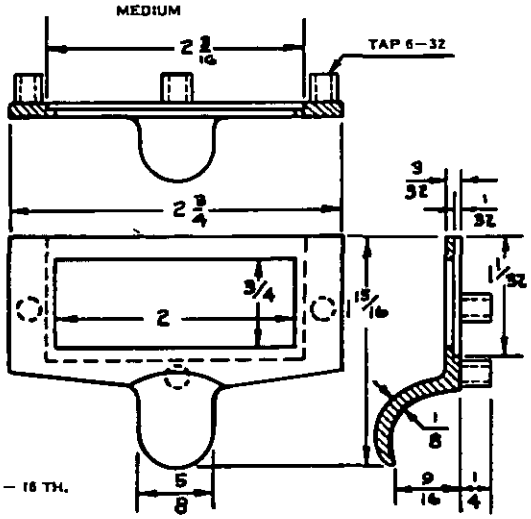


GUIDE ROD KNOB

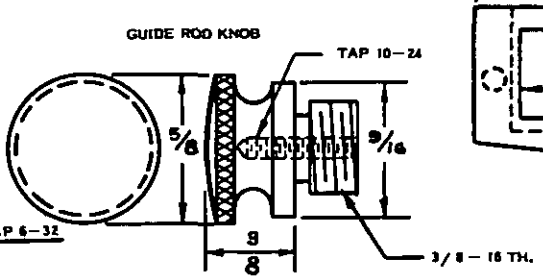


LABEL HOLDER


SMALL

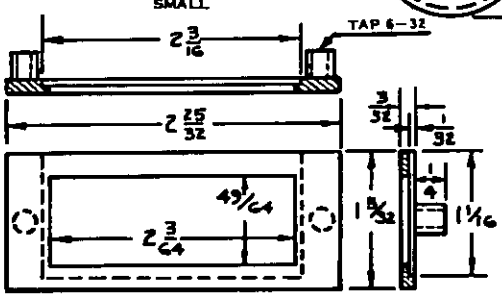

LARGE

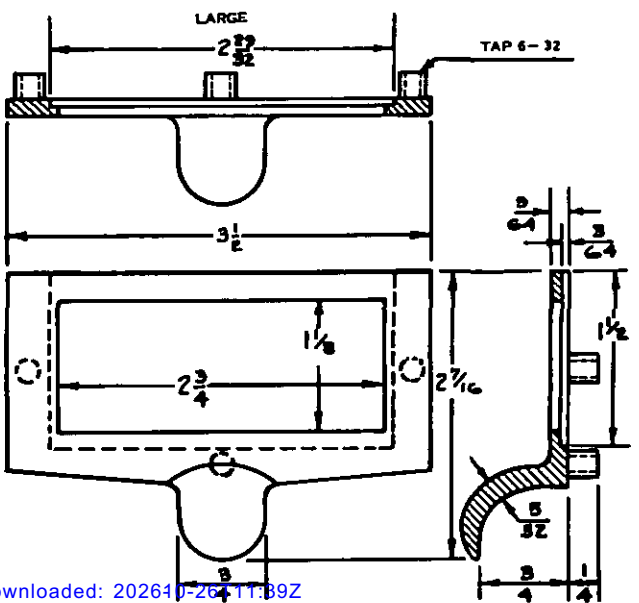


LARGE

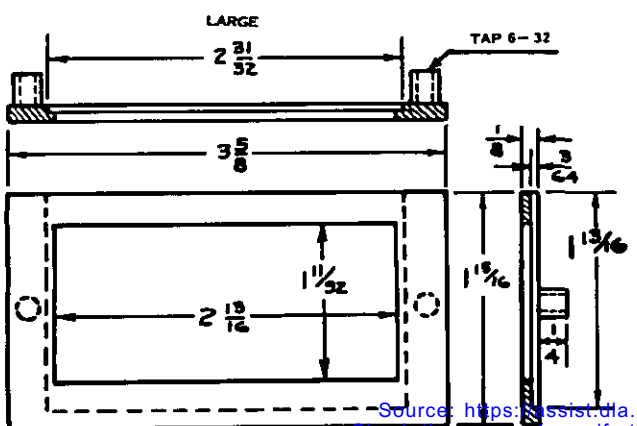



Source: https://assist.dla.mil -- Downloaded: 20260-2611:39Z
Check the source to verify that this is the current version before use.


33" WIDE UNITS WITH SLIDING DOORS AND HINGED DOORS


GLASS OR STEEL PANEL

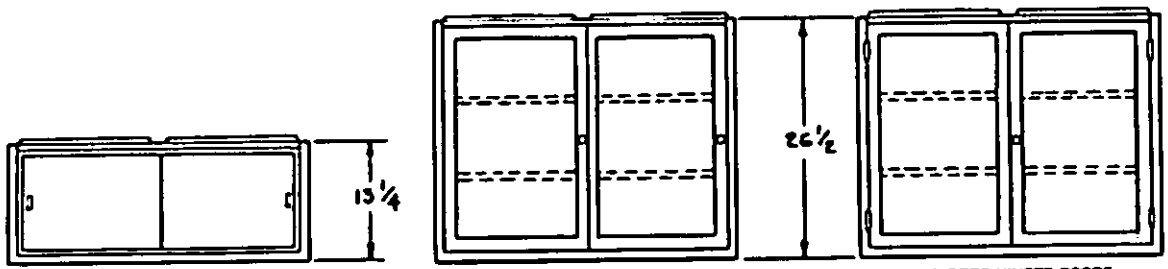

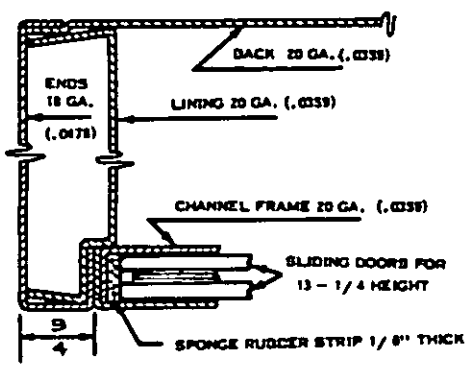


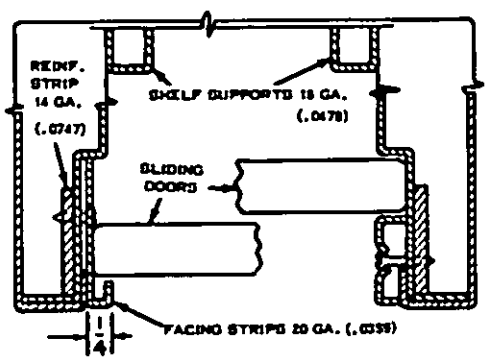

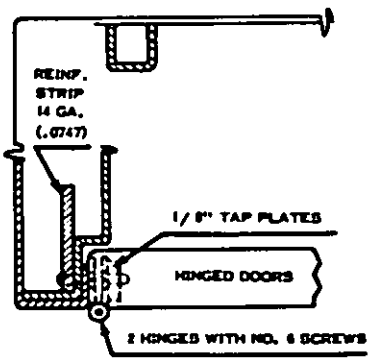


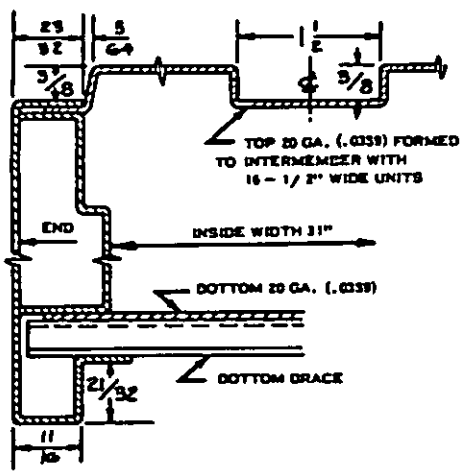



DETAILS OF DOOR FRAMES

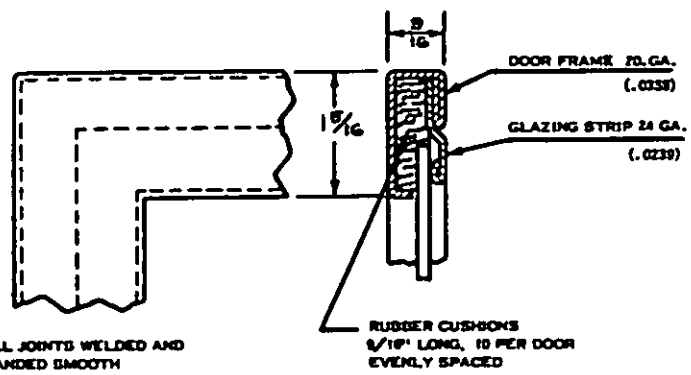


FOR DETAILS OF INTERLOCKING HOOK SEE DRAWER UNIT DETAILS.

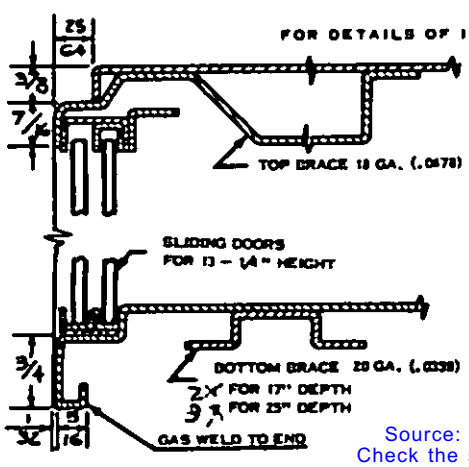

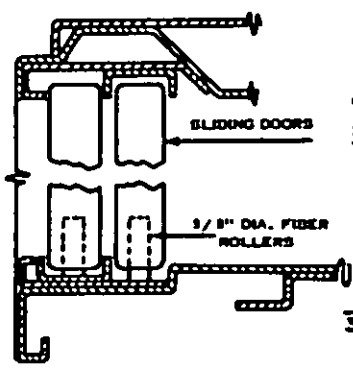


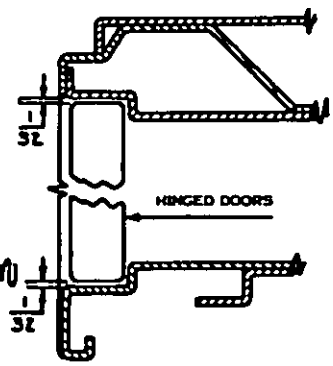

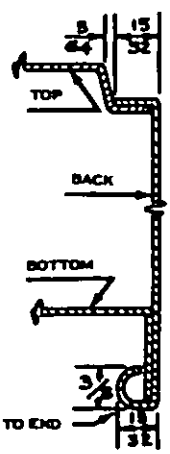


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.


33" WIDE BOOKCASES WITH DISAPPEARING DOORS




13" DEEP
INSIDE { HIGH 9 1/2"
DEEP 12"





13" DEEP
INSIDE { HIGH 11 1/2"
DEEP 12"




13" DEEP
INSIDE { HIGH 13 1/2"
DEEP 12"

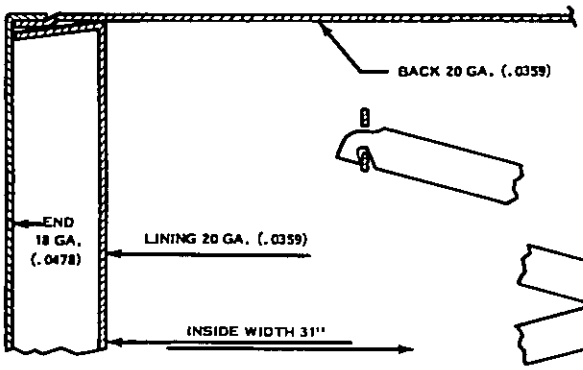


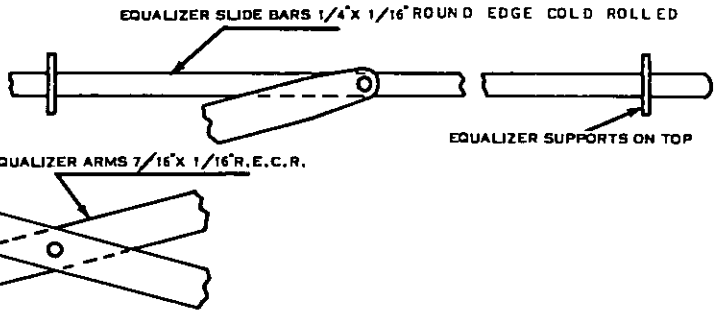

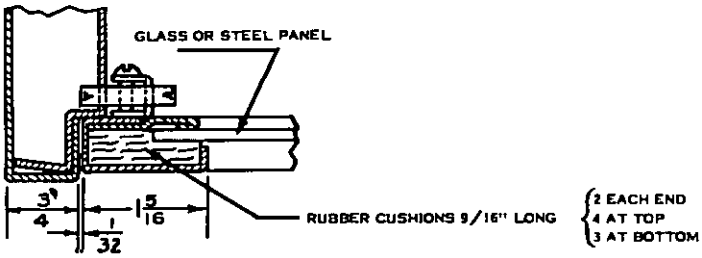

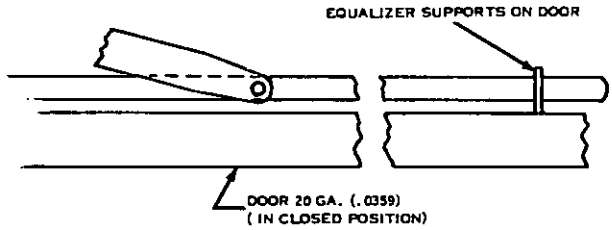


FOR DETAILS OF HOOK SEE SHEET

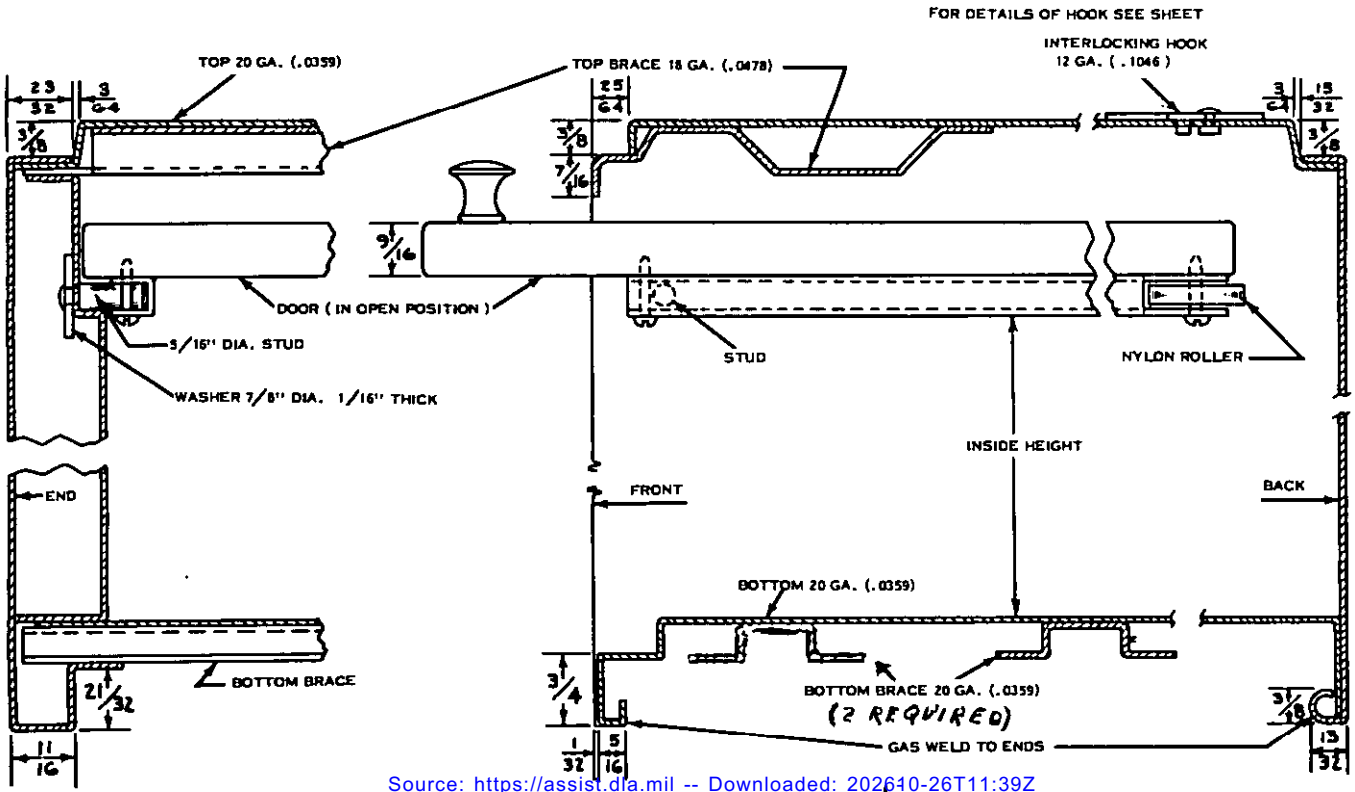


Source: https://assist.dla.mil -- Downloaded: 20240-26T11:39Z
Check the source to verify that this is the current version before use.

33" WIDE BOOKCASES WITH DISAPPEARING DOORS
(ALTERNATE METHOD)

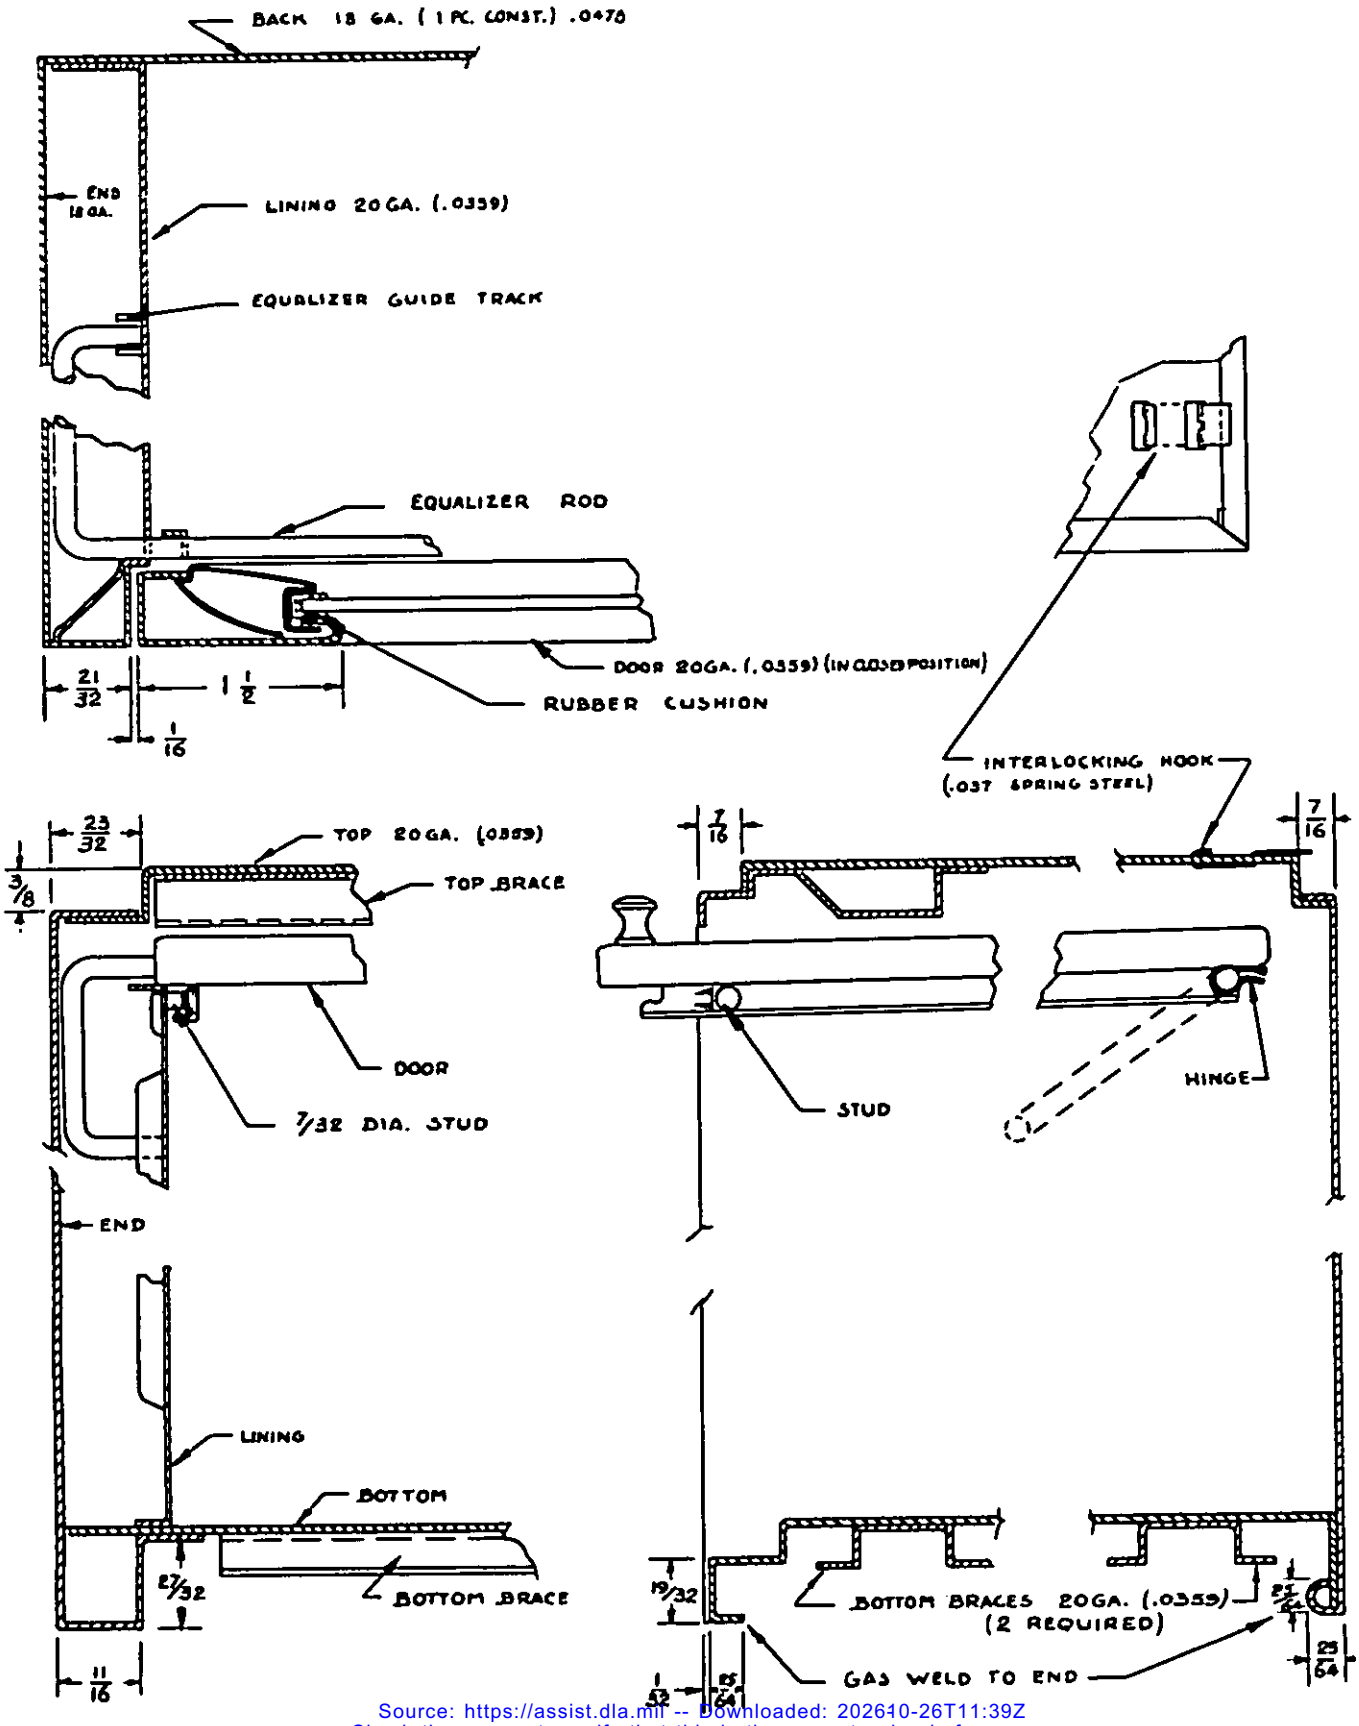


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

STEEL SLIDING REFERENCE SHELF UNITS

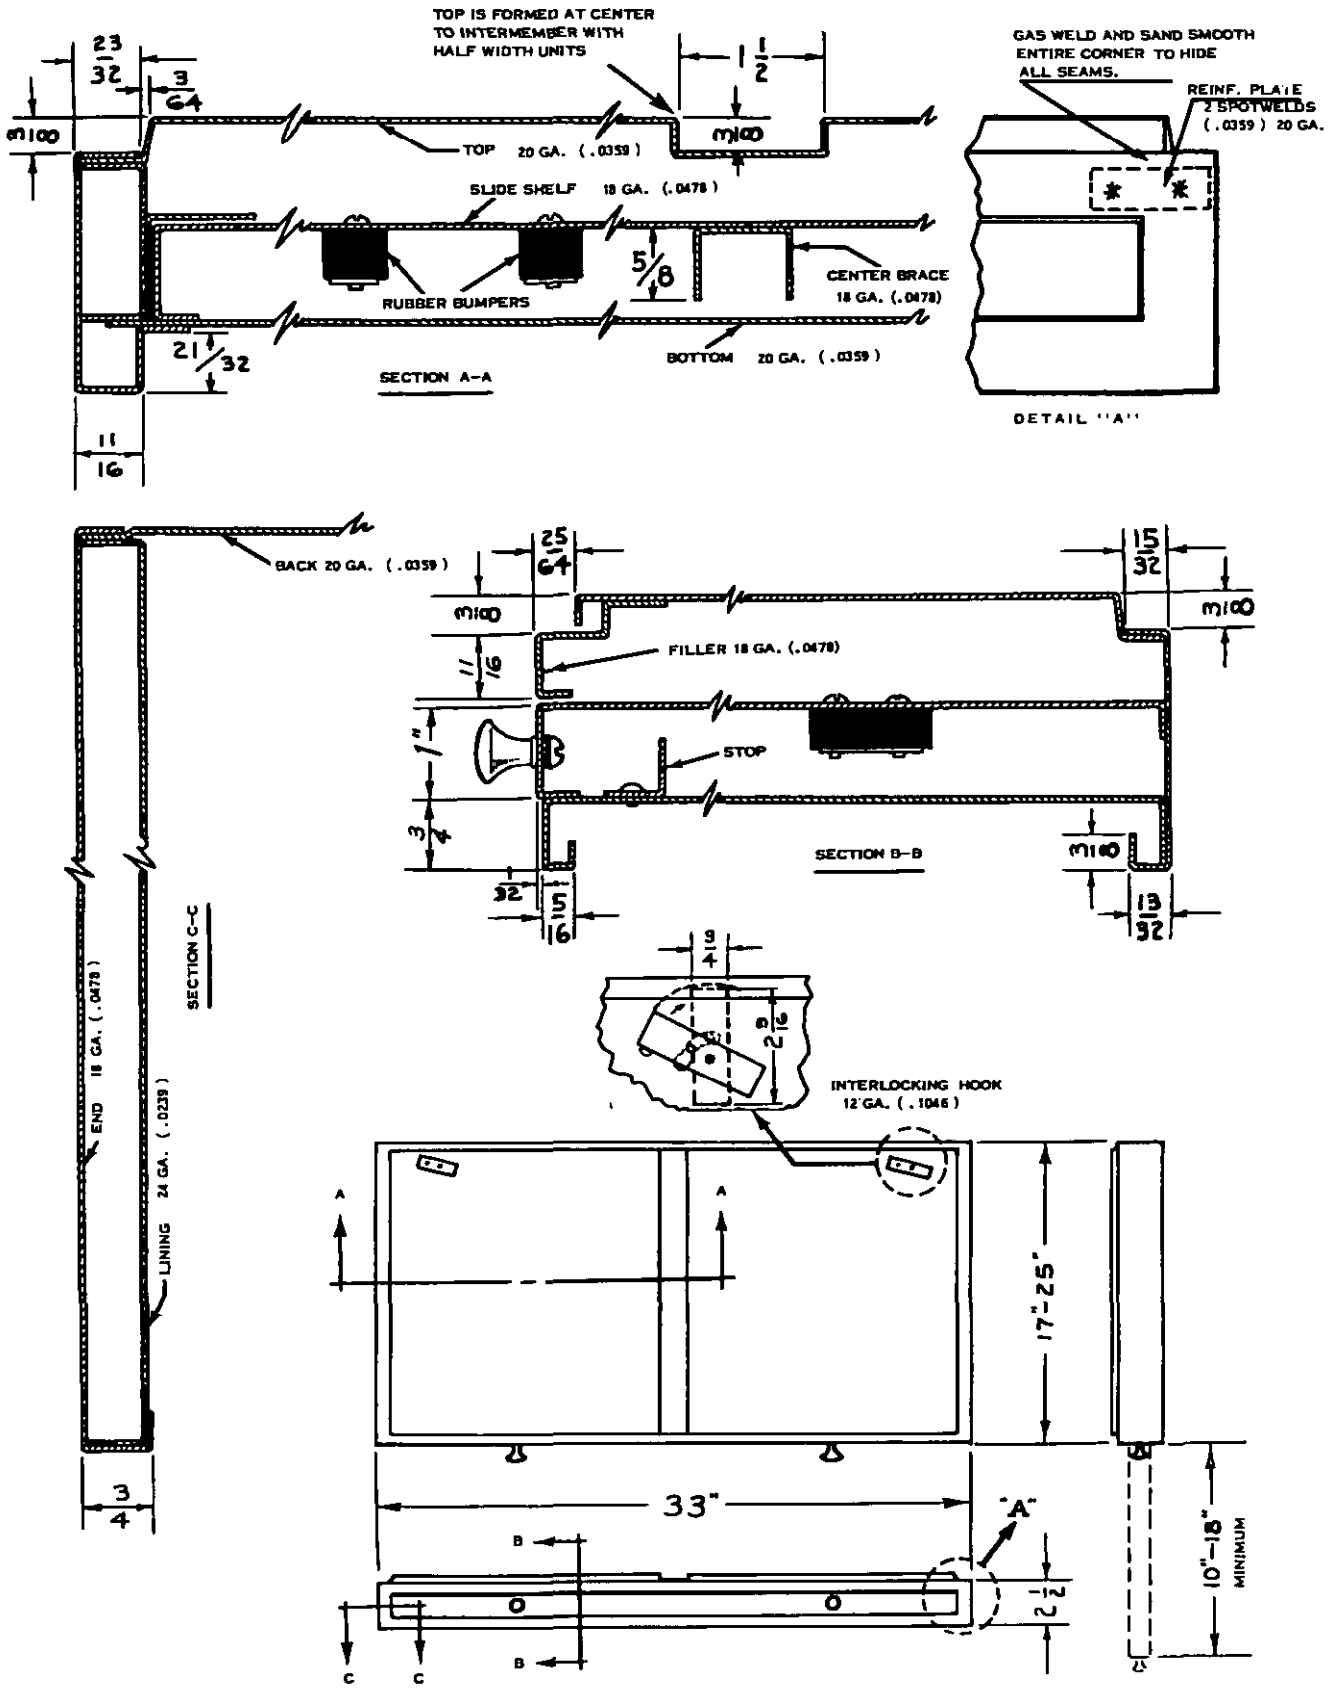


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

STEEL SECTIONAL TOP UNITS

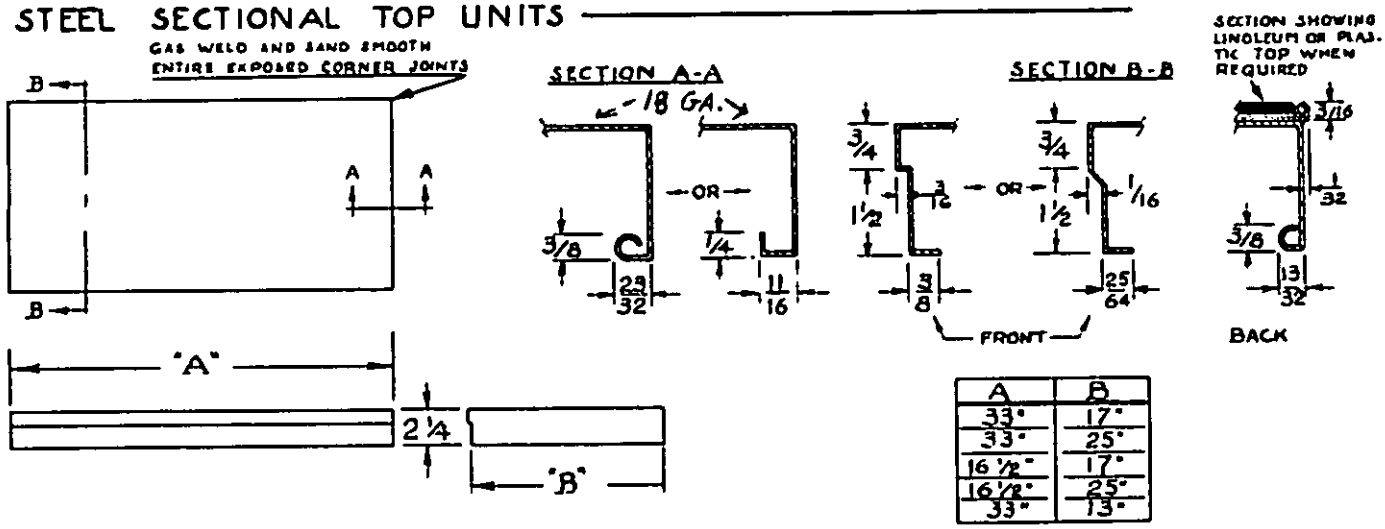


A	B
33"	17"
33"	25"
16½"	17"
16½"	25"
33"	13"

STEEL SECTIONAL FLAT TOP UNIT

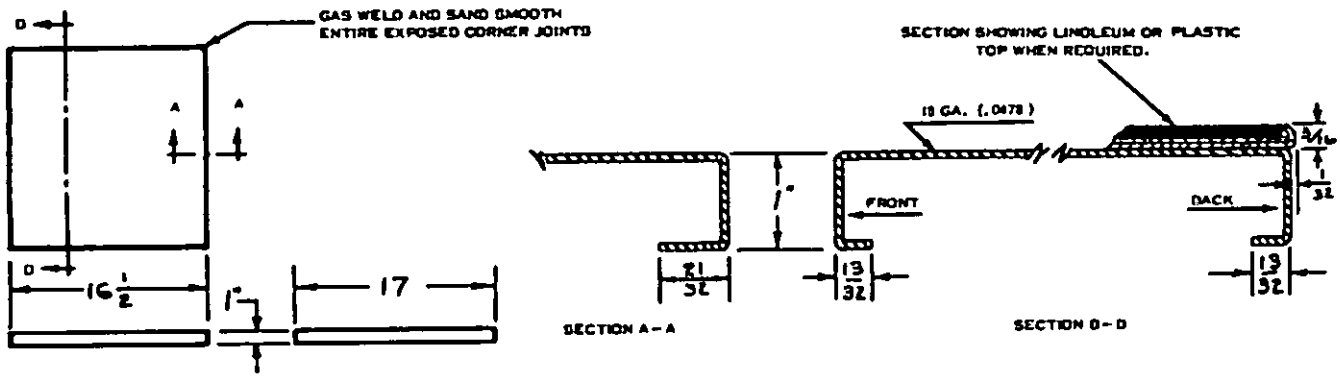


STEEL SECTIONAL REDUCING LEDGE UNITS

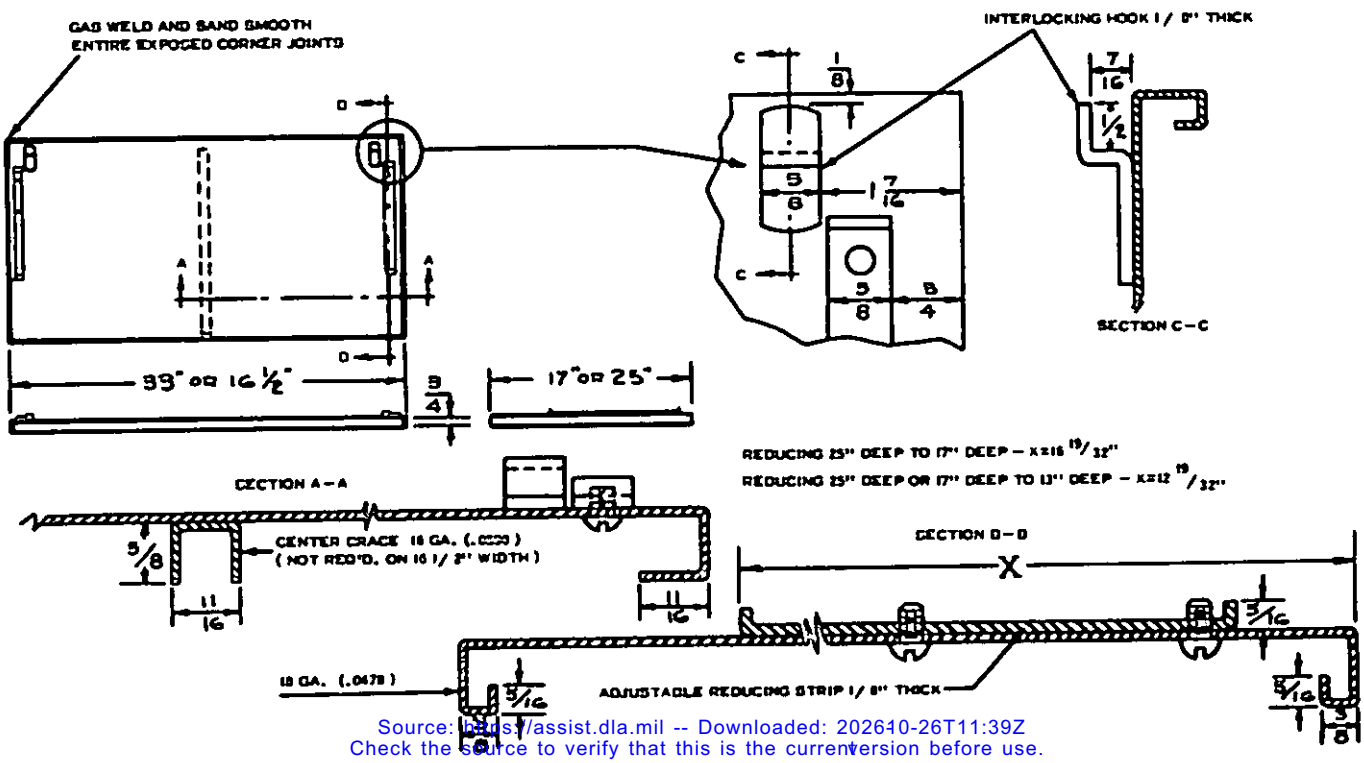


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

STEEL SECTIONAL FLAT BASE UNITS

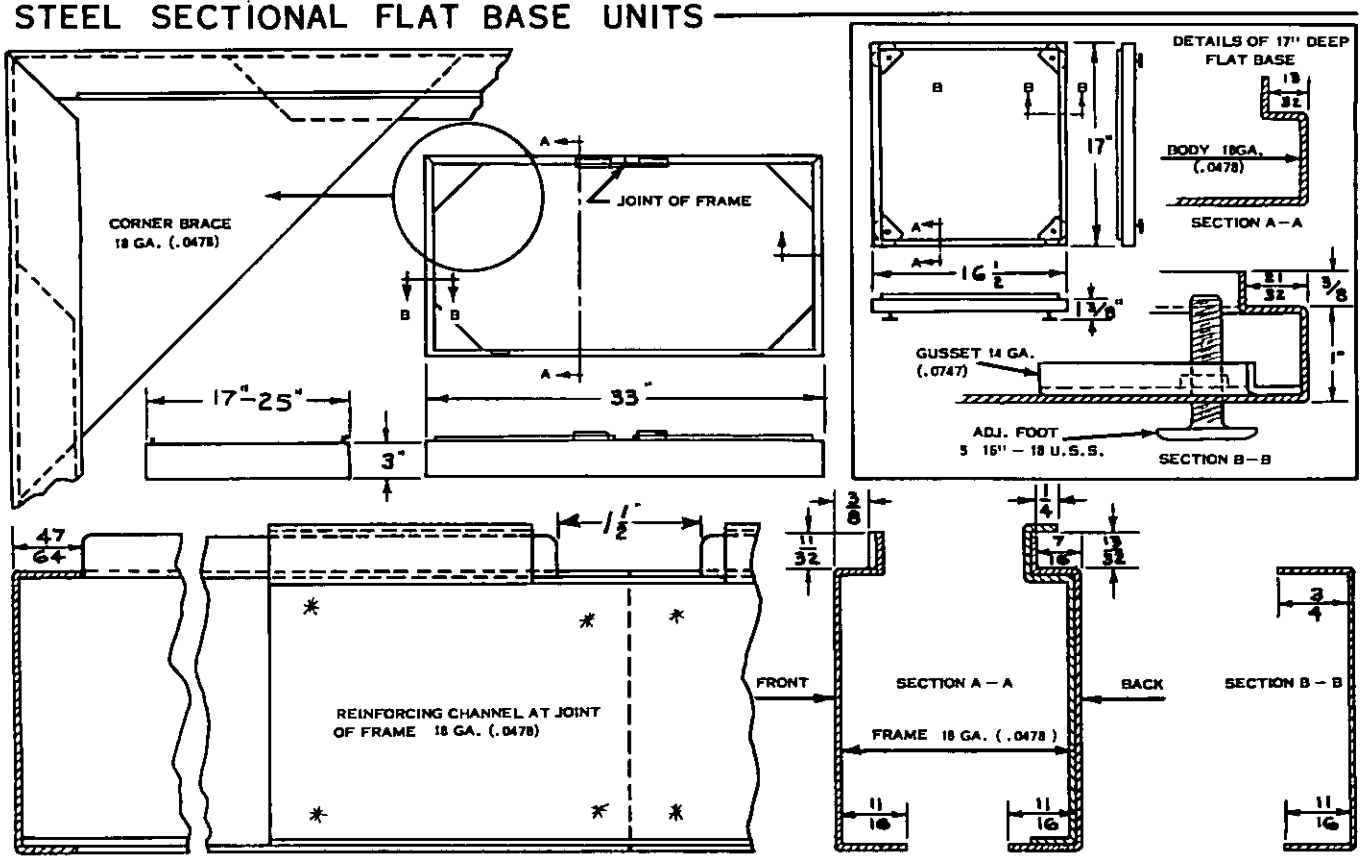


STEEL SECTIONAL CLOSED BASE UNITS

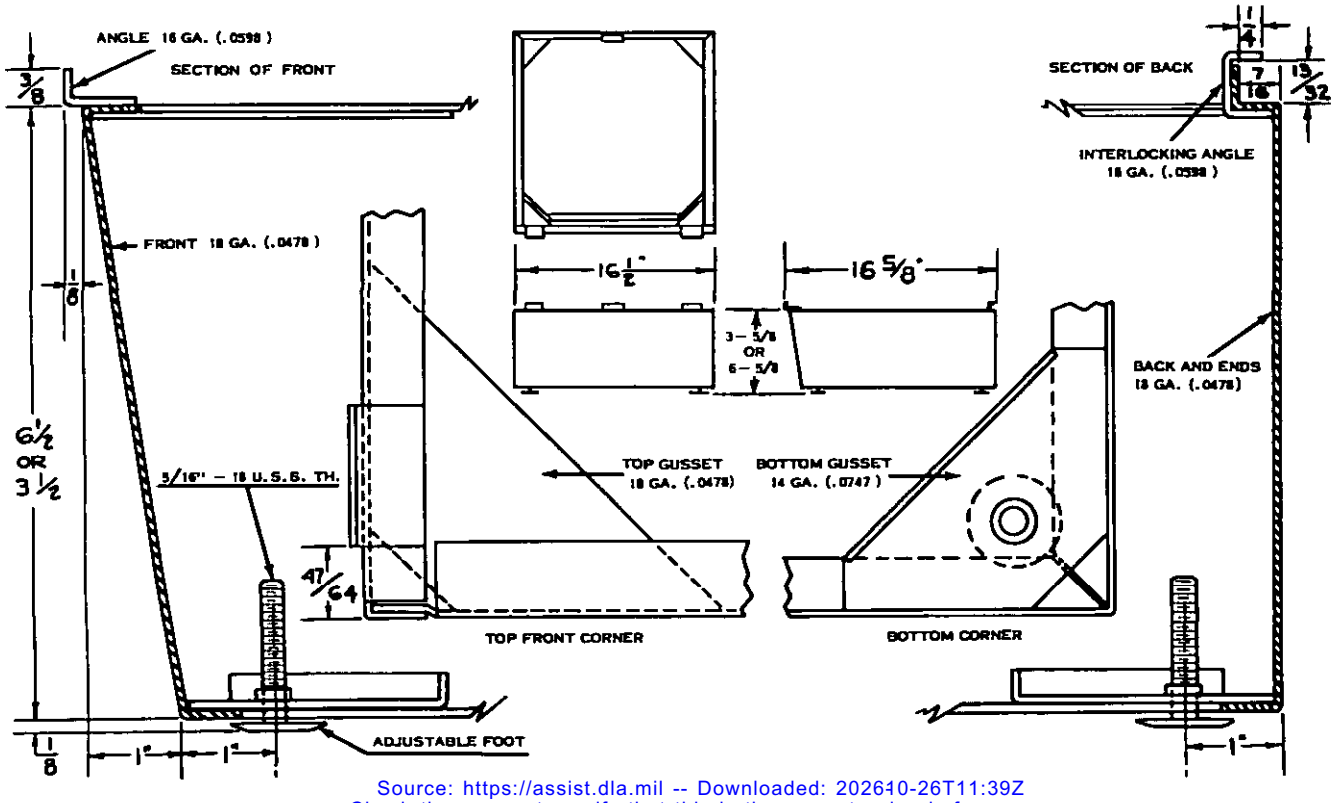

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

STEEL SECTIONAL LEG BASE UNITS

"A"	"B"	"C"
33"	17"	9"
33"	25"	9"
33"	17"	16"
16 1/2"	17"	9"
16 1/2"	25"	9"
33"	13"	10"

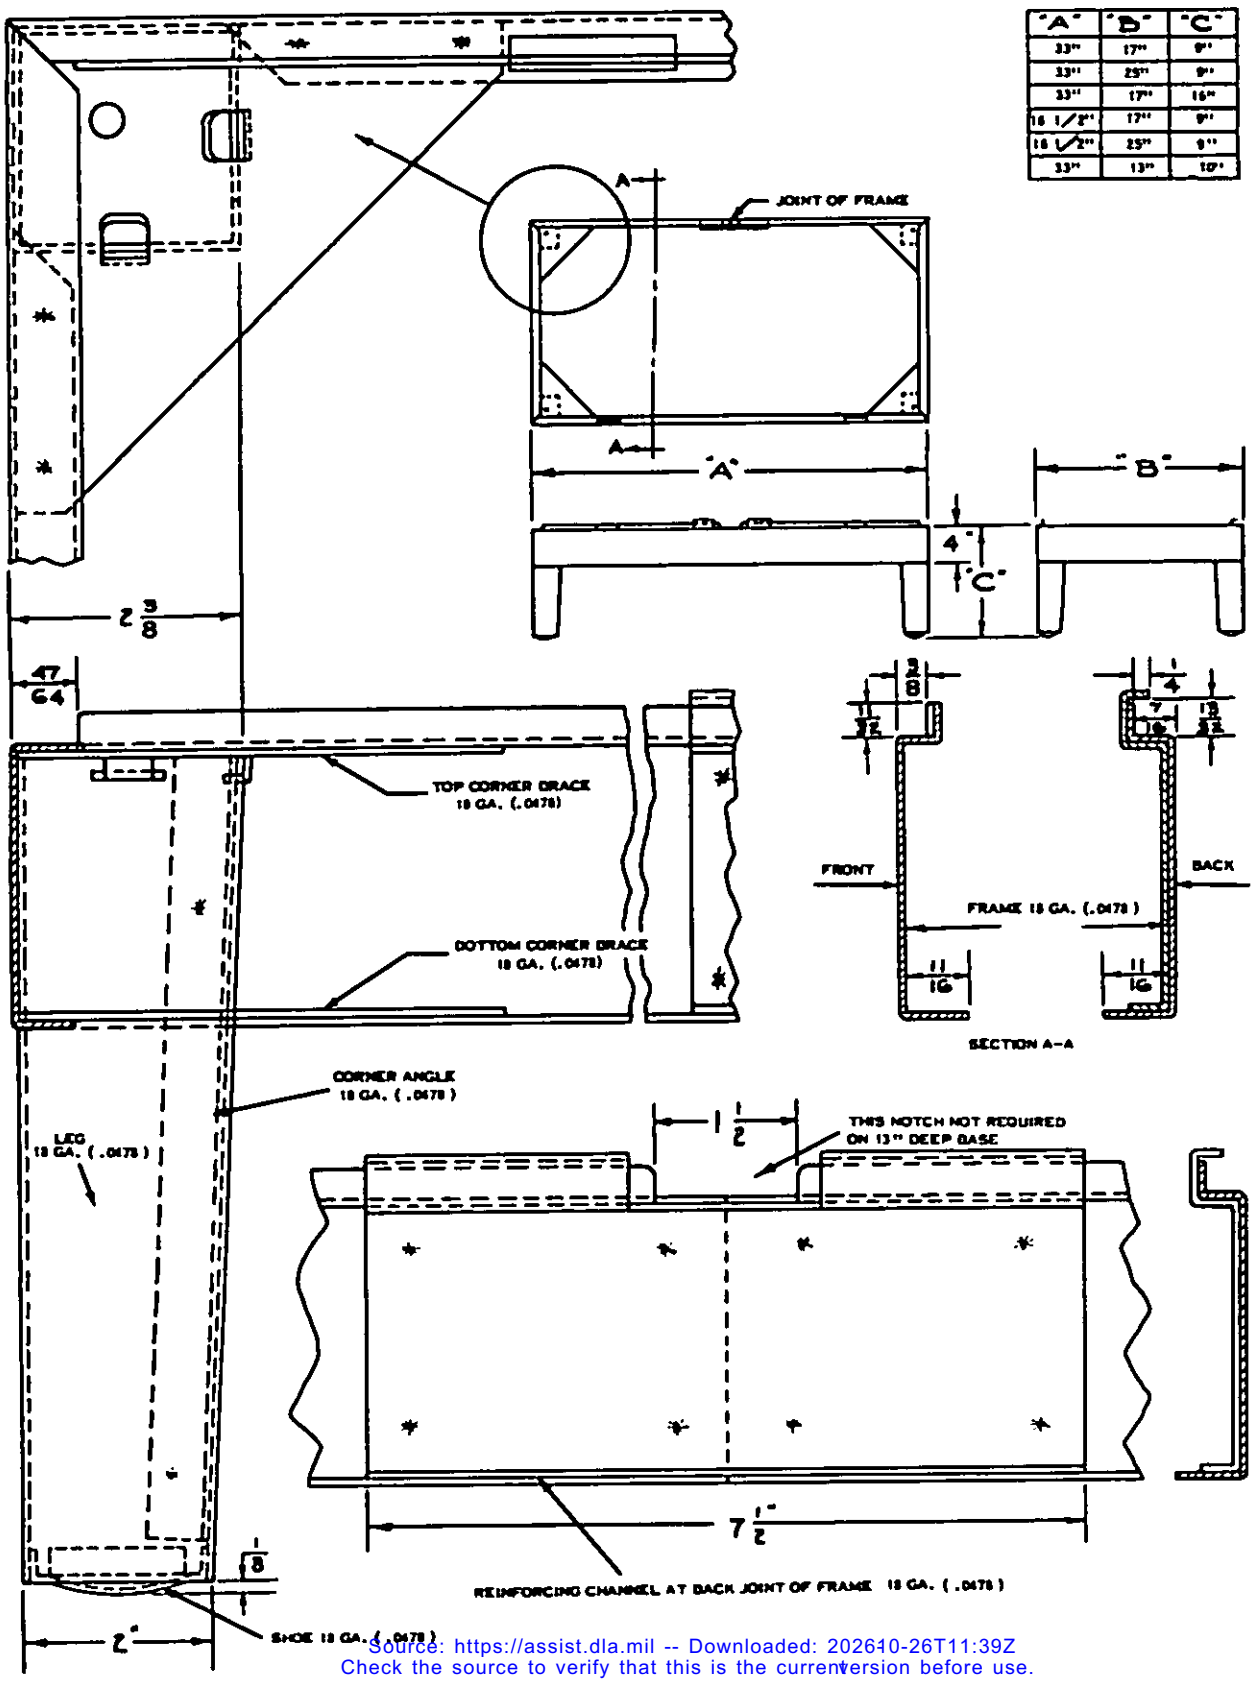


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.


STEEL SECTIONAL LEG BASE UNITS

Alternate Method of construction for 13" deep bases


METHOD B

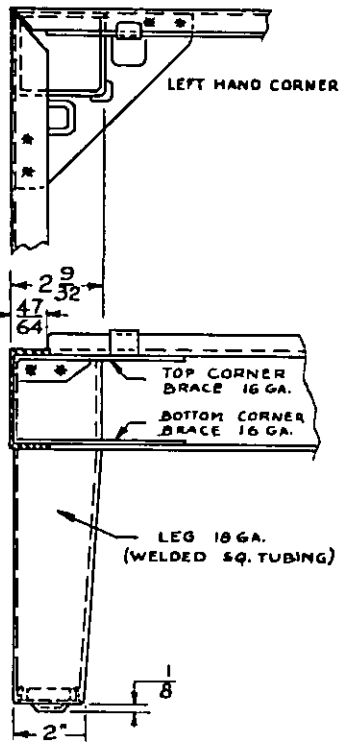


'A'	'B'	'C'
33"	17"	9"
33"	25"	9"
33"	17"	16"
16½"	17"	9"
16½"	25"	9"
33"	13"	10"




METHOD B




METHOD B

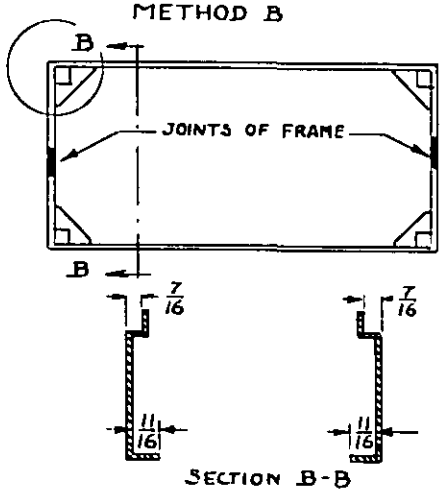

SECTION B-B

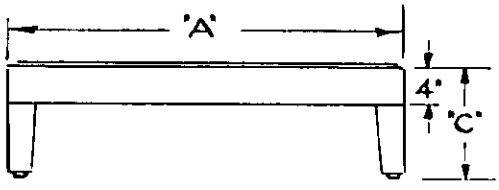

JOINT METHOD B



Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.