AA-O-00240/3C(GSA-FSS)
September 8, 1970
SUPERSEDING
Int.Fed.Spec. AA-O-00240/3b(GSA-FSS)
April 7, 1967
INTERIM REVISION OF
Fed. Spec. AA-O-240
February 2, 1961

INTERIM FEDERAL SPECIFICATION

BOOKCASE, STEEL, UNITIZED

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-240, dated February 2, 1961.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for steel unitized bookcases; the general requirements and other information pertaining to the bookcases will be found in AA-O-00240, Office Furniture, Steel, Unitized (General Specification) (see 6.1).

1.2 Classification

1.2.1 Type. The bookcase shall be of one type and the following size:

Width: 22 inches
Depth: 18 inches

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications:

AA-O-00240 - Office Furniture, Steel, Unitized.
PPP-B-636 - Box, Fiberboard.
PPP-T-97 - Tape, Pressure-Sensitive Adhesive, Filament Reinforced.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their adencies.)

FSC 7110

Source: https://assist.dla.mil. --, Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedure and Tables for Inpsection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

National Classification Board:

National Motor Freight Classification.

(Application for copies may be addressed to the American Trucking Association, Inc., Attention: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies may be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified in the invitation for bids, the requirements of 3.1 of AA-O-00240 shall apply.

3.2 Material. The material used in the construction of the unitized bookcase shall be of the kind and quality specified in 3.2 of AA-O-00240 and as specified herein. The paragraph numbers of the materials used in the bookcase construction are listed in Table I.

TABLE I. Material reference

AA-O-00240 Paragraph Numbers	Material
3.2.1	Steel
3.2.2	Linoleum
3.2.3	Plastic laminate sheet
3.2.4	Finishing materials
3.2.4.1	Primer
3.2.4.2	Enamel
3.2.4.3	Zinc Coating
3.2.4.4	Cadmium plating

3.3 Construction. The construction details of the unitized bookcase shall be as specified in the applicable paragraphs of AA-O-00240 and as specified herein. The paragraph numbers of the construction details are listed in Table II.

TABLE II. Construction reference

AA-O-00240 Paragraph Numbers	Construction
3.3.1	Spot welding
3.3.2	Definition of terms
3.3.2.1	Welding terms
3.3.2.2	Fabricating terms
3.3.4	Color
3.3.4.1	Metal Finish
3.3.4.2	Linoleum
3.3.4.3	Plastic laminate sheet
3.3.5	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE II. Construction reference (con.)

AA-O-00240 Paragraph Numbers	Construction
3.3.6	Assembly
3.3.7	Top construction
3.3.7.2	Binding strip
3.3.7.3	Linoleum top covering
3.3.7.4	Plastic laminate top covering, when specified in invitation for bids
3.3.7.4.1	Control samples for plastic covered tops

3.3.7.1 Top plate and edge molding. The top plate shall be constructed in accordance with constructions (a) or (b) of 3.3.7.1 of AA-O-00240, or alternatively the top plate shall be constructed of not less than 18 gage (0.0478 inch) steel and shall have not less than two reinforcing members which shall each have not less than 4 bends, (when used, an offset formation shall be considered as one 90 degree bend). The reinforcements shall inset the edge molding at front and rear for their full length. Both ends of each reinforcing member shall abut or extend into the edge molding and shall be secured to the edge molding by brazing or mechanical inert gas (MIG) welding. The reinforcing members shall be spot welded to the top plate. The edge molding shall be constructed as specified in 3.3.7.1 of AA-O-00240.

3.3.8 Design. The design and dimensions of the bookcase shall be as shown in Figure 1. The bookcase shall be adjustable in height continuously from 29 inches to 30-1/2 inches. The bookcase shall withstand the tests specified in 4.4 of this specification.

3.3.9 Bookcase construction. The shell sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the back; shall be free of burrs and sharp edges; and shall be spot welded on maximum of 4 inch centers. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the shell sides and back shall be formed in a 90 degree flange. The shell shall have not less than 1/4 inch or more than 3/4 inch radius along the four vertical edges. The bottom shall be not less than 20 gage (0.0359 inch) steel, formed form one piece, and shall have a return flange formation on all four sides not less than 1 inch or more than 2-1/2 inches high with the flanges facing downward. The return flanges shall be attached to shell 90 degree flanges of the sides and back by spot welding on maximum 4 inch centers. The face of the front return flange shall be flush with and welded to the return flange in the side panels. The shell shall have a top front rail constructed of not less than 18 gage (0.0478 inch) steel, incorporating the following 4 bends: The bends shall incorporate a channel form and flanged formation along the front and a 90 degree flange along the back. The face of the front return flange shall be flush with and welded to the return flange in the side panels and shall also be welded to the top flange of the side panels. Exposed joints on the bookcase front shall be free of burrs and rough edges. Provision shall be made in the four bottom corners for the secure attachment of the height adjustment mechanism. The bookcase shall have two inner side panels of not less than 20 gage (0.0359 inch) steel. The top and bottom of the inner panel shall be flanged inward toward the side panel. The rear of the inner panel shall have a 90 degree flange formed to facilitate welding to the shell. The front of the inner panel shall have an off-set and 90 degree flange for intermembering with the return flange of the side panel. Alternatively, the pedestal shall have front and rear vertical reinforcing members constructed of 18 gage (0.0478 inch) steel which incorporate an interlocking arrangement for the inner side panel. The front and rear vertical edges of the inner side panel shall be formed in a 90 degree flange and offset for intermembering with front and rear vertical reinforcing members and to provide a flush fit. Provision shall be made on the inner panel to accommodate adjustable shelves on one inch centers to not more than 2 inches from top and bottom of the bookcase. This provision for shelf adjustment shall be applied to the outside surface of the inner panel, or may be an integral part of the panel. The outside surface of the sides and back of the bookcase shall be smooth and unbroken, except that not more than three 1/16 inch diameter holes will be permitted in each outer side panel and all of these holes in each side panel shall be filled with plug buttons which shall be finished to match the bookcase finish. All front surfaces of the bookcase shall be smooth and unbroken.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

3.3.9.1 Shelf. The bookcase shall have one adjustable shelf formed from not less than 20 gage (0.0359 inch) steel. All four sides of the shelf shall have a 90 degree flange and flatfold and all corners shall be brazed and ground smooth. The shelf shall be secured in place with a spring type retainer to permit easy adjustability.

3.3.9.2 Book stop. The shelf shall be equipped with a removable book stop constructed of not less than 20 gage (0.0359 inch), 1 inch by 1 inch steel angle. The leg of the angle extending toward the back of the bookcase shall have 2 holes corresponding to 2 holes in the shelf and shall be secured with nuts, bolts, and lockwashers. The front leg of the angle shall be 11 inches from the front edge of the shelf. The top edge shall be formed flatfold to the rear. The book stop shall extend the full width of the shelf except for a maximum of 1/8 inch at each end to permit insertion of the stop without damaging inner panel finish.

3.3.10 Height adjustment mechanism. The height adjustment mechanism shall permit continuous height adjustment over a range of 1-1/2 inches minimum and shall be entirely operable by hand. The height adjustment mechanism shall consist of a metal collar having a diameter of not less than 3/4 inch with a 3/8 inch threaded stem. The collar and stem shall operate with a threaded nut incorporated in a support constructed of not less than 18 gage (0.0478 inch) steel. The collar shall have a metal footing not less than 1-1/4 inches in diameter. The bearings surface of the footing shall be fully closed and free from roughness or sharp edges. The threaded stem shall not be visible when the mechanism is adjusted to the highest setting. The collar, metal footing and threaded stem shall be made corrosion resistant by cadmium plating in accordance with 3.2.4.4. The support may be zinc or cadmium plated in accordance with 3.2.4.3 or 3.2.4.4, or enameled in accordance with 3.4, 3.4.1, 3.4.2, and 3.4.3 of AA-O-00240. The height adjustment mechanism shall be constructed and attached to the pedestal in a manner to prevent loosening or instability.

3.4 Pretreatment and finishing. Shall be in accordance with 3.4, 3.4.1, 3.4.2, 3.4.3 and 3.4.4 of AA-O-00240.

3.5 Identification marking. Shall be in accordance with 3.5 of AA-O-00240.

3.6 Workmanship. Shall be in accordance with 3.6 of AA-O-00240.

4. QUALITY ASSURANCE PROVISIONS. The requirements of Section 4 of AA-O-00240 and as specified herein shall apply.

4.2.2.1 Visual examination. Examination of the bookcases shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table II of AA-O-00240 and for specific requirements in Table III shown herein. The lot size shall be expressed in units of bookcases for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for the examination shall be one complete bookcase.

TABLE III. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Pedestal	Components less than minimum gages specified	X	
	Top and bottom edges not flanged		X
	Interior frame not as specified		
	Flush linings not pierced as specified		X
	Piercings not located as specified		
Shelf	Front and back edge not formed		X
	Shelf retainers missing	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification Major	Classification Minor
Height adjustment mechanism	Not continuous adjustment over full range	X	
	Not finished as specified		X
	Not operable by hand		X
Workmanship	Pedestal not securely attached to top		X

4.2.2.2 Dimensional examination. Inspection will be made of bookcases for compliance with dimensions specified including thickness of metal and film thickness of enamel. Any dimensions not within tolerance specified shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection levels	AQL's
For examination in Table III Major	I	4.0
For examination in Table III Total	I	10.0
For examination in 4.2.2.2 (one class)	I	4.0

4.3 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with Table IV. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed in Table IV shall be examined on shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be I of MIL-STD-105 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

TABLE IV. Classification of defects

Examine	Defect
Marking	Omitted; incorrect; illegible, improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate securing of components, contents and padding of perimeter edges, incomplete closure of container flaps, loose strapping, distortion of container.

4.4 Tests. Tests specified in 4.5.1, 4.5.5, 4.5.7, 4.5.8, 4.5.9, 4.5.10 and 4.5.15 of AA-O-00240 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Setting of height adjustment. Prior to packaging, bookcases shall have height adjustments set at 29 inch height.

5.2 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.2.1 Level A. The adjustable shelf shall be secured in place with suitable blocking and bracing, or removed from the bookcase and wrapped in kraft wrapping paper with a minimum basis weight of 40 pounds. When the shelf is removed and wrapped, the paper shall be secured with tape conforming to PPP-T-45 or PPP-T-97. Loose hardware, when applicable, shall be packaged in a cotton cloth drawstring bag or a polyethylene bag a minimum of 2 mills thick. The bag shall be securely closed to prevent loss of contents. The bookcase top surface and edges shall be protected by a full length cover or shroud fabricated from polyethylene film a minimum of 1 mill thick.

5.2.2 Level C. Bookcases shall be packaged in accordance with manufacturer's commercial Practice.

5.3 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.3.1 Level A. Each bookcase, packaged as specified in 5.2.1 shall be packed in a close-fitting box conforming to PPP-B-636, type CF, class weather-resistant, variety DW, grade V15c, style RSC of CSSC. The top surface and edges shall be protected by a close-fitting pad fabricated from fiberboard conforming to PPP-F-320, type CF, class-domestic, variety DW, grade 200. This pad shall cover the entire top surface of the bookcase and have accordian type folds on all four sides a minimum of 3/4 inch thick, these folds shall extend down a minimum of 3 inches on all sides. A die-cut or folded pad of the same material and having length and width dimensions 1/8 inch smaller than the inside length and width of the box shall be utilized at the bottom. The bottom pad shall be of sufficient thickness to provide one-quarter inch clearance between the bottom of the legs (see 5.1) and the bottom of the box. This clearance may be obtained by the use of die-cut clearance holes, angular corner cut-offs or any other commercially acceptable method. The boxes shall be closed and waterproof sealed in accordance with the appendix to PPP-B-636.

5.3.2 Level B. Each bookcase, packaged as specified in 5.2.1 shall be packed in accordance with 5.3.1, except that the boxes shall conform to PPP-B-636, type CF, class domestic, variety DW, grade 275, and the water-proof sealing in not required.

5.3.3 Level C. Bookcases packaged as specified in 5.2.2 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bookcase covered by this specification is intended for use with steel unitized office furniture but may also be used with steel general office furniture. The bookcase height is adjustable from 29 inches to 30-1/2 inches.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, symbol and date of this specification.

(b) Whether preproduction sample is required (see 3.1).

(c) Whether plastic tops are required (see Table II, 3.3.8.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(d) Selection of applicable levels of packaging (see 5.2).

(e) Selection of applicable levels of packing (see 5.3).

(f) Marking requirements (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

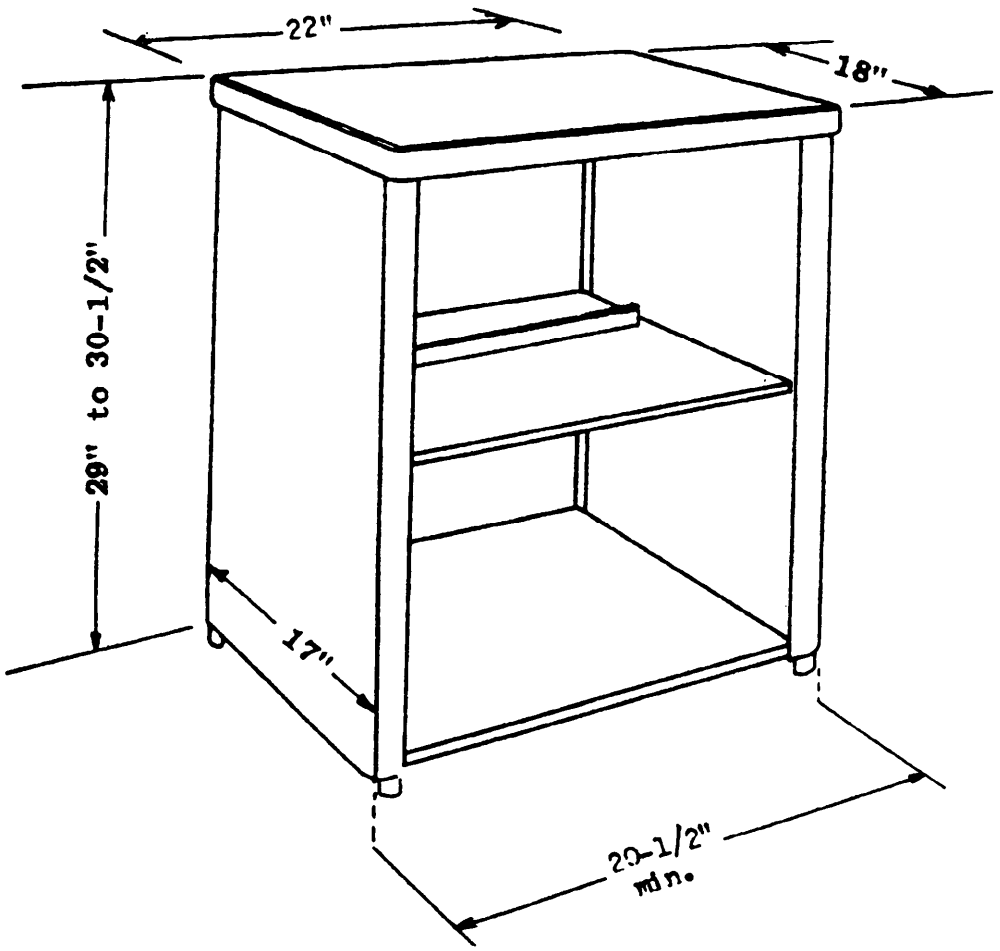


Figure 1 - Bookcase

FIGURE 1. Bookcase

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF), Wash., D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-O-00240/3C(GSA-FSS) Bookcase, Steel, Unitized

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will l[illegible]t required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currenversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.