AA-O-00240/4C(GSA-FSS)
September 8, 1970
SUPERSEDING
Int. Fed. Spec. AA-O-00240/4B(GSA-FSS)
April 7, 1967
INTERIM REVISION OF
Fed. Spec. AA-O-240
February 2, 1961

INTERIM FEDERAL SPECIFICATION

FOR

CREDENZA, OFFICE, STEEL

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-240, dated February 2, 1961.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for a steel office credenza; the general requirements and other information pertaining to the credenza will be found in AA-O-00240, Office Furniture, Steel, Unitized (General Specifications) (see 6.1).

1.2 Classification.

1.2.1 Type. The credenza shall be of one type and the following size:

Width:	66 inches
Depth:	18 inches
Height:	30-1/2 inches

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications:

AA-O-00240	-	Office Furniture, Steel Unitized.
FF-N-105	-	Nails, Wire, Brads, and Staples.
QQ-S-781	-	Strapping, Flat, Steel.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-1055	-	Barrier Material, Waterproofed, Flexible.
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-S-760	-	Strapping, Nonmetallic.
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive, Paper.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston,. New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-A-140 - Adhesive, Water-Resistant, Water-Proof Barrier-Material.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

National Classification Board:

National Motor Freight Classification.

(Application for copies may be addressed to the American Trucking Association, Inc., Attention: Tariff Order Section, 1616 P Street, N. W., Washington, D. C., 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies may be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified in the invitation for bids, the requirements of 3.1 of AA-O-00240 shall apply.

3.2 Material. The material used in the construction of the credenza shall be of the kind and quality specified in 3.2 of AA-O-00240 and as specified herein. The paragraph numbers of the materials used in the credenza construction are listed in Table I.

Table I. - Material References

AA-O-00240 Paragraph Nos.	Material
3.2.1	Steel
3.2.2	Linoleum
3.2.3	Plastic Laminate sheet
3.2.4	Finishing materials
3.2.4.1	Primer
3.2.4.2	Enamel
3.2.4.3	Zinc coating
3.2.4.4	Cadmium plating
3.2.4.5	Chromium plating

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.5 Face hardware. The face hardware shall be constructed of satin finished anodized aluminum; type 302 corrosion-resistant steel; satin finished chromium on steel, die-cast zinc, brass or bronze in accordance with 3.2.4.5. Tensile strength of die-cast zinc shall be not less than 40,000 p.s.i.

3.3 Construction. The construction details of the credenza shall be as specified in the applicable paragraphs of AA-O-00240 and as specified herein. The paragraph numbers of the construction details are listed in Table II.

Table II. - Construction Reference

AA-O-00240 Paragraph Nos.	Construction
3.3.1	Spot welding
3.3.2	Definition of terms
3.3.2.1	Welding terms
3.3.2.2	Fabricating terms
3.3.4	Color
3.3.4.1	Metal finish
3.3.4.2	Linoleum
3.3.4.3	Plastic laminate sheet
3.3.5	Tolerances, top size and height
3.3.6	Assembly
3.3.7	Top construction
3.3.7.1	Top plate and edge molding
3.3.7.2	Binding strip. Alternatively the binding strip may have not less than 3/16 inch quarter round bead.
3.3.7.3	Linoleum top covering
3.3.7.4	Plastic laminate top covering, when specified in invitation for bids.
3.3.7.4.1	Control samples for plastic covered tops

3.3.8 Design. The design and dimensions of the credenza shall be as shown in Figure 1. The credenza shall withstand the tests specified in 4.4 of this specification. The credenza shall be 30-1/2 inches high.

3.3.9 Pedestal construction. The pedestal sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the back; shall be free of burrs and sharp edges; and shall be spot welded on a maximum of 4 inch centers. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the pedestal sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than a 3/4 inch radius along the four vertical edges. The bottom shall be not less than 20 gage (0.0359 inch) steel, formed from one piece, and shall have a return flange formation on all four sides not less than 1 inch or more than 2-1/2 inches high with the flanges facing downward. The return flanges shall be attached to the pedestal 90 degree flanges of the sides and back by spot welding on maximum 4 inch centers. The face of the front return flange shall be flush with and welded to the return flange in the side panels. The pedestal shall have a top front rail constructed of not less than 18 gage (0.0478 inch) steel, incorporating the following 4 bends: The bends shall incorporate a channel form and flanged formation along the front and a 90 degree flange along the back. The face of the front return flange shall be flush with and welded to the return flange in the side panels and shall also be welded to the top flange of the side panels. Exposed joints on the pedestal front shall be free of burrs and rough edges. To provide for the attachment of the legs, specified in 3.3.11 and 3.3.11.1, the underside of the bottom shall be reinforced by means of one or two formed reinforcing members constructed of not less than 18 gage (0.0478 inch) steel placed in a back-to-front position. Flanges shall be provided in the reinforcing member(s) which shall be spot welded to the underside of the pedestal bottom. The legs shall be secured to the reinforcing members. The pedestal shall have two inner side panels of not less than 20 gage (0.0359 inch) steel. The top and bottom of the inner panel shall be flanged inward toward the side panel. The rear of the inner panel shall have a 90 degree flange formed to facilitate welding to the pedestal shell. The front of the inner panel shall have an off-set and 90 degree flange for intermembering with the return flange of the side panel. Alternatively, the pedestal

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

Shall have front and rear vertical reinforcing members constructed of 18 gage (0.0478 inch) steel which incorporate an interlocking arrangement for the inner side panel. The front and rear vertical edges of the inner side panel shall be formed in a 90 degree flange and offset for intermembering with front and rear vertical reinforcing members and to provide a flush fit. Provision shall be made on the inner panel to accommodate adjustable shelves on one inch centers to not more than 2 inches from top and bottom of the pedestal. This provision for shelf adjustment shall be applied to the outside surface of the inner panel, or may be an integral part of the panel. The outside surface of the sides and back of the pedestals shall be smooth and unbroken, except that not more than three 1/16 inch diameter holes will be permitted in each outer side panel. The holes on one side shall provide for attachment of the knee-space shelf and the holes on the opposite side shall be filled with plug buttons which shall be finished to match the credenza finish. All front surfaces of the credenza pedestals shall be smooth and unbroken.

3.3.9.1 Shelf. The pedestal shall have one adjustable shelf formed from not less than 20 gage (0.0359 inch) steel. All four sides of the shelf shall have a 90 degree flange and flatfold and all corners shall be brazed and ground smooth. The shelf shall be secured in place with a spring type retainer to permit easy adjustability.

3.3.9.2 Book stop. The shelf shall be equipped with a removable book stop constructed of not less than 20 gage (0.0359 inch), 1 inch by 1 inch steel angle. The leg of the angle extending toward the back of the bookcase shall have 2 holes corresponding to 2 holes in the shelf and shall be secured with nuts, bolts and lockwashers. The front leg of the angle shall be 11 inches from the front edge of the shelf. The top edge shall be formed flatfold to the rear. The book stop shall extend the full width of the shelf except for a maximum of 1/8 inch at each end to permit insertion of the stop without damaging inner panel finish.

3.3.10 Knee-space shelf. The credenza shall have a shelf above the kneespace with a clearance of 3-1/2 inches between the top of the shelf and the underside of the top. The shelf shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be formed in not less than a return flange along the front and back edges. The side edges shall be formed in a 90 degree flange for attachment to the pedestal sides. The front and rear face of the shelf shall inset the pedestal front and rear not less than 7/8 inch and not more than 1 inch. The shelf shall be attached to the pedestal sides at not less than 3 points at each side.

3.3.11 Legs. The leg shall be similar in design and positioned as shown in Figure 1, which indicates a shaped leg with tapering sides in a curved or straight design. All sides and bottom shall be fully closed and shall have no rough or sharp edges. Legs shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be made corrosion resistant by satin finished chromium plating in accordance with 3.2.4.5 or by enameling in accordance with 3.2.4., 3.3.4.1. and 3.2.4.2. ~~Legs finished by enameling shall be equipped with foot sockets specified in 3.3.11.1.~~

3.3.11.1 Foot sockets. Foot sockets shall be constructed of the material specified in 3.2.5. Steel foot sockets shall be not less than 0.0299 inch thick and aluminum foot sockets shall be not less than 0.039 inch thick. Foot sockets shall be not less than 1-1/2 inches high and shall be formed to conform to the shape of the leg. The foot socket shall be flush with, or slightly inset, the outside surface of the leg and shall be firmly secured with concealed fastenings which are designed to protect floors and to be removable with simple tools.

3.3.12 Doors. The two pedestal components shall be provided with doors. The doors shall have double wall construction and shall be not less than 3/4 inch thick overall. The outside and the inside door panels shall be not less than 22 gage (0.0299 inch) steel. All edges of the inner and outer panels shall be formed to provide rigidity. No sheared edges of metal shall be exposed on the outside panel or along the top, bottom or side flanged edges. The inner and outer walls shall be securely joined by brazing or fusion welding at not less than 3 points along each side and not less than 2 points along top and not less than 2 points along the bottom. The areas of brazing or ~~fusion welding shall be not less than 3/8 inch in length. The top and bottom corner edges shall~~ be completely closed and brazed and ground smooth along the seam where the front and side flanges meet. The door shall be hinged at the outer ends of the credenza. Each door or door frame shall have a catch to retain door in closed position when unlocked. Each door shall be equipped with a lock, as specified in 3.3.12.3 which shall be located below the door pull as shown in Figure 1. The center of the lock face shall be not less than 1-1/2 inches below the lower edge of the pull. Both locks on the two doors on a single unit shall be keyed the same.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.12.1 Hinges. The door shall operate on one of the types of hinges specified in 3.3.12.1.1 or 3.3.12.1.2. The hinges shall support the door square in the pedestal opening. The hinges shall permit door opening not less than 90 degrees.

3.3.12.1.1 Cabinet type hinge. Each door shall have two concealed metal cabinet hinges, mounted on side of door. The design of the hinge shall include an embossed rib. The hinges shall be secured to the door by concealed welding. The side flange of the door where hinges are attached shall be reinforced by use of a plate or other suitable means to prevent hings from distorting the door. These hinges shall be made rust resistant by cadmium plating or enameling per 3.2.4.4 or 3.2.4.2 respectively.

3.3.12.1.2 Pin type hinge. Each door shall have two concealed pin type hinges. The pin located at the top of the door shall be not less than 2-1/2 inches in length, and the diameter shall be 1/4 inch, plus 0 minus .003 inch, with a 3/8 inch diameter rounded head. The opposite end shall be chamfered to facilitate insertion of the pin. The pin located at the bottom of the door shall be of a design which incorporate a spacer ring designed to maintain spacing between pedestal and door bottom. The pin shall be not less than 1-1/16 inches in length, and the diameter shall be 1/4 inch, plus or minus .003 inch. The ends shall be rounded or chamfered to facilitate insertion in door and pedestal. The top and bottom areas of the door where pins are inserted shall have internal reinforcements constructed of not less than 14 gage (0.0747 inch) steel, and formed for strength. The reinforcements shall be so located and formed as to prevent the hinge pins from distorting the door. The holes through which the hinge pins are inserted shall accommodate the pins without destortion of the door or excessive clearance. These hinges shall be made rust resistant by zinc plating, or cadmium plating in accordance with 3.2.4.3 or 3.2.4.4 respectively.

3.3.12.2 Door pull. Each door shall be equipped with a door pull constructed of the material specified in 3.2.5. Stamped door pulls will not be permitted. A design which incorporates open ends will not be permitted. The door pulls shall be mounted vertically and shall be located as indicated in Figure 1 with the bottom edge of the pull located on the horizontal center line of the door as shown in Figure 1. The exposed surfaces of all pulls used on a single unit shall be of the same material or the same metal finish. All surfaces and edges of the pulls shall be ground smooth and all roughness and sharp edges eliminated. The pulls shall have threaded studs or flat bases with tapped holes for attachment and shall be securely attached with screws and lockwashers or with solid nuts and lockwashers. Attachment devices visible on the outside of the door will not be permitted. The end of the stud, the screws, nuts and lockwashers shall be countersunk if attached to the double wall of the door. The hand hold shall be a minimum of 3 inches in length.

3.3.12.3 Locks. The lock shall be located as indicated in Figure 1. The lock shall be a disc tumbler type operated by a grooved key. The face of the lock shall be of the material specified in 3.2.5, or alternatively, shall be dull nickel finish on die-cast zinc. The two locks on each credenza shall be keyed alike and two keys shall be furnished with each item. Each credenza on an order up to 200 units shall be of a different key change.

3.4 Pretreatment and finishing. Shall be in accordance with 3.4, 3.4.1, 3.4.2 and 3.4.3 and 3.4.4 of AA-O-00240.

3.5 Identification marking. Shall be in accordance with 3.5 of AA-O-00240.

3.6 Workmanship. Shall be in accordance with 3.6 of AA-O-00240.

4. QUALITY ASSURANCE PROVISIONS. The requirements of Section 4 of AA-O-00240 and as specified herein shall apply.

4.2.2.1 Visual examination. Examination of the credenzas shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table II of AA-O-00240 and for specific requirements in Table III shown herein. The lot size shall be expressed in units of credenzas for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for the examination shall be one complete credenza.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III Classification of Defects

Examine	Defect	Classification Major	Classification Minor
Pedestal	Components less than minimum gages specified	X	
	Top and bottom edges not flanged Interior frame not as specified		X
	Flush linings not pierced as specified Piercings not located as specified		X
Shelf	Front and back edge not formed		X
	Shelf retainers missing	X	
Knee-space shelf	Front and back edges not formed Not located as specified		X
Legs	Less than minimum gage specified	X	
	Socket not material specified Not finished as specified		X
Door	Sheared edges exposed	X	
	Hinges not as specified Catch does not retain door in closed position Door pull not located as specified		X
Door pull	Not according to design Not secured with screws and lockwashers or solid nuts and lockwashers		X
	Rough or sharp edges that may cause injury	X	
Locks	Wrong type	X	
	Both locks not keyed alike		X
Workmanship	Pedestal not securely attached to top		X

4.2.2.2 Dimensional examination. Inspection will be made of credenzas for compliance with dimensions specified including thickness of metal and film thickness of enamel. Any dimensions not within tolerance specified shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection Levels	AQL's
For examination in Table III Major	I	4.0
For examination in Table III total	I	10.0
For examination in 4.2.2.2 (one class)	I	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.3 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in Section 5 of this specification. Defects shall be scored in accordance with Table IV. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed in Table IV shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be I of MIL-STD-105 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

TABLE IV Classification of Defects

Examine	Defect
Marking	Omitted; incorrect, illegible, improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate securing of drawers, contents and padding of perimeter edges, incomplete closure of container flaps, loose strapping, distortion of container.

4.4 Tests. Tests specified in 4.5.1, 4.5.5, 4.5.7, 4.5.8, 4.5.9, 4.5.10, 4.5.13, 4.5.15 of AA-O-00210 shall apply.

5. PREPARATION FOR DELIVERY

5.1 Cellulose wadding. Where the term cellulose wadding, or equivalent, is used in this specification, it shall be interpreted to mean any material meeting the requirements of PPP-C-843.

5.2 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.2.1 Levels A and B.

5.2.1.1 Doors and shelves. The adjustable shelves shall be secured in place (see 3.3.9.1), or removed and wrapped in minimum 40-pound kraft wrapping paper conforming to Grade B of UU-P-268, and the wrap secured by means of pressure-sensitive adhesive, paper tape conforming to PPP-T-76. The top edges of door shall be covered by 0.120-inch thick embossed cellulose wadding strips (or strips of equivalent material), or 30 pound oil impregnated kraft paper having sufficient width to overlap inside and outside top edges, and length sufficient to fold down over the vertical end edges approximately 2 inches. Strips shall be positioned in such a manner that will insure their remaining in place when the doors are secured in closed position. The doors shall be secured in closed position by closing and locking. The keys, and any loose hardware, shall be placed in a cotton drawstring bag, securely closed, and attached to a door handle.

5.2.1.2 Body and legs. Finished surfaces of body or legs, which will come in contact with any part of the shipping container, or interior fittings, shall be protected by blankets or pads of non-marring cushioning material, as specified in 5.2.1.1. Door handles shall be protected by built-up pads of corrugated fiberboard not less than 1 inch in width and at least one inch longer than the handle length, nor less than one fourth inch greater thickness than the depth of the handle, slotted to fit over the handle, and secured in place. Surface of pad in contact with finished surfaces of credenza and handle shall be lined with a non-marring material. Each leg shall be protected by a tube of corrugated fiberboard, lined with cushioning material as specified in 5.2.1.1, slipped over the leg and secured in place prior to packing. Alternatively, the legs may be protected by either of the following methods:

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with Federal Standard No. 123.

5.4.2 Military. In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

5.4.3 General. In addition to the marking specified above, each shipping container shall be marked with arrows pointing to the top of the container and the word UP under or over each arrow in letters at least 2 inches in height placed on all four sides of the pack at a point approximately 4 to 8 inches down from top of pack. Additionally, the top panel of the container shall be marked in letters 2 inches high with the wording:

TOP

THIS SIDE UP

FRAGILE HANDLE WITH CARE

and on at least one side and one end with the wording:

FURNITURE

FRAGILE HANDLE WITH CARE

6. NOTES:

6.1. Intended use. The steel office credenza is intended for use with steel unitized office furniture or with steel general office furniture. It is designed primarily, however, for use with the steel conference-type desk covered by Specification AA-D-195. The credenza is not intended to be placed immediately next to any other piece of furniture, so does not require the height adjustment required for steel unitized furniture. The credenza is 30-1/2 inches in height.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, symbol and date of this specification.
(b) Whether preproduction sample is required (see 3.1).
(c) Whether plastic tops are required (see Table II, 3.3.13.4).
(d) Selection of applicable levels of packaging (see 5.2).
(e) Selection of applicable levels of packing (see 5.3).
(f) Marking requirements (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

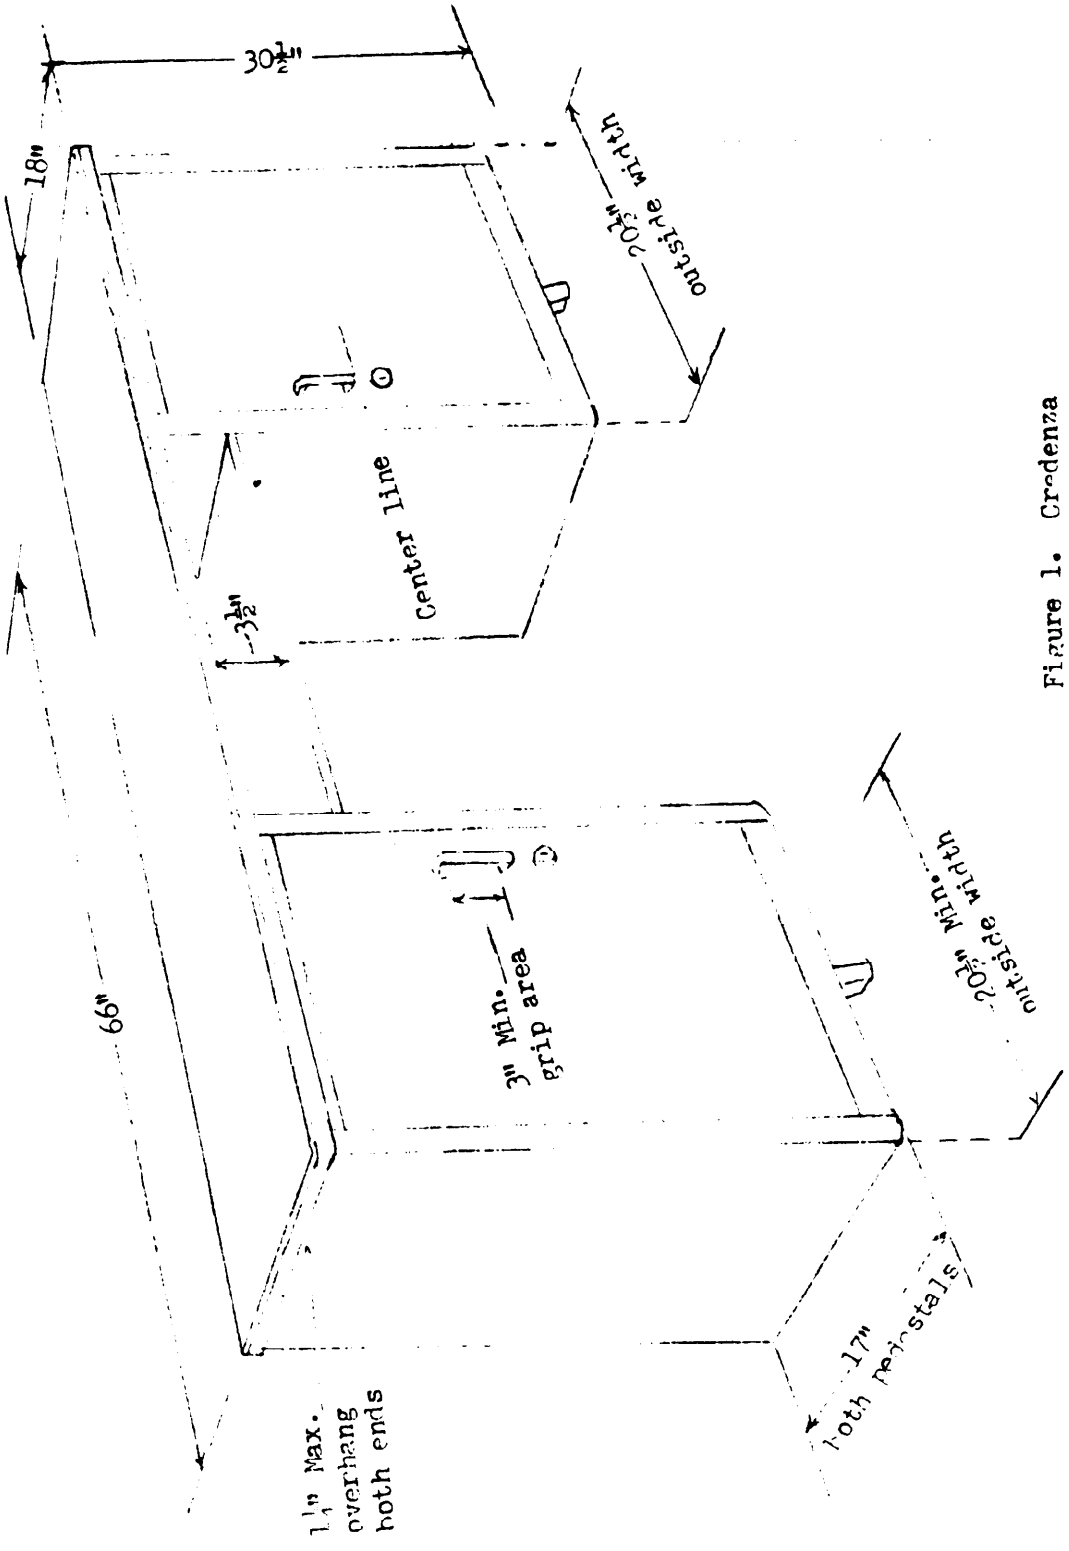


Figure 1. Credenza

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

ITEM	DESCRIPTION	REQ.
1	SKID	1
2	LEG PROTECTORS	4
4	HANDLE PROTECTORS	2
5	FIBERBOARD PAD	1
6	TOP FRONT FILLER	1
7	TOP REAR FILLER	1
8	CARTON	1
9	STRAPPING	2
10	CORK DISKS	8

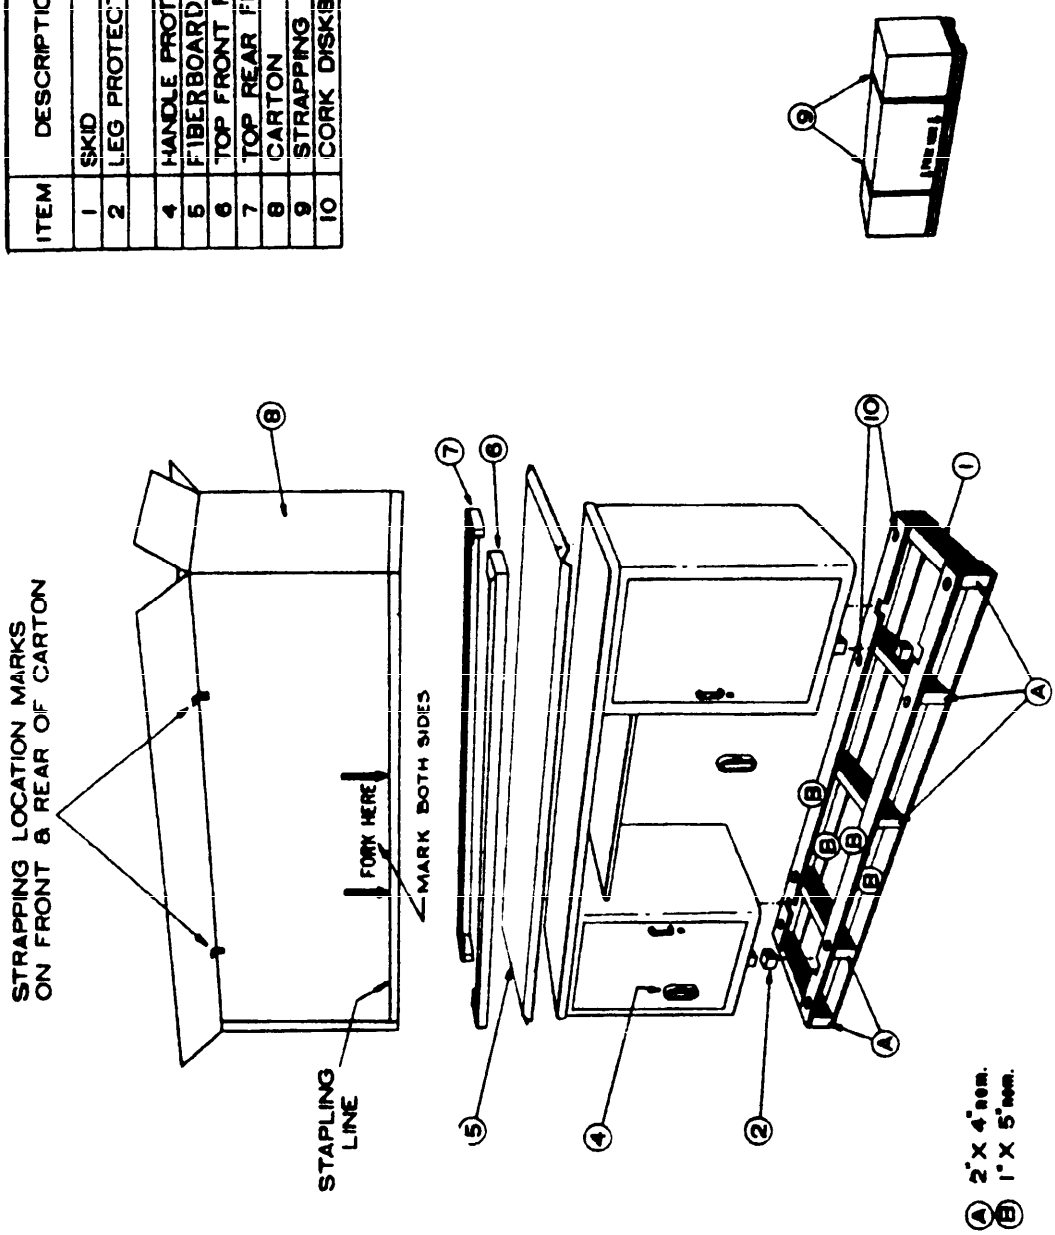


Figure 2 - Packaging for Credenza

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

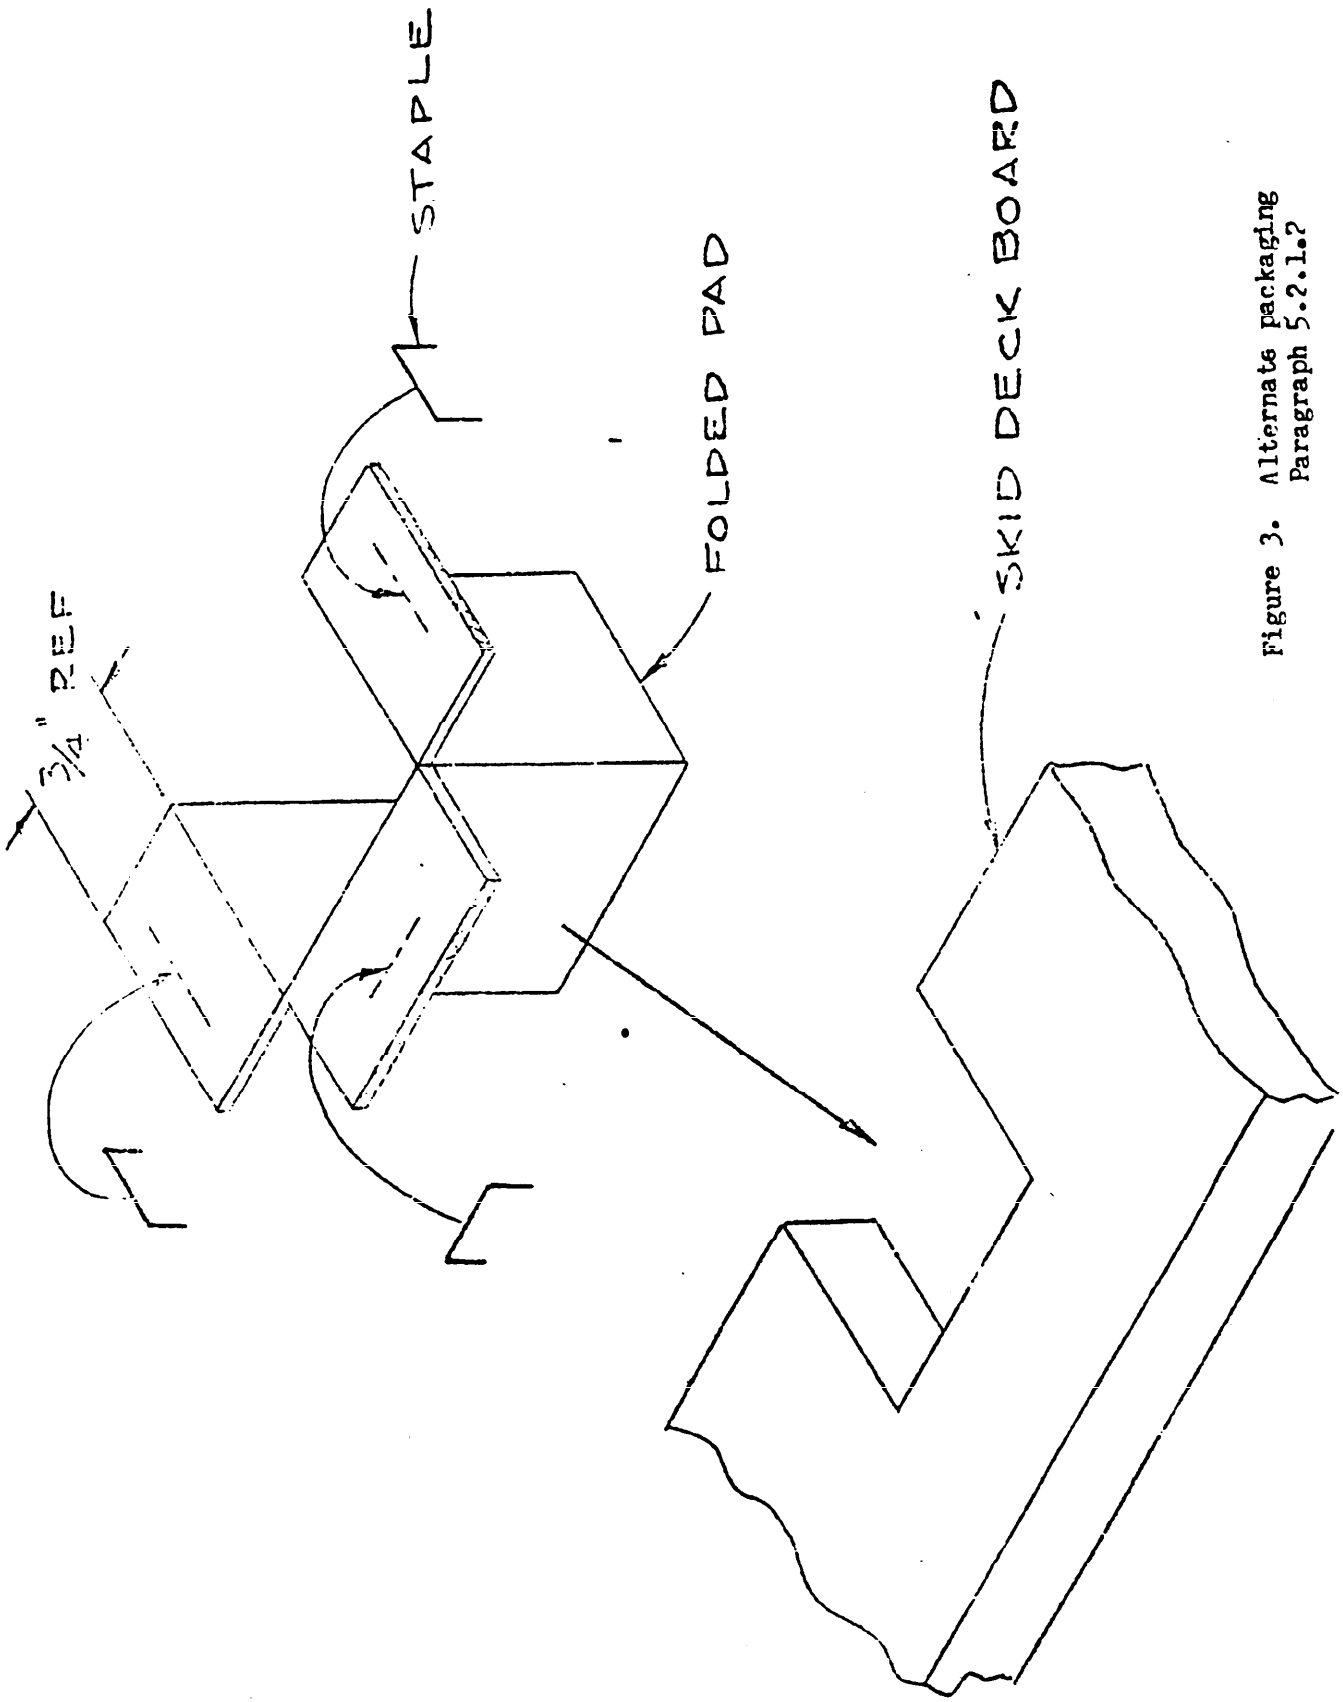


Figure 3. Alternate packaging
Paragraph 5.2.1.2

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to General Services Administration, FSS (FMSF), Wash., D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-O-00240/4C(GSA-FSS) Credenza, Office, Steel

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.