[Metric-SI]
AA-O-00250/1E(GSA-FSS)
July 1, 1993
SUPERSEDING
Int. Fed. Spec. AA-O-00250/1D
July 21, 1989

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, BOOKCASE, WOOD UNITIZED

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the Furniture Commodity Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for the Type II unitized wood office furniture bookcase. General requirements and other information pertaining to this item will be found in Interim Federal Specification AA-O-00250F (GSA-FSS), Office Furniture, Wood, Unitized (General Specification).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The specifications and standards in effect on the date of the invitation for bids are listed in 2.1 of Interim Federal Specification AA-O-00250F hereinafter called the General Specification (G.S.).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 G.S.

3. REQUIREMENTS

3.1 Regulatory requirement. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.2 Materials. Materials used in construction of the bookcases shall be as specified in applicable paragraphs in the General Specification (see Table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Table I. Materials index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Adhesive	3.2.1 Gen. Spec.	Particleboard	3.2.4.6 G.S.
Glass	3.2.2 G.S.	Plastic laminate	3.2.4.7 G.S.
		Steel	3.2.6 G.S.
Wood species	3.2.4.1 G.S.	Pulls	3.2.7.1 G.S.
Solid wood requirements	3.2.4.2 G.S.	Glides	3.2.7.2 G.S.
Wood seasoning	3.2.4.3 G.S.	Shelf standards and supports	3.2.7.3 G.S.
Hardwood plywood	3.2.4.4 G.S.	Hinges, butt type	3.2.7.5.2 G.S.
		Veneer	3.2.4.5 G.S.

3.3 Construction. General construction requirements for bookcase components shall be as specified in the applicable paragraphs in the General Specification (see Table II).

Table II. Construction requirements index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Design and construction	3.3.1 Gen Spec.	Legs	3.3.7 G.S.
Tolerances	3.3.2 G.S.	Mounting plates	3.3.8 G.S.
Joinery	3.3.3 G.S.	Direction of grain	3.3.9.G.S.
Plywood Panels	3.3.4 G.S.	Panel posts	3.3.10 G.S.
Plastic laminate panel construction	3.3.5 G.S.	Chamfered corners	3.3.11 G.S.
Tops	3.3.6 G.S.	Case back attachment	3.3.12 G.S.

3.3.1 Design. The design of the bookcases shall be as shown in Figures 1 and 2.

3.3.1.1 Type II - Case type. The Type II bookcase shall be of the case type with two framed glass doors. There shall be one fixed shelf and one adjustable shelf furnished with each bookcase. The bookcase shall be 965 mm W x 380 mm D x 1245 mm H including the glides at minimum adjustment.

3.3.2 Principal components. The description and dimensions of principal component parts of the bookcases shall be as shown in Table III.

Table I. Materials index

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

Component	Material	Dimensions
Type II bookcase:		
Top	3.3.6 G.S.	19 mm thick
End/bottom panels	Minimum 3-ply particleboard or medium density fiberboard core plywood or minimum 5-ply lumbercore or veneercore plywood, 3.2.4.4 G.S. (Panel post (3.3.10 G.S.) required on front and back-edges of end panels).	19 mm thick
Back panel	Minimum 3-ply plywood, 3.2.4.4 G.S.	9.5 mm thick
Shelves	5-ply lumbercore plywood with clear front edge, 3.2.4.4 G.S. (shape front edge to a 16 mm radius)	16 mm thick
Door Frames	Exposed solid parts, 3.3.4.1 G.S.	27 x 51 mm
Front Rail (lower)	Exposed solid parts, 3.2.4.1 G.S.	25 x 44 mm
Front Parting Rail (upper)	Exposed solid parts, 3.2.4.1 G.S.	19 mm x 31 mm
Back Parting Rail (upper)	Unexposed wood, 3.2.4.1 G.S.	19 mm x 31 mm
Reinforcing Cleats sq.	Unexposed wood, 3.2.4.1 G.S.	19 mm min.
Leg Support Cleats	Unexposed wood, 3.2.4.1 G.S.	24 x 125 by full depth front to rear

3.3.3 Construction details for Type II - Case type. The construction shall conform to the following specifications:

3.3.3.1 Parting rails. All parting rails, both upper and lower, shall be tenoned and glued into the end panels. The lower front parting rails shall be toe-screwed at 45 degree angle (No. 10 screws minimum) from the underside of the front parting rail and into each end panel. Each end panel shall have a veinline inset 28 mm from the back and front edge, the full height of the panel. The veinline shall be 1.6 mm in depth and width.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.3.2 Back panel. The back panel shall be rabbeted into the end panels and lap the bottom panel and the upper rear parting rail.

3.3.3.3 Fixed shelf. There shall be a full depth fixed shelf, tenoned into the inside face of each end panel. The clear space between the upper parting rail and the fixed shelf shall be 300 mm. A cleat, 300 mm deep, shall be glued and screwed to the underside of the shelf and the inside face of each end panel. There shall be a minimum of four screws, evenly spaced, through the back panel into the back edge of the fixed shelf.

3.3.3.4 Adjustable shelves. There shall be one full depth adjustable shelf. Two shelf standards (3.2.7.3 G.S.), 610 mm long minimum, shall be surface mounted vertically, 150 mm apart O.C. on the inside face of each end panel. The two front shelf standards shall be 76 mm O.C. from the front panel edge. Each shelf end of the adjustable shelf shall have cutouts to accommodate the supports to prevent shelf movement. The cutouts shall be finished walnut color.

3.3.3.5 Top. The top shall overhang the front and both sides 13 mm and shall be flush with the back panel. The front corners of the top shall be rounded to a 5 mm radius, minimum, and the back corners shall be eased. The top shall be secured with tapping screws through the upper front and back parting rails and by a full depth cleat, glued and screwed to the underside of the top and inside face of each end panel. The screws shall be not less than No. 10 size and shall be spaced not more than 150 mm apart starting 100 mm (maximum) from each corner. The screws shall penetrate the top 3/4 of its thickness, minimum.

3.3.3.6 Glass doors. Each framed glass door shall be securely hung in place with 3 hinges (3.2.7.5 G.S.) per door. Glass shall be retained with 1/4 round wood moulding or vinyl (or polyethylene) retainer moulding. Moulding shall be securely pin-nailed or retained in a groove. Moulding (including vinyl and polyethylene) shall be neatly miter cut and fitted at the door corners. The doors shall fit freely within the opening and the clearance shall not exceed 2.5 mm at any point on their perimeter when closed. Each door shall be equipped with two catches. The upper catch shall be magnetic and shall be recessed into the parting rail. The lower catch shall be of the bullet type. The female socket of the catch shall be mounted into the bottom of the door frame. The male portion shall be positioned and recessed into the bottom of the case so that the two parts of the catch will intermember smoothly when the door is closed.

3.3.3.7 Legs. Leg mounting cleats and reinforcing cleats shall be positioned and fastened as illustrated in Figure 1. The leg (3.3.7 G.S.) shall be offset on the mounting plate (3.3.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

G.S.) as shown on Figure 2. The leg assembly shall be mounted to the case as shown in Figure 1.

3.4 Finishes. The metal, laminate and wood finish shall be as specified in 3.4 G.S.

3.5 Identification marking. Marking of bookcases shall be as specified in 3.5 G.S.

3.6 Workmanship. Workmanship shall conform to 3.6 G.S.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in Section 4 of the General Specification and as specified herein.

4.2 Assembly examination. An examination of the assembly of the shelf and shelf supports to the bookcase shall be made for defects in ease of assembly and fit of components. The lot size shall be expressed in units of bookcases. The unit of product shall be one bookcase. Defects shall be scored in accordance with Table IV. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G.S.

(NOTE: Unassembled shelves and bookcases selected by the Government inspector shall be fully assembled by the contractor. The inspector shall witness the assembly of the shelf and shelf supports to the bookcase and shall observe the ease of assembly and fit of components).

Table V. Assembly defects

Examine	Defect
Shelf assembly and fitting for bookcase	Shelf standard not adjustable to positions as specified.
	Shelf standards out of alignment.
	Shelf support does not fit into slot in standard.
	Shelf support too loose in standard, i.e. falls out easily.
	Shelf wobbles on shelf supports.
	Shelf does not fit neatly on support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.4.3 Test requirements. Failure to meet test requirements will be cause for rejection. Perform test at first article inspection. On two year contracts, retest units from current production one year after the start of the schedule contract period.

4.4.3.1 Bookcase shelf static load test.
Preparation: Place complete unit with doors on a flat level surface. Install shelves in unit evenly spaced top to bottom. Place a 9 kg. load on both ends of each adjustable shelf for 5 minutes to insure that the shelf supports are fully engaged. Remove this load. Place dial indicators, or equivalent measuring devices at the front edge of the top panel and each adjustable shelf. Take initial readings.

Test: Apply an evenly distributed, 0.6 kg. per linear centimeter non-rigid load on the top panel and each adjustable shelf at the same time. Maintain load for 30 minutes. Record deflections while under load. Remove load.
Acceptance standards: Maximum deflection for top and each shelf while under load: 0.005 mm per mm of shelf length.
End panels shall not bow while bookcase is under load.
Doors shall remain aligned and continue to operate smoothly.
Structural damage to the case, shelves, or shelf supports that affect serviceability or could cause personal injury to the user will be cause for rejection.

4.4.3.2 Bookcase drop test. Each end of the bookcase shall be raised 150 mm and dropped onto a bare concrete floor. The bookcase shall then be thoroughly examined (including glides). There shall be no broken joints, loose mechanical attachments, or other structural damage that affect serviceability or could cause personal injury to the user.

4.4.3.3 Bookcase door test. ANSI Standards for Kitchen and Vanity Cabinets A161.1-1990. Test bookcase with doors in accordance with sections 6.1 and 6.2 Door Operation Tests. Secure unit to test platform to prevent tipping.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. Package, pack, and mark shipping containers in accordance with the contract or order.

6. NOTES

6.1 Intended use. The bookcase covered by this specification is part of a correlated line of wood unitized office furniture designed to conserve floor space and for use in executive offices, courtrooms, and conference rooms of Federal agencies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Title, number, and date of the General specification.

6.3 SI - English unit equivalents.

1 m^2 (square meter) = 1.19617 $yard^2$
1 kg/m^3 (kilogram/cubic meter) = 0.06242 lb.(mass)/ft^3
1 mm (millimeter) = 0.03937 inch (thickness of one dime)
1 m(meter) = 1 000 mm = 1.0936 yard (39.7 in)
1 N(Newton) = 0.225 lb. (force)
1 kg(kilogram) = 2.2 lb.(mass)
1 g(gram) = 0.0022 lb. (mass)
1 g(gram) = 0.03527 oz.(mass avoirdupois)
1 kPa(kilo Pascal) = 0.14514 lb(force)/in^2(PSI)
(C^o x 9/5) + 32 (Celsius) = F^o (Fahrenheit)
1 g/m^2 (gram per square meter) = 0.02949 oz/yd^2 or 0.04426 oz/linear yard (54" W basis)

To convert SI units to English units, multiply SI measurement by the appropriate English conversion factor listed above. See example on next below:

900 mm X 0.03937 in./mm = 35.43 inches

To convert Celsius temperature to Fahrenheit temperature use the above conversion equation. See example below:

(20°C X 1.8) + 32 = 68°F

Preparing Activity
GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

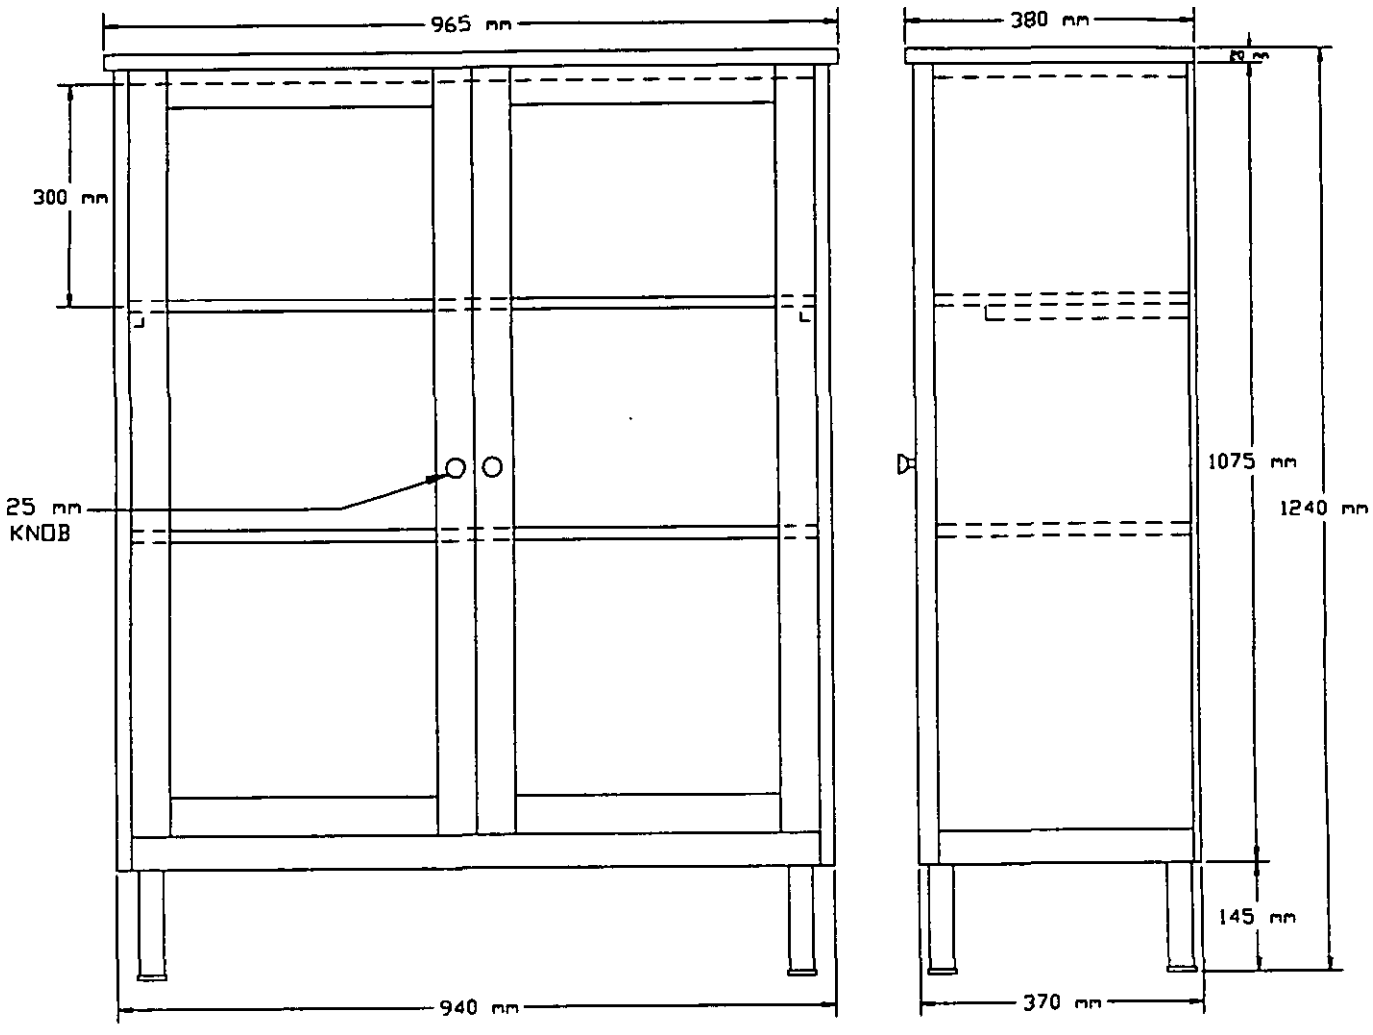


FIGURE 1 TYPE II BOOKCASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

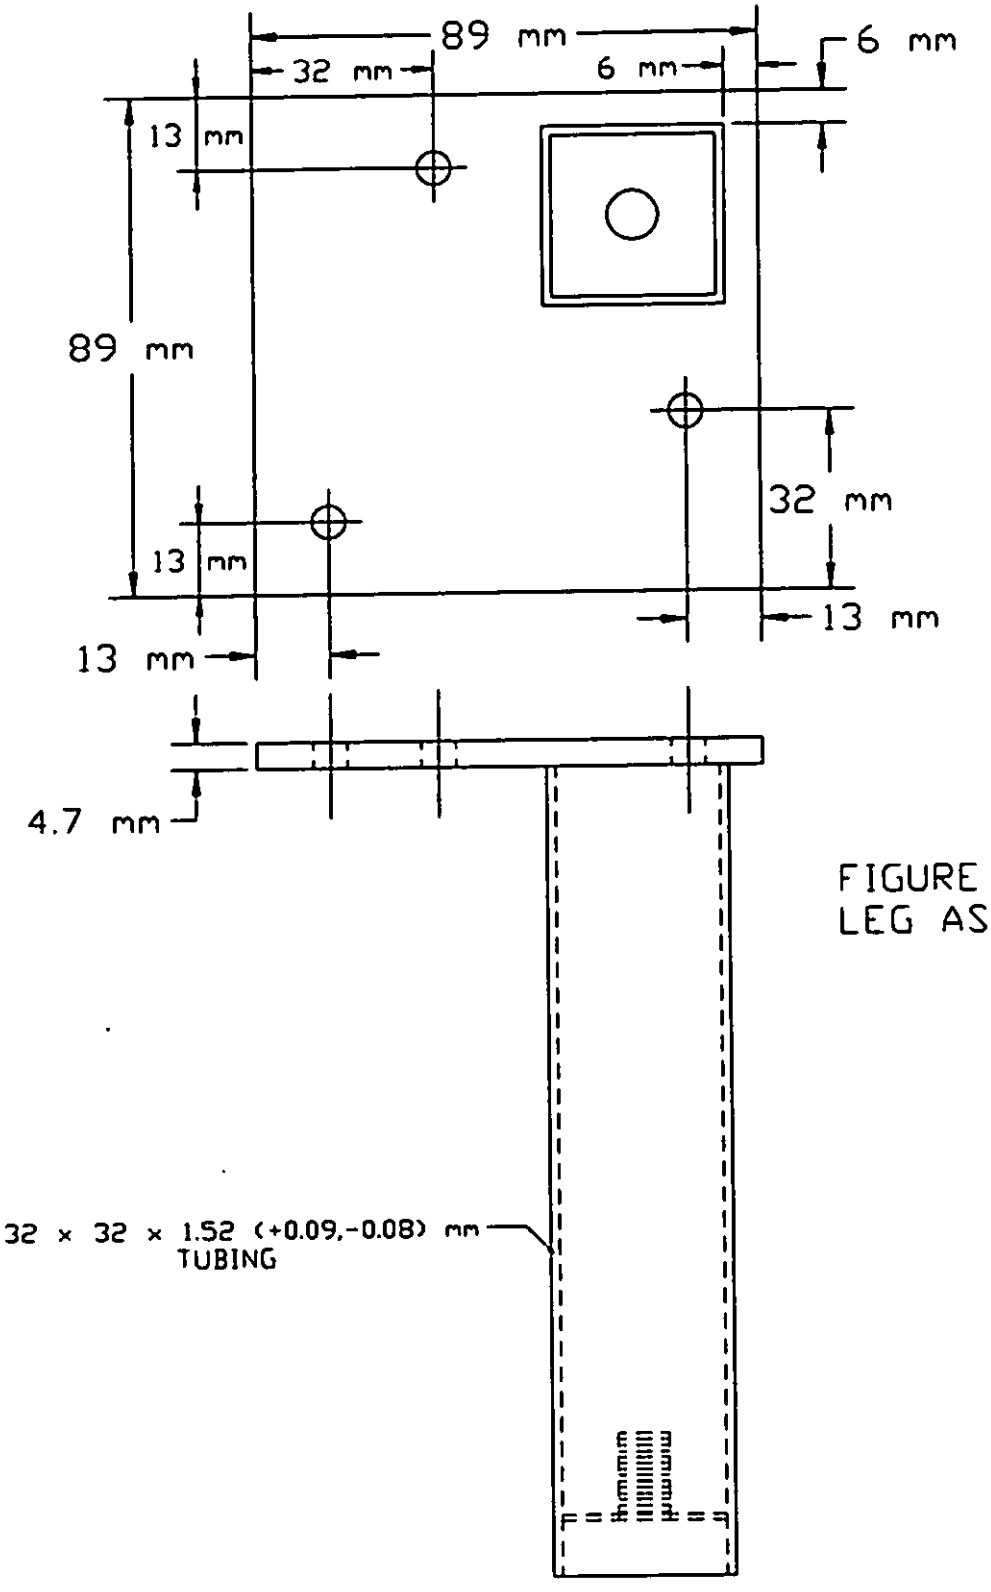


FIGURE 2
LEG ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.