[Metric-SI]
AA-O-00250/2E(GSA-FSS)
July 1, 1993
SUPERSEDING
Int. Fed. Spec. AA-O-00250/2D
JULY 21, 1989

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, CREDENZA, WOOD UNITIZED

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the Furniture Commodity Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above

1. SCOPE

1.1 Scope. This specification covers the detailed requirements for one type and size of unitized wood office furniture credenza. General requirements and other information pertaining to this item will be found in Interim Federal Specification AA-O-00250F (GSA-FSS), Office Furniture, Wood, Unitized (General Specification).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The specifications and standards of this issue is effect on the date of the invitation for bids which form a part of the specification, are listed in 2.1 of Interim Federal Specification AA-O-00250F hereinafter called the General Specification (G.S.).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 G.S.

3 REQUIREMENTS

3.1 Materials Materials used in construction of the credenza shall be as specified in the applicable paragraphs in the General Specification (see Table I).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Table I. Materials index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Adhesive	3.2.1 Gen. Spec	Particleboard	3 2 4.6 G.S
Lacquer	3.2.3 G.S	Plastic laminate	3.2 4.7 G.S.
Wood species	3.2 4.1 G S	Steel	3 2.6 G.S.
Solid wood requirements	3.2 4 2 G S	Pulls	3.2 7 1 G.S
Wood seasoning	3 2.4.3 G.S	Glides	3.2 7 2 G S.
Hardwood plywood	3 2 4 4 G S.	Hinges, knife type	3.2 7 5 1 G S

3 2 Construction. General construction requirements for credenza components shall be as specified in the applicable paragraphs in the General Specification (see Table II)

Table II. Construction requirements index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Design and construction	3.3.1 Gen Spec.	Legs	3.3.7 G.S.
Tolerances	3.3.2 G.S.	Mounting plates	3 3 8 G S.
Joinery	3.3.3 G.S.	Direction of grain	3.3.9.G.S.
Plywood Panels	3.3.4 G.S.	Panel posts	3.3.10 G.S.
Plastic laminate panel construction	3.3 5 G S	Chamfered corners	3.3.11 G.S.
Tops	3 3.6 G S.	Case back attachment	3.3.12 G.S

3 2.1 Design. The design of the credenza shall be as shown in Figure 1. The credenza shall be 1675 mm wide, 450 mm deep and 750 mm high, including glides at minimum adjustment.

3 2 2 Principal components The description and dimensions of principal component parts of the credenza shall be as shown in Table III.

Table III. Principal Credenza Components

Component	Materials	Dimensions, mm
Top	3 3.6 Gen Spec.	32 thick
End Panels Back Panel Bottom panels Shelves Adjustable/ fixed	Min 3-ply Particleboard/ Med Density Fiberboard or Min 3-ply lumber or veneer core plywood, 3 2 4 4 G S (Panel posts (3 3 10 G S) required on front edge of end panels)	19 thick

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Joinery cleats	Unexposed wood, 3.2.4.1 G.S.	19 sq. min.

Table III. Principal Credenza Components (cont.)

Component	Materials	Dimensions, mm
Joinery cleats	Unexposed wood, 3.2.4.1 G.S	19 sq. min
Lower front rail	Exposed solid parts, 3.2 4.1 G S.	25 x 44 thick
Parting rails, front	Exposed solid parts, 3.2.4.1 G.S.	19 thick
Parting rails, back	Unexposed wood, 3.2.4.1 G.S.	19 thick
Leg support cleats	Unexposed wood, 3.2.4.1 G S.	24 x 125 full depth from front to rear

3.2.3 Detailed construction. The case of the credenza shall consist of two identical pedestals, kneespace area and a full height, common back panel. The back of the credenza shall be finished as an exposed surface One adjustable shelf and one door is required in/on each pedestal.

3.2.3.1 Upper parting rails. The upper parting rails shall be tenoned into the end panels. The bottom of the pedestal shall be tenoned into the end panels and into the lower front rail. The back panel shall be rabbeted into the outside end panel of the pedestals and lap the bottom panel and the top back rail.

3 2.3.2 Lower front rail. The lower front rail shall be tenoned and glued into the end panels and shall be toe-screwed at a 45 degree angle (No 10 screws minimum) from the underside of the front rail into the end panels.

3 2.3.3 Cleats. There shall be nearly full depth cleat glued and screwed to each pedestal end panel and the underside of the bottom. In the center compartment there shall be a nearly full width cleat, screwed to the top and glued to the back panel. There shall be a minimum of four screws, evenly spaced, through the back panel into the cleat, or the four screws may be driven through the cleat into the back panel

3 2 3 4 Top The top overhang shall be 13 mm on all four sides The top shall be secured by screws through the upper front and back parting rails and by a nearly full depth cleat, glued and screwed to the end panel and screwed to the underside of the top The screws used for securing the top shall be not

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

less than No 10 size, tapping type, and shall be spaced not more than 150 mm apart starting 100 mm (maximum) from each corner. All screws shall penetrate the top a distance of 25 mm, minimum

3.2.3.5 Center fixed shelf The fixed shelf shall be tenoned into the face of the inside end panels of the pedestals The shelf shall inset 38 mm from the front edge of the pedestal. The clear space between the fixed shelf and the top shall be 100 mm There shall be a minimum of three screws, evenly spaced, inserted through the back panel and into the fixed shelf, or shelf may be attached to the back panel with a nearly full length screw/glue cleat.

3.2.3.6 Adjustable shelves. Each end of the adjustable shelves shall have cutouts to accommodate the supports to prevent shelf movement. The cutouts shall be finished walnut color. The front edge of all adjustable shelves shall be rounded to a 16 radius and all other edges shall be eased There shall be two rows of shelf standards (3.2.7.3 G.S.), vertically surface mounted, 11 inches apart O.C., on the inside face of each pedestal end panel. The shelf standards shall be not less than 50 mm shorter than the interior height. The supports shall be readily and easily adjusted throughout the entire length of the standard. The shelf standards shall be secured with brass plated screws. The spacing of the screws shall be 150 mm (maximum) apart.

3.2.3.7 Doors. Doors shall be 19 mm, minimum 5 ply hardwood plywood (3.2.4.4 G.S.) doors shall be banded on top and both side edges as specified in 3.2.4.4 G.S Knife hinges (3.2.7.5.1 G.S.) required for hanging doors. The door shall fit freely within the opening and the clearance shall not exceed 2 mm at any point on its perimeter. Door pulls (3.2.7.1 G.S.) shall be provided and positioned as shown in figure 1 The pull shall be secured to the door by a trim screw through the door into the pull. There shall be two catches and strike plates for each door that will hold the door securely closed without looseness. Catches and strike plates shall be dark brown or antique brass finished.

3.2.3.8 Leg support. The leg support cleats shall be glued and screwed to the underside of the bottom panel. There shall be not less than two screws, No. 10 minimum, evenly spaced in each end of the leg support cleat The mounting plates shall be centered on the pedestal, with the leg centered on the plate The mounting plate shall be attached to the leg support cleat as specified in 3 3 8 G S

3 3 Finishes The metal, laminate and wood finish shall be as specified in 3 4 G S

3 4 Identification marking Marking of credenza shall be as specified in 3 5 G S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3 5 Workmanship. Workmanship shall conform to 3.6 G.S.

4 QUALITY ASSURANCE PROVISIONS

4 1 The quality assurance provisions shall be as specified in Section 4 of the General Specification and as specified herein.

4 2 Assembly examination. An examination of the assembly of the shelves and shelf supports to the shelf standards of the credenzas shall be made for defects in ease of assembly and fit of components. The lot size shall be expressed in units of credenzas. The unit of product shall be one credenza. Defects shall be scored in accordance with Table IV. Inspection level and acceptable quality level (AQL) shall be as specified in 4 4.G.S

(NOTE· Unassembled shelves and credenzas, selected by the Government inspector, shall be fully assembled by the contractor. The inspector shall witness the assembly of the shelves and shelf supports to the shelf standards of the credenza and shall observe the ease of assembly and fit of components)

TABLE IV. Shelf assembly defects

Examine	Defect
Shelf assembly and fittings	Shelf standards out of alignment. Shelf standard not adjustable to position as specified. Shelf support does not fit into slot in standard. Shelf support too loose in standard, i.e., falls out easily. Shelf wobbles on shelf support (when in horizontal plane). Shelf does not fit neatly on support.

4 3 Test requirements for credenza.

4 3 1 ANSI Desk Product Test X5.5-1989. Failure to comply with these test requirements will be cause for rejection. Perform all tests on a complete piece of furniture in furniture manufacturer's plant or at an independent test facility. Test certifications from component suppliers will not be acceptable Or two year contracts, retest units from current production one year after the start of the schedule contract period

ANSI X5 5-1989 is available from the American National Standards Institute, Inc , 1430 Broadway, New York, NY 10018.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Test the credenza, required for first article inspection in accordance with sections 4, 5, 10, 11, 13, 15 and in ANSI X5.5-1989 with the changes listed below

4 Horizontal Surface Static Load Test.

4.3.2 Test Procedure, Proof Load. Change requirements as follows: Place concentrated and distributed loads 25 mm from the front of the credenza

4.4.2 Test Procedure, Proof Load Add the following requirements. Concentrated Load The maximum deflection with concentrated load in place shall not exceed 0.05 mm per mm of top length (Example 0.005 mm x 1524 mm length = 7.6 mm maximum allowable deflection.) The permanent set with concentrated load removed shall not exceed 0.001 mm per mm of top length

Proof Load No damage or loss of serviceability snall result from application of the test load.

10.0 Racking Test: Change test procedure where necessary to ensure that the legs, not the end of the pedestal, support the weight of the credenza.

12.0 - Leg Strength Test. Test each glide on item.

4.3 2 ANSI Performance Standards for Kitchen and Vanity Cabinets A161.1-1990. Failure to comply with these test requirements will be cause for rejection. Perform all tests on a complete piece of furniture in furniture manufacturer's plant or at an independent test facility Test certificates from component suppliers will not be acceptable. On two year contracts, retest units from current production, one year after the start of the schedule contract period.

Test credenza at first article inspection, in accordance with sections 6 1 and 6.2 in ANSI A161.1-1990 with the following changes:

6.1 3 Minimum Performance. Add: 5. Carefully check door for any splitting or other failure.

5. PREPARATION FOR DELIVERY

5 1 Packaging, packing and marking Package, pack, and mark shipping containers in accordance with the contract or order

6 NOTES

6 1 Intended use The bookcases covered by this specification are units in a correlated line of wood unitized office furniture

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

designed to conserve floor space and for use in executive offices, and courtrooms of Federal agencies.

6 2 Ordering data Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Title, number, and date of the General Specification.

6 3 SI - English unit equivalents.

1 m^2 (square meter) = 1.19617 $yard^2$
1 kg/m^3 (kilogram/cubic meter) = 0 06242 lb (mass)/ft^3
1 mm (millimeter) = 0 03937 inch (thickness of one dime)
1 m(meter) = 1 000 mm = 1.0936 yard (39.7 in)
1 N(Newton) = 0 225 lb. (force)
1 kg(kilogram) = 2 2 lb (mass)
1 g(gram) = 0.0022 lb. (mass)
1 g(gram) = 0.03527 oz (mass avoirdupois)
1 kPa(kilo Pascal) = 0 14514 lb(force)/in^2(PSI)
(C^o x 9/5) + 32 (Celsius) = F^o (Fahrenheit)
1 g/m^2(gram per square meter) = 0.02949 oz/yd^2 or 0.04426 oz/linear yard (54" W basis)

To convert SI units to English units, multiply SI measurement by the appropriate English conversion factor listed above. See example on next below

900 mm X 0.03937 in./mm = 35.43 inches

To convert Celsius temperature to Fahrenheit temperature use the above conversion equation. See example below:

(20°C X 1.8) + 32 = 68°F

Preparing Activity
GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

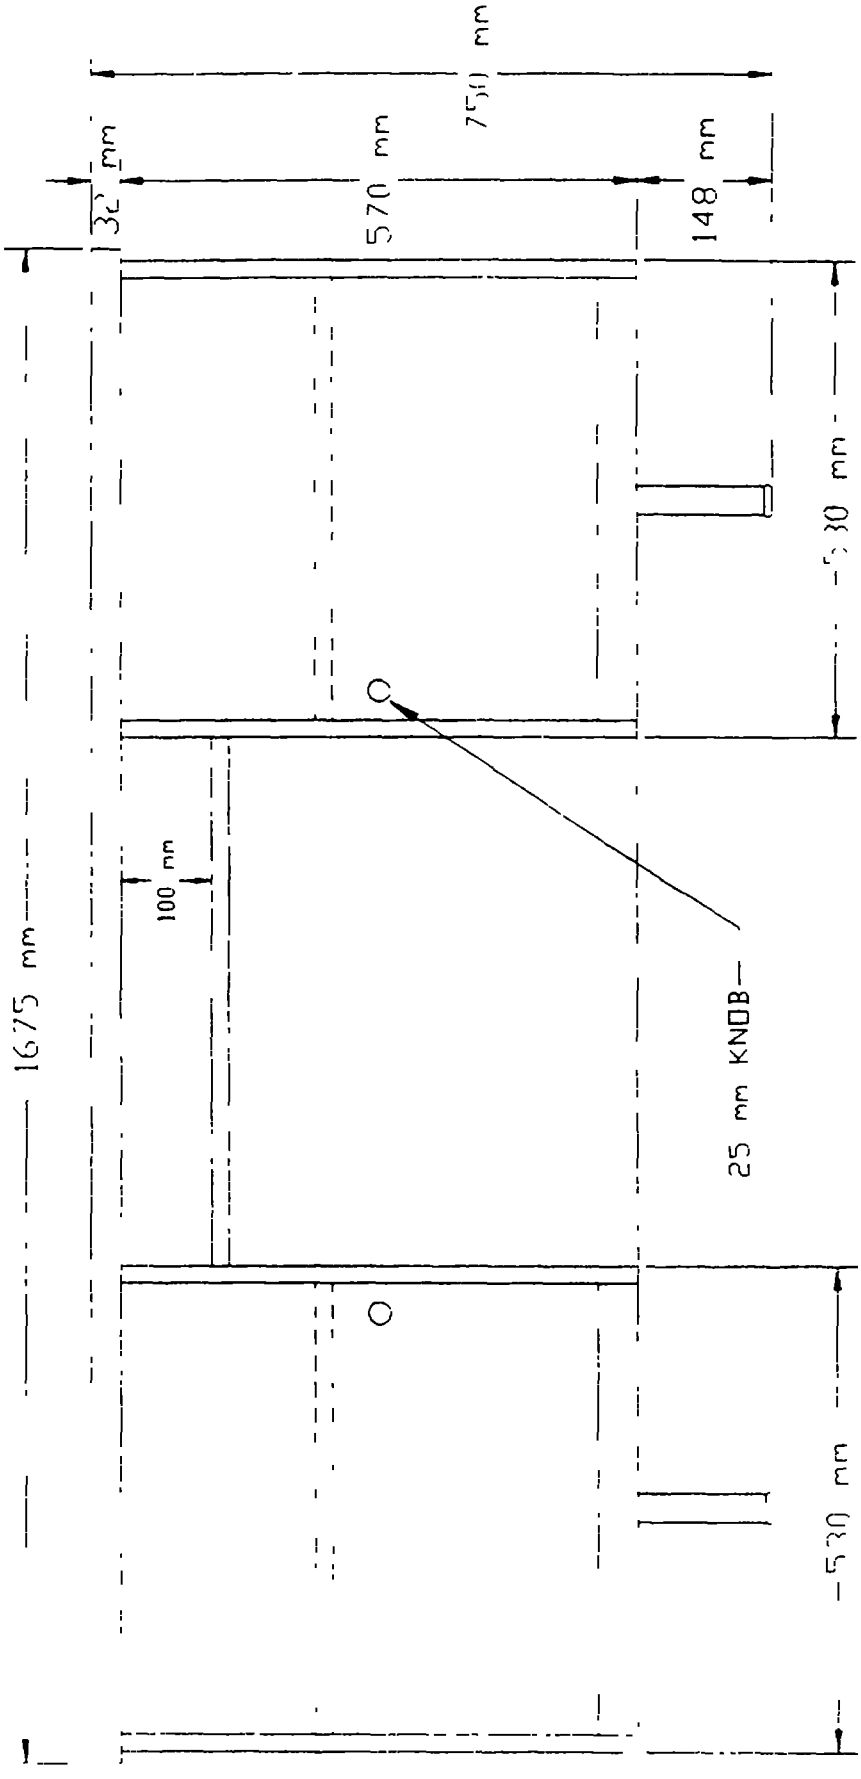


FIGURE 1. CREDENZA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.