AA-0-00250/3C (GSA-FSS)
October 2, 1978
SUPERSEDING
Int. Fed. Spec. AA-0-00250/3b
September 1, 1967

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: DESKS, DESK ATTACHMENTS, WOOD, UNITIZED

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for the unitized wood office furniture desks and desk attachments. General requirements and other information pertaining to these items will be found in Interim Federal Specification AA-0-00250D(GSA-FSS), Office Furniture, Wood, Unitized (General Specification).

1.2 Classification.

1.2.1 Types, styles, sizes, and classes. The desks and desk attachments covered by this specification shall be of the types, styles, sizes, and classes specified herein and as follows (see 6.2):

Type I - Desks, for L-units. (See Figs. 1 and 2)

Style A - Single pedestal.

Size 1 - 60 by 24 inches.

Class 1 - Left pedestal.
Class 2 - Right pedestal.

Size 2 - 60 by 30 inches.

Class 1 - Left pedestal.
Class 2 - Right pedestal.

Size 3 - 68 by 38 inches.

Class 1 - Left pedestal.
Class 2 - Right pedestal.

Style B - Single pedestal, bookcase back. (See Figs. 2 and 3)

60 by 30 inches.

Class 1 - Left pedestal.
Class 2 - Right pedestal.

Style C - Center drawer only, panel ends. (See Fig. 6)

54 by 30 inches.

Class 1 - Connector on right.
Class 2 - Connector on left.

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Type II - Desk attachment, L-units. (See Fig. 5)

Style A - With end panel, no drawers.

36 by 18 inches.

Size 1 - Full height (29-1/2 inches).

Class 1 - Right end panel.
Class 2 - Left end panel.

Size 2 - Secretarial height (26-1/2 inches).

Class 1 - Right end panel.
Class 2 - Left end panel.

Style B - Stationery pedestal.

36 by 18 inches.

Size 1 - Full height (29-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Size 2 - Secretarial height (26-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Style C - Drawer pedestal.

36 by 18 inches.

Size 1 - Full height (29-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Size 2 - Secretarial height (26-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Style D - Drawer pedestal.

42 by 18 inches

Size 1 - Full height (29-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Size 2 - Secretarial height (26-1/2 inches).

Class 1 - Right pedestal.
Class 2 - Left pedestal.

Type III - Desk, single pedestal, NOT for L-units. (See Fig. 4)

54 by 30 inches.

Class 1 - Left pedestal.
Class 2 - Right pedestal.

Type IV - Desk, double pedestal. (See Fig. 2)

Size 1 - 60 by 30 inches.
Size 2 - 68 by 38 inches.
Size 3 - 74 by 38 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The specifications and standards of the issue in effect on the date of the invitation for bids which form a part of the specification, are listed in 2.1 of Interim Federal Specification AA-0-00250D, hereinafter called the General Specification (G.S.).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 G.S.

3. REQUIREMENTS

3.1 Recovered material requirement. The end items listed below shall contain not less than * percent by weight recovered material, excluding packaging. Recovered materials are defined as materials which have been collected or recovered from solid waste. (See 4.3).

Type and Style	* Percent Reclaimed Material
Type II, Style B	1%
Type I, Style B Type IV	1.75%
Type I, Style A Type II, Style A Type II, Style C Type II, Style D Type III	2%
Type I, Style C	3%

3.2 Materials. Materials used in construction of the desks and desk attachments shall be as specified in the applicable paragraphs in the General Specification (see Table I).

TABLE I. Materials index

Component	AA-0-00250D Par. No.	Component	AA-0-00250D Par. No.
Adhesives	3.2.1 Gen. Spec.	Pulls	3.2.7.1 G.S.
Lacquer	3.2.3 G.S.	Locks	3.2.7.2 G.S.
Wood species	3.2.4.1 G.S.	Strike plate	3.2.7.3 G.S.
Solid wood requirements	3.2.4.2 G.S.	Glides	3.2.7.4 G.S.
Wood seasoning	3.2.4.3 G.S.	Shelf standards and supports	3.2.7.7 G.S.
Hardwood plywood	3.2.4.4 G.S.	Two-way suspension	3.2.7.8.1 G.S.
Particleboard	3.2.4.6 G.S.	Three-way suspension	3.2.7.8.2 G.S.
Plastic laminate	3.2.5 G.S.		
Steel	3.2.6 G.S.		

3.2.1 Angle brace. The angle brace shall be of cold rolled round steel (3.2.6 G.S.) bar 3/8 inch in diameter. Each end of the brace shall be flattened and drilled to accommodate one No. 12 screw. The brace shall be 12 inches long minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3 Construction. General construction requirements for bookcase components shall be as specified in the applicable paragraphs in the General Specification (see Table II).

TABLE II. Construction requirements index

Component	AA-O-00250D Par. No.	Component	AA-O-00250D Par. No.
Design and construction	3.3.1 Gen. Spec.	Legs	3.3.7 G.S.
Tolerances	3.3.2 G.S.	Mounting plates	3.3.8 G.S.
Welding	3.3.3 G.S.	Direction of grain	3.3.9 G.S.
Joinery	3.3.4 G.S.	Drawer construction	3.3.10 G.S.
Plastic laminate panel construction	3.3.5 G.S.	Panel posts	3.3.12 G.S.
Tops	3.3.6 G.S.	Chamfered corners	3.3.13 G.S.

3.3.1 Design. The design of the desks and desk attachments shall be as shown in Figures 1 through 10, as applicable. The Type I desk shall be free standing units which may be used with or without desk attachments. The construction of all Type II desk attachments shall be such that they will fit any of the Type I desks. The Class 1 desk attachment is for use with the Class 1 desk, and the Class 2 desk attachment is for use with the Class 2 desk. The height of the Type II desk attachment shall be 26-1/2 or 29-1/2 inches including the glides at the lowest position. The Type III desk shall be a single pedestal unit, and the Type IV desk shall be a double pedestal unit. The height of all desks shall be 29-1/2 inches including the glides at minimum adjustment.

3.3.2 Principal components. The description and dimensions of principal components parts of the desks and desk attachments shall be as shown in Table III.

TABLE III. Principal desk and desk attachment components

Component	Material	Dimension, inches
Tops	3.3.6 Gen. Spec.	1-1/4 thick
Pedestal end panels, except Type II, Style B	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Pedestal end panels, for Type II, Style B	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Pedestal back panel, except Type II, Style B	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Pedestal back panel, for Type II, Style B	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Pedestal dust bottom, except Type II, Style B	3 ply plywood, 3.2.4.4 G.S.	3/20 thick
Pedestal bottom panel, for Type II, Style B	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Desk back panels	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Attachment back panels	5 or 7-ply plywood, 3.2.4.4 G.S.	13/16 thick
Desk and attachment end panels	5-ply plywood, 3.2.4.4 G.S.	13/16 thick
Panel posts	Exposed solid parts, 3.2.4.1 G.S.	13/16 by 1-1/8
Drawer fronts	5-ply plywood	13/16 thick

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Principal desk and desk attachment components (cont'd)

Component	Material	Dimension, inches
Framing rails:		
Top front rail	Exposed solid parts, 3.2.4.1 G.S.	3/4 by 2-1/2
Top back rail	Unexposed wood, 3.2.4.1 G.S.	3/4 by 1-1/2
Lower front rail	Unexposed wood, 3.2.4.1 G.S.	3/4 by 1-1/2
Lower parting rail	Exposed solid parts, 3.2.4.1 G.S.	1 by 1-3/4
Side rails or ledges	Unexposed wood, 3.2.4.1 G.S.	3/4 by 1-1/2
Joinery cleats (exposed)	Exposed solid parts, 3.2.4.1 G.S.	3/4 by 3/4
Joinery cleats (unexposed)	Unexposed wood, 3.2.4.1 G.S.	3/4 by 3/4
Leg support cleats	Unexposed wood, 3.2.4.1 G.S.	15/16 by 5 by full depth (panel to panel or rail to rail)
Reference slides for desks:		
Type I:		
Style A, Size 1	3.3.5 G.S.	13/16 thick by 20 long
Style A, Sizes 2 and 3, and Style B	3.3.5 G.S.	13/16 thick by 25 long
Type III and IV	3.3.5 G.S.	13/16 thick by 25 long

3.3.3 Top and pedestal dimensions. The minimum dimensions of the tops and pedestals for the desks and desk attachments shall be as shown in Table IV.

TABLE IV. Top and pedestal dimensions

Item	Tops, inches	Pedestals, inches
Desks:		
Type I		
Style A - Size 1	60 by 24	16-1/4 by 23 by 22-7/16
Size 2	60 by 30	16-1/4 by 29 by 22-7/16
Size 3	68 by 38	16-1/4 by 29 by 22-7/16
Style B	60 by 30	16-1/4 by 29 by 22-7/16
Style C	54 by 30	(None)
Type III	54 by 30	16-1/4 by 29 by 22-7/16
Type IV		
Size 1	60 by 30	16-1/4 by 29 by 22-7/16
Size 2	68 by 38	16-1/4 by 29 by 22-7/16
Size 3	74 by 38	16-1/4 by 29 by 22-7/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE IV. Top and pedestal dimensions (cont'd)

Item		Tops, inches	Pedestals, inches
Desk attachments:			
Type II			
Style A -	Sizes 1 and 2	36 by 18	(None)
Style B -	Size 1	36 by 18	12 by 17 by 22-7/16
	Size 2	36 by 18	12 by 17 by 19-7/16
Style C -	Size 1	36 by 18	16-1/4 by 17 by 22-7/16
	Size 2	36 by 18	16-1/4 by 17 by 19-7/16
Style D -	Size 1	42 by 18	16-1/4 by 17 by 22-7/16
	Size 2	42 by 18	16-1/4 by 17 by 19-7/16

3.3.4 Reference slides. The reference slides shall be a plastic laminate assembly (3.3.5 G.S.). The front and two side edges shall be banded as specified in 3.3.5 G.S. Dimensions of the slides shall be as specified in Table III. The front corners shall be rounded to a radius of 1/8 inch, minimum. The top edge of the front and both sides shall be chamfered a minimum of 1/16 inch at a 45 degree angle. The bottom edge of the front and both sides shall be eased. With the exception of the back edge, all edges of the reference slide shall be finished walnut color. All slides shall have a built-in stop to prevent falling out when fully extended but, permitting easy removal when desired. The slides shall be capable of extending beyond the case front a minimum of 75 percent of their length. The slides shall be furnished with 3/4 inch diameter pull (3.2.7.1 G.S.).

3.3.5 H-frame. The H-frame shall consist of two vertical members connected by two cross members. The vertical and lower cross member shall be made of square tubular steel (3.2.6 G.S.), 16 gage (0.0598 inch), and 1-1/4 inches in cross section. The vertical member shall be 28-1/4 inches high including glides in lowest position. The upper cross member shall be an 11 gage (0.1196 inch) steel bar 2-1/2 inches wide. It shall extend the full width between the vertical members. The lower cross member shall be positioned so that it shall be 1/4 inch above the lower edge of the side panel when assembled. The upper and lower cross members shall be welded (3.3.3 G.S.) to the vertical members. There shall be holes drilled through the vertical members and lower cross members to accomodate No. 14 screws for attaching the side and back panels. Holes shall also be drilled through the upper cross member to accomodate a minimum of four No. 14 screw for attaching to the top. The finish shall be as specified in 3.4.2 G.S. The lower end of each vertical member shall be equipped with a leveling glide 3.2.7.4 G.S. The end of the H-frame tubing just above the glide shall be ground smooth to remove sharp edges.

3.3.6 Drawer pedestal construction. All pedestals containing three storage drawers shall have two internal frames. All pedestals that contain a storage drawer and a file drawer shall have three internal frames. All desks furnished with a lock shall have a 3 ply dust shield framed and glued into the drawer frame over the file drawer. The parting rails and drawer bearers shall be grooved to receive the dust shield. The joinery of the frames shall be doweled (2 per corner) or tongue and groove. The material and dimensions of the frames shall be as shown in Table III. A 3 ply dust bottom shall be housed into the bottom frame on all four sides. The front rail of the bottom frame shall be concealed by the lower parting rail. The front rail of the frame between the storage drawer and the file drawer shall be concealed by and butt to the drawer front below it. An angle strike plate of the type shown in Figure 8, having two oblong holes, shall be secured to the underside of the parting rail with round or oval head screws. Reference slides, when provided, shall be supported on the side rails or ledges of the upper frame. The upper frame on the Type II attachment pedestal, Styles C and D, Size 2 shall be concealed by the top drawer front. The front and back rails of all frames shall be mortised into the end panel of the pedestals. There shall be two countersunk screws (No. 10 minimum) through each side rail into the end panel and one screw (No. 10 minimum) through the back rail into the back panel. All screws used in panels shall penetrate the panel 5/8 inch minimum. The front parting rail shall be tenoned and glued into the end panels and shall be toe-screwed, from the bottom of the rail on each side at a 45 degree angle (No. 10 screws minimum), into the panels. The back panel of all desks shall be tenoned and glued into the end panels and shall be butted to the back rails of the frames. The back panel shall be toe-screwed (No. 10 minimum) into the end panels at the top and bottom. The back panel of desk attachments shall be the full length of the unit and shall be tenoned and glued into the back panel post of the outside end panel. The inside end panel shall be tenoned and glued into the back panel. There shall be a full width cleat glued and screwed two ways into the back kneespace panel and the inside end panel. The inside end panel shall be toe-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

screwed (No. 10 minimum) into the back panel at the top and bottom joint. There shall be two leg support cleats (front and back) glued and screwed to the end panels and to the bottom frame. There shall be a minimum of two screws (No. 10 minimum), evenly spaced, on each end of the cleat into the end panel and a minimum of two screws (No. 10 minimum), evenly spaced, on the side of the cleat into the frame rail. The legs shall be centered on the mounting plates. The mounting plates shall be centered on the pedestal and shall be set in approximately 2 inches from the front and from the back edges of the pedestal. The mounting plates shall be secured to the leg support cleats with screws (No. 12 minimum). The Type II, Style B, C and D units shall be shipped with a legs removed from the pedestal. Pilot holes shall be accurately drilled in the leg support cleat to accommodate the screws used to attach the legs. These pilot holes shall be staggered thus preventing the possibly of putting the legs on backwards. Care shall be taken to ensure that these legs can be easily attached to the support cleat with a screw driver. Clear assembly instructions shall be included.

3.3.7 Drawer construction - detailed. All drawers shall be counstructed as specified in 3.3.10 G.S. and shall be furnished with a pull as shown in Figure 6. The minimum inside drawer dimensions shall be as specified in Table V.

TABLE V. Drawer inside dimensions (in inches)

Item	Height clearance	Depth	Width
Desks			
Type I			
Style A, storage drawer	5-1/2	18	12
file drawer	11	18	12
All others, storage drawer	5-1/2	23	12
file drawer	11	23	12
Attachments			
Type II			
Style C and D, Size 1:			
storage drawer	5-1/2	14	12
file drawer	11	14	12
Style C and D, Size 2:			
storage drawer	3-3/8	14	12
file drawer	11	14	12

3.3.7.1 Storage drawer. All storage drawer sides shall be grooved to permit partitions to be placed at locations 2-1/8, 5-7/16, 8-3/4, and 11-1/16 inches from the inside of the drawer front. There shall be two removable partitions of 3-ply plywood, 3/16 inch thick by 4 inches high, furnished with each drawer. With the exception of Type I, Style A, Size 1 desks, all desk storage drawers shall also be equipped with one removable partition dry dovetail into the drawer sides 15-1/4 inches from the inside of the drawer front. The partition shall be either solid wood or plywood, and shall be 3/8 inch thick by 4 inches high. All storage drawers shall be equipped with a two-way suspension (3.2.7.8.1 G.S.).

3.3.7.2 File drawer. All desk file drawers shall be equipped with one removable partition of either plywood or solid wood, 3/8 inch thick, dry dovetailed into the drawer sides 14 inches from the drawer front inside face. With the exception of Type I, Style A, Size 1 desks, all desk file drawers shall also provide for the partition to be positioned 17 inches from the drawer front inside face. All desk file drawers shall be equipped so that either of the following filing methods may be used. Each desk file drawer shall have grooves to accommodate hanger bars for both legal and letter size hanging files. The grooves shall be milled in the drawer sides. The front groove shall be 1 inch from the drawer front inside face. The spacing of the grooves shall be 12-1/4 inches apart (O. D.) for letter size and 15-1/4 inches apart (O. D.) for legal size. The grooves shall be 1/8 inch wide by 1/4 inch deep and of sufficient length to allow the file folder, when in place, to clear the drawer bottom 1/2 inch, minimum. Two hanger bars of cold rolled steel, 1/8 inch thick by 5/8-3/4 inch wide shall be furnished for each desk file drawer. A track with steel follower, easy to operate and positive in action, shall be surfaced mounted crosswise in each desk file drawer and lengthwise in each desk attachment styles C and D file drawer. The track shall be secured to the drawer bottom with two round head phillips screws. The hanger bars, track and steel follower shall have a zinc plated, cadmium plated, or baked enamel finish. Each desk file drawer shall be furnished with a lock positioned as shown in the applicable figure. All desk file drawers shall be equipped with three-way suspensions (3.2.7.8.2 G.S.) having a rated load of 150 pounds, minimum. All desk attachment file drawers shall be equipped with three-way (three section) suspension slides having a rated load of 100 pounds, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.8 Stationery pedestal construction. The construction of the Type II, Style B attachment pedestal shall be as specified in 3.3.6 except as follows: The end and back panels shall be faced on two sides. There shall be an upper frame with an exposed front rail. The bottom shall be of 5-ply plywood and shall be tenoned into the pedestal on three sides. The leg support cleats shall be glued and screwed to the underside of the bottom panel. There shall be a minimum of two screws (No. 10 minimum), evenly spaced, in each end of the leg support cleat. Two rows of shelf standands (3.2.7.7 G.S.), extending within two inches of the full height of the opening, shall be surface mounted vertically on the inside face of each end panel. One row of the shelf standards shall be inset 2-1/4 inches O.C. from the front panel post edge. The supports shall be readily and easily adjusted throughout the entire length of the standard. The shelf standards shall be secured with brass plated screws. The spacing of the screws or staples shall be 6 inches apart maximum. Each stationery pedestal shall be furnished with five removable shelves. Each shelf shall be 5-ply plywood, 3/8 inch thick. There shall be a stationery stop of solid wood, positioned 10-3/4 inches from the shelf front edge, glued and bradded or stapled to one side of each shelf. The stationery stop shall be 8 inches wide by 3/8 inch deep by 5/8 inch high with the top portion rounded. The shelves shall be easily removable for rearrangement. The front portion of all shelves shall be rounded and all other edges shall be eased.

3.3.9 Assembly of desks.

3.3.9.1 Desk assembly, Type I, Style A. The pedestal shall be constructed as specified in 3.3.6. The kneespace panel shall be tenoned into the inside end panel of the pedestal and into the opposite end panel. A cleat, 1-1/2 inches wide by 3/4 inch thick by full height, shall be glued and screwed two ways at the joint of the kneespace panel to the attached end panel. A cleat, approximately full height, shall be glued and screwed two ways into the kneespace panel and the pedestal inside end panel. The minimum inset of the kneespace panel from the back edge of the pedestal shall be 1 inch on the Size 1 desk, 6 inches on the Size 2 desk, and 2 inches on the Size 3 desk. The H-frame (3.3.5) shall be positioned so that the front leg is in vertical alignment with the front leg of the pedestal, but not less than 2-1/2 inches from the front edge of the end panel. The H-frame shall be attached directly to the inside face of the end panel by three screws (No. 10 minimum), equally spaced, inserted through lead holes in each vertical member of the frame and two screws inserted through lead holes in the lower horizontal member. The center drawer opening shall be 24 inches wide by 3 inches high and the center drawer shall have a full width wood pen and pencil tray divided into three compartments. The two end compartments of the tray shall be a minimum of 3 inches wide. The inside depth of the tray shall be 1-1/2 inches minimum. Center drawer inside depth shall be 17 inches minimum. The center drawer shall be equipped with metal spring stops which will prevent accidental removal, but allow removal when necessary. The center drawer shall be supported by cleats attached to both the pedestal inside end panel and drawer bearer. A 3/4 inch wide plastic glide shall be securely attached to the top, front edge of both drawer support cleats. The drawer bearer shall be concealed behind a full width and height apron extending from the drawer opening to the end panel. The apron shall be tenoned into the panel post of the end panel. The apron shall have a 1/16 inch break at the joint of the apron to the end panel. Cleats, approximately full height, shall be glued and screwed two ways into both the drawer bearer and the apron, and the end panel and the apron. The apron shall be chamfered 1/4 inch minimum on the lower back edge and the end located at te center drawer opening. The apron shall have two holes, 7/16 inch in diameter, drilled on 8-inch centers to accommodate the bolts used for securing the connecting device of the desk attachment. The center of the hole shall be 1-1/4 inches from the underside of the top (see Fig. 9). The bolts shall be as shown in Figure 9 and and the heads shall be brass finished. Two bolts shall be furnished with each desk and they shall be drawn up snugly to the apron when the desk is used as a free-standing unit. As an alternate method of suspending the center drawer, a 16 gage steel Z-bar suspension may be used, shaped and formed properly to be secured by screws to the top, and flanged for attaching by a minimum of two screws to the apron. Each pedestal end panel shall be secured to the top by three screws inserted through bored and counterbored holes in the end panel and by two screws through the back rail of the top frame. The apron shall be secured to the top by two screws inserted through bored and counterbored holes in the apron. The H-frame shall be secured to the top by four screws inserted through holes in upper cross member. A cleat, approximately full width, shall be glued and screwed to the kneespace panel and to the top by four screws each way. All screws used in the top shall penetrate the top 15/16 inch minimum. When particleboard is used, sheet metal screws only shall be used for attaching tops. An angle brace, specified in 3.2.1, shall be secured at a 45° angle to the underside of the top and to the inside face of the end panel by screws. The brace shall be 12 inches O.C. from the front edge of the top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.9.2 Desk assembly, Type I, Style B. TheStyle B bookcase desk shall be assembled in a similar mannner to the Style A except that it shall have a bookcase back. A floating or single end panel shall be provided the same length as the pedestal depth and a shelf (10 inches minimum in depth) 13/16 inch thick, plastic laminate panel (3.3.5 G.S.) shall be tenoned into the pedestal panel and the floating panel to form the bottom bookshelf. A solid wood facing shall be glued and screwed to the underside of the front edge of the shelf to simulate the facint (1-3/4 inches) used on other pieces in the group. The shelf shall be reinforced by glued and screwed cleats on both ends. There shall be a full length cleat glued and screwed into the kneespace panel and into the underside of the shelf. There shall be full length pilaster leg (1-1/4 inch square tubing) constructed as shown in Figure 8, attached directly to the end panel with a minimum of three screws (No. 10), penetrating the panel a minimum of 5/8 inch. There shall be four screws (No. 10) inserted through the top plate of the leg and pentrating the top a minimum of 15/16 inch. The back leg on the floating panel end of the desk shall be positioned under the bookshelf as shown in Figure 3. It shall be supported by a leg support cleat glued and screwed to the bottom of the shelf and to the end panel. The center drawer shall be suspended and equipped as specified in 3.3.9.1 and shall be 16-1/2 inches deep. The kneespace panel shall be positioned to allow the shelf to be 10 inches deep, minimum. There shall be an adjustable shelf furnished with each desk for the bookcase section. The shelf shall be faced and self-edged with plastic laminate (3.2.5 G.S.) and shall be the full width of the section. The shelf shall be 3/4 inch thick of 5-ply lumber-core construction (before lamination of the plastic) and 9-1/2 inches deep minimum. Each shelf end shall have cutouts to accommodate the supports to prevent shelf movement. The cutouts shall be finished walnut color. There shall be seven sets of holes drilled into the inside of the end panels of the bookcase section on 1 inch centers vertically. The lateral spacing of the holes shall be on a minimum of 6-1/2 inch centers. The two lower holes shall be centered 6-3/8 inches from the top surface of the fixed shelf. Four steel shelf supports shall be furnished. The supports shall be of the drop-leg type with the stem 1/4 inch in diameter by 3/8 inch long and the leg 1/2 inch wide and 3/4 inch long minimum.

3.3.9.3 Desk assembly, Type I, Style C. The Style C desk (see Fig. 6), shall be assembled with two open end panels (no pedestal). The back panel shall be tenoned into the end panel posts and there shall be a cleat at the joint as specified in 3.3.9.1. The H-frame shall be attached as specified in 3.3.9.1 and shall have the proper spread to ensure having the minimum distance (2-1/2 inches) between the front edge of the panels and the front legs as specified in 3.3.9.1. There shall be a full length cleat glued and screwed (four screws) into the back panel and screwed (four screws) into the top, in addition to the four screws inserted through the upper flange of the H-frame into the top. The screws shall penetrate the panels a minimum of 5/8 inch. The connecting apron shall be the same dimensions as specified in 3.3.9.1 and shall be assembled to the desk in the same manner. A center drawer shall be furnished, equipped, and installed in the same manner as the other Type I desks except that it shall be suspended by two drawer bearers concealed behind their respective aprons. The aprons on each side of the center drawer shall be attached to the desk in the same manner as specified in 3.3.9.1 except that the apron on the opposite side to the connecting apron shall have no holes. The overhang of the top shall be a minimum of 5 inches on the back and 1/2 inch on the ends. An angle brace shall be installed as specified in 3.3.9.1 on each end of the desk.

3.3.9.4 Desk assembly, Type III. The assembly of the Type III desk shall be identical to assembly of the Type I desks, but because it will not be used with L-units, the apron will be approximately 6 inches shorter and there will be no holes drilled for attachment purposes. An angle brace shall be installed, as specified in 3.3.9.1, on the open panel end of the desk. The inset of the kneespace panel from the back edge of the pedestal shall be 2 inches (plus or minus 1/4 inch).

3.3.9.5 Desk assembly, Type IV. The two pedestals of the Type IV desk shall be secured to the top by screws (No. 10) through bored and counterbored holes in the end panels of the pedestals. The screws shall penetrate the top a minimum of 15/16 inch. There shall be a minimum of three screws in each end panel and two in each back panel of the pedestals. The back or kneespace panel shall be inset 2 inches from the pedestal backs and tenoned into the inside ends of the pedestals. There shall be a full length cleat glued and screwed two ways into the inside end panels of the pedestals and into the kneespace panel and also into the kneespace panel and screwed into the top. All screws into the top shall penetrate a minimum of 15/16 inch. The center drawer shall be suspended by cleats attached by glue and screws to the inside panel of the pedestals. The center drawer shall be equipped as specified in 3.3.9.1. The pedestal construction shall be as specified in 3.3.6. There shall be three storage drawers and a reference slide in the left pedestal and one storage drawer, one file drawer, and a reference slide in the right pedestal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.10 Desk attachment assembly. All Type II desk attachments shall be assembled in two heights, full height of 29-1/2 inches and secretarial height of 26-1/2 inches (heights include glides at minimum adjustment). The back panel of the attachments shall be the full length from the end panel and shall fit flush to the end of the L-unit desk to which it is attached. There shall be a full length strip of either soft rubber or felt 3/16 inch thick by 3/4 inch wide applied to the edge of the back panel, with sufficient adhesive to insure permanence, to allow for take up spacing resulting from plus or minus tolerances when securing the attachments to the L-unit desks. The connecting device shall be as specified in 3.3.11 and as shown in Figures 9 and 10. The connecting device shall be secured to the underside of the attachment top in proper position and secured with screws (No. 10) with a penetration of 15/16 inch into the top. On all Size 1 attachments the back panel length shall exceed the width of the top sufficiently to allow the back panel to fit snugly to the side panel of the desk and at the same time permit the attachment top to fit against and be flush to the desk top. On all Size 2 attachments the back panel length shall be in relationship to the width of the top to allow a snug fit of the top of the attachment to the connecting apron and for the back panel of the attachment to fit flush to the end panel of the L-unit desk. Thre shall be a draw lock or cam lock installed approximately 3 inches from the bottom of the two joining panels of the L-unit. The receptacle or hook shall be positioned and attached to the inside of the open end panel of the desk and the cam or draw arm shall be positioned and attached to the inside of the back panel of the attachment. The two panels shall be held firmly without movement of either until the release of the holding mechanism. The fit of the back panel of the desk attachment to the end panel of the L-unit desk shall be such that no light can be observed at any point of the joining.

3.3.10.1 Type II, Style A attachment. The Type II, Style A attachment shall be assembled with an open end panel supported by an H-frame. The H-frame shall be 15 inches (O.D.) wide. The H-frame shall be secured as specified for the open end panel of the Type I, Style A desk in 3.3.9.1. The top shall be secured by a full length cleat glued and screwed into the back panel and screwed into the top. The screws shall be not less than No. 10 size tapping type, and shall be spaced 6 inches apart maximum starting 4 inches maximum from each corner. All screws used shall penetrate the top 15/16 inch, minimum.

3.3.10.2 Type II, Style B attachment. The pedestal of the Type II, Style B attachment shall be as specified in 3.3.8. There shall be a full length cleat glued and screwed two ways into the inside end panel of the pedestal and into the back panel, and a full length cleat glued and screwed two ways into the back panel and screwed into the top. The pedestal shall be secured to the top by three screws on each side and two screws in the back through the upper frame. The screws shall be not less than No. 10 size tapping type, and shall be spaced 6 inches apart maximum, starting 4 inches maximum from each corner. All screws shall penetrate the top 15/16 inch minimum.

3.3.10.3 Type II, Style C attachment. The drawer pedestal of the Type II, Style C desk attachment shall be as specified in 3.3.6. The pedestal of the Size 1 attachment shall have one storage drawer and one file drawer specified in 3.3.4.1 and 3.3.4.3 of AA-0-00250/5C, respectively, except that the file drawer sides shall be grooved to accommodate hanger bars for letter size hanging files. The front grooves shall be set in 1/2 inch from the inside face of the drawer front. In lieu of a reference slide, there shall be a filler strip of exposed solid wood (3.2.4.1 G.S.) glued and screwed to the front rail. The strip shall be 1 by 7/8 inch high or as required to completely close the opening between the top and the top rail. There shall be a veinline a maximum of 1/16 inch in width and depth at the point of joinery of the strip to the top rail. The veinline shall run the entire length of the joint. The pedestal of the Size 2 attachment shall be identical except that the reference slide area shall be omitted and teh top drawer opening shall be reduced sufficiently to allow the top of the pedestal to be 3 inches lower than Size 1. The top of the Size 1 attachment shall be secured to the pedestal by screws through bored and counterbored holes through the pedestal end panels. The top shall be secured to the Size 2 attachment in the same manner as the Type II, Style B attachment specified in 3.3.10.2. There shall be a cleat, approximately full depth, glued and screwed two ways into the inside end panel of the pedestal and screwed into the top and a cleat, approximately full width, glued and screwed two ways into the back panel and screwed into the top. The screws shall be not less than No. 10 size tapping type, and shall be spaced 6 inches apart maximum, starting 4 inches from each corner. All screws used shall penetrate the top 15/16 inch, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.10.4 Type II, Style D attachment. The assembly of the Type II, Style D desk attachments shall be identical to the Type II, Style C attachments, Sizes 1 and 2 except that the unit shall be 6 inches longer.

3.3.11 Connecting device.. The connecting device shall be 11 gage (0.1196 inch) steel angel (3.2.6 G.S.) of the dimensions and design shown in Figures 9 and 10. The method of connecting the attachment to the desk shall be as shown in Figure 9. The bolts for connecting the units shall remain with the desk when an attachment is not used.

3.4 Finishes. The metal, laminate and wood finish shall be as specified in 3.4 G.S.

3.5 Identification marking. Marking of desks and desk attachments for identification shll be as specified in 3.5 G.S.

3.6 Workmanship. Workmanship shall conform to 3.6 G.S.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in section 4 of the General Specification and as specified herein.

4.2 Assembly examination. An examination of the assembly of the shelves and shelf supports to the shelf standards of the desk attachments and the adjustable shelf in the bookcase desk shall be made for defects in ease of assembly and fit of components. The lot size shall be expressed in units of desks or desk attachments, as applicable. The unit of product shall be one desk, one desk attachment, desk and desk attachment, as applicable. Defects shall be scored in accordance with Table VI. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G.S.

(Note: Unassembled shelves, desks, and desk attachments, selected by the Government inspector, shall be fully assembled by the contractor. The inspector shall witness the assembly of the shelves and shelf supports to the shelf standards of the desk attachment or desk and the assembly of the desk attachment to the desk, as applicable, and shall observe the ease of assembly and fit of components.)

TABLE VI. Assembly defects

Examine	Defects
Shelf assembly and fittings	Shelf standards or brackets out of alignment. Shelf standard not adjustable to positions as specified. Shelf support does not fit into slot in standard. Shelf support too loose in standard, i.e., falls out easily. Shelf wobbles in shelf support or bracket (when in horizontal plane). Shelf does not fit neatly on support or bracket.
Assembly of desk attachment to desk	Not easily assembled, i.e., assembling required realignment of parts, drilling or enlargement of holes, use of hammer, drift pin or other mechanical means. Top surface of desk attachment not flush with top surface of desk. Back (kneespace) panel of desk attachment not flush with desk end panel (i.e., light can be seen through joint). Connecting device not secured to desk attachment.

4.3 Recovered material certification. A certificate shall be submitted stating that the end items supplied contain the percentage of recovered material required in 3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Types I, III and IV desks and Type II, Style A desk attachments. Each desk or desk attachment shall be furnished set-up and shall be packaged, packed and marked in accordance with PPP-P-1877. The levels of packaging and packing shall be as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

5.1.2 Type II, Styles B, C and D desk attachments. Each desk attachment shall be furnished with its legs detached, and shall be packaged, packed and marked in accordance with PPP-P-1877. The levels of packaging and packing shall be as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

5.2 Palletization.

5.2.1 Desks. Unless otherwise specified (see 6.2), each Type I, III and IV desk shall be palletized in accordance with the palletization requirements of PPP-P-1877 for desks. Desks packed in accordance with the level C packing requirements of PPP-P-1877 shall not require palletization.

5.2.2 Desk attachments. Unless otherwise specified (see 6.2), all Type II desk attachments shall be palletized in accordance with the palletization requirements of PPP-P-1877 for desk attachments (set-up). Desk attachments, packed in accordance with the level C packing requirements of PPP-P-1877, shall not require palletization.

6. NOTES

6.1 Intended use. The desk and desk attachments covered by this specification are units in a correlated line of wood unitized office furniture designed to conserve floor space and for use in executive offices, courtrooms, and conference rooms of Federal agencies.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, nad date of this specification.
(b) Title, number, and date of the General specification.
(c) Type, style, size, and class (see 1.2.1).
(d) Levels of packaging and packing required (see 5.1.1 and 5.1.2).
(e) Marking required (see 5.1.1 and 5.1.2).
(f) When palletization is NOT required (see 5.2.1 and 5.2.2).

GSA DC-01900581

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

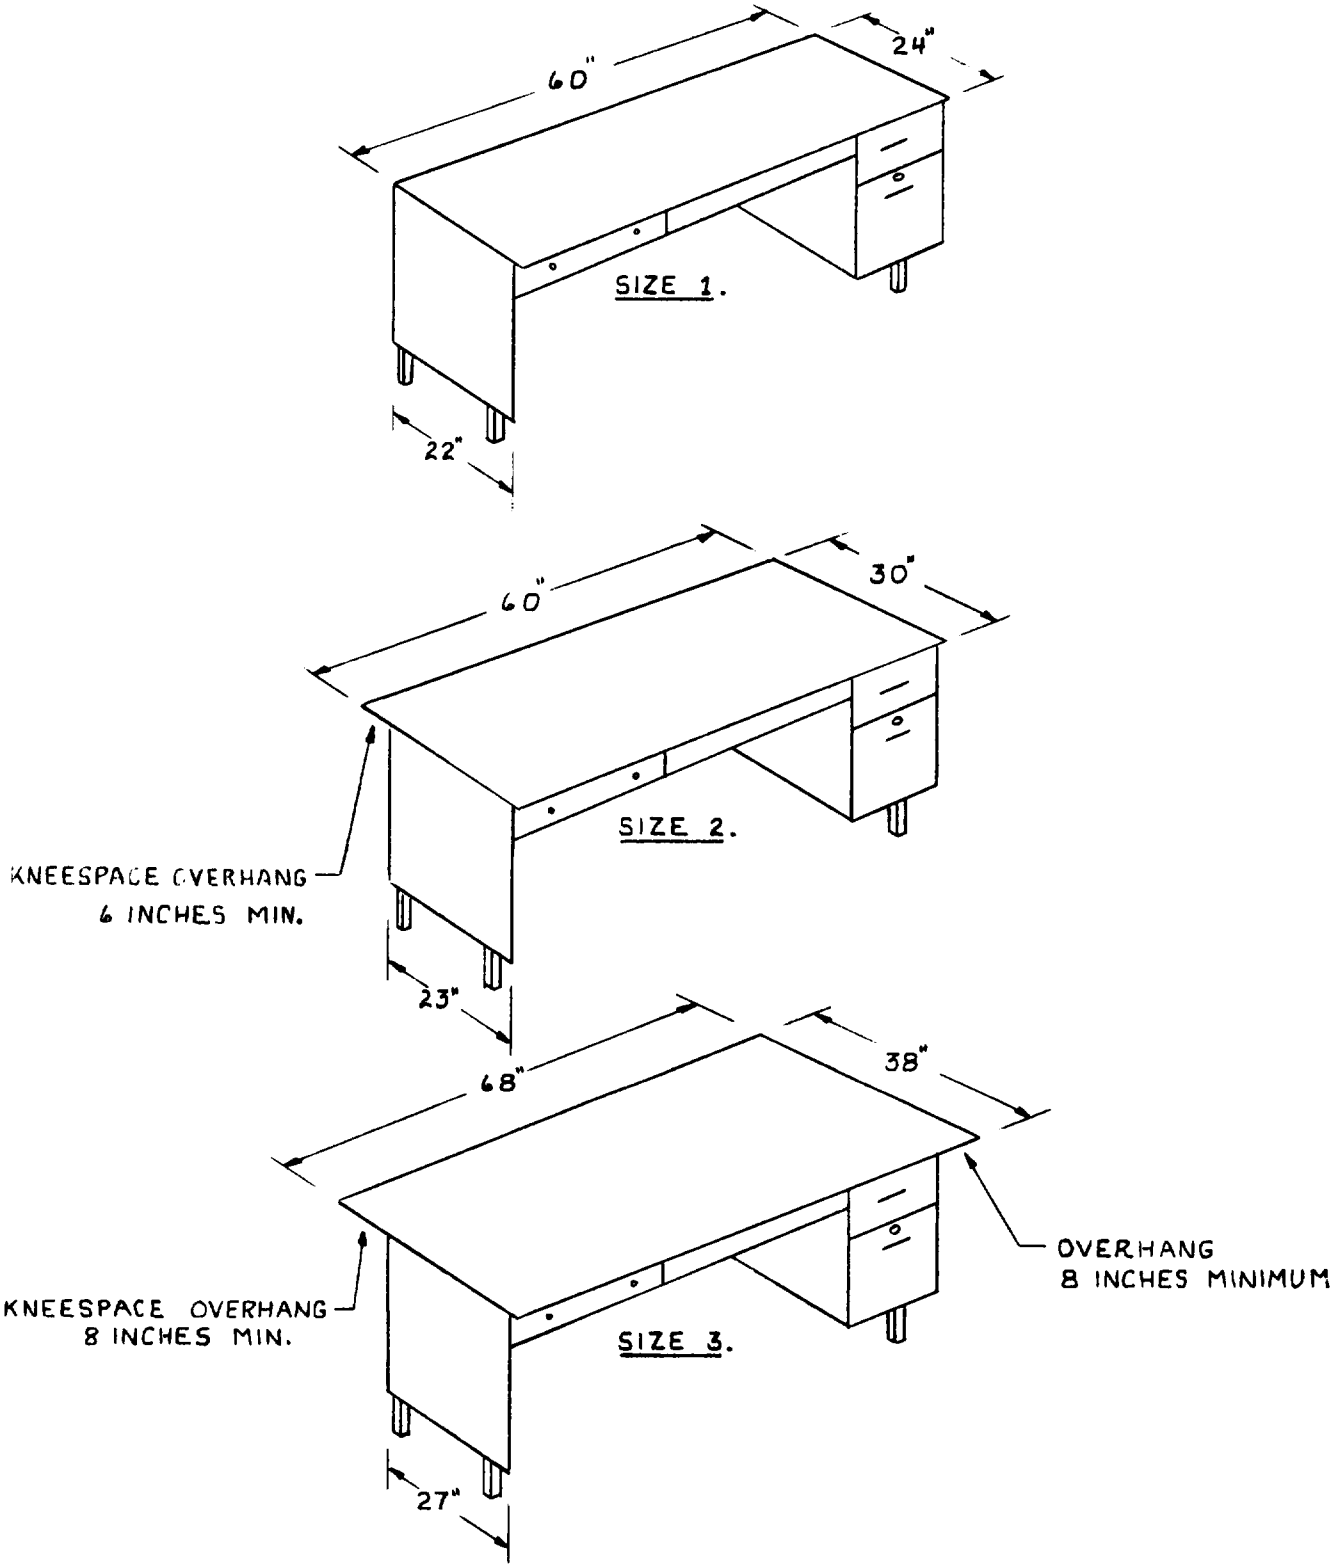


FIGURE 1. TYPE I, STYLE A DESKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

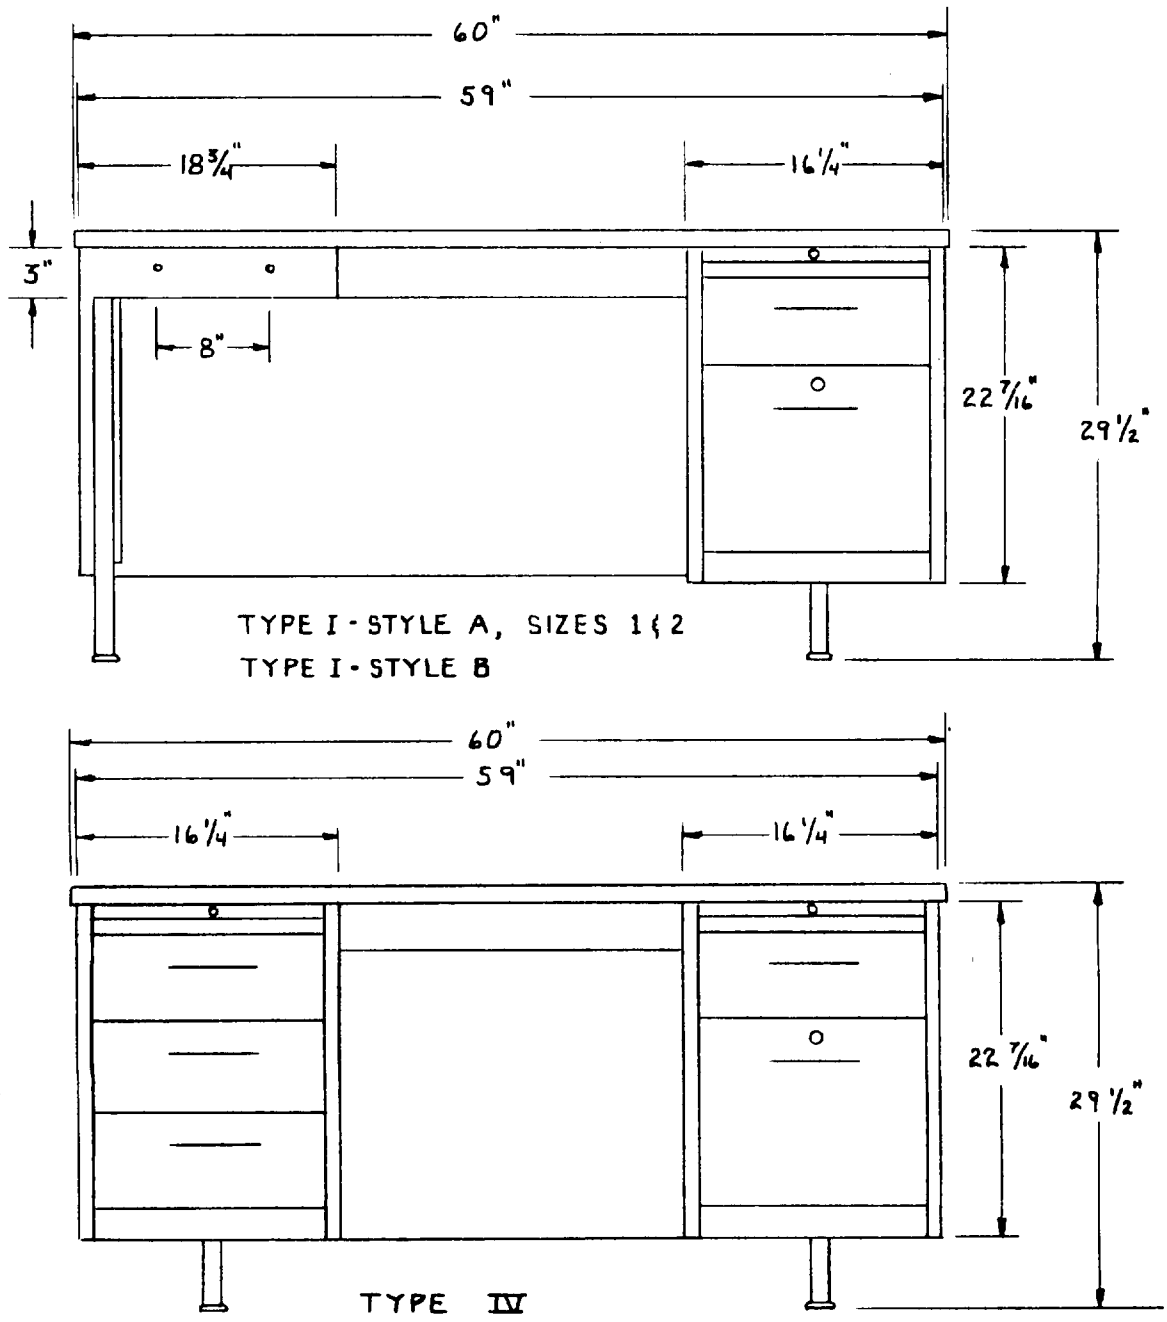
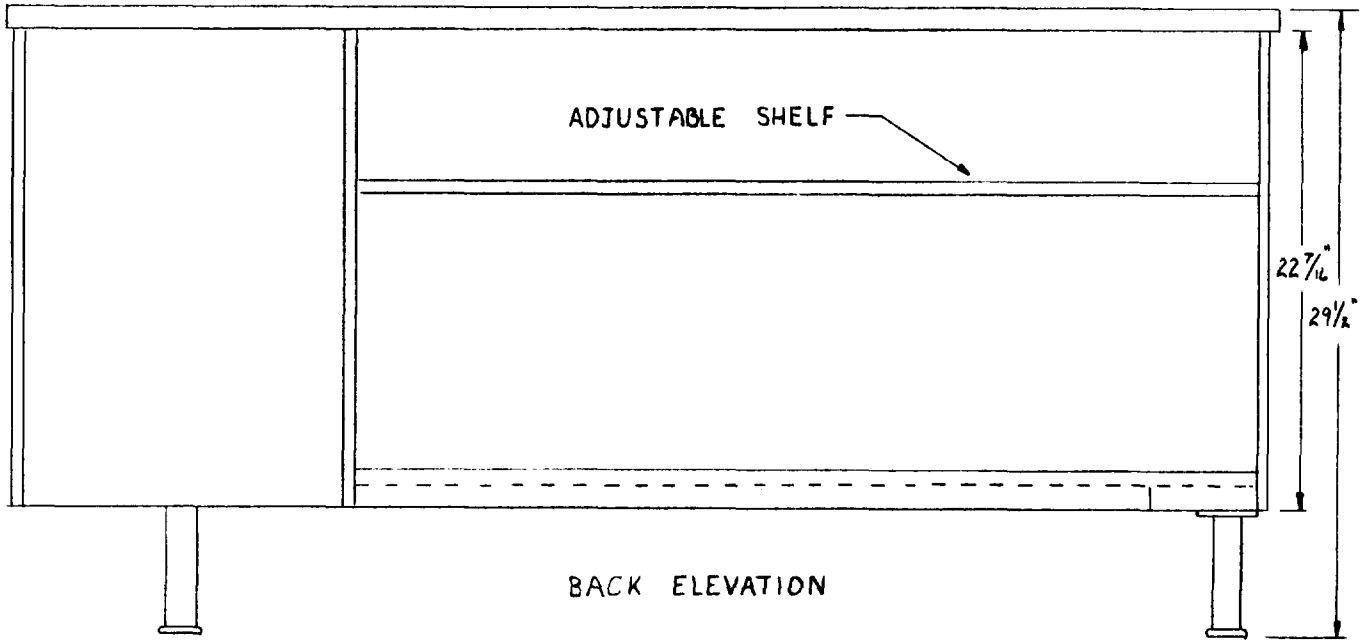


FIGURE 2. TYPE I & TYPE IV DESKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.



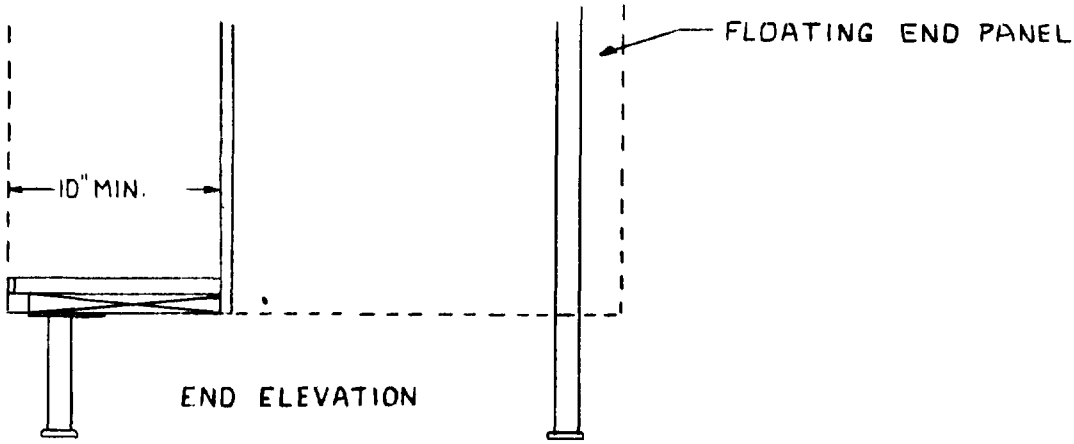


FIGURE 3. TYPE I STYLE B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

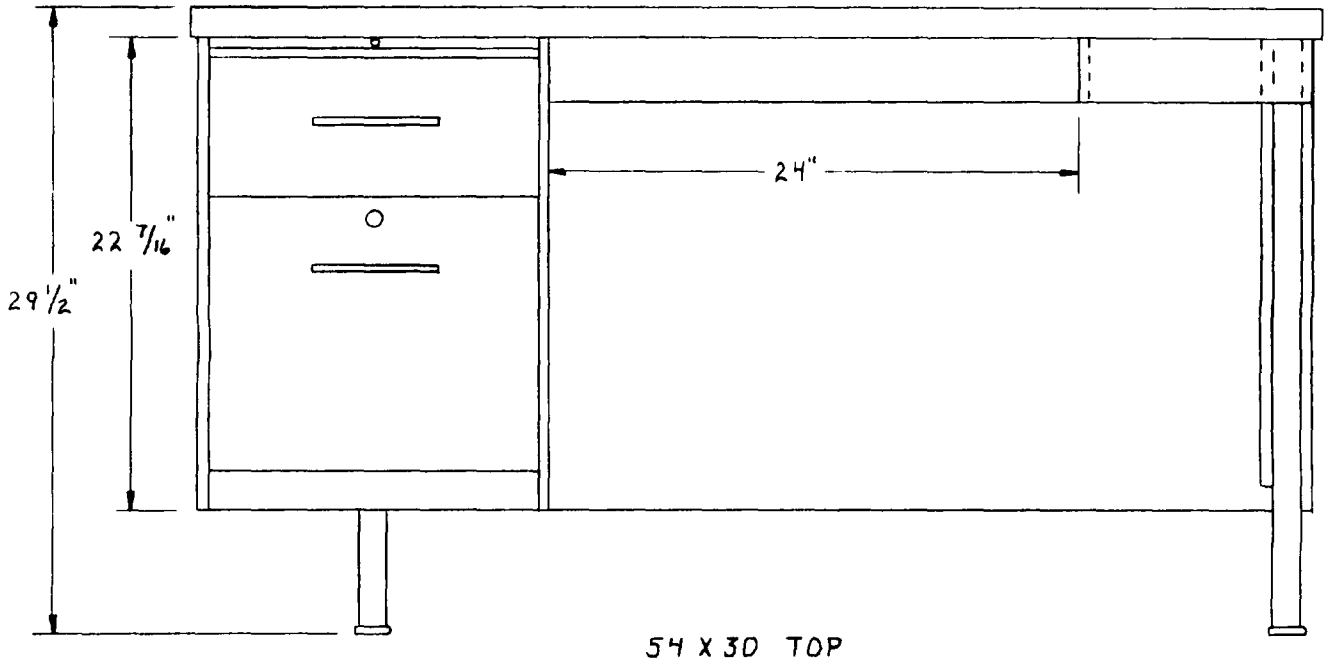


FIGURE 4. TYPE III DESK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

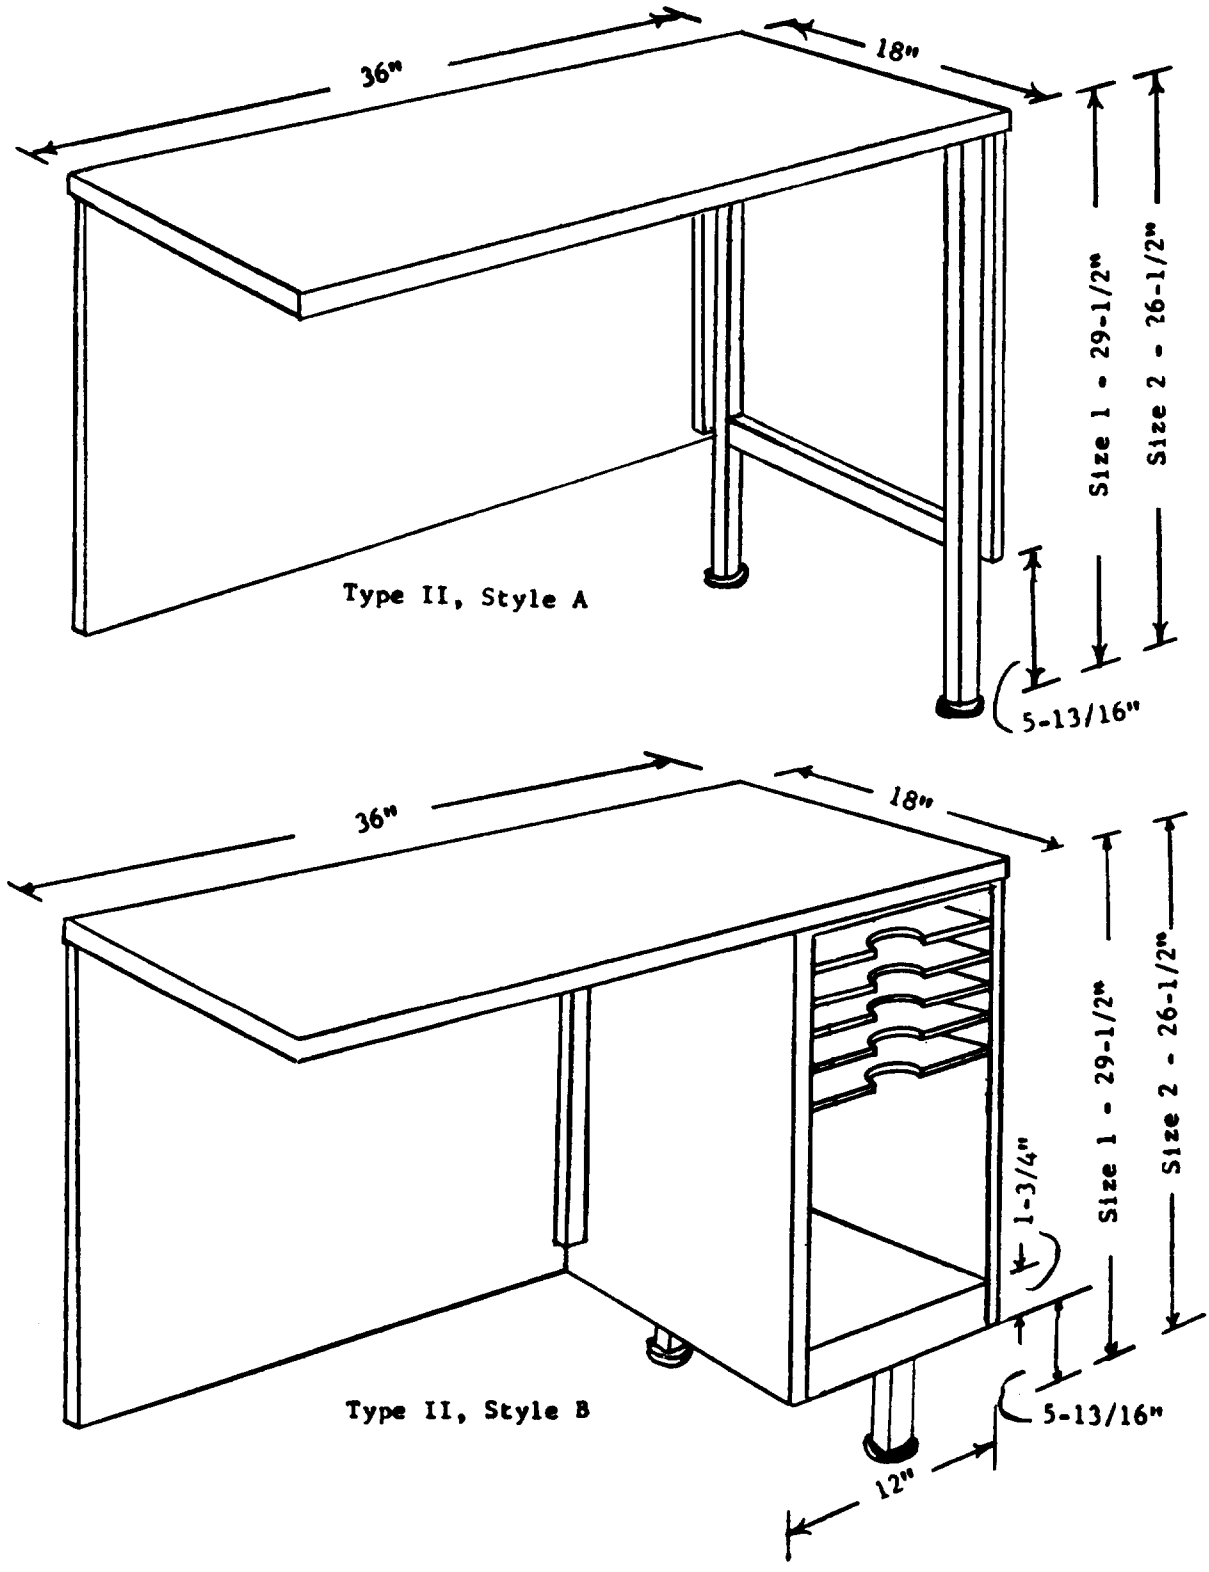
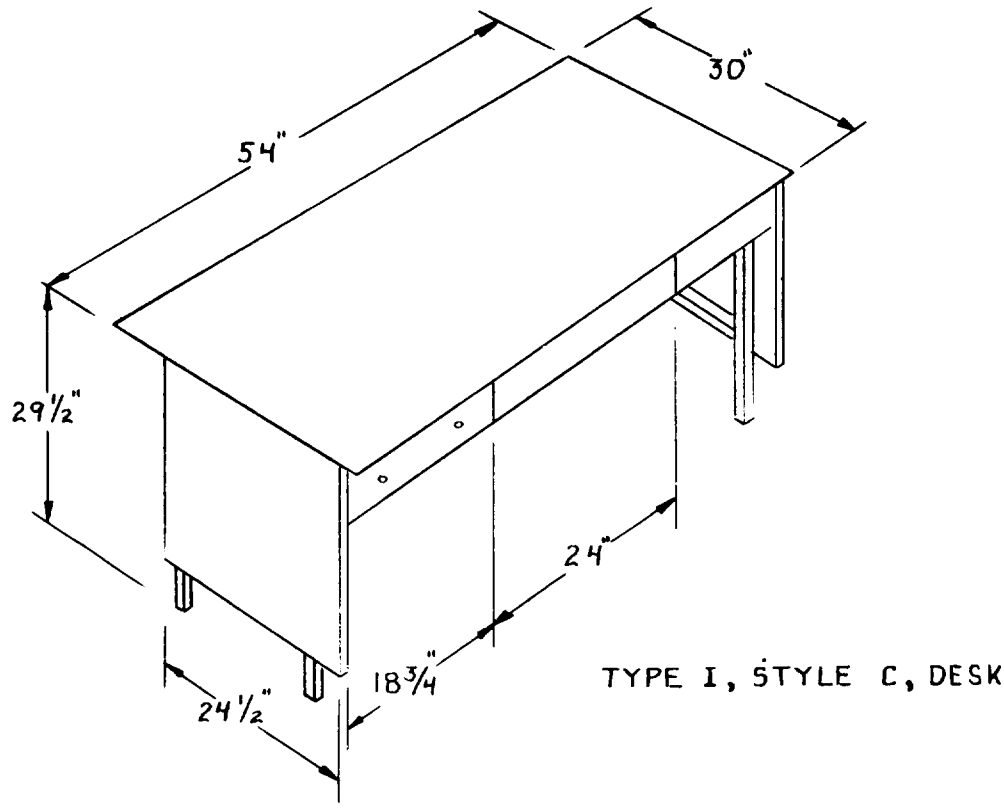


Figure 5. Type II Attachments, Style A and B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.



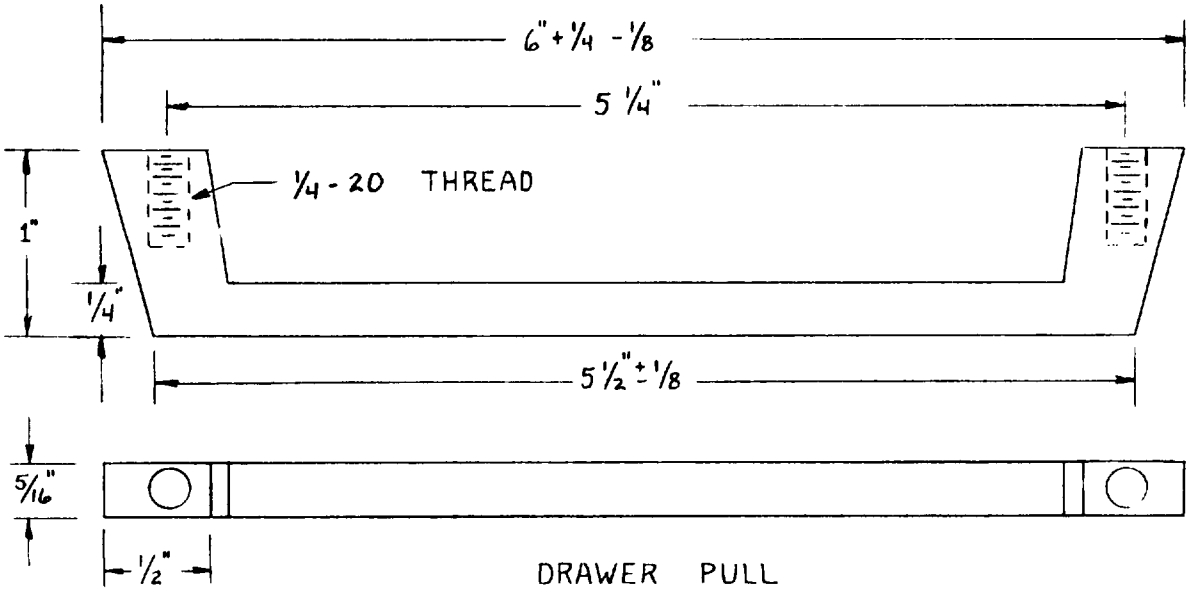


FIGURE 6. TYPE I, STYLE C DESK AND DRAWER PULL

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

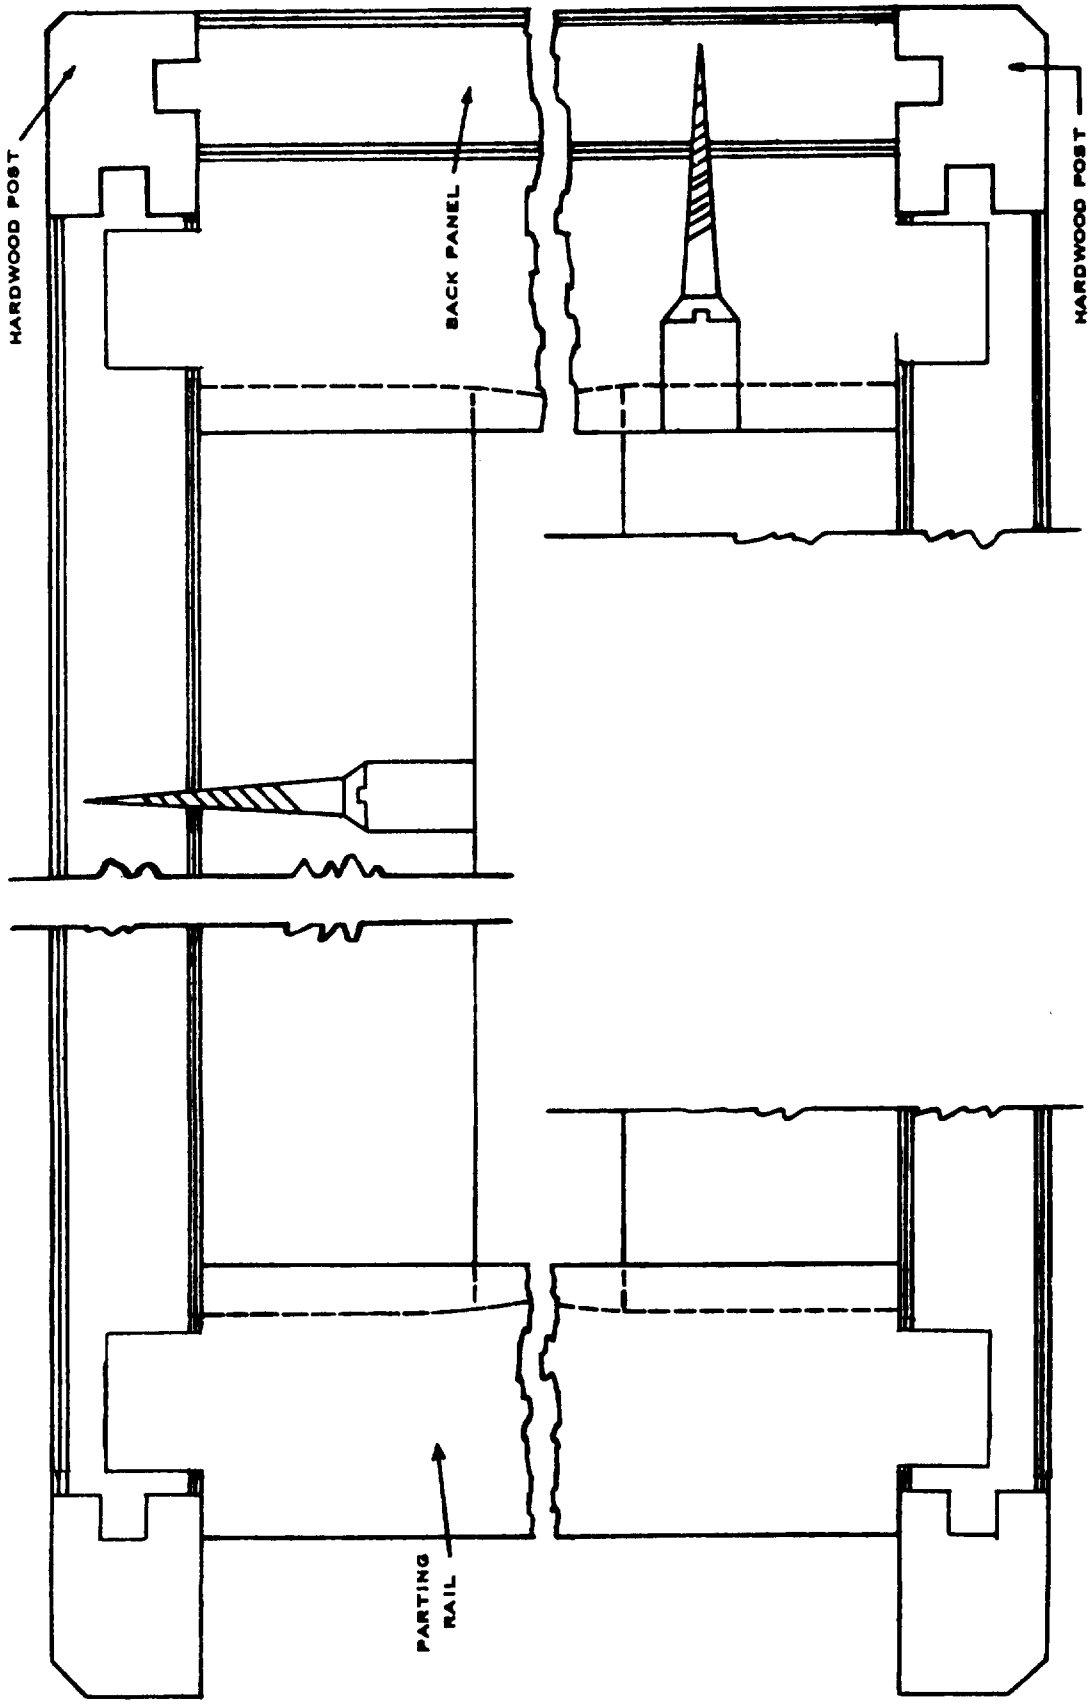


Figure 7. Detail - Drawer Bearer Frame Assembly...End and Back Panels

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

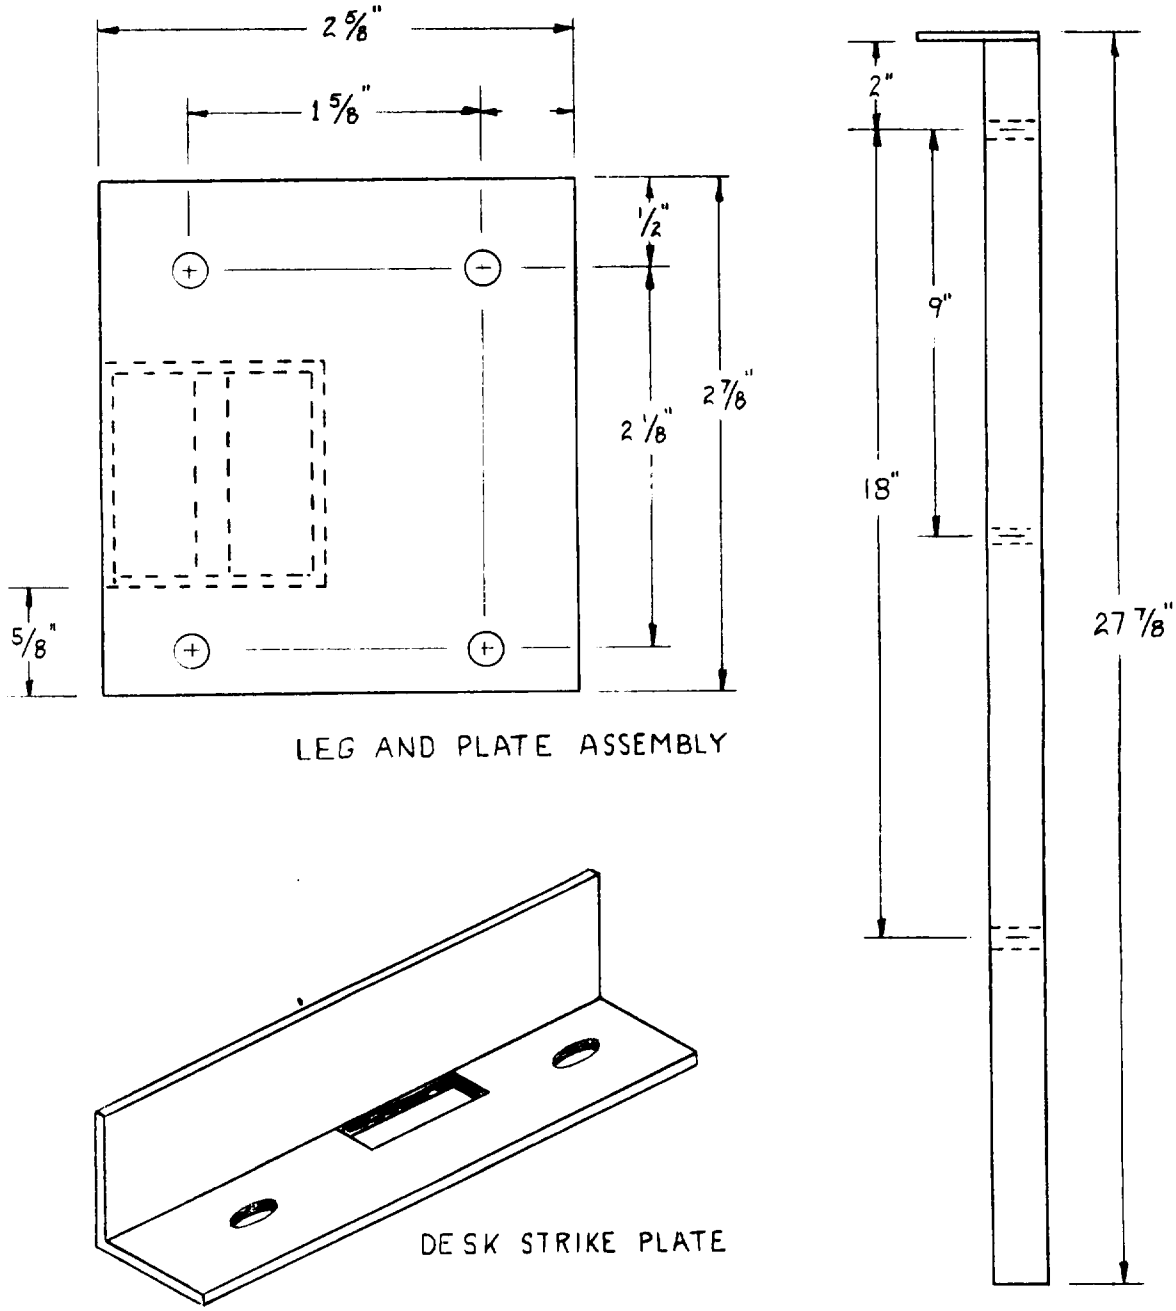


FIGURE 8. DESK STIKE PLATE, LEG ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.


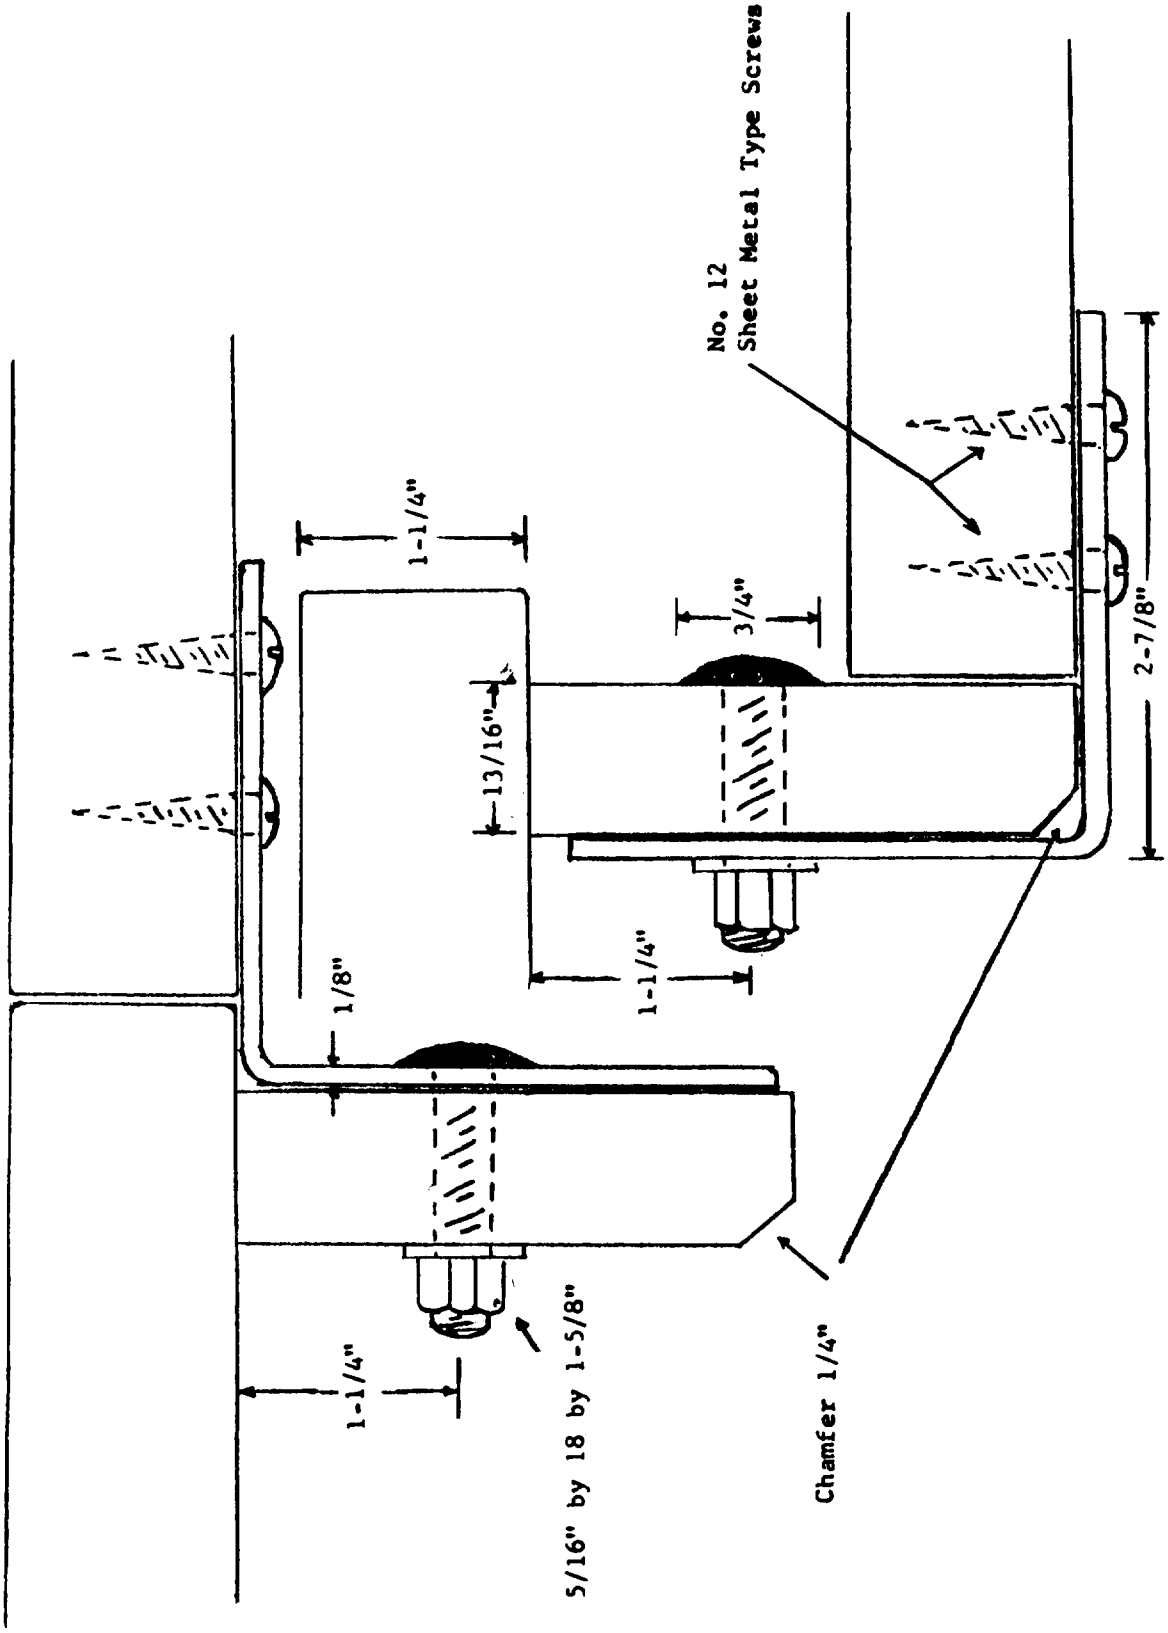


Figure 9. Method of Connecting Desks and Attachments

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

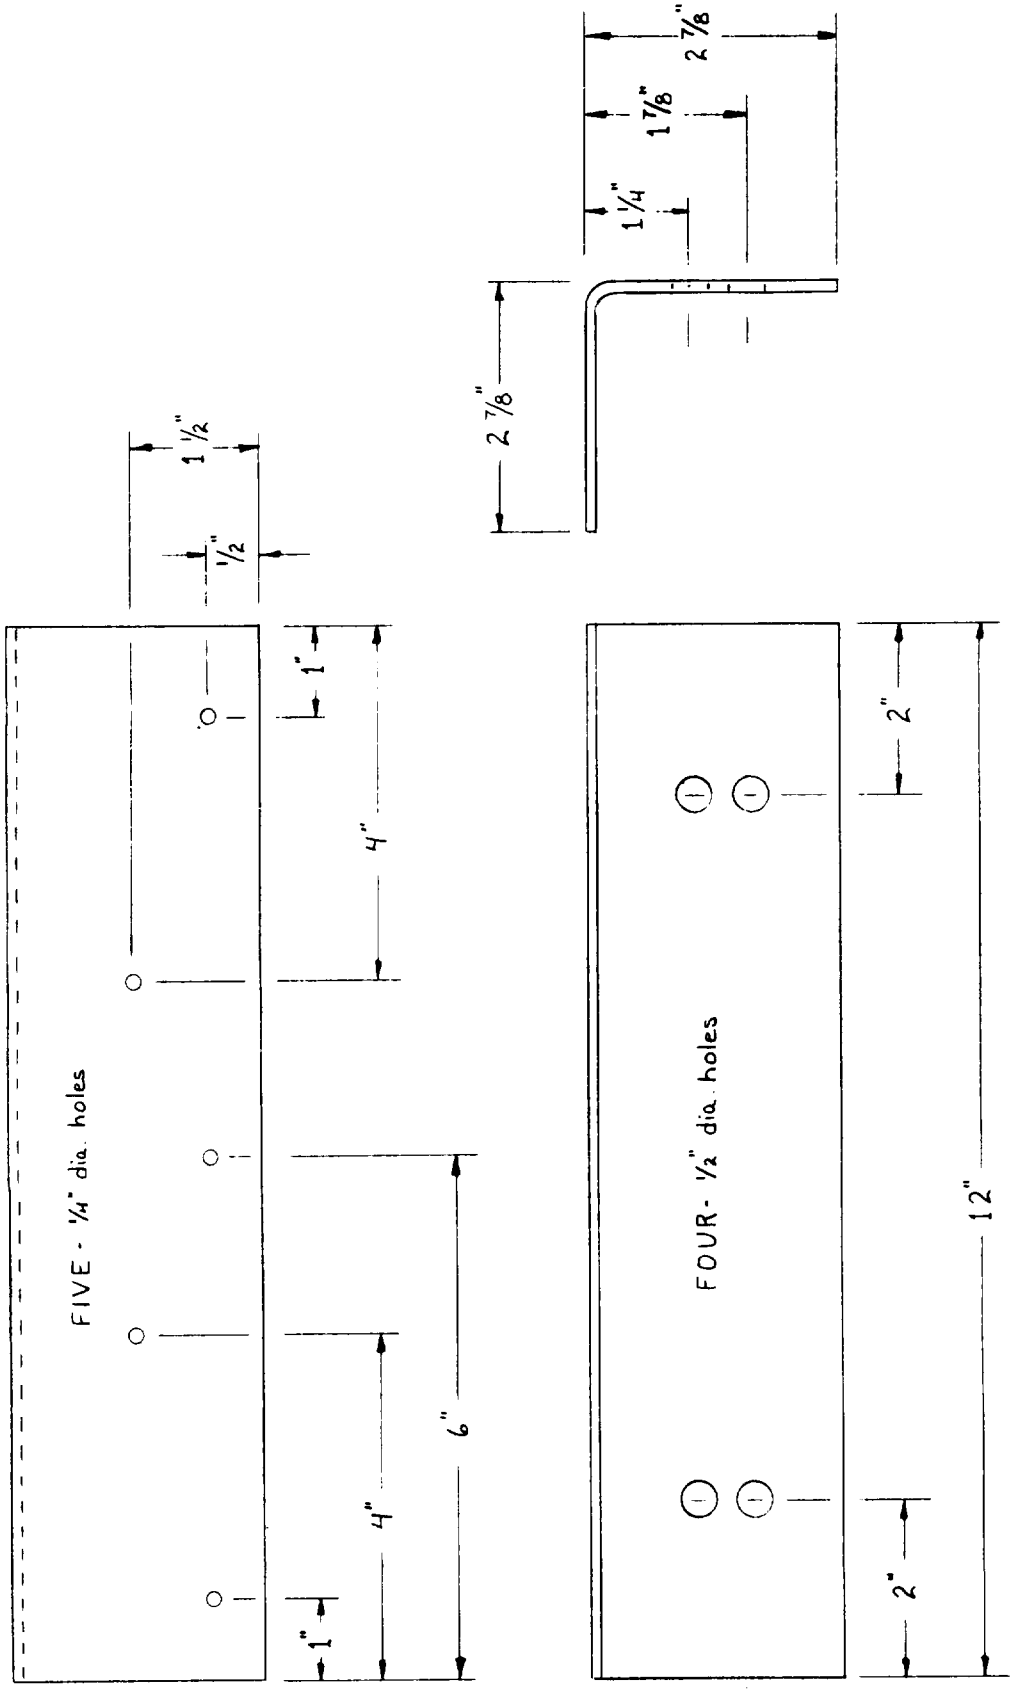

11 GAGE (0.1196") STEEL

FIGURE 10. STEEL ANGLE CONNECTOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.