AA-0-00250/5C (GSA-FSS)
October 2, 1978
SUPERSEDING
Interim Fed Spec AA-0-00250/5b
September 1, 1967

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE STORAGE UNITS, WOOD, UNITIZED

(DETAILED SPECIFICATION)

This Interim Federal Specification was prepared by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information It is recommended that Federal agencies use it for procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1 1 Scope This specification covers the detailed requirements for the unitized wood office furniture storage units. General requirements and other information pertaining to these items will be found in Interim Federal Specification AA-0-00250D (GSA-FSS), Office Furniture, Wood, Unitized (General Specification)

1 2 Classification.

1 2 1 Types, designs, and styles The storage units covered by this specification shall be of the types, designs, and styles specified herein and as shown in Figures 1, 2, and 3 as applicable (see 6 2)

Type I - Open unit, adjustable shelves

Design 1 - One compartment
Design 2 - Two compartments

Type II - Closed unit with drawers

Design 1 - One compartment

Style A - One storage drawer, one file drawer
Style B - Three storage drawers

Design 2 - Two compartments

Style A - One storage drawer and one file drawer or left side, three storage drawers on right side
Style B - Three storage drawers on left side, one storage drawer and one file drawer on right side
Style C - Three storage drawers on each side
Style D - One storage drawer and one file drawer on each side

Type III - Combination open and closed units

2 APPLICABLE DOCUMENTS

2 1 Specifications and standards The specifications and standards of the issue in effect on the date of the invitation for bids which form a part of the specification are listed in 2.1 of Interim Federal Specification AA-0-00250D, hereinafter called the General Specification (C S)

2 2 Other publications The documents which form a part of this specification are listed in 2 2 C S

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3 REQUIREMENTS

3 1 Recovered material requirement The end items listed below shall contain not less than * percent by weight recovered material, excluding packaging Recovered materials are defined as materials which have been collected or recovered from solid waste (See 4 3)

Type, Design, Style	* Percent reclaimed material
Type I, Design 1 Type III	1%
Type II, Design 1, Style A Type II, Design 2, Style A, B, C, D	2%
Type II, Design 1, Style B	3%

3 2 Materials Materials used in construction of the storage units shall be as specified in the applicable paragraphs in the General Specification (see Table I)

TABLE I Materials index

Component	AA-0-00250D Par No.	Component	AA-0-00250D Par No
Adhesive	3.2 1 Gen Spec	Plastic laminate	3 2 5 G S
Lacquer	3 2.3 G S	Steel	3 2 6 G S
Wood species	3 2.4 1 G S	Pulls	3 2.7 1 G S.
Solid wood requirements	3 2.4.2 G S	Glides	3 2 7 4 G S
Wood seasoning	3.2 4.3 G S	Shelf standards and supports	3 2 7 7 G S
Hardwood plywood	3.2 4 4 G S	Two-way suspension	3.2 7 8 1 G S
Particleboard	3.2 4.6 G S	Three-way suspension	3 2 7 8 2 G S

3 3 Construction General construction requirements for storage units shall be as specified in the applicable paragraphs in the General Specification (See Table II)

TABLE II. Construction requirements index

Component	AA-0-00250D Par No	Component	AA-0-00250D Par No
Design and construction	3 3.1 Gen Spec	Mounting plates	3 3 8 G S
Tolerances	3.3.2 G S	Direction of grain	3 3 9 G S
Welding	3 3 3 G S	Drawer construction	3 3 10 G S
Joinery	3 3 4 G S	Doors	3 3 11 G S
Plastic laminate panel construction	3 3 5 G S	Panel posts	3 3 12 G S
Tops	3.3.6 G S	Chamfered corners	3 3 13 G S
Legs	3 3 7 G S	Case attachment	3 3 14 G S

3 3 1 Design The design of the storage units shall be as shown in Figures 1 through 4 as applicable Type I storage units shall be open face units with adjustable shelf(ves), Type II, storage units shall be closed units with drawers, and Type III storage units shall be combination open and closed units The width shall be 22 inches for Design 1, 42 inches for Design 2, and 66 inches for Type III The depth shall be 18 inches and the height shall be 29-1/2 inches including glides at minimum adjustment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3 3 2 Principal components The description and dimensions of principal component parts of the storage units shall be as shown in Table III

TABLE III. Principal storage unit components

Component	Material	Dimensions, inches
Top	3 3 6 G S	1-1/4 thick
End panels and partitions		
Type I units and right compartment of Type III units.	5-ply plywood, 3.2.4.4 G.S	13/16 thick
Type II units and left compartment of Type III units.	5-ply plywood, 3.2.4.4 G S.	13/16 thick
Panel posts	Exposed solid parts, 3 2.4 1 G.S.	1 by 1-1/8
Back panel	Minimum 3-ply plywood, 3.2 4.4 G.S.	3/8 thick
Bottom panel		
Type I and III units	5-ply plywood, 3.2.4.4 G.S	13/16 thick
Type II units	5-ply plywood, 3.2.4.4 G,S	13/16 thick
Shelves, adjustable	5-ply plywood, 3.2 4.4 G.S. (shape front edge to a 5/8 radius)	5/8 thick
Shelf, fixed	5-ply plywood, 3.2.4 4 G.S.	13/16 thick
Drawer fronts	5-ply plywood, 3.2.4.4 G S	13/16 thick
Parting rails		
Lower front	Exposed solid parts, 3.2 4 1 G.S.	1 by 1-3/4
Upper front	Exposed solid parts, 3.2.4 1 G.S,	3/4 by 2-1/4
Upper rear	Unexposed wood, 3 2.4 1 G.S	3/4 by 2-1/4
Joinery cleats	Unexposed wood, 3.2.4.1 G.S	3/4 square
Leg support cleats	Unexposed wood, 3.2 4 1 G.S.	1 by 5 full depth front to rear

3 3 3 Detailed case construction, Types I and II. The upper and lower parting rails shall be tenoned and glued into the end panels. The lower front rail shall be toescrewed at a 45 degree angle (No 10 screws minimum) from the underside of the front rail into the end panel. The bottom panel shall be tenoned into the lower front parting rail panel and upper rear parting rail. The top overhang shall be 1/2 inch on all four sides. The top shall be secured with screws through the upper front and rear parting rails and by a cleat, approximately full depth, screwed to the underside of the top and glued and screwed to the inside face of each end panel. All screws used for securing the top shall be No. 10 size minimum, tapping type, and shall be spaced not more than 6 inches apart starting 4 inches (maximum) from each corner All screws shall penetrate top, 15/16 inch minimum The leg support cleats shall be securely glued and screwed to the underside of the bottom panel There shall be a minimum of two screws (No. 10 minimum), evenly spaced, in each end of the leg support cleat A cleat, extending approximately the entire distance between the leg support cleats, shall be glued and screwed to the underside of the bottom panel and the lower front parting rail The leg shall be offset on the mounting plate as shown in Figure 5 The mounting plate shall be cornered and attached to the leg support cleat by screws (No 12 minimum) not less than 1 inch long

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3 3 3 1 Center partition, Design 2 units In addition to the requirements specified in 3 3 3, all Design 2 storage units shall have a center partition tenoned into the bottom panel There shall be three screws, evenly spaced, inserted through the bottom panel into the bottom edge of the center partition and a minimum of four screws, evenly spaced, inserted through the back panel into the back edge of the center partition There shall be cleats, approximately full depth, screwed to the underside of the top and glued and screwed to each inside face of the center partition

3 3 4 Drawer construction The drawers for the Type II and III units shall be constructed as specified in 3 3.10 G S The drawer pull shall be as shown in Figure 6

3 3 4 1 Storage drawer, Type II units Each storage drawer shall be provided with a two-way suspension (3 2 7 8 1 C S)

3 3 4 2 Storage drawer, Type III units Each storage drawer shall be provided with a three-way suspension (3.2 7.8 2 G.S) with a 100 pound minimum, rated load capacity

3.3 4 3 File drawer, Type II units Each file drawer shall be provided with a two-way suspension. The file drawer shall be equipped so that either of the following filing methods may be used Each file drawer shall have a surface mounted track with steel follower, easy to operate and positive in action The track shall be secured to the drawer bottom with two round head philips screws. In addition, each file drawer shall have grooves to accommodate hanger bars for both legal and letter size hanging files The grooves shall be milled in the inside face of the drawer front and back The letter size grooves shall be 12-1/4 inches apart (O D) and the legal size grooves shall be 15-1/4 inches apart (O.D) The grooves shall be positioned so that legal size files, when in place, will be approximately centered in the drawer The grooves shall be 1/8 inch wide by 1/4 inch deep and of a length to allow the file folder, when in place, to clear the drawer bottom 1/2 inch, minimum Two hanger bars of cold rolled steel 1/8 inch thick by 5/8-3/4 inch wide shall be furnished with each file drawer The hanger bars, track and steel follower shall have a zinc plated, or baked enamel finish

3 3 4 4 File drawer, Type III units The file drawer for the Type III units shall be as specified in 3 3 4 3, except that a 100 pound minimum three-way suspension shall be provided and drawer sides shall be grooved to accommodate hanger bars for letter size hanging files The front grooves shall be set in 1/2 inch from the inside face of the drawer front

3 3 5 Case interior details

3 3 5 1 Type I, Design 1 The Type I, Design 1 storage unit shall be as specified in 3 3 3 and shall be furnished with one adjustable shelf Each shelf end shall have cutouts to accommodate the supports to prevent shelf movement The cutouts shall be finished walnut color Except for the rounded front edge, all edges shall be eased There shall be two rows of shelf standards surface mounted, vertically, approximately 11 inches apart, on the inside face of each end panel One row of shelf standards shall be inset approximately 2-1/2 inches from the front panel post edge an all standards shall be a maximum of two inches less than the interior height The supports shall be readily and easily adjusted throughout the entire length of the standard The shelf standards shall be secured with brass screws which shall penetrate the end panel 5/8 inch minimum The spacing of the screws shall be a maximum of 6 inches apart

3 3 5 2 Type I, Design 2 The Type I, Design 2 storage unit shall be as specified in 3 3 3 and 3 3 3 1 and shall be furnished with two adjustable shelves Each end shall have cutouts to accommodate the supports to prevent shelf movement The cutouts shall be finished walnut color Except for the rounded front edge, all edges shall be eased. Shelf standards shall be mounted to the end panels as specified in 3 3 5.1. There shall be two rows of shelf standards mounted to each face of the center partition

3 3 5.3 Type II, Design 1, Style A The Type II, Design 1, Style A Storage unit shall be as specified in 3 3 3 and shall be furnished with one storage drawer (3 3.4 1), located at the top of the case and one file drawer (3 3.4 3), located at the bottom of the case

3 3 5 4 Type II, Design 1, Style B The Type II, Design 1, Style B storage unit shall be as specified in 3 3 3 and shall be furnished with three storage drawers (3 3 4 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3 5.5 Type II, Design 2, Style A The Type II, Design 2, Style A storage unit shall be as specified in 3 3 3 and 3.3.3 1 There shall be one storage drawer (3.3.4.1), located at the top of the case and one file drawer (3 3 4 3), located at the bottom of the case on the left side and three storage drawers (3 3.4.1), on the right side.

3 3 5 6 Type II, Design 2, Style B The Type II, Design 2, Style B storage unit shall be as specified in 3 3 3 and 3.3 3 1 There shall be three storage drawers (3 3.4.1), located on the left side and one storage drawer (3 3.4 1), located at the top of the case, and one file drawer (3.3.4.3), located at the bottom of the case on the right side.

3 3 5 7 Type II, Design 2, Style C. The Type II, Design 2, Style C storage unit shall be as specified in 3 3 3 and 3 3.3.1 There shall be three storage drawers (3.3.4.1), located on each side

3 3 5.8 Type II, Design 2, Style D The Type II, Design 2, Style D storage unit shall be as specified in 3 3 3 and 3 3.3.1 There shall be one storage drawer (3.3.4.1), located at the top of the case and one file drawer (3.3.4.3), located at the bottom of the case positioned on each side.

3 3 6 Detailed construction Type III The upper parting rails shall be tenoned into the end panels and into the partitions. The lower front rail shall be tenoned and glued into the end panels and shall be toe-screwed at a 45 degree angle (No. 10 screws minimum) from the underside of the front rail into the end panel The bottom panel shall be the full width of the case and shall be tenoned into the end panels and into the lower front rail. The back panel shall be the full height of the end panel and shall be rabbeted into the end panel and lap the bottom panel and the top rear rails The partitions shall be tenoned into the bottom panel. There shall be three screws, evenly spaced, inserted through the bottom panel into the bottom edge of each partition ad a minimum of four screws, evenly spaced, inserted through the back panel into the back edge of each partition. The top, leg support cleats, mounting plates, and joinery cleat at lower front rail shall be attached as specified in 3 3.3. There shall be a cleat, approximately full dpeth, screwed to the underside of the top and glued and screwed to the inside face of each partition. A cleat, extending approximately the full width of the center compartment, shall be screwed to the underside of the top and glued and screwed to the back panel. There shall be a minimum of three screws, evenly spaced, through the back panel into the cleat In the center compartment a fixed shelf shall be tenoned into each partition face The clear space between the fixed shelf and the top shall be 7 inches. A cleat, approximately full depth with tapered front end shall be glued and screwed to the underside of the shelf and to the face of each partition. The left compartment shall contain one storage drawer (3.3.4.2), and one file drawer (3 3.4.4) The right compartment shall be furnished with one adjustable shelf and a door Each end of the adjustable shelf shall have cutouts to accommodate the supports to prevent shelf movement. The cutouts shall be finished walnut color. Except for the rounded front edge, all edges shall be eased There shall be two rows of shelf standards (3.2.7.7 G.S), surface mounted vertically, 11 inches apart O.C., on the inside face of each end panel. One row of shelf standards shall be inset 2-1/2 inches O.C from the front panel post edge. All standards shall be a maximum of 2 inches less than the interior height The supports shall easily adjust over the entire length of the standard The standards shall be secured with brass screws which shall penetrate the end panel 5/8 inch The screws shall be spaced a maximum of 6 inches apart There shall be two catches and strike plates that will hold the door securely closed The right compartment shall have shelf standards attached as specified in 3.3.5.1 to the inside face of the end panel and the inside face of the partition

3 4 Finishes The metal, laminate and wood finish shall be as specified in 3.4 G.S

3.5 Identification marking. Marking of the storage units shall be as specified in 3 5 G S

3 6 Workmanship. Workmanship shall conform to 3.6 G.S.

4 QUALITY ASSURANCE PROVISION

4 1 The quality assurance provisions shall be as specified in section 4 of the General Specifications

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4 2 Assembly examination An examination of the assembly of the shelves and shelf supports to the shelf standards of the Type I and III storage units shall be made for defects in ease of assembly and fit of components. The lot size shall be expressed in units of storage units. The unit of product shall be one storage unit. Defects shall be scored in accordance with Table IV. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G S.

(NOTE Unassembled shelves and storage units, selected by the Government inspector, shall be fully assembled by the contractor. The inspector shall witness the assembly of the shelves and shelf supports to the shelf standards of the storage units and shall observe the ease of assembly and fit of components)

TABLE IV Shelf assembly defects

Examine	Defect
Shelf assembly and fittings	Shelf standards out of alignment.
	Shelf standard not adjustable to positions as specified
	Shelf support does not fit into slot in standard
	Shelf support too loose in standard, i.e , falls out easily
	Shelf wobbles on shelf support (when in horizontal plane).
	Shelf does not fit neatly on support.

4 3 Recovered material certification A certificate shall be submitted stating that the end items supplied contain the percentage of recovered material required in 3.1

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. Each storage unit shall be packaged, packed and marked in accordance with PPP-P-1877. The levels of packaging and packing shall be as specified (see 6 2), and marking shall be for civil agencies or military activities as specified (see 6 2).

5 2 Palletization Unless otherwise specified (see 6.2), storage units with a width of 42 inches or more shall be palletized in accordance with the palletization requirements of PPP-P-1877 for storage units Storage units packed in accordance with the level C requirements of PPP-P-1877, and all Type I, Design 1 storage units shall not require palletization.

6. NOTES

6.1 Intended use The storage units covered by this specification are in a correlated line of wood unitized office furniture designed to conserve floor space and for use in executive offices, courtrooms, and conference rooms of Federal agencies


6.2 Ordering data Purchasers should select the preferred options permitted herein and include the following in procurement documents

(a) Title, number, and date of this specification
(b) Title, number, and date of the General Specification
(c) Type, design, and style (see 1.2.1)
(d) Levels of packaging and packing required (see 5.1)
(e) Marking required (see 5 1)
(f) When palletization is NOT required (see 5 2).

GSA DC D 900583

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TYPE I, DESIGN 1
OPEN UNIT

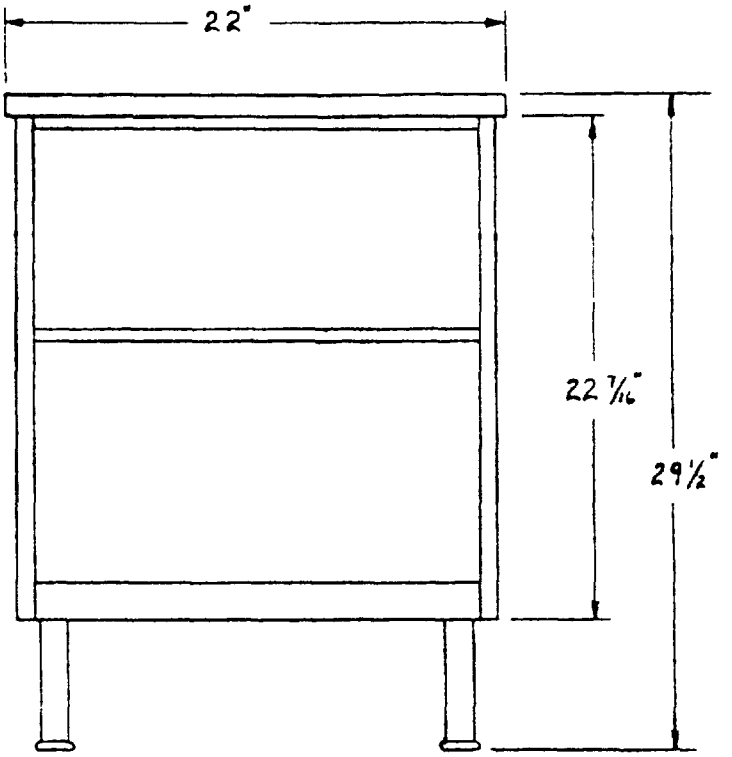

TYPE II, DESIGN 1
CLOSED UNIT

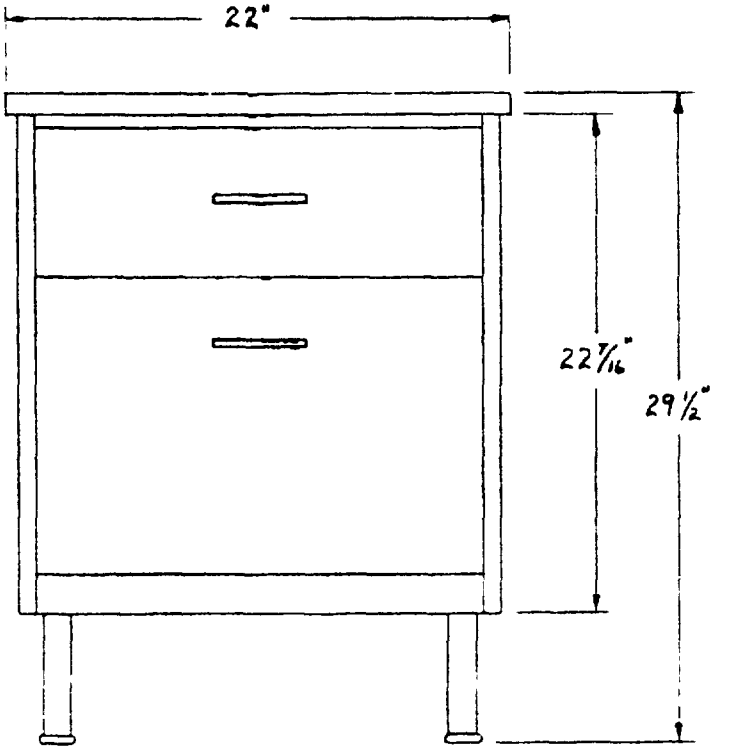


FIGURE 1 STORAGE UNIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

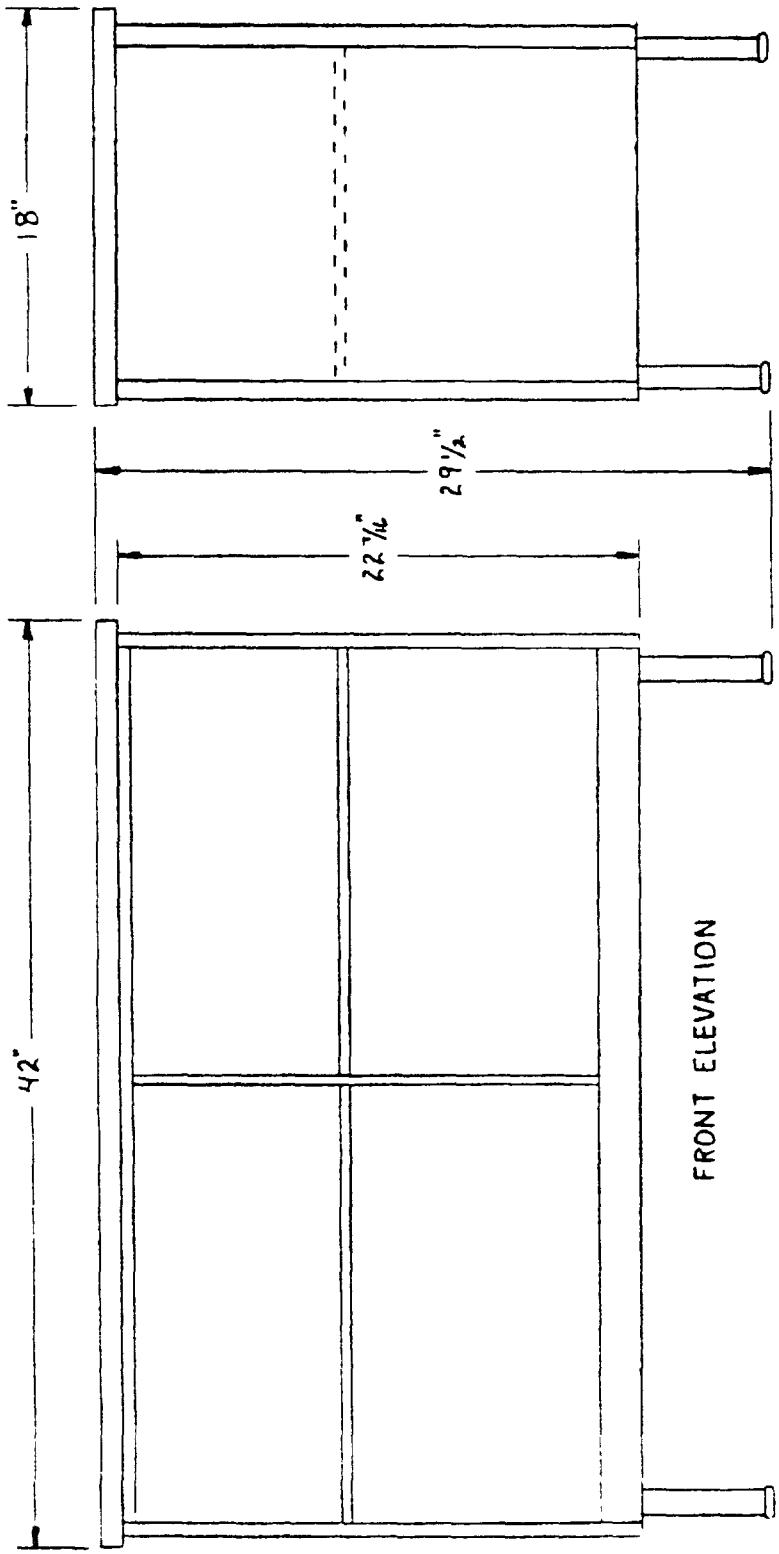


FIGURE 2. TYPE I, DESIGN 2, STORAGE UNIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

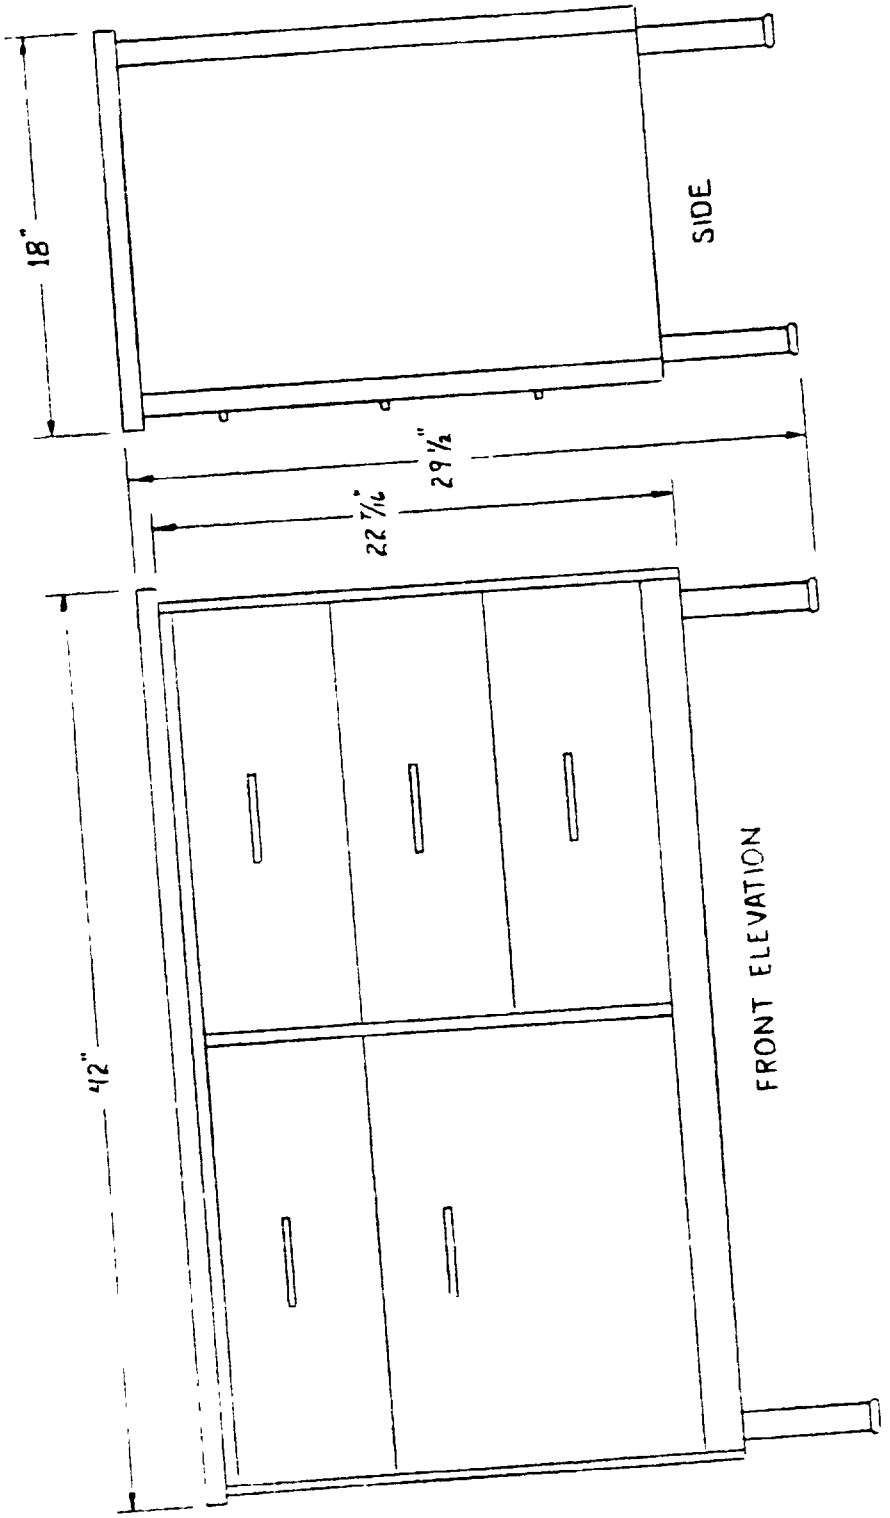


FIGURE 3 TYPE II, DESIGN 2, STORAGE UNIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

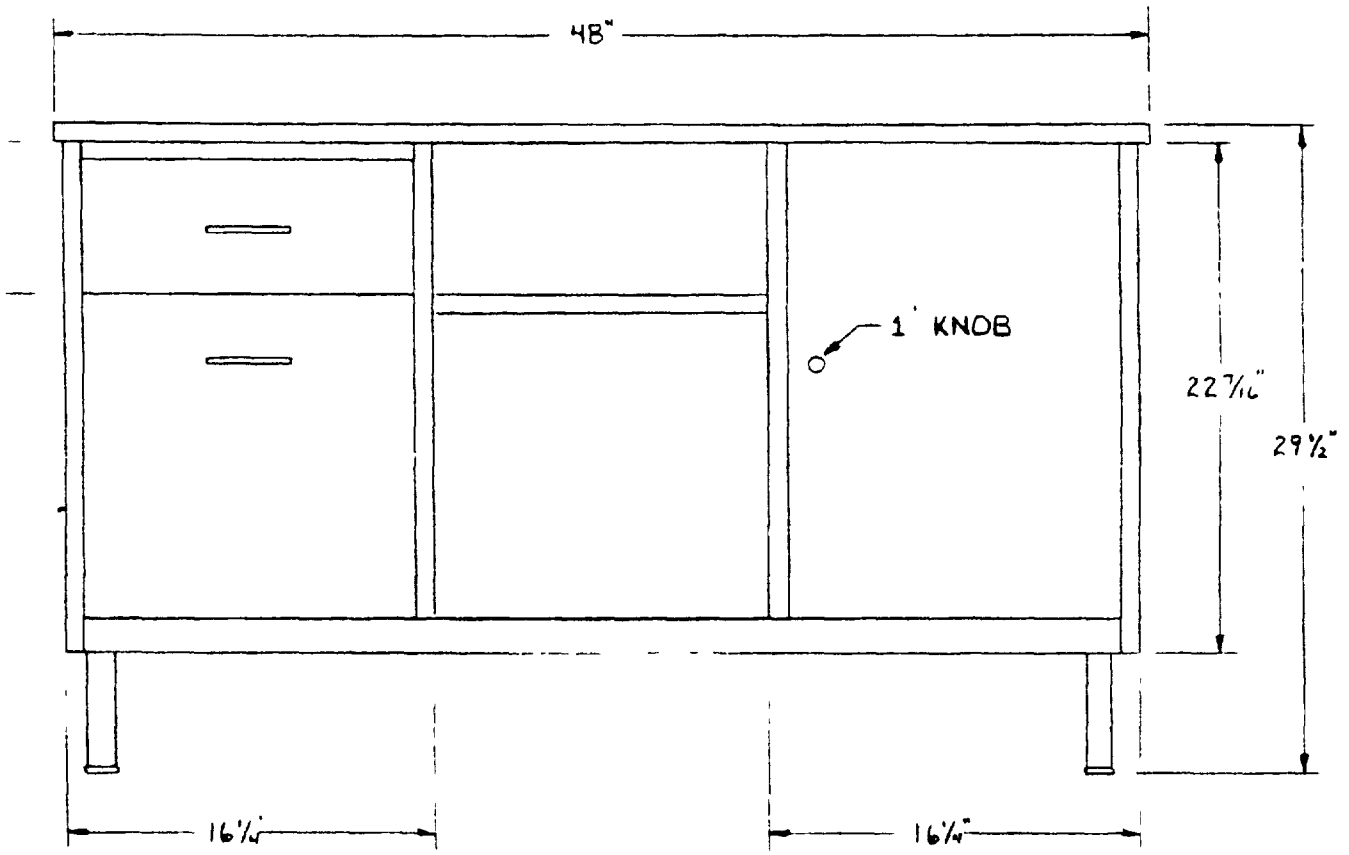


FIGURE 4 TYPE III, STORAGE UNIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

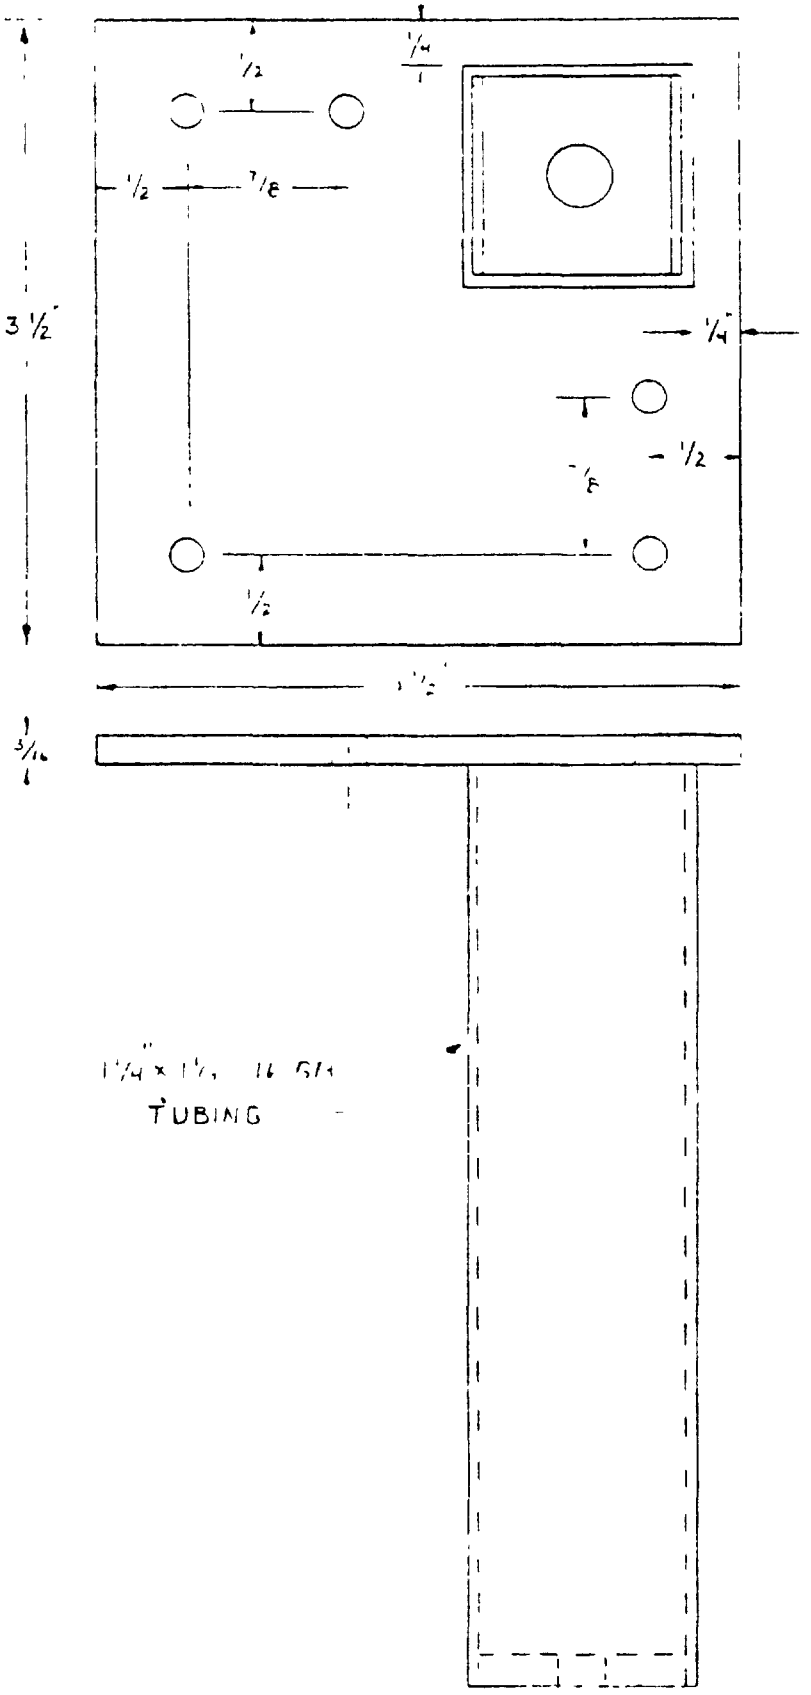


FIGURE 5 LEG ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

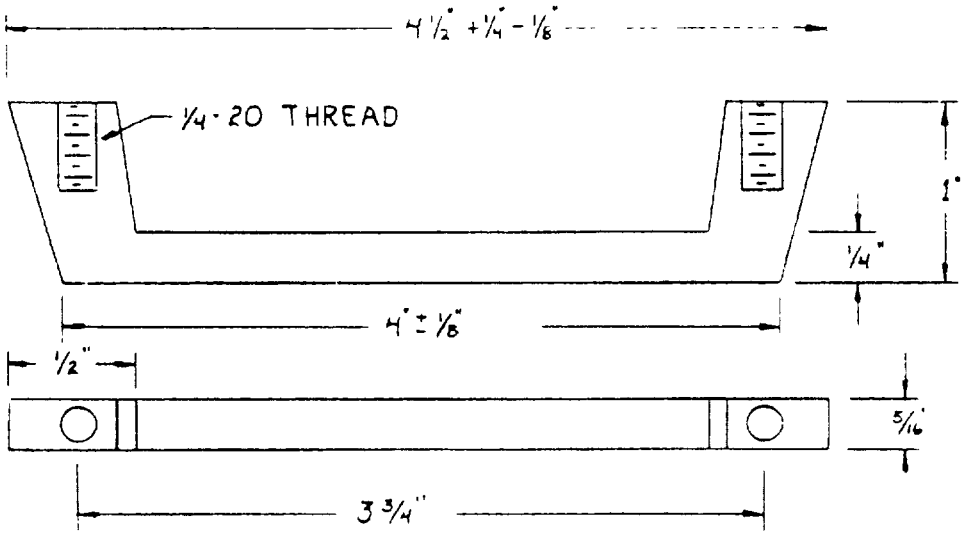


FIGURE 6 DRAWER PULL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.