[Metric-SI]
AA-O-00250/6F(GSA-FSS)
July 1, 1993
SUPERSEDING
Int. Fed. Spec. AA-O-00250/6E
July 21, 1989

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, TABLES, WOOD, UNITIZED

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the Furniture Commodity Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for the unitized wood office furniture tables. General requirements and other information pertaining to these items will be found in Interim Federal Specification AA-O-00250F (GSA-FSS), Office Furniture, Wood, Unitized, (General Specification).

1.2 Classification.

1.2.1 Types and sizes. The office tables covered by this specification shall be of one type and the sizes specified herein and as follows (see 6.2). Dimensions are in millimeters and include glides at minimum adjustment.

Size 1 - 1500 mm L X 750 mm W X 750 mm H.
Size 2 - 1800 mm L X 860 mm W X 750 mm H.
Size 3 - 2400 mm L X 960 mm W X 750 mm H.
Size 4 - 3000 mm L X 1200 mm W X 750 mm H.

2 APPLICABLE DOCUMENTS

2.1 Specifications and standards. The specifications and standards in effect on the date of the invitation for bids are listed in 2 1 of Interim Federal Specification AA-O-00250F hereinafter called the General Specification (G.S.).

2 2 Other publications. The documents which form a part of this specification are listed in 2.2 G.S.

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.2 Materials. Materials used in the construction of the tables shall be as specified in the applicable paragraphs in the General Specification (see Table I).

Table I. Materials index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Adhesive	3.2.1 Gen. Spec.	Plastic laminate	3.2.4.7 G.S.
Lacquer	3.2.3 G.S.	Hardwood plywood	3.2.4.4 G.S.
Wood species	3.2.4.1 G.S.	Particleboard	3.2.4.6 G.S.
Solid wood requirements	3.2.4.2 G.S.	Steel	3.2.6 G.S.
		Glides	3.2.7.2 G.S.
Wood seasoning	3.2.4.3 G.S.	Screws	3.2.7.4 G.S.

3.3 Construction. General construction requirements for bookcase components shall be as specified in the applicable paragraphs in the General Specification (see Table II).

Table II. Construction requirements index

Component	AA-O-00250F Para. No.	Component	AA-O-00250F Para. No.
Design and construction	3.3.1 Gen Spec.	Tops	3.3.6 G.S.
		Legs	3.3.7 G.S.
Tolerances	3.3.2 G.S.	Direction of grain	3.3.9.G.S.
Joinery	3.3.3 G.S.		

3.3.1 Design. The design of the tables shall be as shown in Figure 1. The tables shall be fitted with four legs of knockdown design. Dimensions shall be as shown in 1.2.1.

3 3.1.1 Size 1. The top overhang shall be 50 mm on all four sides

3 3 1.2 Size 2. The top overhang shall be 200 mm on each end and 100 mm on each side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.1.3 Size 3. The top overhang shall be 50 mm on all four sides.

3.3.1.4 Size 4. The top overhang shall be 350 mm on each end and 175 mm on each side.

3.3.2 Principal components. The description and dimensions of principal component parts of the tables shall be as shown in Table III.

Table III. Principal table components

Component	Material	Dimensions, millimeters
Tops	3.3.6 G.S.	32 mm thick
Aprons	Min. 5-ply Lumber or Veneer-core plywood, 3.2.4.4 G.S.	25 x 75 mm (wood corner block used) 19 x 75 mm (metal corner bracket used)
Frame	Same as apron	Sizes 1&2-1422 X 660 mm Sizes 3&4-2337 X 864 mm
Wood corner block assembly	Unexposed wood, 3.4.4.1 G.S. See figure 3	33 mm thick, minimum
Metal or corner bracket assembly	See Figure 2	Sizes 1 and 2 - corner stiffener: 75 mm high x 1.52(±0.08 mm), angle 38 x 38 mm by 3.04 (±0.18 mm) Sizes 3 and 4 - corner stiffener: 75 mm high x 1.90(+0.18,-0.10), angle 38 x 38 mm by 3.04 (±0.18 mm)
Legs	3.3.7 G.S.	38 x 38 mm, 1.52 (±0.08 mm)
Center brace for size 3 and 4 table frames	Ash, beech, birch, cherry, maple, oak, or walnut	27 mm (min) thick by 74 mm wide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.3 Assembly of components. The components specified in 3.3.2 shall be assembled as specified herein.

3.3.3.1 Apron assembly. The aprons (see table III) shall be secured to the top by tapping screws inserted through bored holes spaced 150 mm (maximum) apart starting 115 mm (maximum) from each apron end. The screws shall be not less than No. 10 and shall penetrate the top a minimum of 3/4 of its thickness.

3.3 3.2 Leg Assembly. All legs (see table III) shall be furnished with glides (3.2.7.2 G.S.). The end of the leg tubing just above the glide shall be ground smooth so that there are no sharp edges. Either metal corner bracket (figure 2) or wood corner block (figure 3) may be used for fastening legs to aprons.

3.3.3 3 Center brace. (See table III.) The frame of all size 3 and 4 tables shall be reinforced by a one-piece, solid wood, brace extending the full length between the end aprons. The two end aprons shall be dadoed on the center of the inside face not to exceed a 5 mm depth to receive the brace. The brace shall be secured to the underside of the table top in the same manner as the aprons. The brace shall not extend below the end apron bottom edge. The brace shall be further secured by triangular wood glue blocks, glued and screwed opposite each other on either side of the brace, and screwed to the underside of the top at a point approximately one third of its length from the inside face of each of the end aprons. In addition, each side apron shall be braced by triangular wood glue blocks, glued and screwed to the apron and screwed to the underside of the top at the point approximately one third of its length from the inside face of each of the end aprons.

3.4 Finishes. The metal, laminate and wood finish shall be as specified in 3.4 G.S.

3.5 Identification marking. Marking of tables shall be as specified in 3.5 G.S.

3.6 Workmanship. Workmanship shall conform to 3.6 G.S. In addition there shall be no sharp edges on the inner and outer bottom edges of the aprons, metal components of corner bracket assemblies, and ends of legs where glides are attached. Top overhang on aprons shall be balanced.

4 QUALITY ASSURANCE PROVISIONS

4 1 The quality assurance provisions shall be as specified in section 4 of the General specification and as specified herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.2 Assembly examination. An examination, of the assembly of the legs to the table aprons, shall be made for defects in ease of assembly and fit of components. The lot size shall be expressed in units of tables. The unit of product shall be one table. Defects shall be scored in accordance with Table IV. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4. G.S.

(NOTE: Unassembled legs and table top assemblies, selected by the Government inspector, shall be fully assembled by the contractor. The inspector shall witness the assembly of the legs to the table aprons and shall observe the ease of assembly and fit of components).

Table IV. Assembly defects

Examine	Defect
Assembly of legs to table aprons	Not easily assembled, i.e., assembling required realignment of parts, drilling or enlargement of holes, use of hammer, drift pin or other mechanical means.
	Legs out of square.
(Wood brace assembly only)	Distance between corner block and leg not within range 6 to 9 mm.

4.3 Test requirements for tables.

ANSI Desk Product Test X5.5-1989. Failure to comply with these test requirements will be cause for rejection. Perform all tests on a complete piece of furniture in furniture manufacturer's plant or at an independent test facility. Test certifications from component suppliers will not be acceptable. On two year contracts, retest units from current production one year after the start of the schedule contract period.

ANSI X5.5-1989 are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

Test the tables in accordance with sections 4, 5, 10, 11, 12, and 13 in ANSI X5.5 1989 with following changes and additions.

Delete all references to "drawers" in the tests.

4.2Horizontal Surface classifications Use test procedure for Primary surface (4 2.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.2Test procedure. Reduce load to 68 kg. Apply load in center of table top.

10.3Acceptance level. No structural damage or loss of serviceability is acceptable after testing.

11.2Acceptance level. No structural damage or loss of serviceability is acceptable after testing.

12.Leg Strength Test. Applicable to all base design including tables with nonadjustable glides.

13.2Test procedures. Use Table Test Procedure (13.2.2).

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. Package, pack, and mark shipping containers in accordance with the contract or order.

6. NOTES

6.1 Intended use. The tables covered by this specification are units in a correlated line of wood unitized office furniture designed to conserve floor space for use in executive offices, courtrooms, and conference rooms of Federal agencies.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Title, number, and date of the General specification.
(c) Size (see 1.2.1).

6 3 Reference part numbering system.

AAO250/6 - 1 A

Size:	A	Size 1 1500 x 750 mm
	B	2 1800 x 860 mm
	C	3 2400 x 960 mm
	D	4 3000 x 1200 mm
Type.	1	Type 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

6.4 SI - English unit equivalents.

1 m^2 (square meter)	= 1.19617 $yard^2$
1 kg/m^3 (kilogram/cubic meter)	= 0.06242 lb.(mass)/ft^3
1 mm (millimeter)	= 0.03937 inch (thickness of one dime)
1 m(meter) = 1 000 mm	= 1.0936 yard (39.7 in)
1 N(Newton)	= 0.225 lb. (force)
1 kg(kilogram)	= 2.2 lb.(mass)
1 g(gram)	= 0.0022 lb. (mass)
1 g(gram)	= 0.03527 oz.(mass avoirdupois)
1 kPa(kilo Pascal)	= 0.14514 lb(force)/in^2(PSI)
(C^o x 9/5) + 32 (Celsius)	= F^o (Fahrenheit)
1 g/m^2(gram per square meter)	= 0.02949 oz/yd^2 or0.04426 oz/linear yard (54" W basis)

To convert SI units to English units, multiply SI measurement by the appropriate English conversion factor listed above. See example on next below:


900 mm X 0.03937 in./mm = 35.43 inches

To convert Celsius temperature to Fahrenheit temperature use the above conversion equation. See example below:

(20°C X 1.8) + 32 = 68°F

Preparing Activity
GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

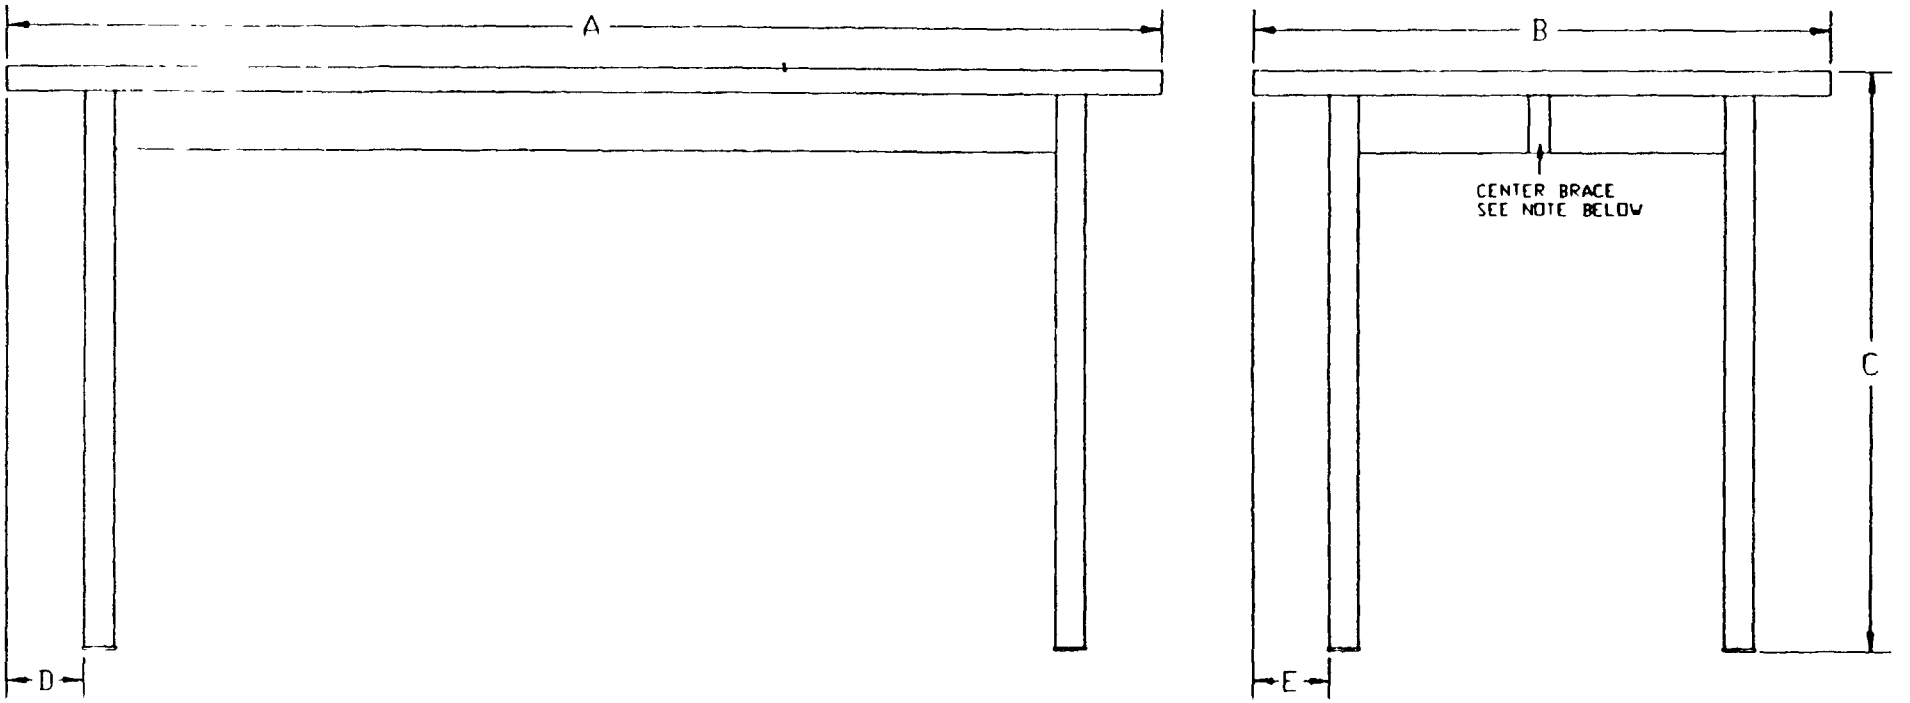

DIMENSION IN MILIMETERS (mm)

	A	B	C	D	E
SIZE 1	1500	750	750	50	50
SIZE 2	1800	860	750	200	100
SIZE 3	2400	960	750	50	50
SIZE 4	3000	1200	750	350	175

NOTE CENTER BRACE (3333) REQUIRED ON SIZE 3 AND 4 TABLES

FIGURE 1 TABLES

AA-D-00250/6F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


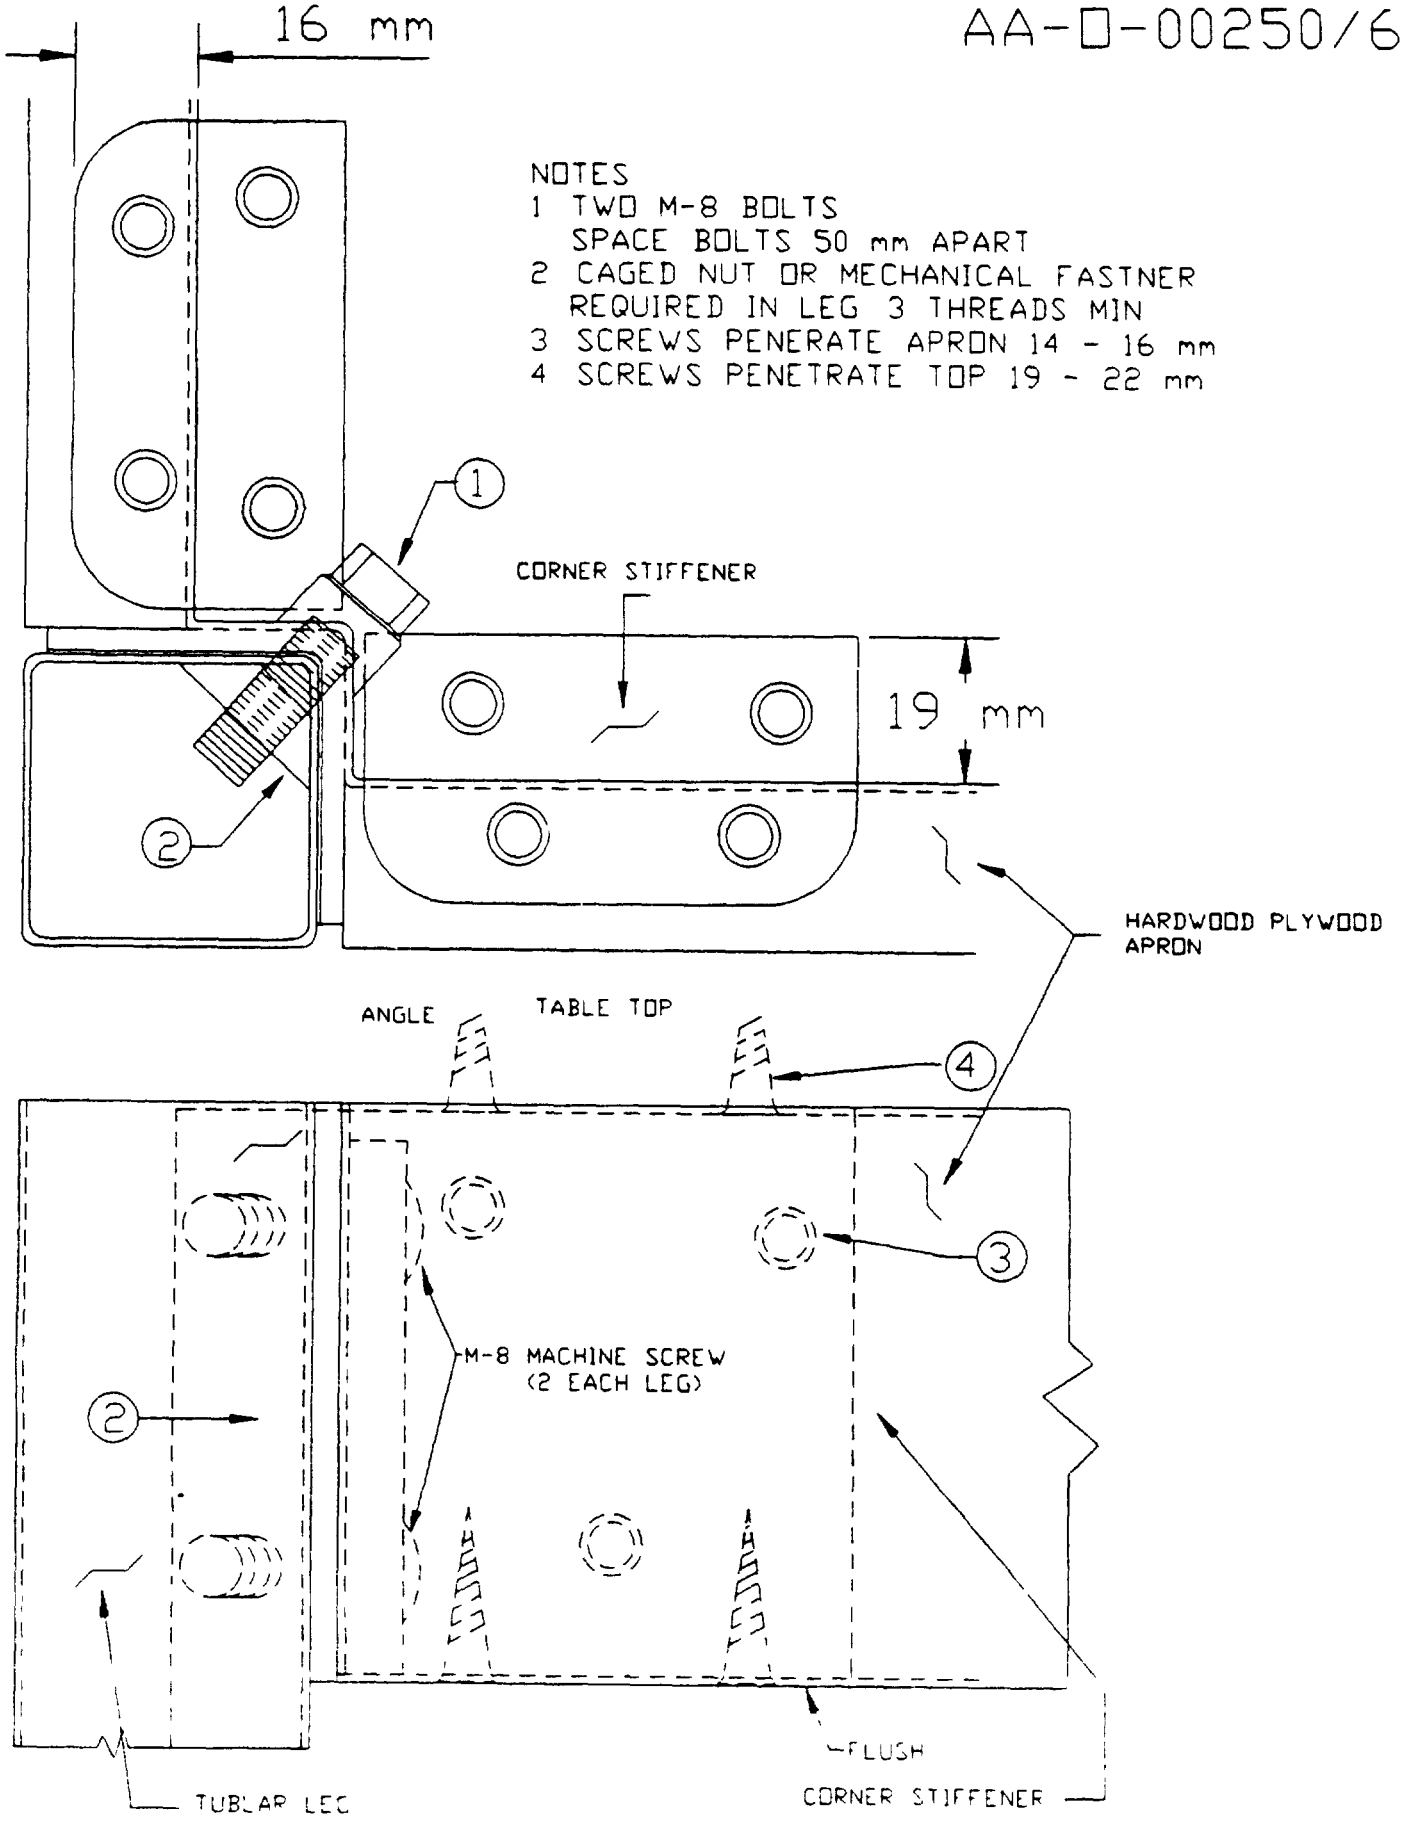


FIGURE 2
METAL CORNER BRACKET ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

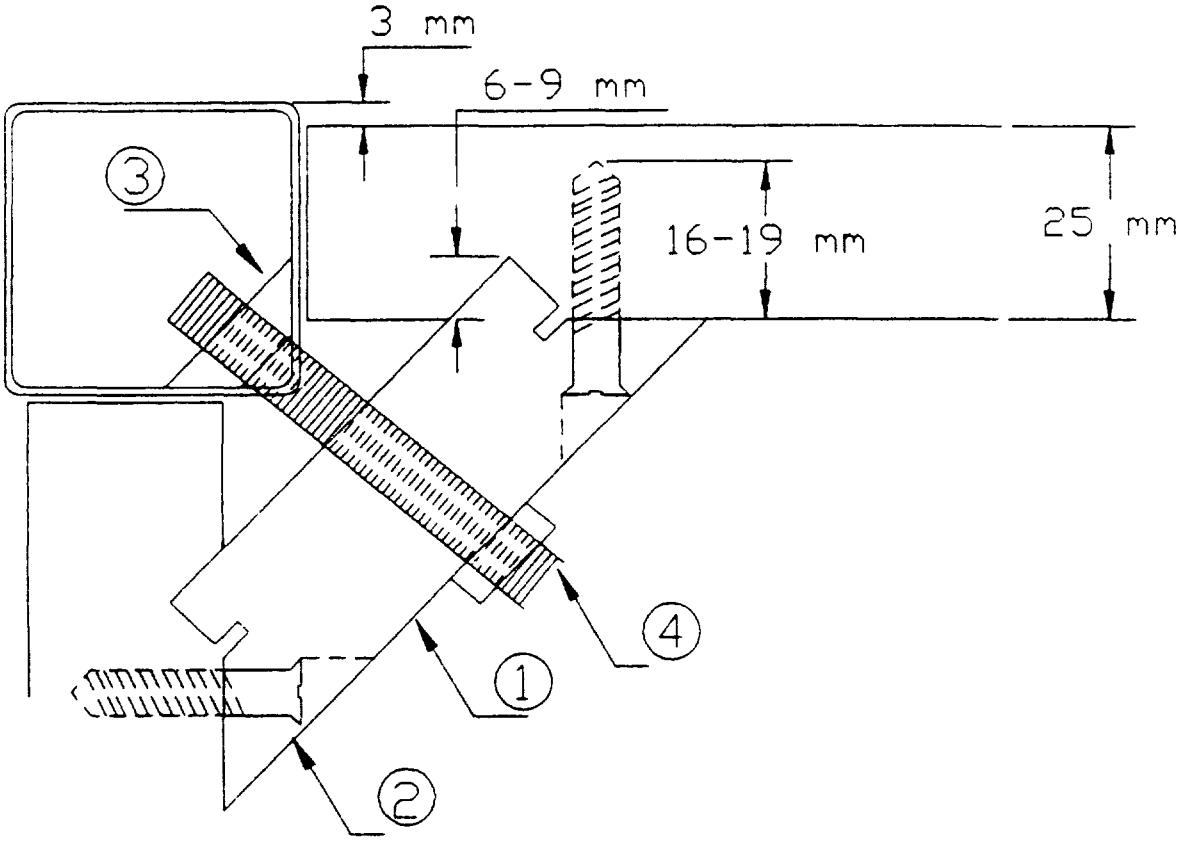

NOTES
1 CORNER BLOCK 24 X 73 mm
2 TENON AND GLUE CORNER BLOCKS TO APRONS AND SECURE WITH 2 SCREWS PER END
3 CAGED NUT OR MECHNICAL FASTNER REQUIRED IN LEG. 3 THREADS MIN
4 TWO 8 mm No 18 STUDS REQUIRED WITH NUTS AND WASHERS, THREADED OR WELDED IN TO LEG, OR TWO M-8 BOLTS WITH WASHERS SPACE STUDS/BOLTS 44 mm APART

FIGURE 3
WOOD CORNER BRACE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.