AA-O-00250/78 (GSA-FSS)
October 2, 1976
SUPERSEDING
Int Fed Spec AA-O-00250[illegible]
September 1, 1967

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, TYPEWRITER STAND, WOOD, UNITIZED

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington DC 20406 based on currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 Scope. This specification covers the detailed requirements for one type and size of unitized wood office furniture typewriter stand. General requirements and other information pertaining to the stand will be found in Interim Federal Specification AA-O-00250b(GSA-FSS), Office Furniture, Wood, Unitized (General Specification).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The specifications and standards of the issue in effect on the date of the invitation for bids which form a part of the specification are listed [illegible] of Interim Federal Specification AA-O-00250b, hereinafter called the General Specification (GS).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 of the General Specification.

3. REQUIREMENTS

3.1 Recovered materials requirement. The typewriter stand shall contain not less than [illegible] % by weight of recovered materials, excluding packaging. Recovered material materials are defined as materials which have been collected or recovered from solid waste. (See 4.2)

3.2 Materials. Materials used in construction of the typewriter stand shall be as specified in applicable paragraphs in the General Specification (see Table I).

TABLE I Materials index

Component	AA-O-00250b Par No	Component	AA-O-00250b Par No
Adhesives	3.2.1 Gen Spec	Hardwood plywood	3.2.4.4 GS Lacque-
Wood species	3.2.4.1 GS	Plastic laminate	3.2.5 GS
Solid wood requirements	3.2.4.2 GS	Steel	3.2.6 GS
Wood seasoning	3.2.4.3 GS		

3.2.1 Angle brace. The angle brace shall be of round steel bar (3.2.6 GS) [illegible]/8 inch in diameter. Each end shall be flattened and drilled to accommodate at least one screw No. 10 (minimum). The span of the brace shall be 12 inches minimum.

3.2.2 Casters. The casters shall be of the non-lock (regular) and side brake type. The stem of the casters [illegible] diameter of 3/8 inch minimum. The [illegible] the caster shall be installed with a lock washer. The wheels of the casters shall be of nonmarking [illegible] and shall [illegible] diameter of [illegible] inches [illegible] with a tread [illegible] minimum. The casters shall have self lubricating bearings. [illegible] finish of the metal portions of the casters shall be [illegible] plated.

3.3 [illegible] typewriter stand [illegible] specified in the applicable paragraphs of the General Specification (see Table I).

TABLE II. Construction requirements index

Component	AA-0-00250D Par No	Component	AA-0-00250D Par No
Design and construction	3.3.1 Gen Spec.	Tops	3.3.6 G.S
Tolerances	3.3.2 G.S	Direction of grain	3.3.9 G.S
Welding	3.3.3 G.S	Panel posts	3.3.12 G.S
Joinery	3.3.4 G.S	Chamfered corners	3.3.13 G.S
Plastic laminate panel construction	3.3.5 G.S		

3.3.1 Design. The design shall be as shown in Figure 1. The typewriter stand shall be 36 inches wide, 18 inches deep, and 26-1/2 inches high including the casters.

3.3.2 Principal components. The description and dimensions of principal component parts of the typewriter stand shall be as shown in Table III.

TABLE III. Principal typewriter stand components

Part	Description	Dimensions inches
Top	3.3.6 G.S	1-1/4 thick
End panels	5-ply plywood, 3.2.4.4 G.S	13/16 thick
Back panel	5-ply plywood, 3.2.4.4 G.S	13/16 thick
Panel posts	Exposed solid parts, 3.2.4.1 G.S	13/16 by 3/4
Joinery cleats		
Back and end panel joint	Unexposed wood, 3.2.4.1 G.S	1-1/2 by 3/4
Top and back panel joint	Unexposed wood, 3.2.4.1 G.S	3/4 square

3.3.4 H-frame. The H-frame shall consist of two vertical members connected by two cross members. The vertical and lower cross member shall be made of square tubular steel (3.2.6 G.S.), 16 gage (0.0598 inch), and 1-1/4 inches in cross section. The vertical member shall be 28-1/4 inches high including glides at lowest setting. The upper cross member shall be an 11 gage (0.1196 inch) steel bar, 2-1/2 inches wide. It shall extend the full width between the vertical members. The lower cross member shall be positioned so that it will be 1/4 inch above the lower edge of the side panel when assembled. The upper and lower cross members shall be welded (3.3.3 G.S.) to the vertical members. There shall be holes drilled through the vertical members and lower cross members to accommodate No. 14 screws for attaching the side and back panels. Holes shall also be drilled through the upper cross member to accommodate a minimum of four No. 14 screws for attaching to the top. The finish shall be as specified in 3.4.2 G.S. The lower end of each vertical member shall be equipped as specified in 3.3.5. The end of the H-frame tubing just above the glide shall be ground smooth to remove sharp edges.

3 3 5 Typewriter stand construction detail The back panel shall be tenoned and glued into the back posts of the end panels There shall be an approximately full height cleat glued and screwed two ways at the joint of the back panel to the end panel The H-frame (3 3 4) shall be attached directly to the end panel by three No. 14 screws equally spaced, inserted through lead holes in each vertical member of the frame and two screws inserted through lead holes in the lower horizontal member The overhang of the top on all sides shall be 1/2 inch There shall be four screws through the upper cross member of the H-frame into the top There shall be an approximately full width cleat glued and screwed to the back panel and screwed to the top The screws shall be tapping type, not less than No 10 size and shall be spaced 6 inches apart maximum starting 4 inches maximum from each corner All screws used in the top shall penetrate the top 15/16 inch minimum and all screws used in the back and end panels shall penetrate the panel 5/8 inch minimum An angle brace (3 2 1), shall be secured at a 45 degree angle to the underside of the top and to the inside face of the end panel by screws The brace shall be centered on the depth dimension Each leg of the H-frame shall have a tapped steel block to accommodate a threaded stem type caster The block shall be 1/2 inch thick minimum and shall be welded inside the tubing Each front leg shall be equipped with a side brake caster (3 2 2) and each rear leg shall be equipped with a nonlock (regular) caster (3 2 2) to match the former

3 4 Finishes The metal, laminate and wood finish shall be as specified in 3 4 G S

3 5 Identification marking Marking of typewriter stand for identification shall be as specified in 3 5 G S

3 6 Workmanship Workmanship shall conform to 3 6 G S

4 QUALITY ASSURANCE PROVISION

4 1 The quality assurance provisions shall be as specified in section 4 of the General Specification

4 2 Recovered material certification A certification shall be submitted, stating that the end item supplied contain the percentage of recovered material required in 3 1

5 PREPARATION FOR DELIVERY

5 1 Packaging, packing and marking Each typewriter stand shall be packaged, packed and marked in accordance with PPP-P-1877 The levels of packaging and packing shall be as specified (see 6 2), and marking shall be for civil agencies or military activities as specified (see 6 2)

6 NOTES

6 1 Intended use The typewriter stands covered by this specification are units in a correlated line of wood unitized office furniture designed to conserve floor space and for use in executive offices, courtrooms, and conference rooms of Federal agencies

6 2 Ordering data Purchasers should select the preferred options permitted herein and include the following information in procurement documents

(a) Title, number, and date of this specification
(b) Title, number, and date of the General Specification
(c) Levels of packaging and packing required (see 5 1)
(d) Marking required (see 5 1)

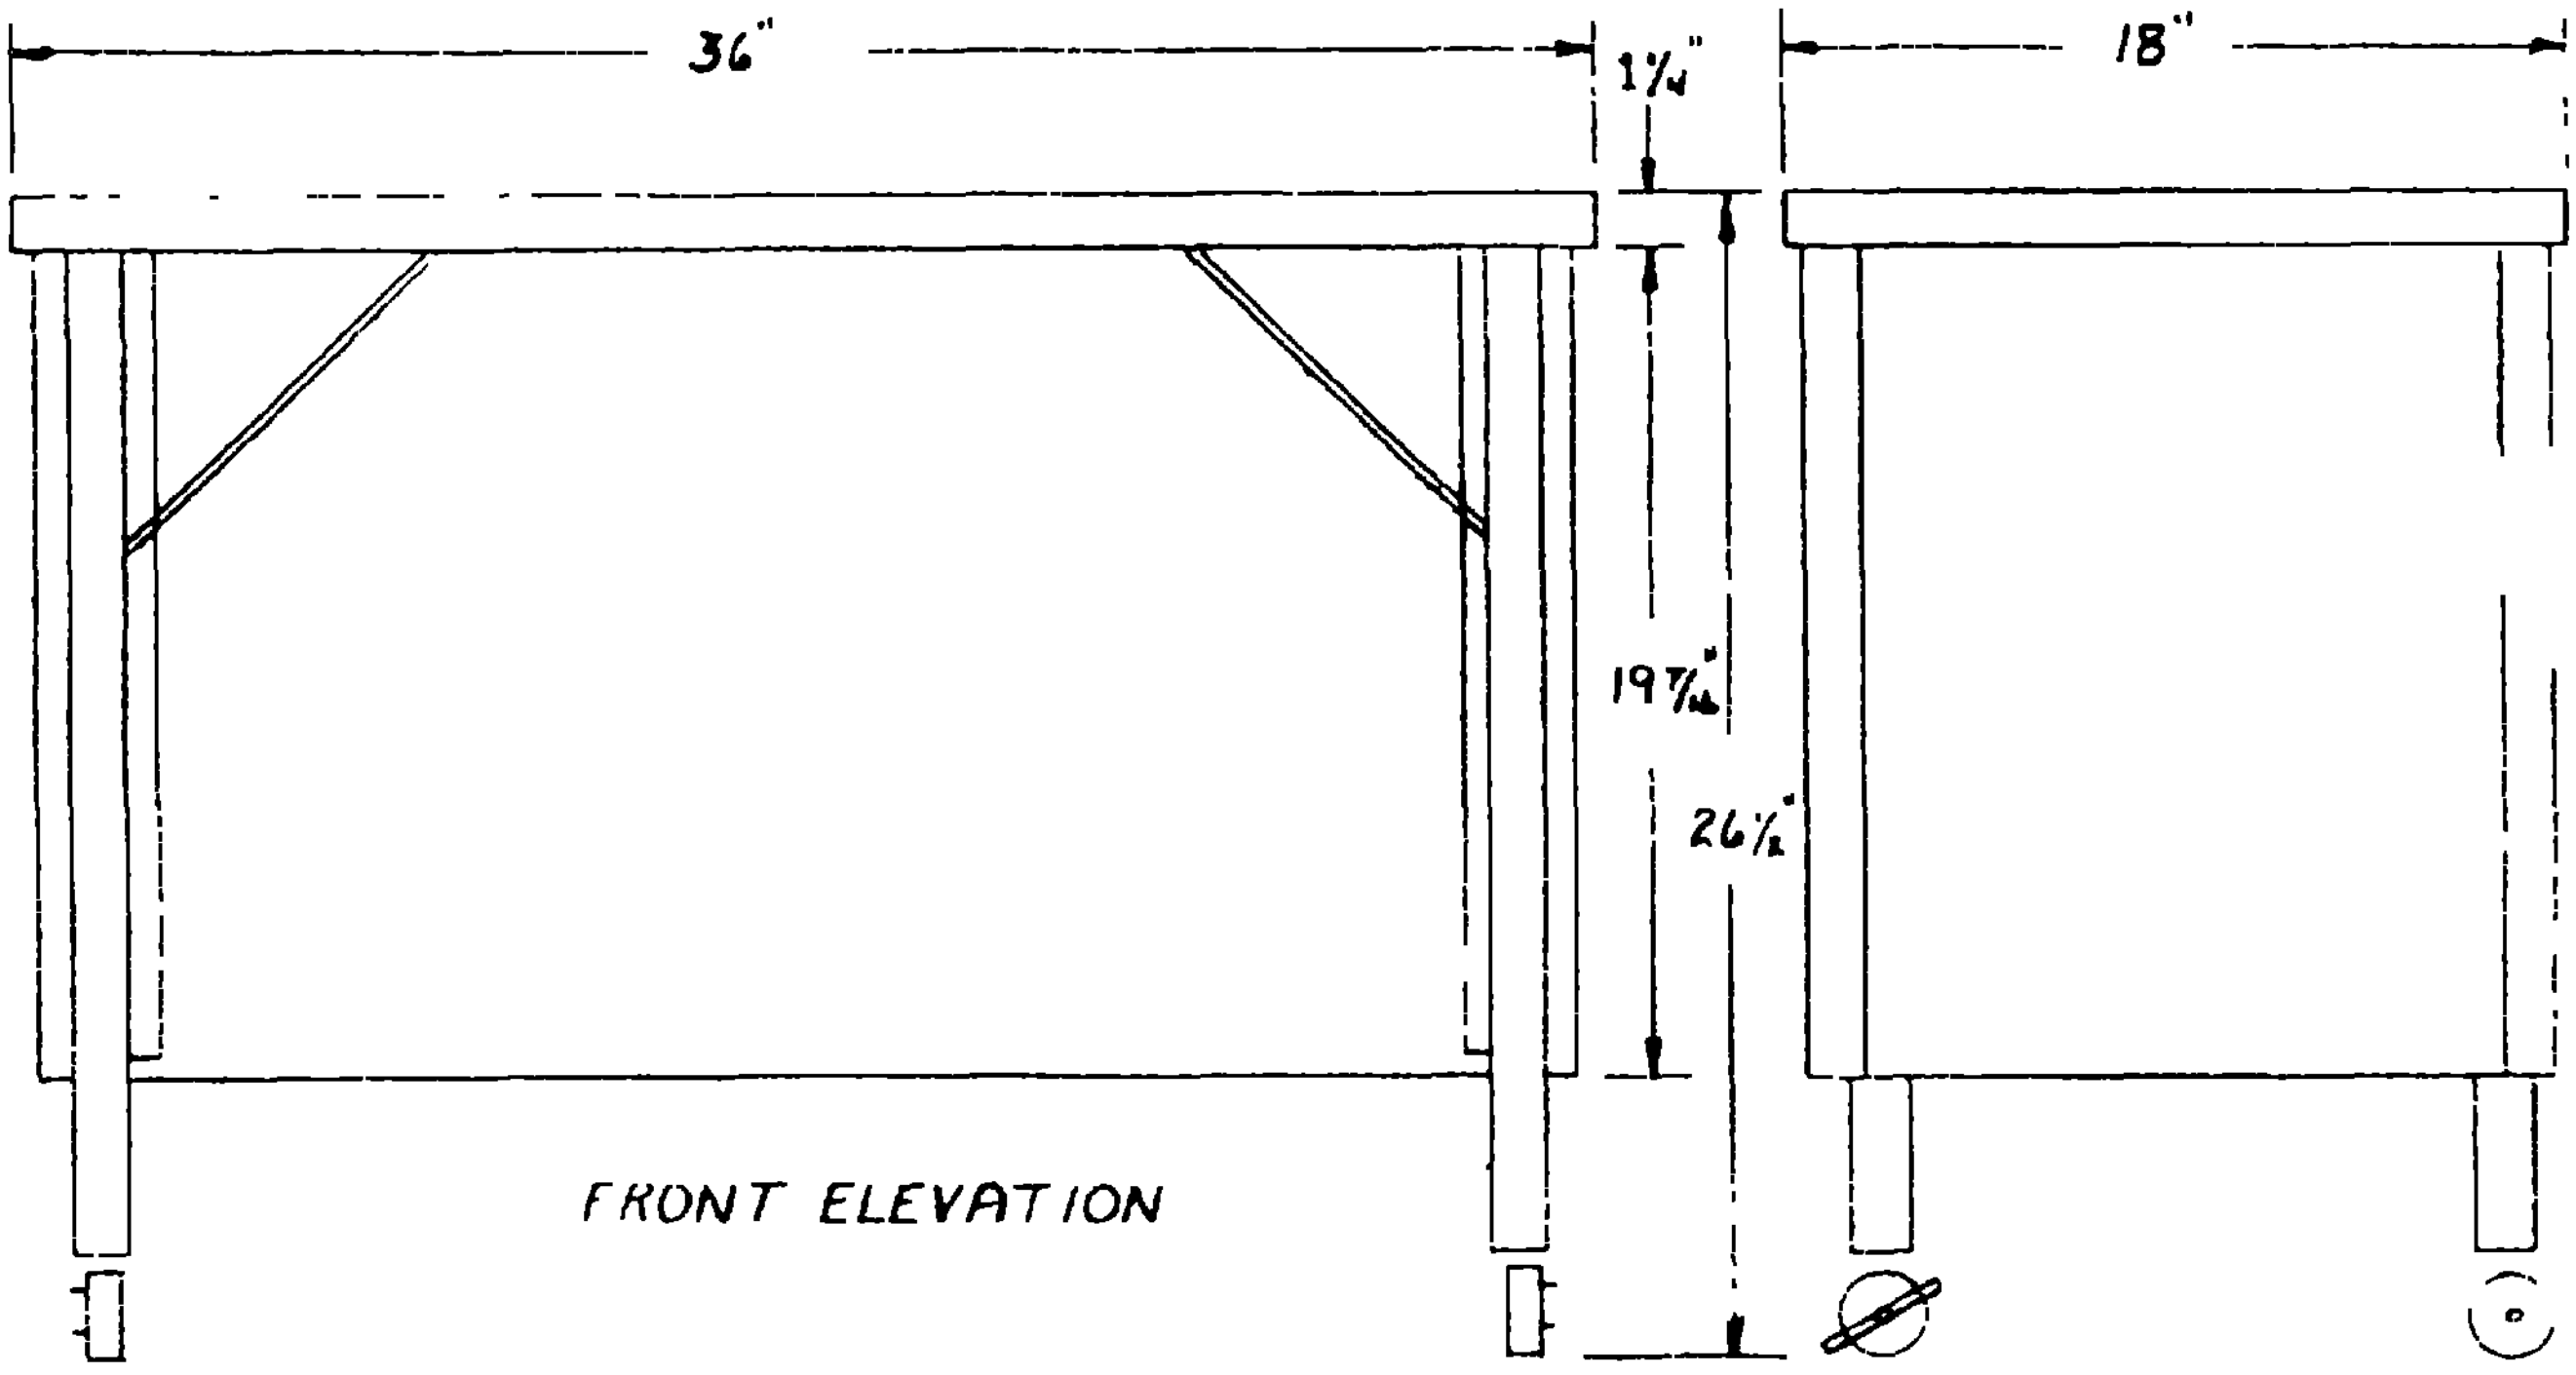
36"
1¼"
18"
19⅞"
26½"
FRONT ELEVATION

FIGURE 1 TYPEWRITER STAND