AA-O-230/2a
October 7, 1964

SUPERSEDING
Int. Fed. Spec. AA-O-00230/2
February 7, 1964 and
Fed Spec AA-C-35
September 7, 1950

FEDERAL SPECIFICATION

OFFICE FURNITURE: CABINET, TELEPHONE, EXECUTIVE TYPE, WOOD, TRADITIONAL, (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers the detailed requirements in traditional design for an executive office telephone cabinet General requirements and other information pertaining to the cabinets will be found in Federal Specification AA-O-230, Office Furniture, Executive Type, Wood, Traditional (General Specification).

1.2 **Classification.** The telephone cabinets covered by this specification shall be of one type and size as shown in the figures

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issues in effect on date of invitation for bids, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-230, hereinafter called the General specification

2.2 Other publications, which form a part of this specification, will be found in 2.2 of the General specification

3. REQUIREMENTS

3.1 **Preproduction sample.** Preproduction sample requirements shall be in accordance with 3.1 of the General specification

3.2 **Materials** The materials used in the construction of the telephone cabinets shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers for the various components referenced in the General specification are listed in table I.

TABLE I.—*Material references*

AA-O-230 Par. No	Component	AA-O-230 Par No	Component
3.2.2	Adhesives	3 2 4	Filler
3.2 3	Wood	3.2.5	Lacquer
3 2 3 1	Kinds of wood	3 2 6	Hardware
3 2 3.2	Solid wood	3.2 6 1	Face hardware
3 2 3 3	Plywood	3 2 6 2	Locks
3 2 3 3 1	Matching of veneers	3 2 6.2 1	Strike-plate
3 2 3 4	Seasoning, all wood parts	3 2 6 3	Composition glides
3 2 3 5	Varieties of wood	3 2 6 4	Self standards and supports
		3 2 6 5	Other hardware

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE II —*Construction references*

AA-O-230 Par No	Component	AA-O-230 Par No	Component
3 3 2	Tolerances	3 3 9 1	Posts
3 3 4	Joining & assembly	3 3 9 2 1	Bracket foot base
3 3 5	Gluing of joints	3 3 9 3	Built-up stock
3 3 8 2	Dowels		

3.3 **Construction** The general construction requirements of the telephone cabinets and their component parts shall be as specified in 3 3 of the General specification The paragraph numbers for the various components as found in the General specification are listed in table II

3 3.1 *Design* The design of the telephone cabinets shall be as shown in figure 2(1)

3 3.2 *Direction of grain* The grain pattern shall be as shown in figure 2(1)

3 3.3 *Slotting* The cabinets shall be slotted through the fixed shelf and bottom and provided with a concealed opening at the top for telephone wires A channel approximately 3 inches long by 3/4 inch wide by 1/4 inch deep shall be cut in the underside of the top to allow wire to be placed over the center of the back panel

3 3 4 *Plywood parts.*

3 3 4 1 *Tops.* The cabinet tops shall be not less than 5-ply, 1-3/8 inches thick, lumber-core plywood with solid molded edges as shown in figure 2(2) The corners shall be chamfered The border veneers shall be 1-1/2 inches wide and set at 45° angles with the direction of the grain reversed at each axis The size of the bands shall be in accordance with the size of the chamfered corners. The tops shall be positioned as specified in 3 3 8 1 of the General specification.

3 3 4 2 *Doors* The doors shall be of 5-ply, good on two sides 13 16 inch thick lumber-core plywood The doors shall be banded on the top and bottom with 1-1, 2 inch wide (minimum) solid wood before the application of the molded edge Each door shall have a pull as shown in figure 2(1)

3 3 4 3 *Shelves* Each cabinet shall be provided with two adjustable shelves in addition to the fixed shelf The face veneers and the front of all shelves shall match the wood of the cabinet exposed to view in normal use position All shelves shall be 13 16 inch thick and faced on two sides.

3 3 4 4 *Other plywood parts.* The cabinet backs, and bottoms, shall be 5-ply, 13/16-inch thick lumber-core plywood and the ends shall be 5-ply, 3 4-inch thick lumber-core plywood, faced on two sides.

4.3 **Methods of finishing.** The methods of finishing shall be as specified in 3 4 of the General specification.

3.5 **Color and appearance of finish.** The color and appearance of the finish shall be as specified in 3.5 of the General specification.

3.6 **Identification marking.** Identification marking shall be in accordance with 3.6 of the General specification

3 7 **Workmanship** Workmanship shall be in accordance with 3 7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in section 4 of the General specification

5 PREPARATION FOR DELIVERY

(For civil agency procurement the definitions and application of the levels of pack-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

aging and packing shall be in accordance with Fed Std. No 102.)

5 1 **Packaging.** Packaging shall be level A, B, or C, as specified (see 6 2).

5 1 1 *Level A or B* Each cabinet shall be covered and wrapped on the top, sides, front, and back with full pads or blankets of non-abrasive cushioning material The cushioning pads or blankets shall be made of macerated paper, wood-fiber felt, or cellulose wadding conforming to PP-C-843, type II The pads or blankets shall be secured in place with pressure sensitive tape

5 1.2 *Level C* The cabinet shall be packaged in accordance with the suppliers commercial practice

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6 2)

5.2.1 *Level A* Each cabinet, cushioned as specified in 5 1 1, shall be packed in a close-fitting box conforming to PPP-B-636, Class 2, V3c, Style RSC The boxes shall be closed, waterproof sealed with tape, and reinforced with filament tape in accordance with the appendix to the box specification

5 2 2 *Level B* Each cabinet, cushioned as specified in 5 1 1 shall be packed in a close-fitting box conforming to PPP-B-636, Type I, Class 1, Style RSC Closure of the boxes shall be by adhesive applied over at least 75 percent of the flap area or by the two strip tape method as specified in Rule 41, Section 7, of the Uniform Freight Classification, using tape conforming to PPP-T-45

5 2 3 *Level C* The cabinets shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation

5.3 **Marking**

5 3 1 *Civil agencies.* In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with Fed Std No. 123

5 3.2 *Military* In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129

6. NOTES

6.1 **Intended use** The executive office type telephone cabinet in traditional styling was designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies The cabinets should compliment the traditional decor of executive areas when used with other items within the group

6 2 **Ordering data.** Purchasers should exercise any desired options offered herein and, should specify the following.

(*a*) Title, symbol and date of this specification

(*b*) Title, symbol and date of the General specification.

(*c*) When preproduction sample is not required

(*d*) Level of packaging

(*e*) Level of packing

(*f*) Marking requirements

6.3 **Transportation description.** Transportation descriptions and minimum weight applicable to this commodity are

Rail·

Stands, not otherwise indexed by name, wooden, setup
Carload minimum weights
In cars 40' 9' or less in lengths, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds
In cars exceeding 40' 9" in lengths, inside measurements 16,000 18 000, 21 000, 24,000, 30.000 and 40,000 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Motor.

Stands, not otherwise indexed, wooden, setup, in boxes or crates.
Truckload minimum weights.—10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds, subject to rule 115, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


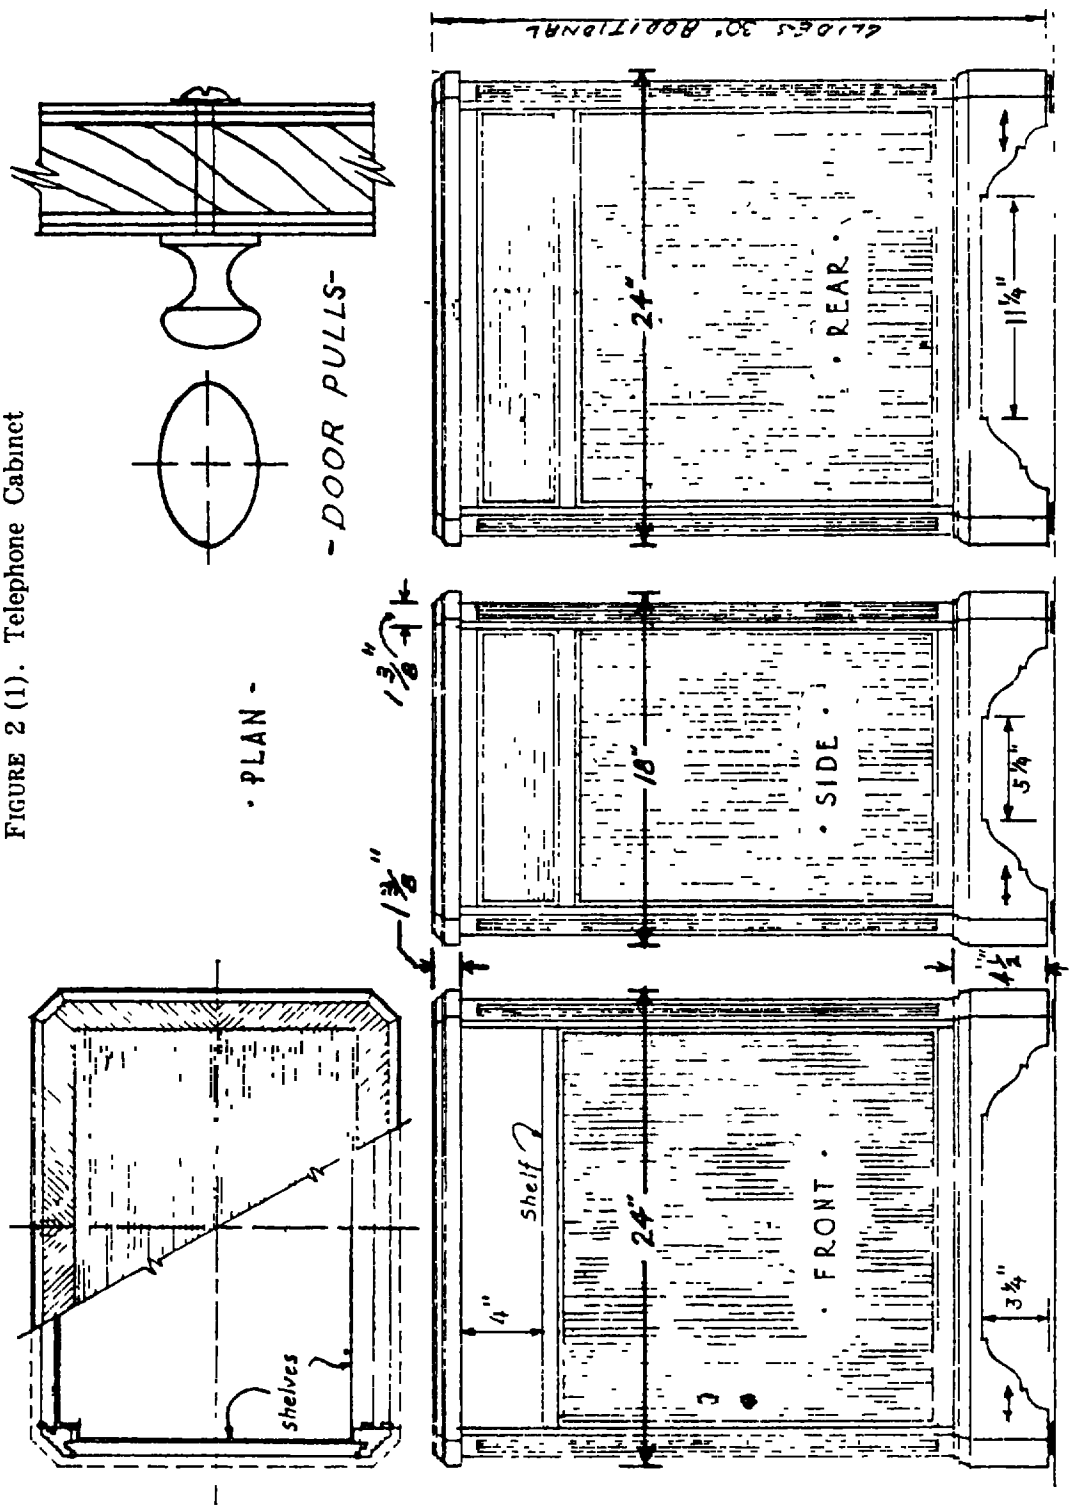


FIGURE 2 (1). Telephone Cabinet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 2 (2). Top, Corner, and Base Detail

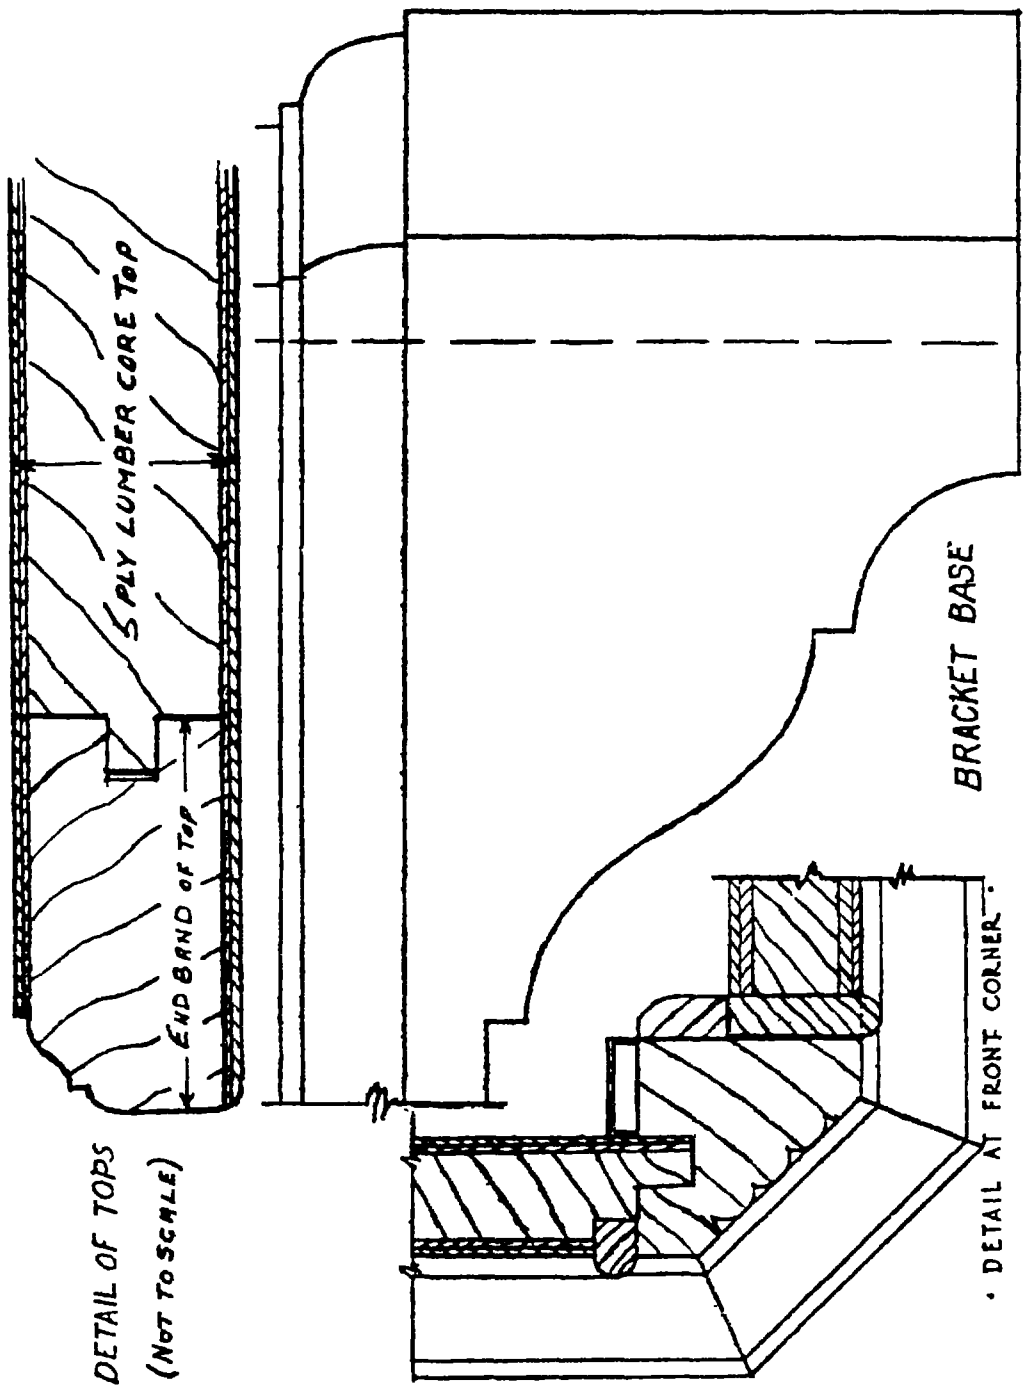

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.