AA-O-230/3a
October 7, 1964

SUPERSEDING
Int. Fed. Spec AA-O-00230/3
February 7, 1964 and
Fed. Spec. AA-C-555
July 28, 1949

FEDERAL SPECIFICATION

OFFICE FURNITURE: COSTUMER, EXECUTIVE TYPE, WOOD, TRADITIONAL, (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope** This specification covers the detailed requirements for the executive office type costumer. General requirements and other information pertaining to the costumer will be found in Federal Specification AA-O-230, Office Furniture, Executive, Type, Wood, Traditional (General Specification).

1.2 **Classification.** The costumer covered by this specification shall be of one type and size as shown in the figures.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issues in effect on the date of invitation for bids, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-230, hereinafter called the General specification.

2.2 Other publications, which form a part of this specification, will be found in 2.2 of the General specification.

3. REQUIREMENTS

3.1 **Preproduction sample.** Preproduction sample requirements shall be in accordance with 3.1 of the General specification.

3.2 **Materials.** The materials used in the construction of the costumer shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers for the various components referenced in the General specification are listed in table I.

TABLE I

AA-O-230 Par No.	Component
3.2.2	Adhesives
3.2.3	Wood
3.2.3.2	Solid wood
3.2.3.4	Seasoning, all wood
3.2.3.5	Varieties of Wood
3.2.4	Filler
3.2.5	Lacquer

3.2.1 *Hardware.* The hat and coat hooks shall be of bronze and of the design and size shown in figure 3 (4). The backs of the hooks shall be concave, having a radius of 7/8 inch. The bronze castings shall have the following chemical composition. 83 percent copper, 4 percent tin, 6 percent lead, and 7 percent zinc. Allowable tolerance shall be ± 0.5 percent. The castings shall be true, without air or sand holes or other defects. All surfaces shall be evenly and smoothly finished. The hooks shall receive one coat of synthetic clear finish which shall be baked.

3.3 **Construction.**

3.3.1 *Design.* The design of the costumer shall be as shown in figure 3(1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.2 *Tolerances.* Tolerances shall be as specified in 3.3.2 of the General specification.

3.3.3 *Gluing.* All joints shall be glued as specified in 3.3.5 of the General specification

3.3 4 *Joining and assembly* Joining and assembly shall conform to 3.3.4 of the General specification

3.3.5 *Shaft.* The shaft shall be 64 inches in height, and shall be one continuous piece of solid or built-up stock which shall be carefully matched with other parts of the costumer for color and wood grain pattern. The shaft shall be reeded as shown in figure 3 (1). Hat and coat hooks (4) as specified in 3.2.1 shall be attached to the top of the shaft by two, 7/8-inch bronze or brass screws and positioned as shown in figure 3 (1).

3.3.6 *Base* The base shall consist of two crossed supports, four filler pieces, four braces and four feet. The crossed supports shall be 21-1/4 inches long, 2-1/2 inches wide by 1-1/2 inches thick, and lap-jointed at the center. The filler pieces shall be securely glued to the cross supports at their intersection The assembly shall be shaped and molded as shown in Figures 3(1), 3(2), 3(3), 3(4). The braces shall be shaped and molded as shown in figures 3(2) and 3(3). The braces shall be glued and doweled or tenoned to the shaft, and glued and screwed to the cross supports. The feet shall be turned as shown in figure 3 (3) and shall be glued and doweled to the cross supports. A lag screw, 3/8 inch by 3 inches, with flat washer, shall be used to secure the base to the shaft.

3.3 7 *Dowels* Dowels shall be as specified in 3.3.8.2 of the General specification.

3.4 Methods of finishing. The methods of finishing shall be as specified in 3 4 of the General specification

3.5 Color and appearance of finish. The color and appearance of the finish shall be as specified in 3.5 of the General specification.

3.6 Identification marking. Identification marking shall conform to 3 6 of the General specification

3.7 Workmanship. Workmanship shall be in accordance with 3.7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in section 4, of the General specification.

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No 102.

5.1 Packaging.

5.1.1 *Level A or B.* Each costumer shall be wrapped in a non-abrasive paper or pads of cushioning material secured in place with tape conforming to PPP-T-76 or by ties of twine.

5.1.2 *Level C.* Costumers shall be prepared for shipment in accordance with the manufacturers normal commercial practice.

5.2 Packing

5.2.1 *Level A.* Each costumer, wrapped as specified in 5.1 1, shall be packed in a fiberboard box conforming to PPP-B-636, class 2, V3C, style RSC. Formed fiberboard interior bracing shall be used to prevent vertical and lateral movement during transit The boxes shall be waterproof sealed with tape conforming to PPP-T-76 and reinforced with bands of filament tape in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.2.2 *Level B.* Each costumer, wrapped as specified in 5.1.1, shall be packed in a fiberboard box conforming to PPP-B-636, type I or II, class 1, style RSC, minimum bursting strength of 275 p.s.i. Formed fiberboard interior bracing shall be used to prevent vertical and lateral movement during transit. Closure of the shipping container shall be by adhesive applied over at least 75 percent of the flap area or by the two strip tape method as specified in Rule 41, section 7, of Uniform Freight Classification, using tape conforming to PPP-T-45.

5.2.3 *Level C.* Costumers shall be packed in accordance with the manufacturer's normal commercial practice in containers conforming to carrier rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military activities.* In addition to any special marking required in the contract or order, shipping containers shall be marked in accordance with applicable paragraphs of Military Standard MIL-STD-129.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. The executive type office costumer was designed for use in executive office, courtrooms, libraries, and conference rooms of Federal agencies. They should be used to compliment the traditional decor created by the use of other traditional executive type office furniture within this group.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, symbol and date of this specispecification.
(b) Title, symbol and date of the General specification.
(c) When preproduction sample is not required.
(d) Level of packaging.
(e) Level of packing.
(f) Marking requirements.

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are.

Rail:


Costumers, wooden (Specify Setup or Knocked Down)
Carload minimum weights:
In cars 40' 9" or less in length, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.
In cars exceeding 40' 9" in length, inside measurements, 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Motor:

Costumers, wood. (Specify Setup or Knocked Down)
Truckload minimum weights—10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 3 (1). Costumer.

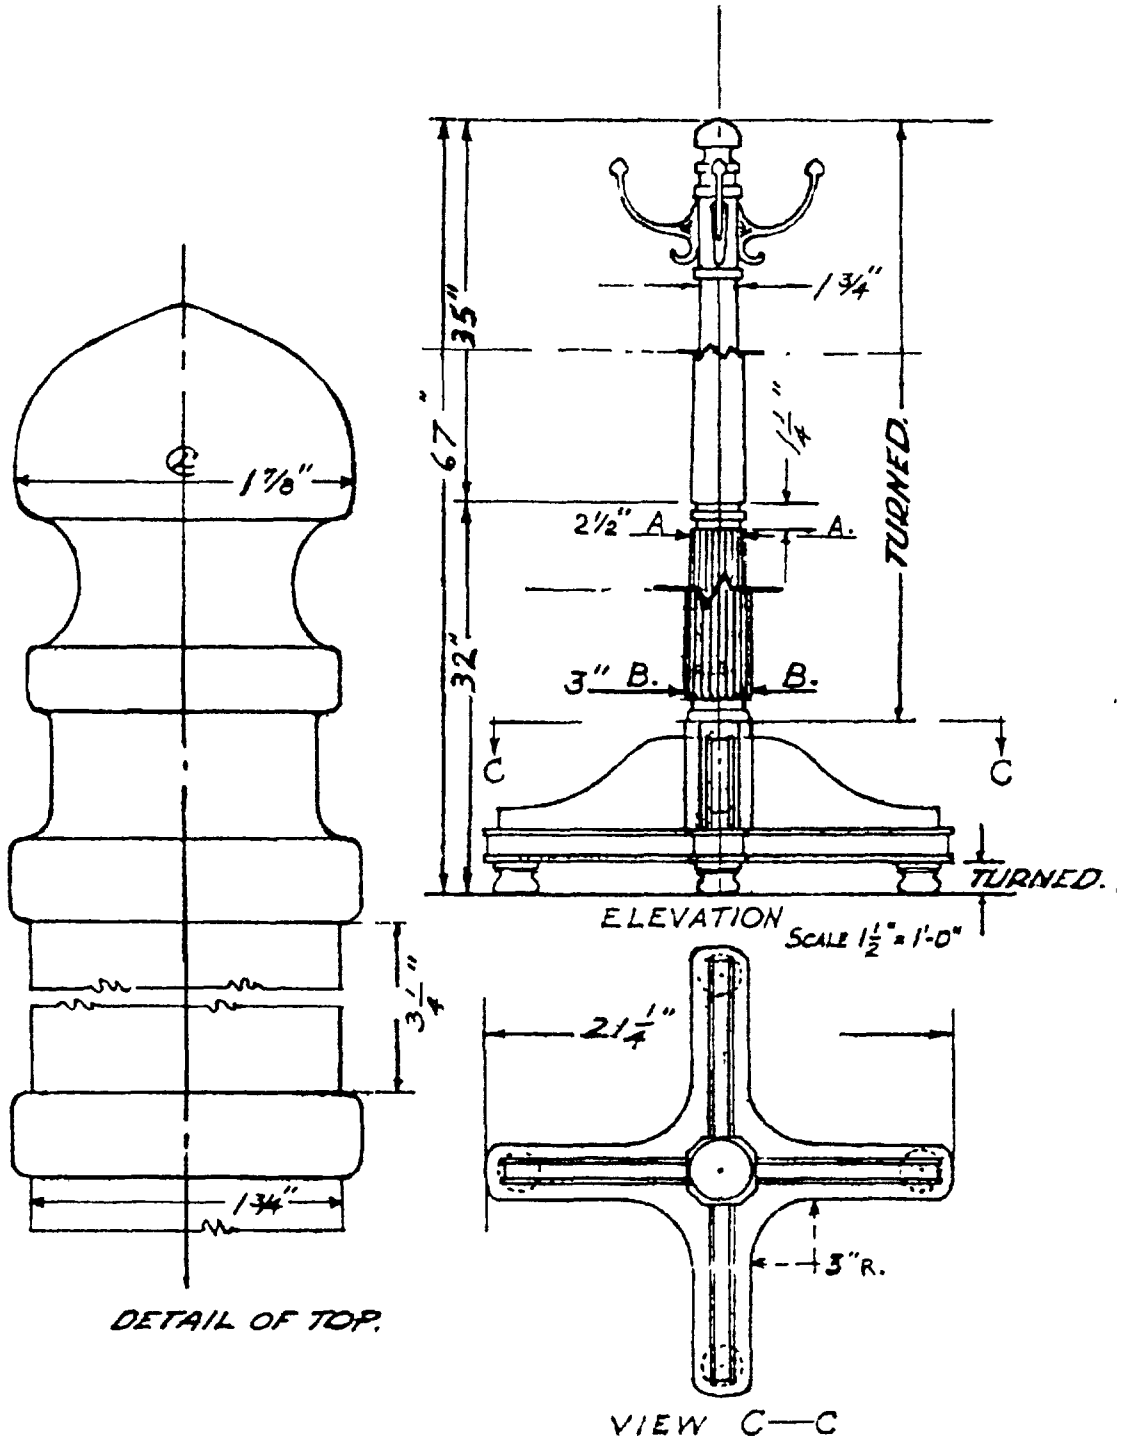


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 3 (2). Section A-A and Base Section.

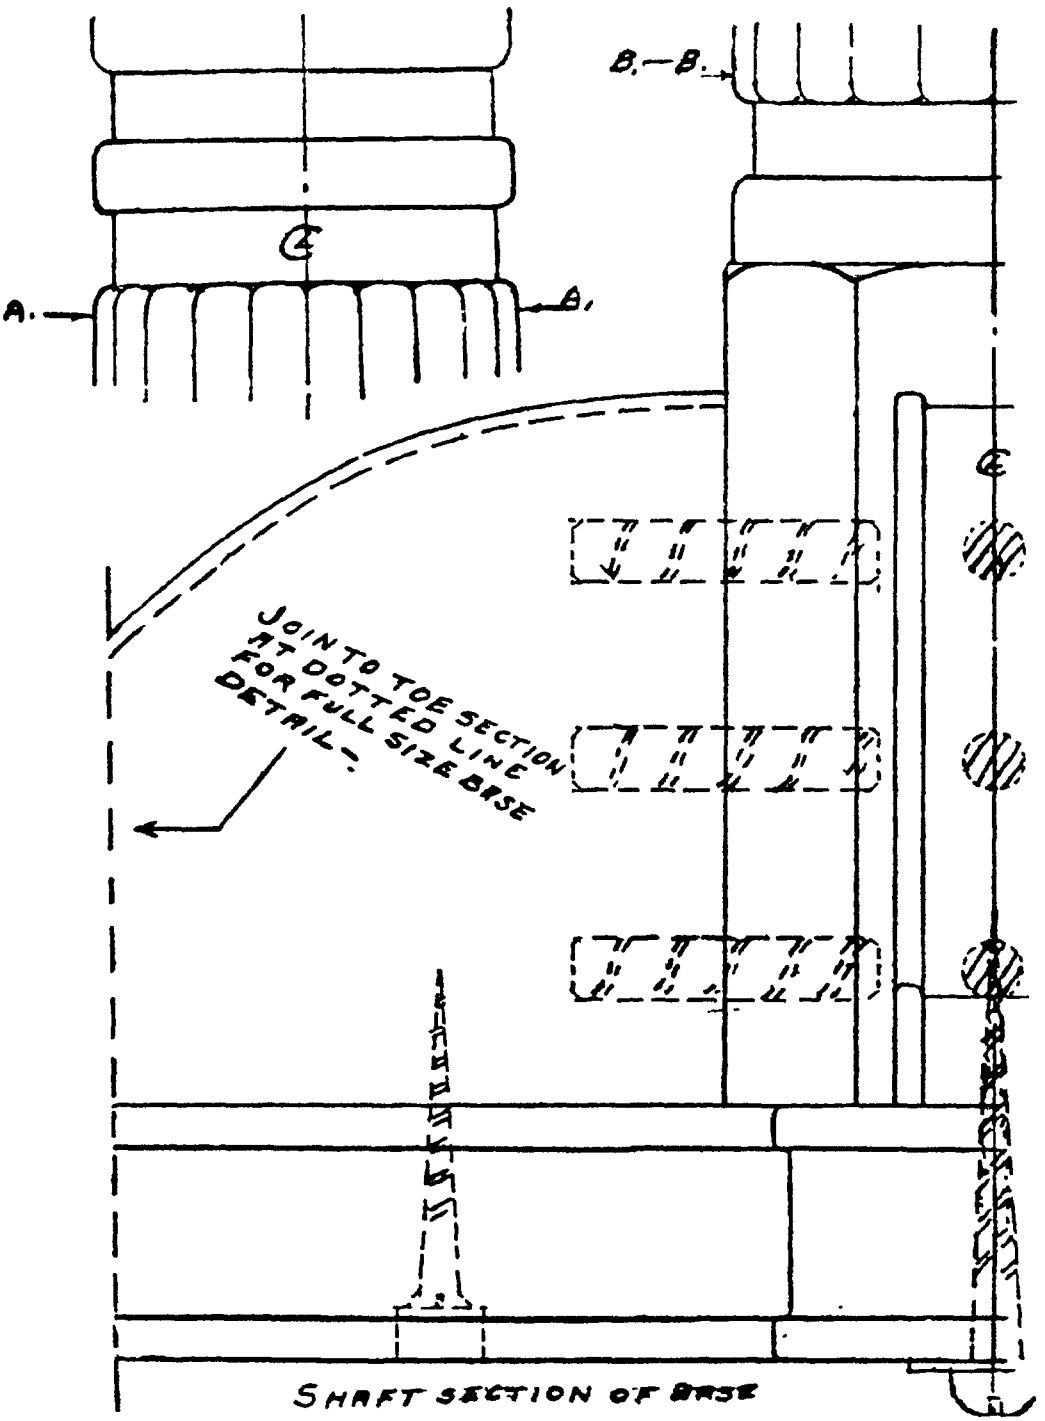


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 3 (3). Base Section

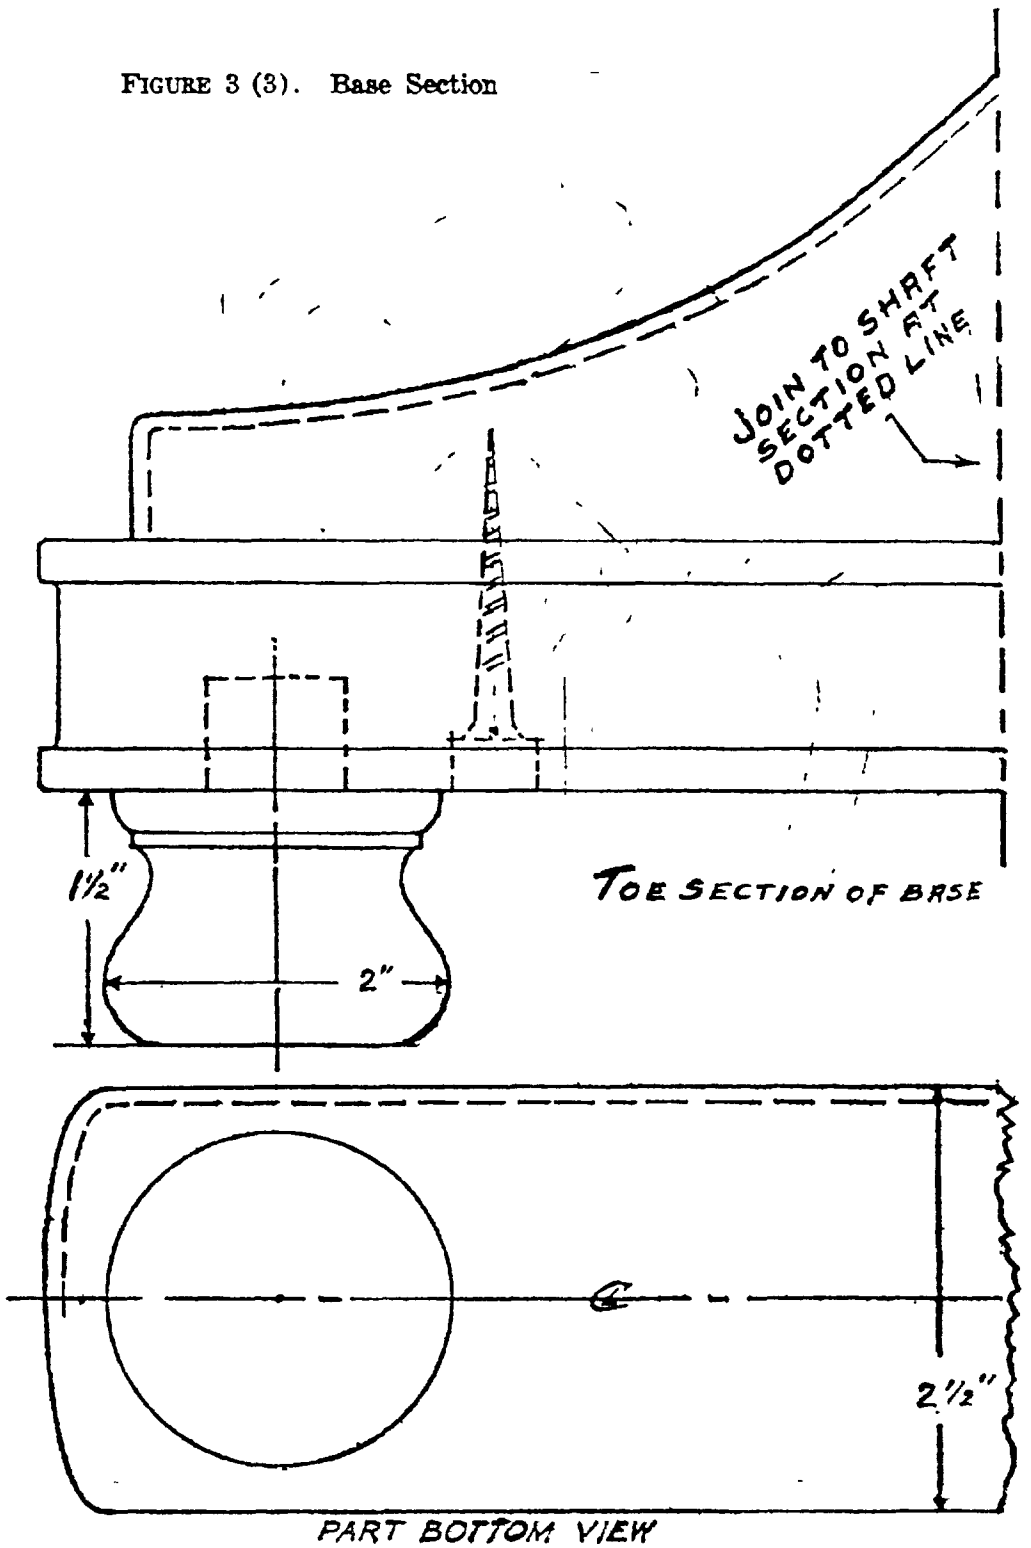

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 3 (4). Shaft Cross Section and Hook.

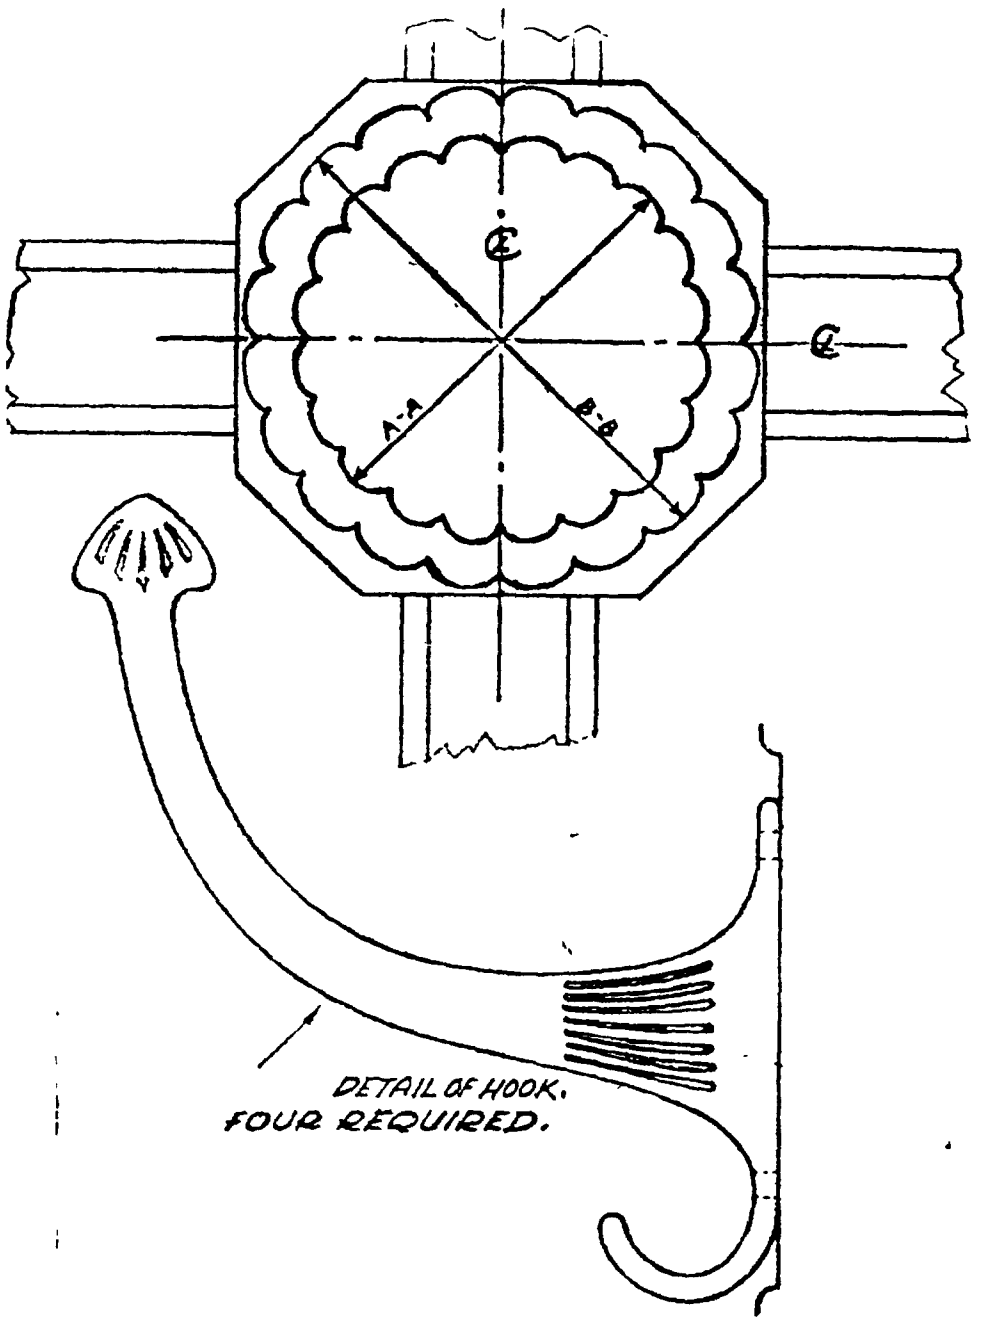

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.