AA–O–230/5a
October 7, 1964
SUPERSEDING
Int. Fed. Spec. AA–O–00230/5
February 7, 1964 and
Fed. Spec. AA–T–108a
May 25, 1954

FEDERAL SPECIFICATION

OFFICE FURNITURE: TABLES, EXECUTIVE TYPE, WOOD, TRADITIONAL, (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements in traditional design for executive office tables. General requirements and other information pertaining to the tables will be found in Federal Specification AA–O–230, Office Furniture, Executive Type, Wood, Traditional (General specification).

1.2 Classification. The executive office tables covered by this specification shall be of the following types, classes, and sizes as specified. (See 6.4)

1.2.1 *Types, classes, and sizes:*

Type I—Occasional tables.

Class 1—Telephone table—(24 inches by 18 inches by 30 inches high).

Class 2—End table.

Size 1—26 inches by 14 inches by 22 inches high.

Size 2—26 inches by 18 inches by 22 inches high.

Class 3—Coffee table—(48 inches by 20 inches by 16 inches high).

Type II—Conference tables.

Class 1

Size 1—48 inches by 30 inches by 30 inches high (one drawer).

Size 2—72 inches by 36 inches by 30 inches high (two drawers).

Class 2—Four drawers.

Size 1—84 inches by 42 inches by 30 inches high.

Size 2—96 inches by 48 inches by 30 inches high.

Size 3—120 inches by 48 inches by 30 inches high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Size 4—144 inches by 48 inches by 30 inches high.

Note: The table heights do not include glides.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issues in effect, on date of invitation for bids, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-230, hereinafter called the General specification.

2.2 Other publications, which from a part of this specification will be found in 2.2 of the General specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with 3.1 of the General specification.

3.2 Materials. The materials used in the construction of the tables shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers for the various components referenced in the General specification are listed in table I.

TABLE I—*Material references*

AA-O-230 Par. No.	Component
3.2.2	Adhesives
3.2.3	Wood
3.2.3.1	Kinds of wood
3.2.3.2	Solid wood
3.2.3.3	Plywood
3.2.3.3.1	Matching of veneer plies
3.2.3.4	Seasoning, all wood parts
3.2.3.5	Varieties of wood
3.2.4	Filler
3.2.5	Lacquer
3.2.6	Hardware
3.2.6.1	Face hardware
3.2.6.5	Other hardware

3.2.1 *Glides.* Glides for all tables, except type II, class 2, shall be a minimum of 1 inch in diameter, of the rubber-cushion nail type, with lower face of stainless steel which shall have an oxidized copper finish. Glides for the type II, class 2 tables shall have a dark brown composition base. There shall be no metal to metal contact after the glides are applied. The glides shall have a 13 gage wire nail with a needle point extending approximately 5/8 inch above the rubber cushion.

3.2.2 *Bolts and washers.* The hanger bolts for the type I tables shall be not less than 1/4 inch in diameter. The hanger bolts for the type II tables shall be not less than 3/8 inch in diameter and all hanger bolts shall be of such length as required to penetrate not less than One-half the diagonal thickness of the leg. The washers shall be not less than 1/16 inch thick by 7/8 inch in diameter. A bolt, nut, and washer shall be furnished as a unit for assembly.

3.2.3 *Rubber.* The rubber bumper shall be formed of live rubber and shall be of a color approximately that of the walnut color of the tables. The rubber shall be shaped and applied as shown in figure 5(12).

3.3 Construction.

3.3.1 *Design.* The design of the tables

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

shall be as shown in figures 5(1) through 5(13).

3.3.2 *Tolerances.* Tolerances shall be as specified in 3.3.2 of the General specification.

3.3.3 *Direction of grain.* The grain pattern shall be as shown in the applicable figures.

3.3.4 *Joining and assembly.* Joining and assembly shall be in accordance with 3.3.4 of the General specification.

3.3.5 *Gluing.* Gluing of all joints shall conform to 3.3.5 of the General specification.

3.3.6 *Tops.* The tops and shelves shall be 5-ply construction and shall be of the thicknesses indicated in table II. The solid edges shall be applied and the tops shall be dressed to a uniform thickness before the cross-banding and face veneers are applied. Each table top shall have a border of straight veneer set at a 45° angle with the direction of grain reversed at each axis of the table tops. The grain match shall start at the axis and the same grain pattern shall be used for the entire border. The width of the border shall be as indicated in table II.

3.3.7 *Legs.* The legs of the tables shall be solid or of built-up stock as specified in 3.3.9.1 of the General specification. A panel of highly figured burl, of either walnut or carpathian elm, not less than 1/28 inch thick shall be glued to the two exposed sides of the legs as shown in the applicable figure. All corner legs shall be reeded on the two outsides faces as shown in the applicable figures with the number of reeds as indicated in table II. All legs shall be milled to fit the inside of the brass or bronze shoes.

3.3.8 *Shoes.* The shoes shall be cast of brass or bronze and be of the designs and sizes shown in the applicable figures. The shoes shall be square in shape and tapered, open at the bottom, and shall have a small bead around the top edge. The height of the shoes shall be in proportion to the size of the legs. All edges of the shoes shall be slightly eased. The flat surface of the shoe shall fit flush with the surface of the leg. The shoes shall be secured with two oval-headed brass or bronze screws on the inside of the leg.

3.3.9 *Drawers.* The drawer sides shall be dovetailed to the front and back. Drawer fronts shall be 5-ply, lumber-core construction, hardwood plywood or of solid wood, not less than ¾ inch thick, and shall have applied molded edges as shown in figures 5(9) and 5(10). The sides, backs, bottom face and partitions shall be as specified in 3.2.3.5 of the General specification. The backs and sides shall be the same height as the fronts, and shall be flush on the top edges. The top edge of the drawer sides shall be coved, starting approximately 1½ inches from the front and continuing to within 1½ inches of the back. The sides and backs shall be 7/16 inch thick. The drawer bottoms shall be 3-ply, ¼ inch thick, and shall be set in grooves in the front, sides, and back, and shall be reinforced at the corners and sides with not less than eight glue blocks. The partitions shall be ⅜ inch thick. Each drawer shall be fitted with a convenience tray of the design shown in figure 5(9). The tray shall be neatly fitted and floating on solid wooden blocks screwed to the bottom of the drawer. Each drawer shall be fitted with a brass or bronze pull as shown in figure 5(3).

3.3.9.1 *Dustproofing.* Each drawer shall be completely cased in by drawer stretchers, drawer bearers, and a dust shield. The dust shield shall be not less than 3/16 inch thick or less than 3-ply plywood, and shall fit into grooves in the drawer bearers and the rails. A full-width stretcher shall be provided on both sides of each drawer.

3.3.10 *Knock-down construction.* All tables, except type I, class 1 and type 1, class 2, size 2, shall be of knock-down construc-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

tion. All pilot holes shall be accurately drilled to match bolt or screw holes in adjoining parts. Hanger bolts shall be screwed into the legs with an adequate amount of the bolt protruding to enable it to penetrate through the nut a minimum of 1/8 inch and firmly secure the adjoining member. Washers and nuts shall be placed on each bolt. All knock-down table legs shall have one hanger bolt except type II, class 2, which shall have two in each leg.

3.4 Detailed construction. The tables covered by this specification shall be constructed as shown in the applicable figures and as specified herein and be of the dimensions for tops, legs and drawers as shown in table II.

3.4.1 *Type I, class 1 table.* The type I, class 1 tables shall be as shown in figure 5(1). The tops shall be 13/16 inch thick and constructed as specified in 3.3.6. The legs shall be as specified in 3.3.7.

3.4.1.1 *Aprons.* The aprons shall be of 5-ply lumber-core plywood or of solid exposed wood and shall be not less than 3/4 inch thick by 3 1/4 inches wide. The aprons shall be joined to the legs by mortise and tenon, the mortise shall be not less than 1/2 inch deep, the tenons shall be not less than one-third the thickness of the rails or less than 1/4 inch. The aprons shall be secured to the top by four steel angle brackets, fastened by 3/4-inch No. 10 screws. Each side of the angle bracket shall be not less than 3/4 inch long by 1/8 inch thick. Rails shall be not less than 3/4 inch thick and shall be grooved for the dust panel. End rails shall be 2 1/4 inches wide and shall support the drawer. The front and back rails shall be 1 5/8 inches wide. The end and back rails shall be secured to the aprons by screws as shown in figure 5(2), and the front rail shall be tenoned into the legs. All rails shall be faced with a molding as shown in figure 5(2) and the front rail shall be tenoned into the legs. All rails shall be faced with a molding as shown in figure 5(2) which shall continue around the legs, or the rails and dust panel may be omitted and the drawer supported by an upper shelf. The upper shelf shall be not less than 3/4 inch thick 5-ply lumber-core plywood. The upper shelf shall be secured to the aprons by the same method as rails and as shown in figure 5(2), with the molding applied to all edges of the shelf and mitred around the legs. As an alternate method of attaching the aprons to the top, 3/4 by 3/4 inch solid wood cleats, of any of the woods specified for framing parts in table II of the General specification, may be used in lieu of the steel brackets. The cleats shall be screwed two ways into the apron and into the top and shall be thoroughly glued to the apron.

3.4.1.2 *Drawer guides.* The drawer guides shall be solid wood as specified for framing parts in table II of the General specification. The guides shall be not less than 3/8 inch thick by 9/16 inch wide and shall extend along the drawer side not less than two thirds of the depth of the drawer, and shall be secured to the bearer by glue and nails.

3.4.1.3 *Fixed shelf.* The fixed shelf for the type I, class 1 and the type I, class 2, size 2 tables shall be not less than 13/16 inch thick and be of the same construction as the tops except that the border veneers will not be required. The edges of the shelf shall be shaped as shown in figure 5(2). The shelf shall be housed into the legs not less than 1/2 inch and secured by countersunk screws into the leg from the underside of the shelf. The shelf opening shall be 4 inches.

3.4.2 *Type I, class 2 table.* The type I, class 2 tables shall be as shown in figure 5(4) and constructed as herein specified. The tops shall be as specified in 3.3.6 and be 13/16 inch thick.

3.4.2.1 *Aprons.* The aprons and method of securing them to the top shall be as specified for type I tables in 3.4.1.1 except the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

width of the apron shall be 2½ inches and the molding shall be applied to the bottom edge of the apron as shown in figure 5(6). The aprons shall butt-join the legs and a corner brace shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than ¾ inch thick and of the same width as the aprons, and shall be secured to the aprons by glue and screws. The screws shall be not less than 1¼ inch No. 8, and shall be set at right-angles to the aprons.

3.4.2.2 *Legs.* The legs shall be as specified in 3.3.7 and be of the dimensions and number of reeds as shown in table II. The legs shall be secured to the aprons by a rail bolt which shall be not less than ¼ inch diameter and of such length to pass through the corner brace and penetrate the legs as specified in 3.2.2 or not less than 1¼ inches.

3.4.3 *Type I class 3 table.* The type I, class 3 table shall be as shown (in part) in figure 5(7) and constructed as herein specified.

3.4.3.1 *Tops.* The tops shall be constructed as specified in 3.3.6 and shall be not less than 13/16 inch thick.

3.4.3.2 *Aprons.* The aprons and method of attachment to top shall be as specified for type 1, class 1 table, except that the width of the apron shall be 3 inches and the molding shall be applied to the bottom edge of the apron as shown in figure 5(6). The aprons shall butt-join the legs and a corner brace shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than ¾ inch thick and be of the same width as the aprons, and shall be secured to the aprons with glue and screws. The screws shall be not less than 1¼ inch by No. 8 and shall be set at right angle to the aprons.

3.4.3.3 *Legs.* The legs shall be as specified in 3.3.7 and be of the dimension and number of reeds as indicated in table II. The legs shall be secured to the aprons by a rail bolt which shall be not less than ¼ inch in diameter and of such length to pass through the corner brace and penetrate the legs as specified in 3.2.2 or not less than 1¼ inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE II—*Dimensions (in inches)*

Type Class Size	Top								Legs				Drawers			
	Ht.	W.	D.	Th.	Projection (from legs)		Corner chamfer	Border	No. Req.	Size		No. Reeds	No. Req.	Face		Depth not less than
					Fr. & Bk.	Ends				Top	Bottom			Width	Height	
Type I																
Class 1	30	24	18	13/16	5/8	5/8	0	1-1/2	4	1-3/4	1	3	1	20-1/4	3-1/4	15
Class 2,																
size 1	22	26	14	13/16	5/8	5/8	0	1-1/2	4	1-5/8	1	3	0	0	0	0
size 2	22	26	18	13/16	5/8	5/8	0	1-1/2	4	1-5/8	1	3	0	0	0	0
Class 3	16	48	20	1-1/8	7/8	1-3/4	1-3/8	2	4	2	1	3	0	0	0	0
Type II																
Class 1,																
size 1	30	48	30	1-1/8	7/8	1-3/4	1-3/4	3	4	2-1/4	1-1/2	4	1	22	3-1/4	20
size 2	30	72	36	1-1/8	1-1/4	2-1/2	2	3	4	2-1/2	1-3/4	4	2	22	3-1/4	16
Class 2,																
size 1	30	84	42	1-3/8	1-1/2	3	2-1/2	3-1/2	5	2-3/4	2	5	4	22	3-1/4	16
size 2	30	96	48	1-3/8	1-3/4	3	2-1/2	3-1/2	5	2-3/4	2	5	4	22	3-1/4	18
size 3	30	120	48	1-3/8	2-1/4	4	3	4	5	3	2-1/4	6	4	22	3-1/4	18
size 4	30	144	48	1-3/8	2-1/4	4	3	4	5	3	2-1/4	6	4	22	3-1/4	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.4.4 *Type II, class 1.* The type II, class 1 tables shall be as shown in figure 5(8). The tops shall be as specified in 3.3.6 and be of the thickness for each size as indicated in table II.

3.4.4.1 *Aprons.* The front and back aprons shall be of 5-ply lumber-core plywood or of exposed solid wood not less than ¾ inch thick by 3¼ inches wide and shall have a rail and molding below the apron as shown in figure 5(10). The apron shall butt-join the legs without tenons. The end aprons shall be 4 inches wide and shall have a molding applied to the lower edge of the apron face as shown in figure 5(10). A corner brace shall be dadoed or dovetailed into the aprons. The corner brace shall be not less than ¾ inch thick and the same width as the aprons and shall be secured to the aprons by glue and not less than two screws at each joint. The screws shall be not less than 1¼ inch No. 8, and shall be set at right-angle to the apron. The aprons shall be secured to the top by screws through holes bored and counterbored into the aprons or by angle brackets as specified in 3.4.1.1. The screws used to secure the aprons to the top shall be not less than size No. 10 and of such length that not less than three-fourths the thickness of the top shall be penetrated. The screws or angles shall be not more than 16 inches apart. Rails shall butt-join the legs and shall be secured to the bottom edge of the apron by glue and screws. The screws shall be not less than 1½ inch No. 8, and the heads shall be countersunk and countersinks shall be sanded smooth. The rails shall be of the same wood as the aprons and shall be not less than ¾ inch thick by 2⅛ inches wide. Alternately the rails may be of the wood shown in table II of the General specification for unexposed parts, and have an exposed wood molding applied as shown in figure 5(9). The rails shall be grooved to receive the dust panel.

3.4.4.2 *Drawers.* The drawers shall be constructed as specified in 3.3.9 and be of the size and quantity shown in table II. The drawers shall be supported by full width and length drawer stretchers and full length drawer bearers and aligned by drawer guides as specified in 3.4.1.2.

3.4.4.2.1 *Drawer stretchers.* The drawer stretchers shall be not less than ¾ inch thick and shall be not more than 1/32 inch narrower than the aprons. The drawer stretchers shall be tenoned into the aprons not deeper than ⅜ inch, and shall be secured to the aprons by glue and full-length glue blocks and shall be secured to the top in the same manner as the aprons. The drawer bearers shall be not less than ¾ inch thick by 2 inches wide. The bearers shall butt-join the rails and shall be grooved on one side to receive the dust panel. Each drawer bearer shall be secured to the drawer stretcher by glue and not less than three, 1½ inch No. 8 screws with the heads countersunk flush.

3.4.4.3 *Legs.* The legs shall be constructed as specified in 3.3.7 and be of the dimensions and number of reeds for each size specified in table II. The legs shall be secured to the apron by hanger bolts. The bolts shall be not less than ⅜-inch diameter by such length as is required to pass through the corner brace and penetrate each leg as specified in 3.2.2 or not less than 1½ inches.

3.4.5 *Type II, class 2.* The type II, class 2 (four drawer) tables shall be as shown in figures 5(11) and 5(12). The tops shall be constructed as specified in 3.3.6 and of the thickness indicated in table II.

3.4.5.1 *Aprons.* The aprons, and the method of securing to tops, and corner braces shall be the same as specified for tables in 3.4.4.1, except that all aprons shall be 3¼ inches high and the rail shall continue all the way around. The rails shall be of the same dimension and material as those specified in 3.4.4.1 except that the molding shall be omitted and a rubber bumper shall be applied to the rail as shown in figure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5(12). The rail and bumper shall butt-join the legs.

3.4.5.2 *Center stretchers.* Two center stretchers shall run lengthwise and be spaced to receive and secure the center leg. The center stretchers shall have spacer blocks as shown in figure 5(11), and shall be secured to the aprons and tops the same as the drawer stretchers for the type II, class 1 tables and as specified in 3.4.4.2.1. The drawer stretchers shall be as specified in 3.4.4.2.1 and shall be tenoned into the center stretchers and secured thereto by glue and by glue blocks and to the aprons and tops as specified in 3.4.4.2.1. The drawer bearers and provision for tenoning dust panels into bearers and rails shall be same as specified in 3.4.4.2.1 and drawer guides shall be as specified in 3.4.1.1.

3.4.5.3 *Drawer.* The drawers shall be constructed as specified in 3.3.9 and be of the applicable sizes and quantities as shown in table II.

3.4.5.4 *Legs.* The legs shall be constructed as specified in 3.3.7 and be of the dimensions, and the number of reeds as shown in table II for each size table. The corner legs shall be reeded on the two outside corners only, and the center leg shall be reeded on the faces towards the drawers. The center leg shall fit between the two center stretchers and shall be secured to the stretchers by not less than two ⅜-inch bolts in staggered positions. The corner legs shall be secured to the aprons with two hanger bolts through each corner brace.

3.5 Methods of finishing. The methods of finishing shall be as specified in 3.4 of the General specification.

3.6 Color and appearance of finish. The color and appearance of the finish shall be as specified in 3.5 of the General specification.

3.7 Identification marking. Identification marking shall be in accordance with 3.6 of the General specification.

3.8 Workmanship. Workmanship shall conform to 3.7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in Section 4 of the General specification.

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A or B.*

5.1.1.1 *Assembled tables.* The drawer shall be secured in the closed position with metal drawer clips. The metal clips shall be provided with cushioning to prevent marring of the exposed surfaces of the table. The legs and points of contact between the table, interior blocking and bracing, or inner walls of the container shall be protected with cushioning material fabricated in the form of pads or blankets. The cushioning material shall be anyone of the following materials or combinations of these materials to provide built-up cushioning of not less than ½ inch thick:

Macerated paper, plain.

Macerated paper, tissue-faced.

Shredded paper.

Wood wool.

Wood fiber felt.

Cellulose wadding.

Excelsior (sealed ends).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Cotton wadding.

Laminated cellulose wadding backed with corrugated fiberboard.

Three inches of the pad to be used on the legs shall be folded under the leg and the end of the pads tightly tied around the bottom part of each leg. The cushioning material shall be secured by spiral ties of minimum 30-pound tensile strength jute, sisal, manila, or cotton twine having the spiral winding spaced not more than 2½ inches apart.

5.1.1.2 *Knocked-down tables.* The hardware not attached to the disassembled components of the tables shall be placed in a cotton cloth draw-string bag and the bag secured. The bagged hardware shall be placed in the drawer and secured. The drawer shall be secured in the closed position with metal drawer clips. The metal clips shall be provided with cushioning to prevent marring of the exposed surface of the table. The disassembled components of the tables shall be separately wrapped with cushioning material and the wrap secured as specified in 5.1.1.1.

5.1.2 *Level C.* The tables shall be packaged in accordance with the suppliers commercial practice.

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Each table, packaged as specified in 5.1, shall be covered with a shroud constructed of material conforming to UU–P–271, class H or M. All seams of the shroud shall be sealed with adhesive conforming to MIL–A–140. The shrouded table shall be packed in any of the containers conforming to the following specifications at the option of the contractor:

Specification	*Type or Class*
PPP–B–585	Class 3 use
PPP–B–591	Class II
PPP–B–601	Overseas type
PPP–B–621	Class 2
PPP–B–640	Class2, grade A

Closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.2.2 *Level B.* Each table, packaged as specified in 5.1, shall be packed in a box conforming to PPP–B–591, class 1; or to PPP–B–640, class 1, grade A or to PPP–B–636, type I, class 1. Sealing and closure shall be in accordance with the appendix to the applicable box specification.

5.2.3 *Level C.* The tables shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military activities.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL–STD–129.

6. NOTES

6.1 **Intended use.** The executive office type tables in traditional styling covered by this specification were designed for use in executive offices, courtrooms, libraries and conference rooms of Federal agencies. The tables should compliment the traditional decor of executive areas when used with other furniture items within the group.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, symbol and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(*b*) Title, symbol and date of the General specification.

(*c*) Type, class, and size, if applicable.

(*d*) When preproduction sample is not required.

(*e*) Level of packaging.

(*f*) Level of packing.

(*g*) Marking requirements.

6.3 Cross reference data. The following is a correlation of new item designations with those of AA-T-108a:

As listed in AA-O-230/5	*As listed in AA-T-108a*
Type I, *Occasional Tables:*	
Class 1, Telephone table	Type I, Size 1
Class 2, End tables	
Size 1	Type I, Size 2
Size 2	(New item)
Class 3, Coffee table	Type I, Size 11
Type II, *Conference tables:*	
Class 1	
Size 1	Type I, Size 4
Size 2	Type I, Size 6
Class 2, Four drawers	
Size 1	Type I, Size 7
Size 2	Type I, Size 8
Size 3	Type I, Size 9
Size 4	Type I, Size 10

6.4 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tables, not otherwise indexed by name, wooden.

Carload minimum weights:

In cars 40'9" or less in length, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements, 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.


Motor:

Tables, not otherwise indexed, wooden.

Truckload minimum weights—10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(1). Telephone Table.
Type I, Class 1, Table

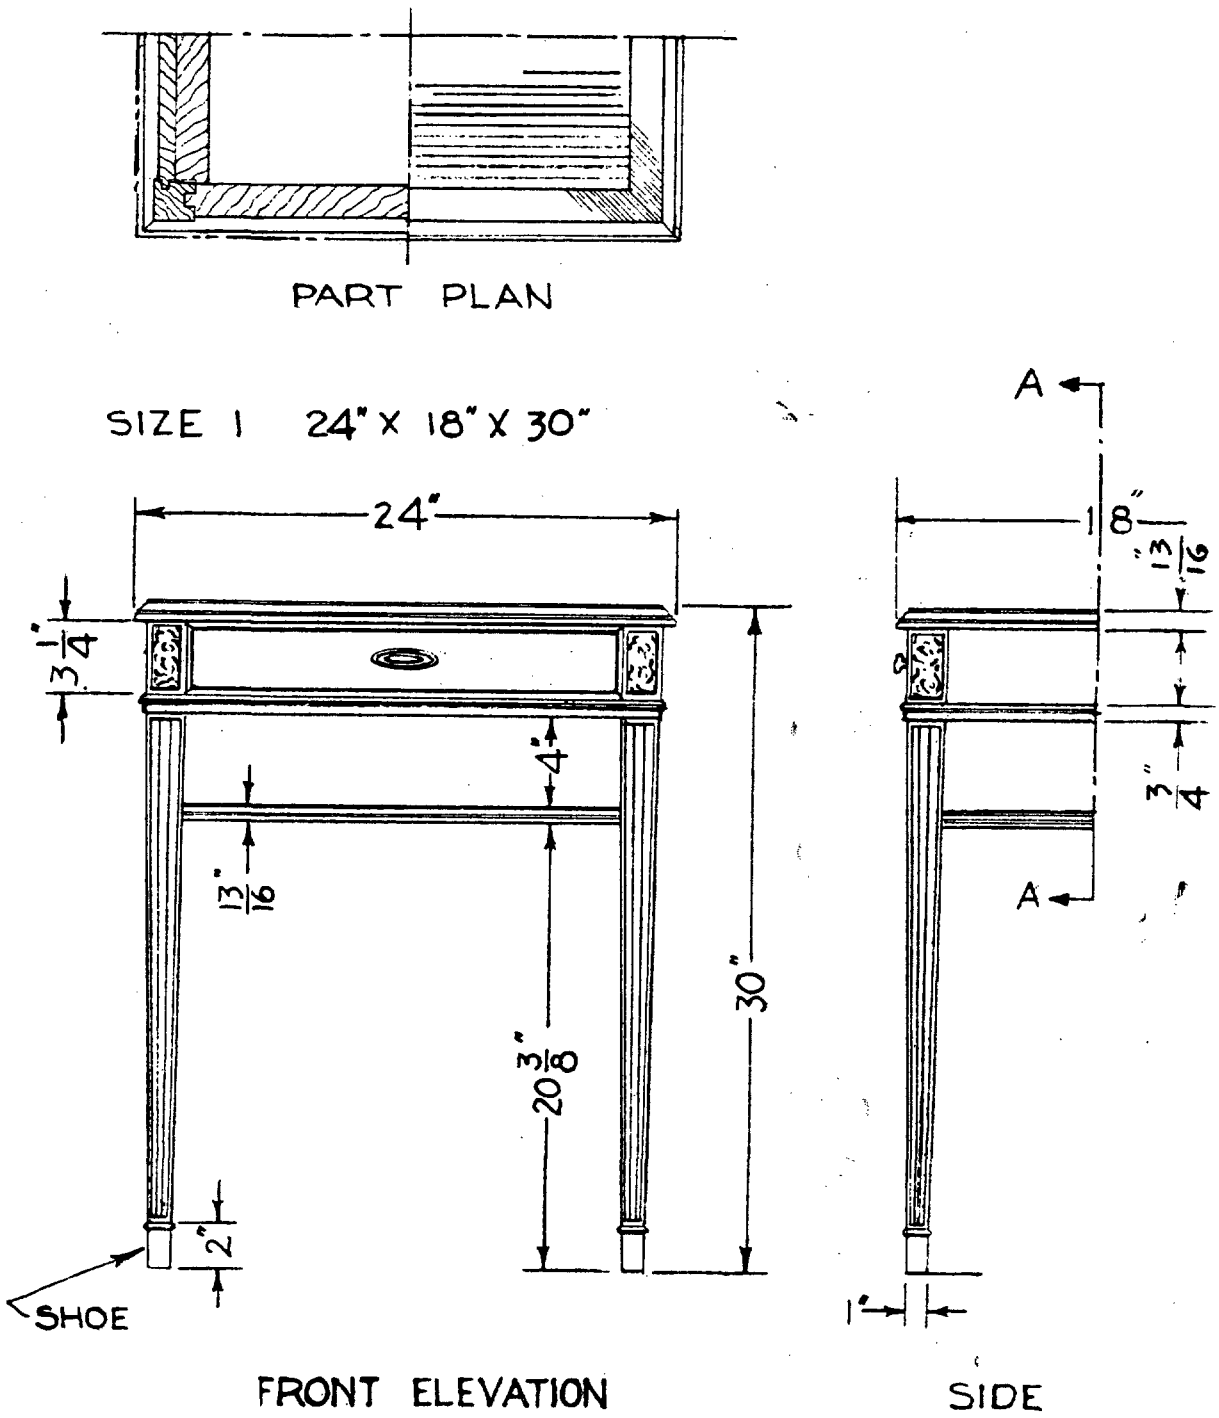


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(2). Leg Section, A-A, B-B, and C-C

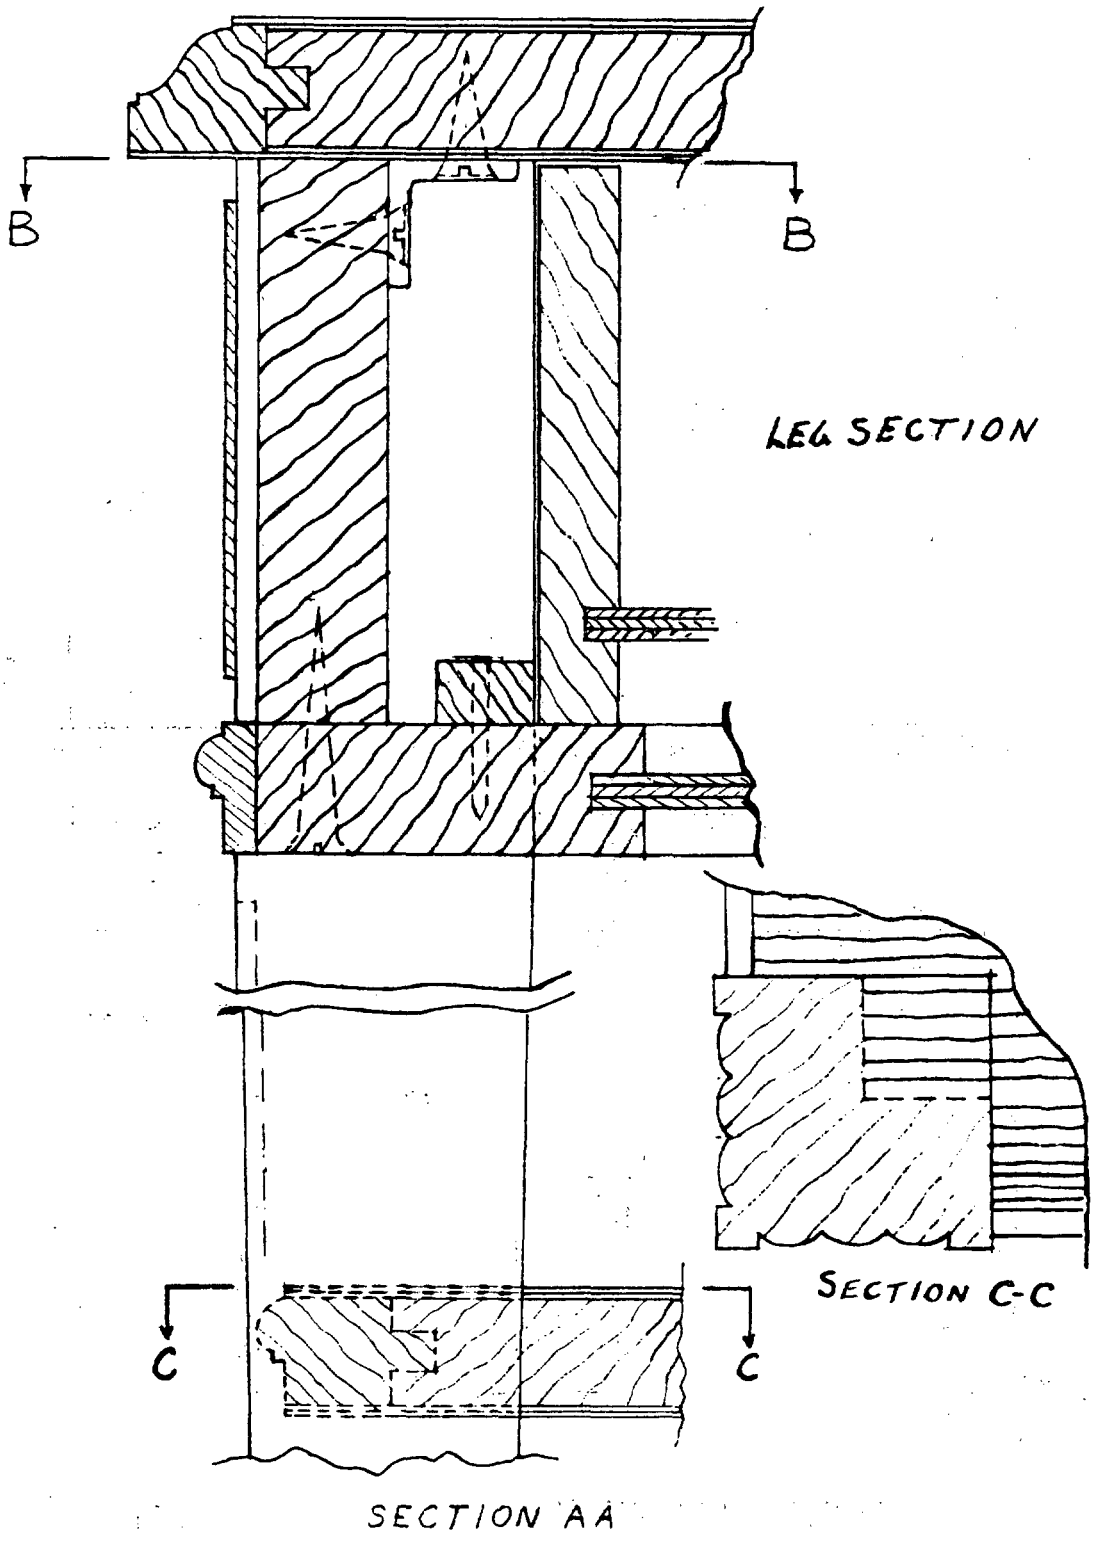


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(3). Section B-B and Pull

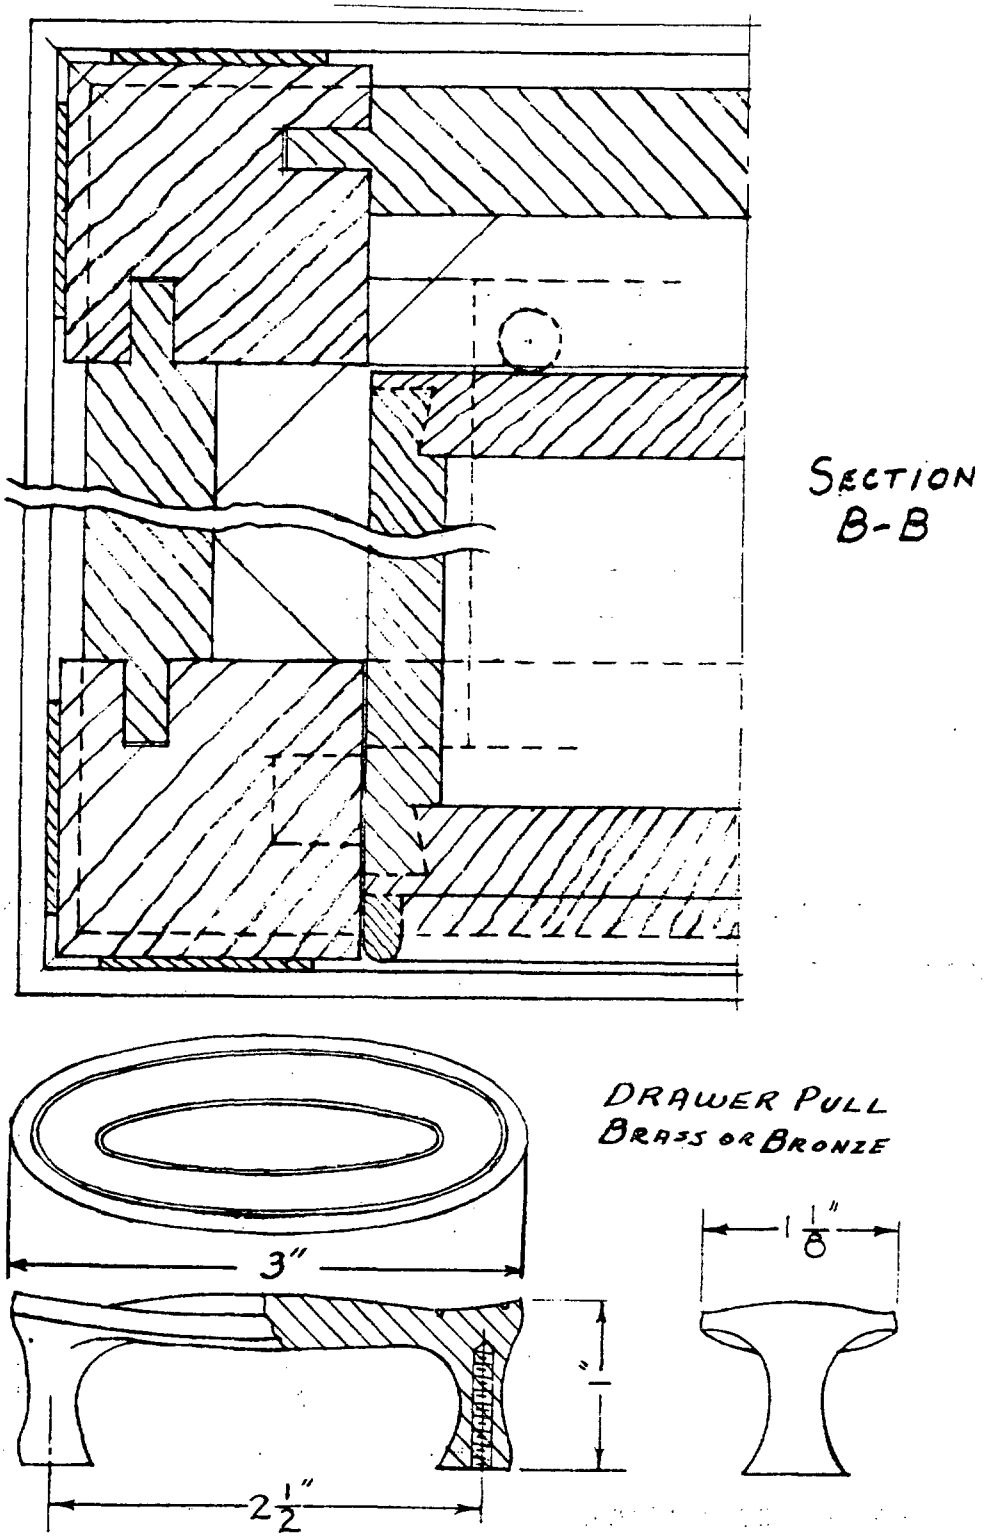


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(4). End Table
Type I, Class 2, Size 1

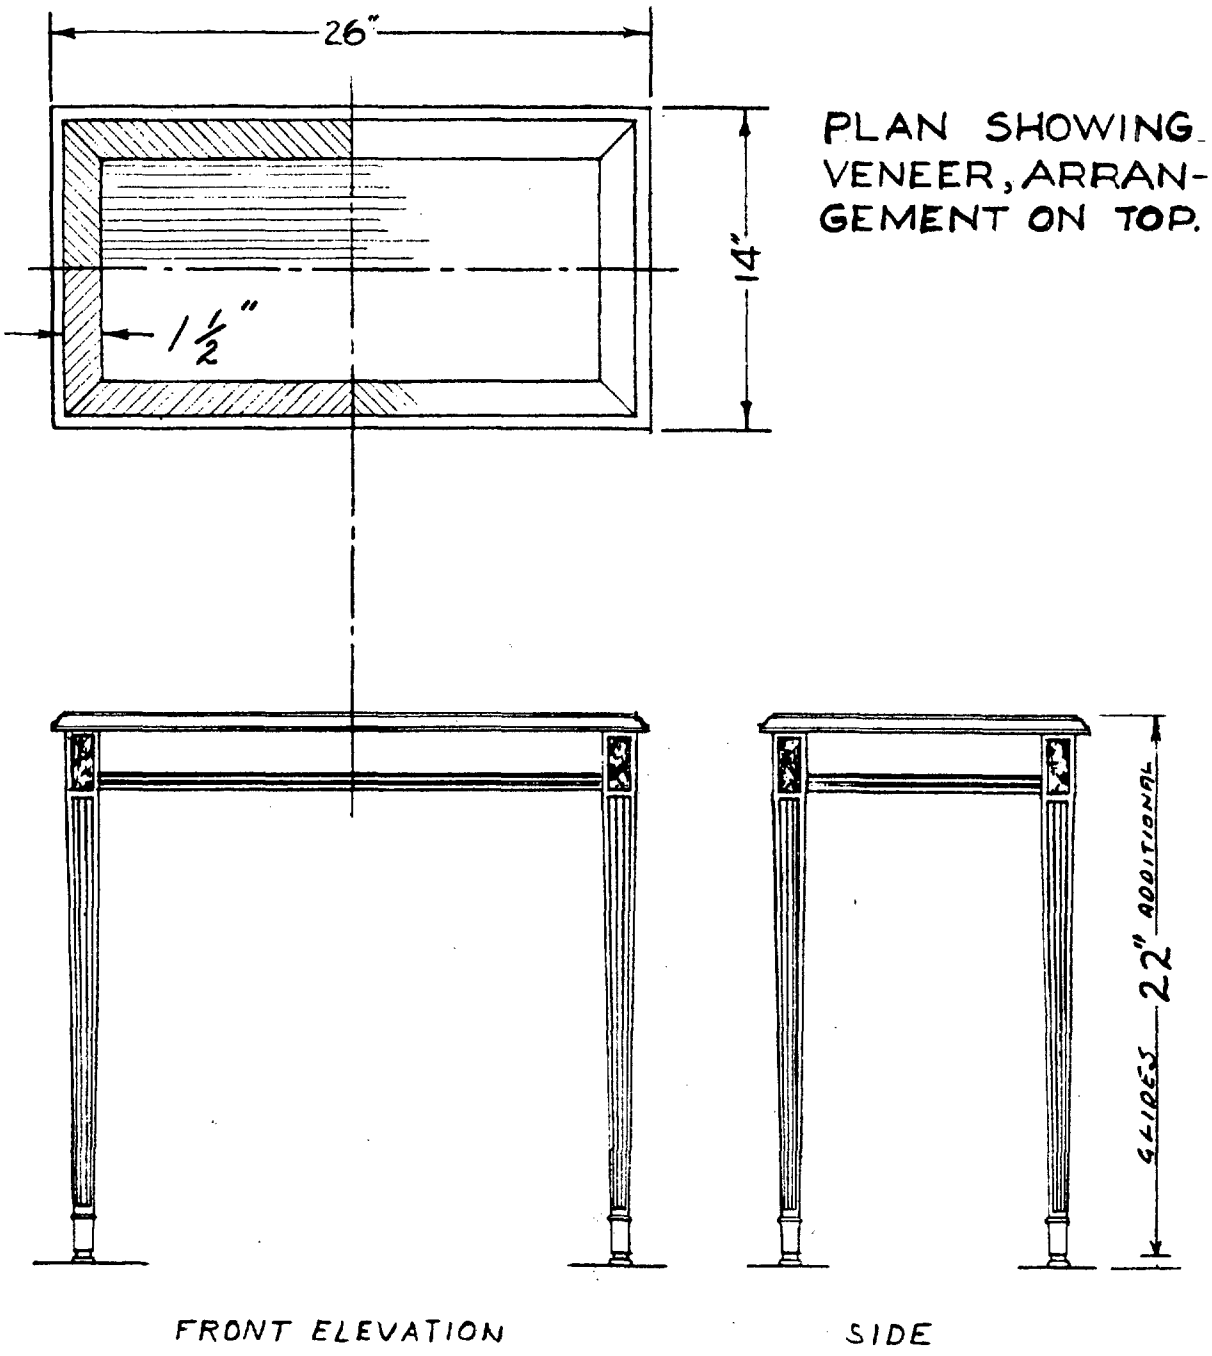


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(5). Corner and Leg Section

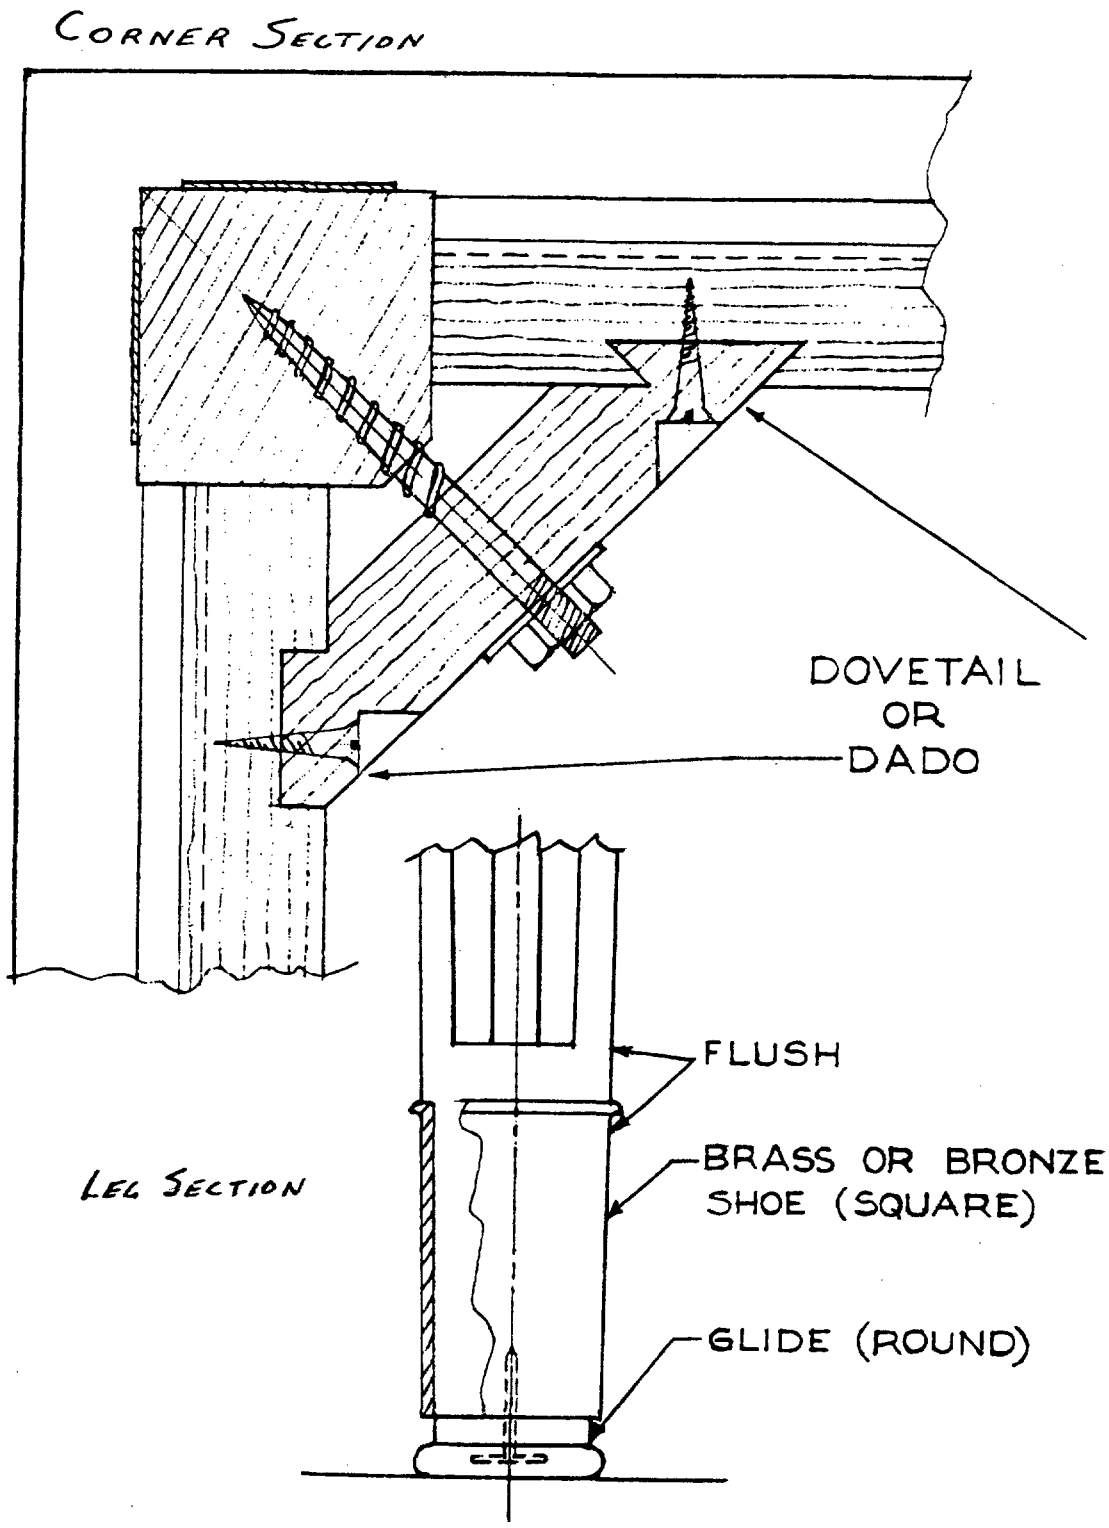


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(6). Corner Section

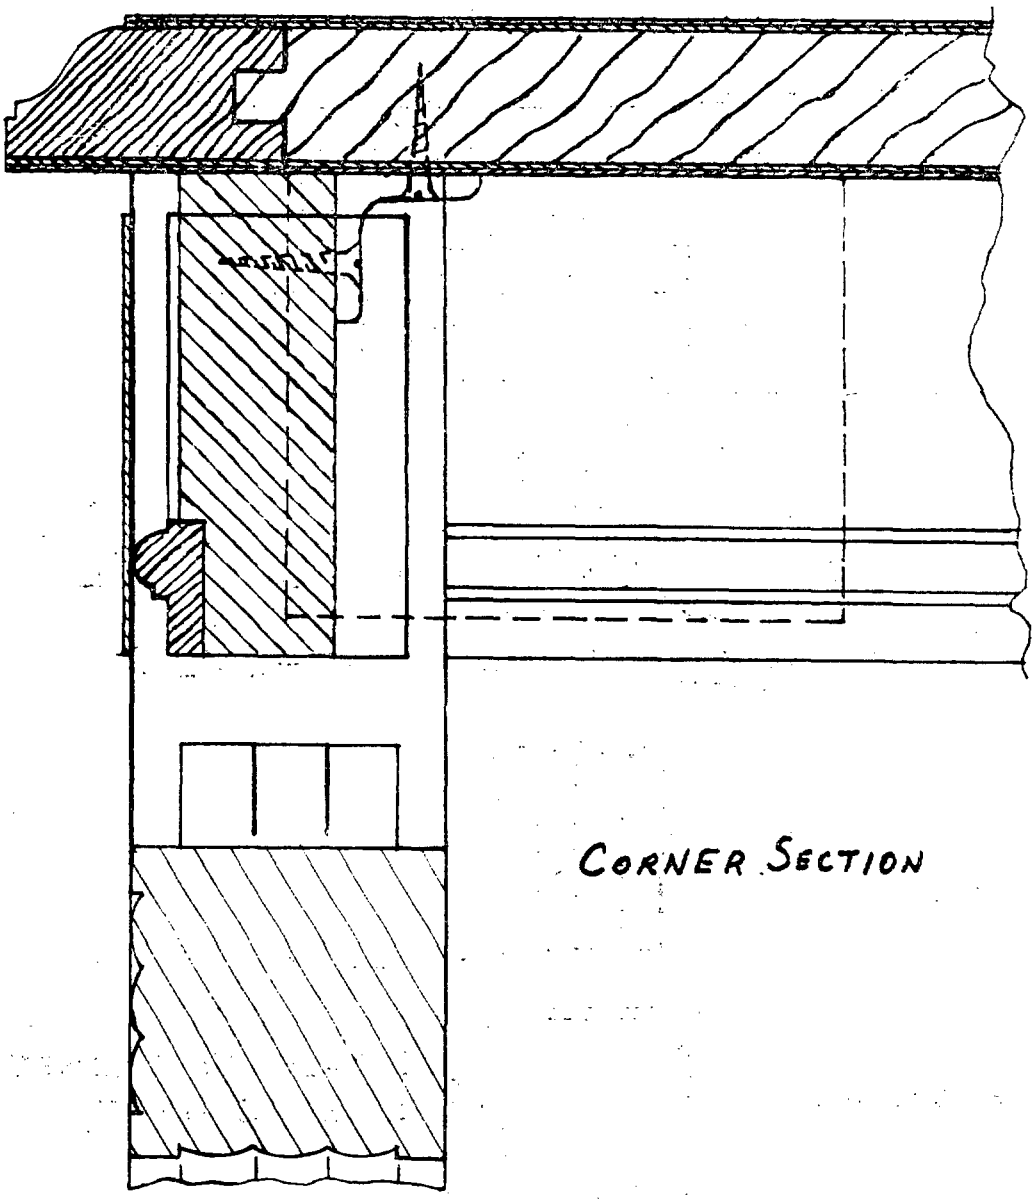


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


Figure 5(7). Coffee Table

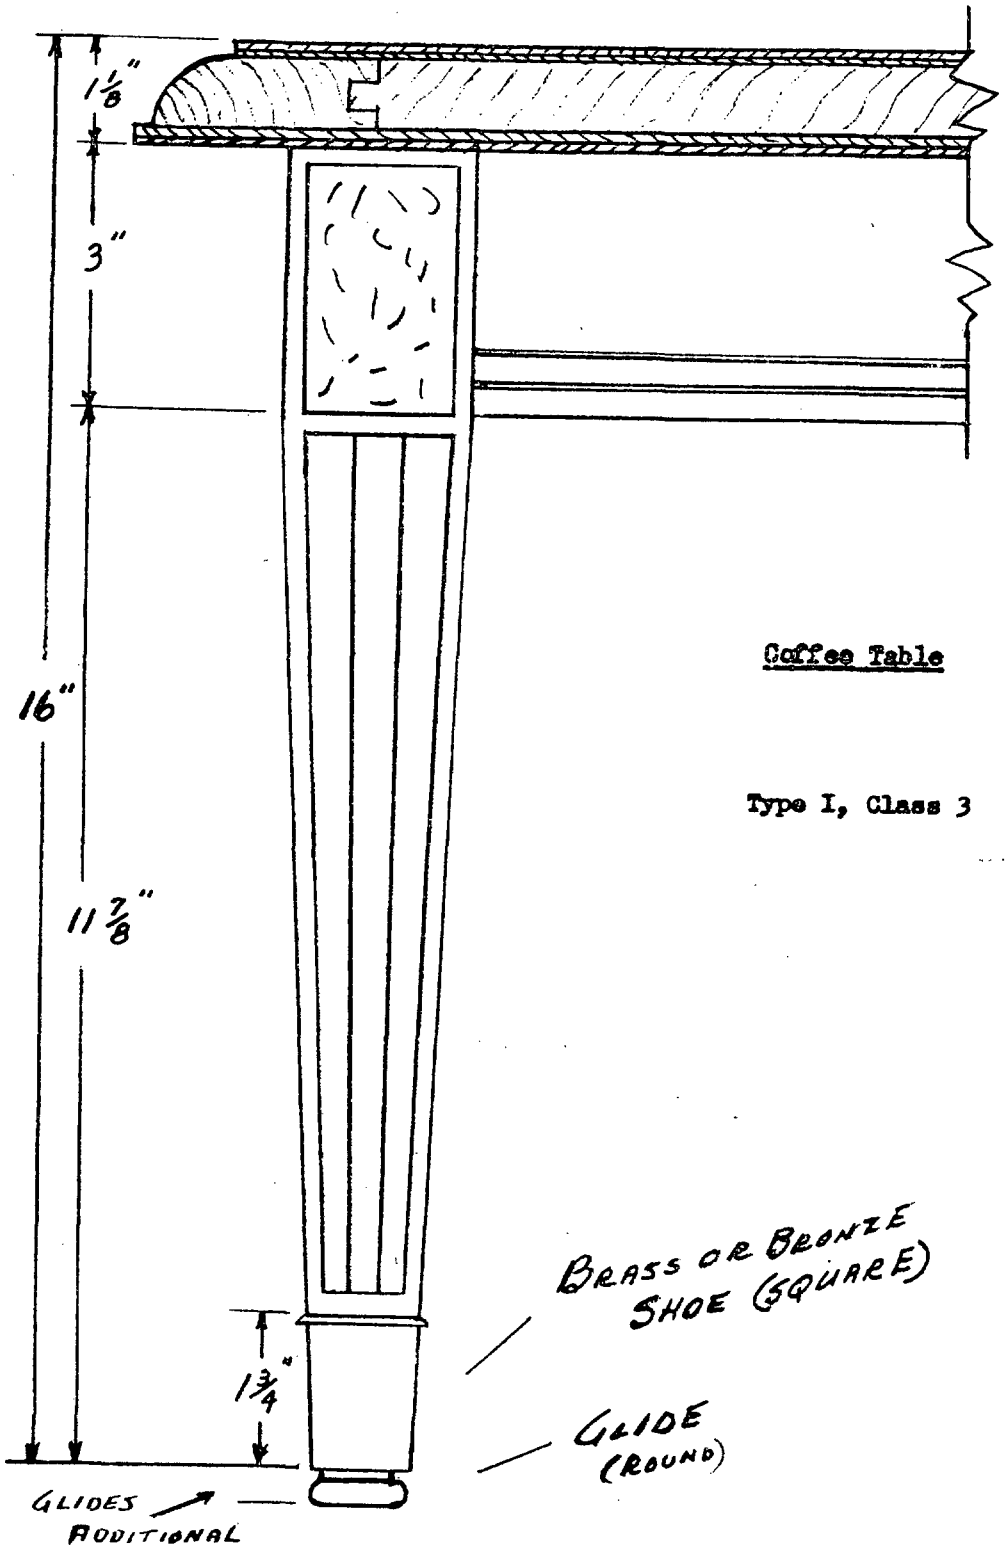

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


Figure 5(8). Top Plan and Front Elevation

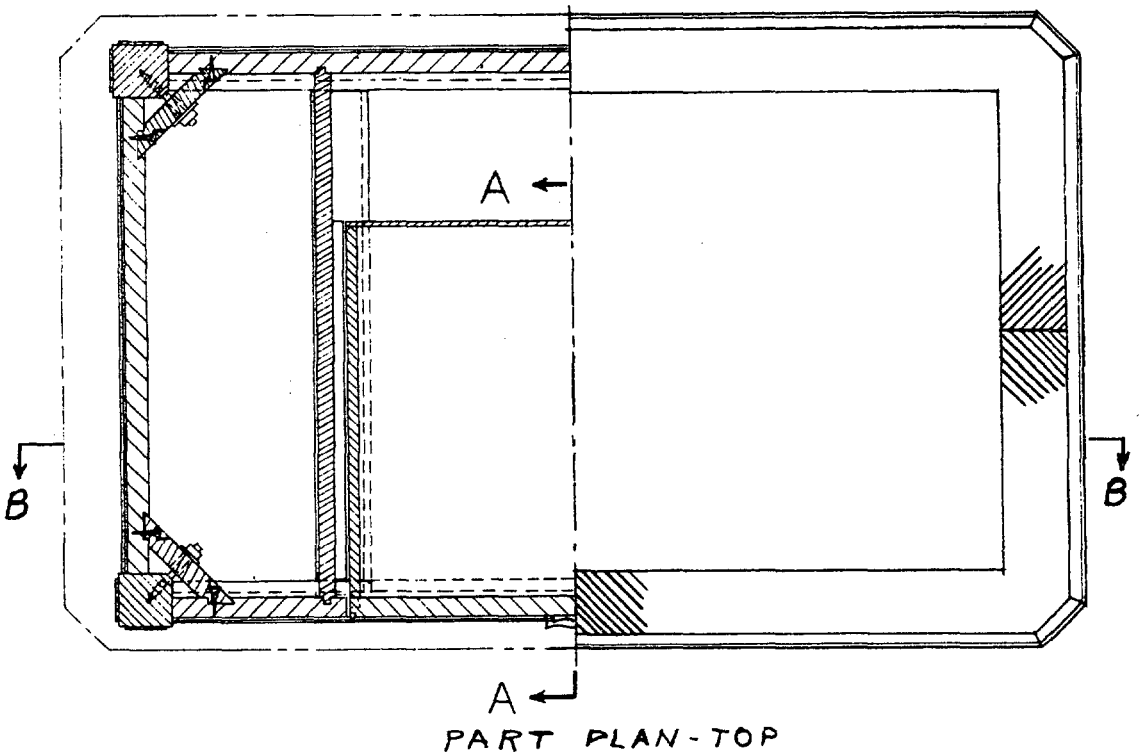

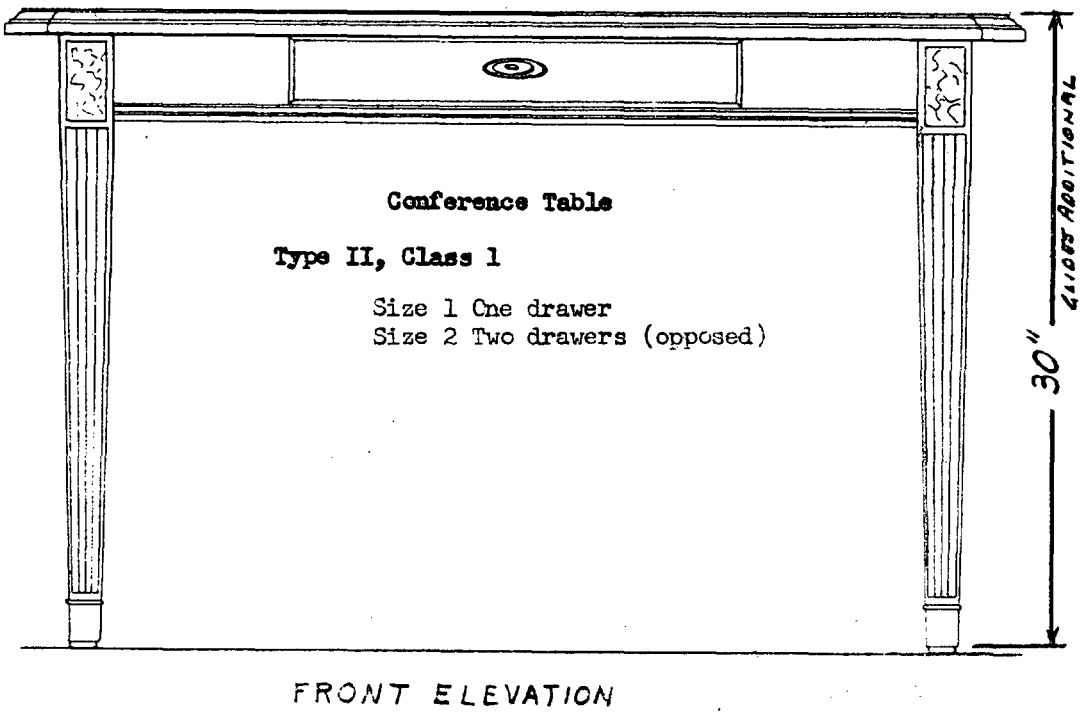


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(9). Drawer, Tray Detail and Side Elevation

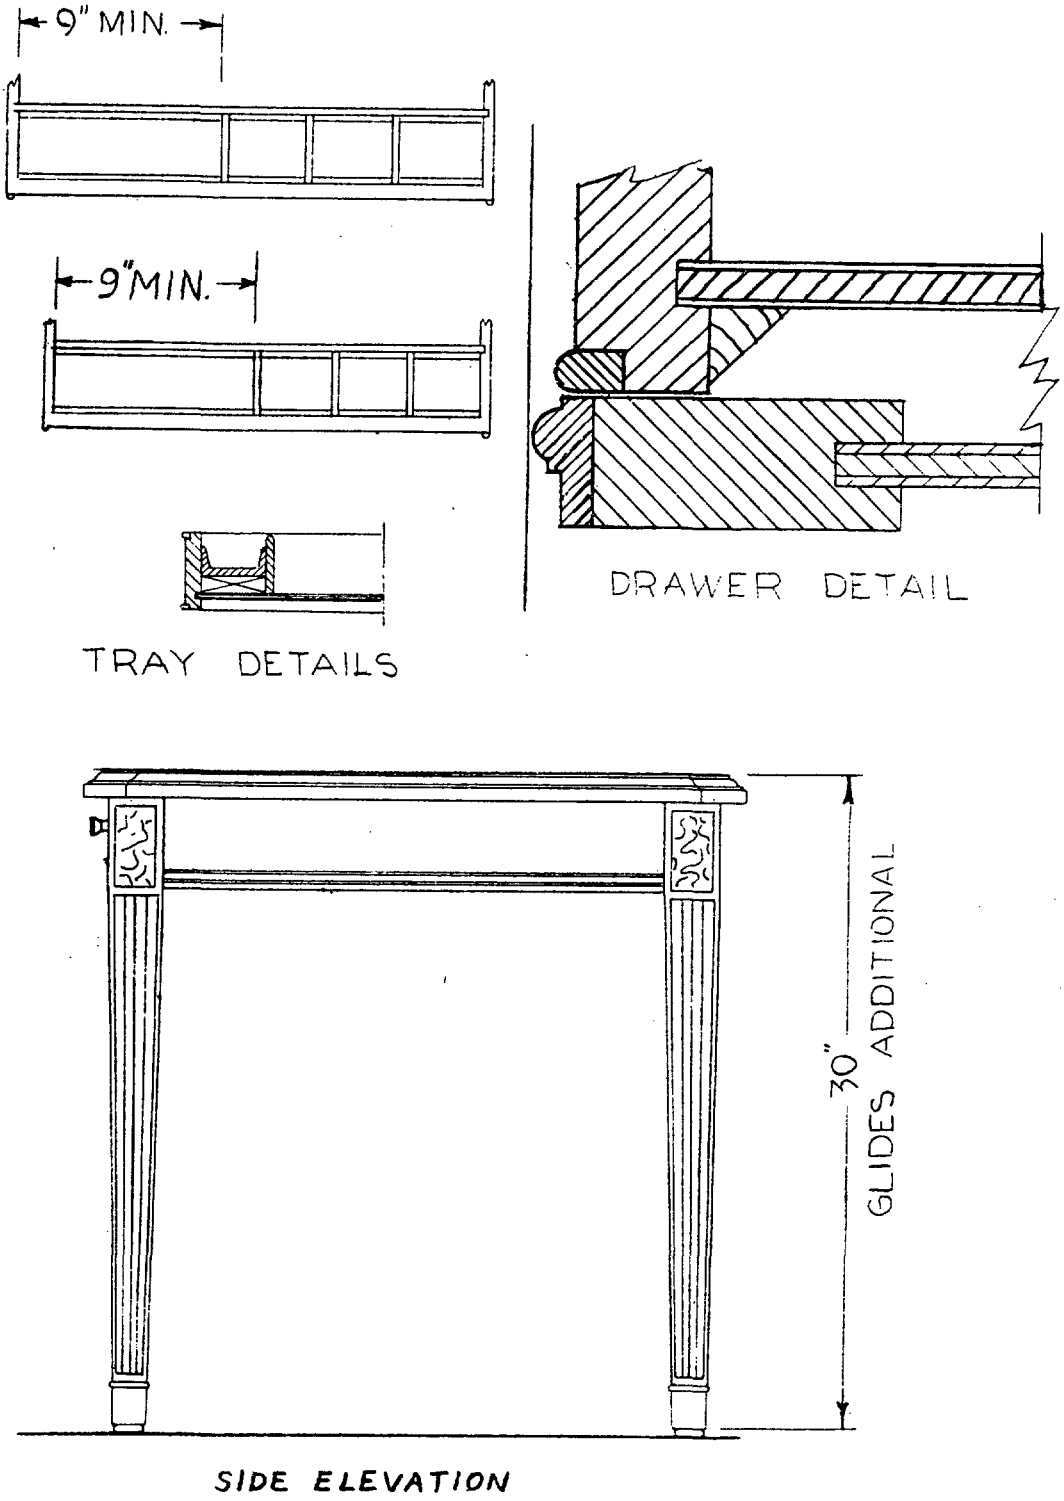


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(10). Drawer Detail

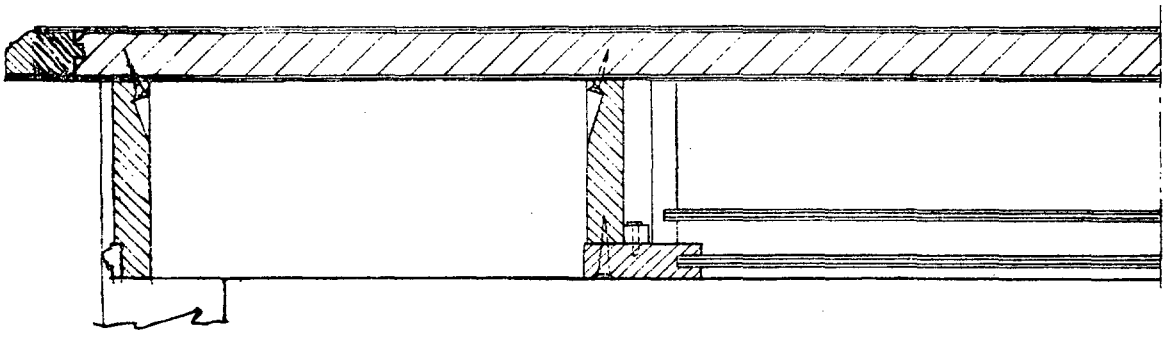


SECTION B-B

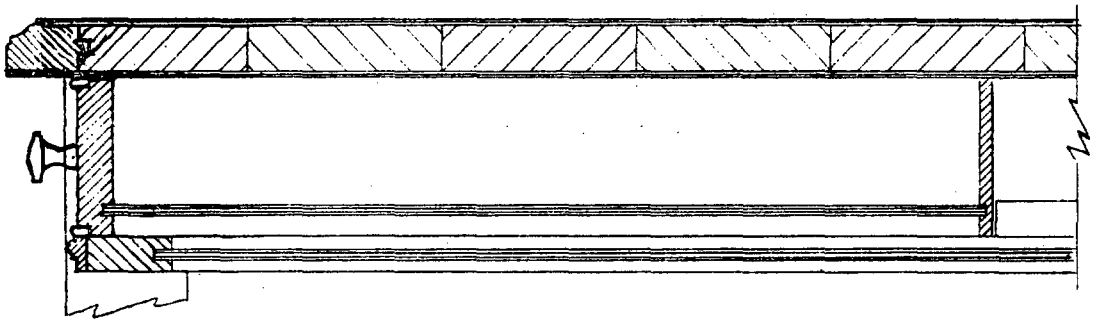

SECTION A-A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(11). Part Top Plan and Front Elevation

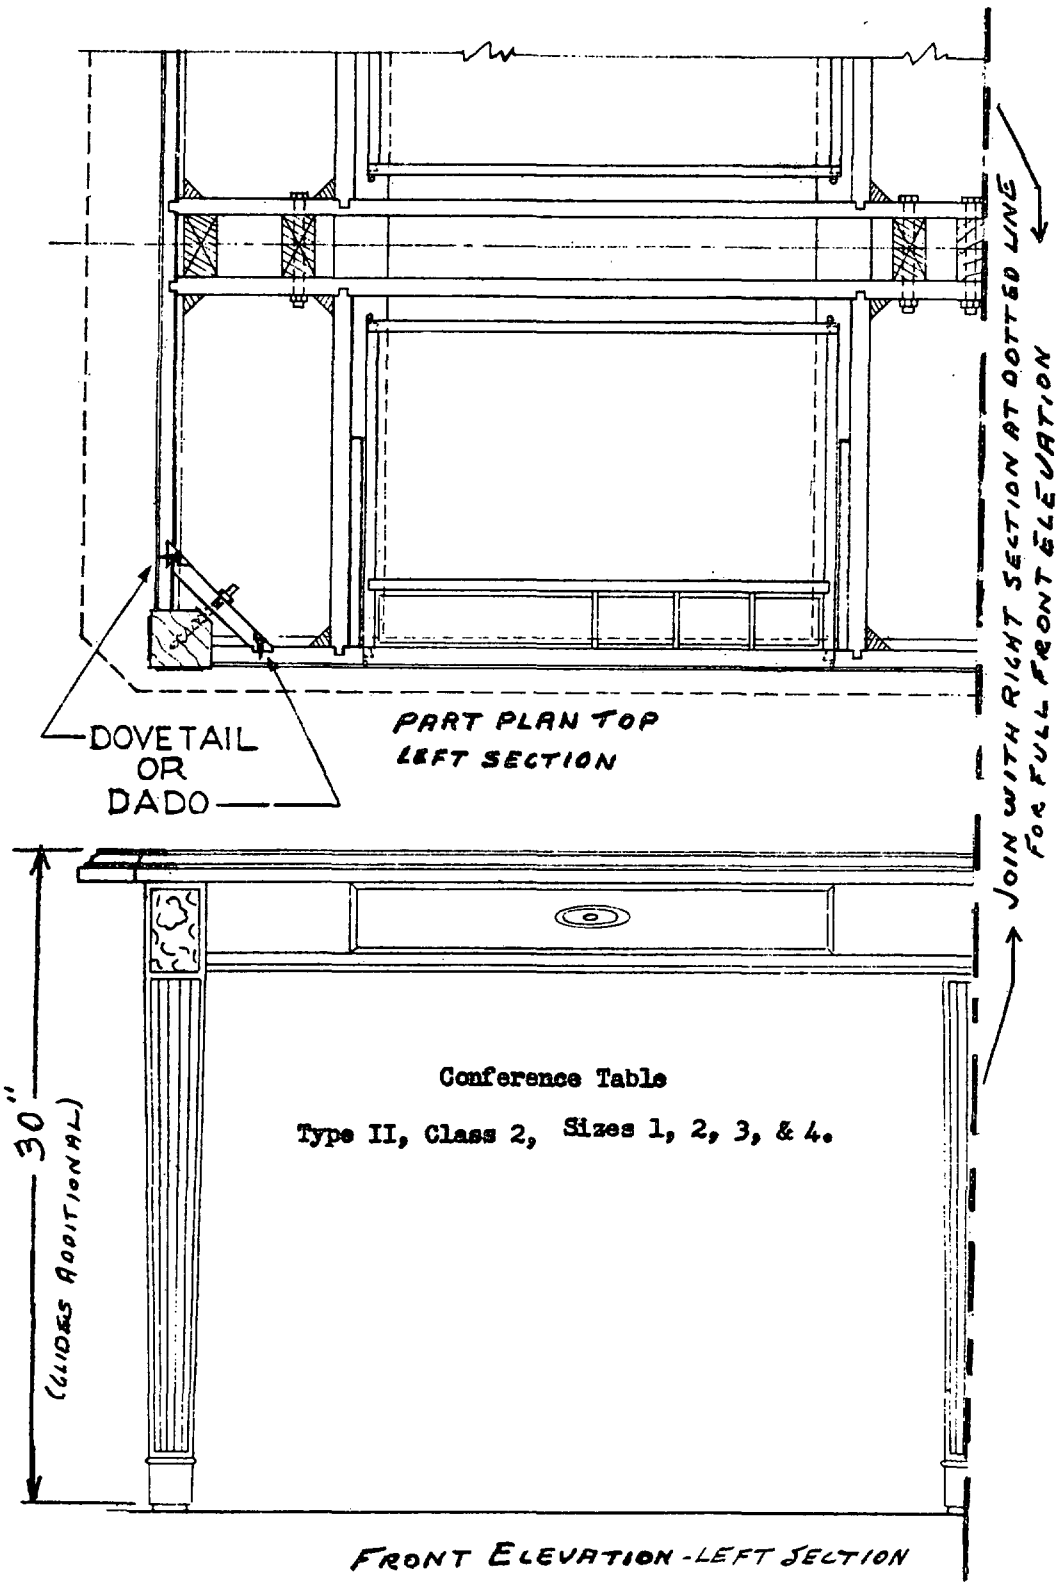


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(12). Part Top Plan and Front Elevation

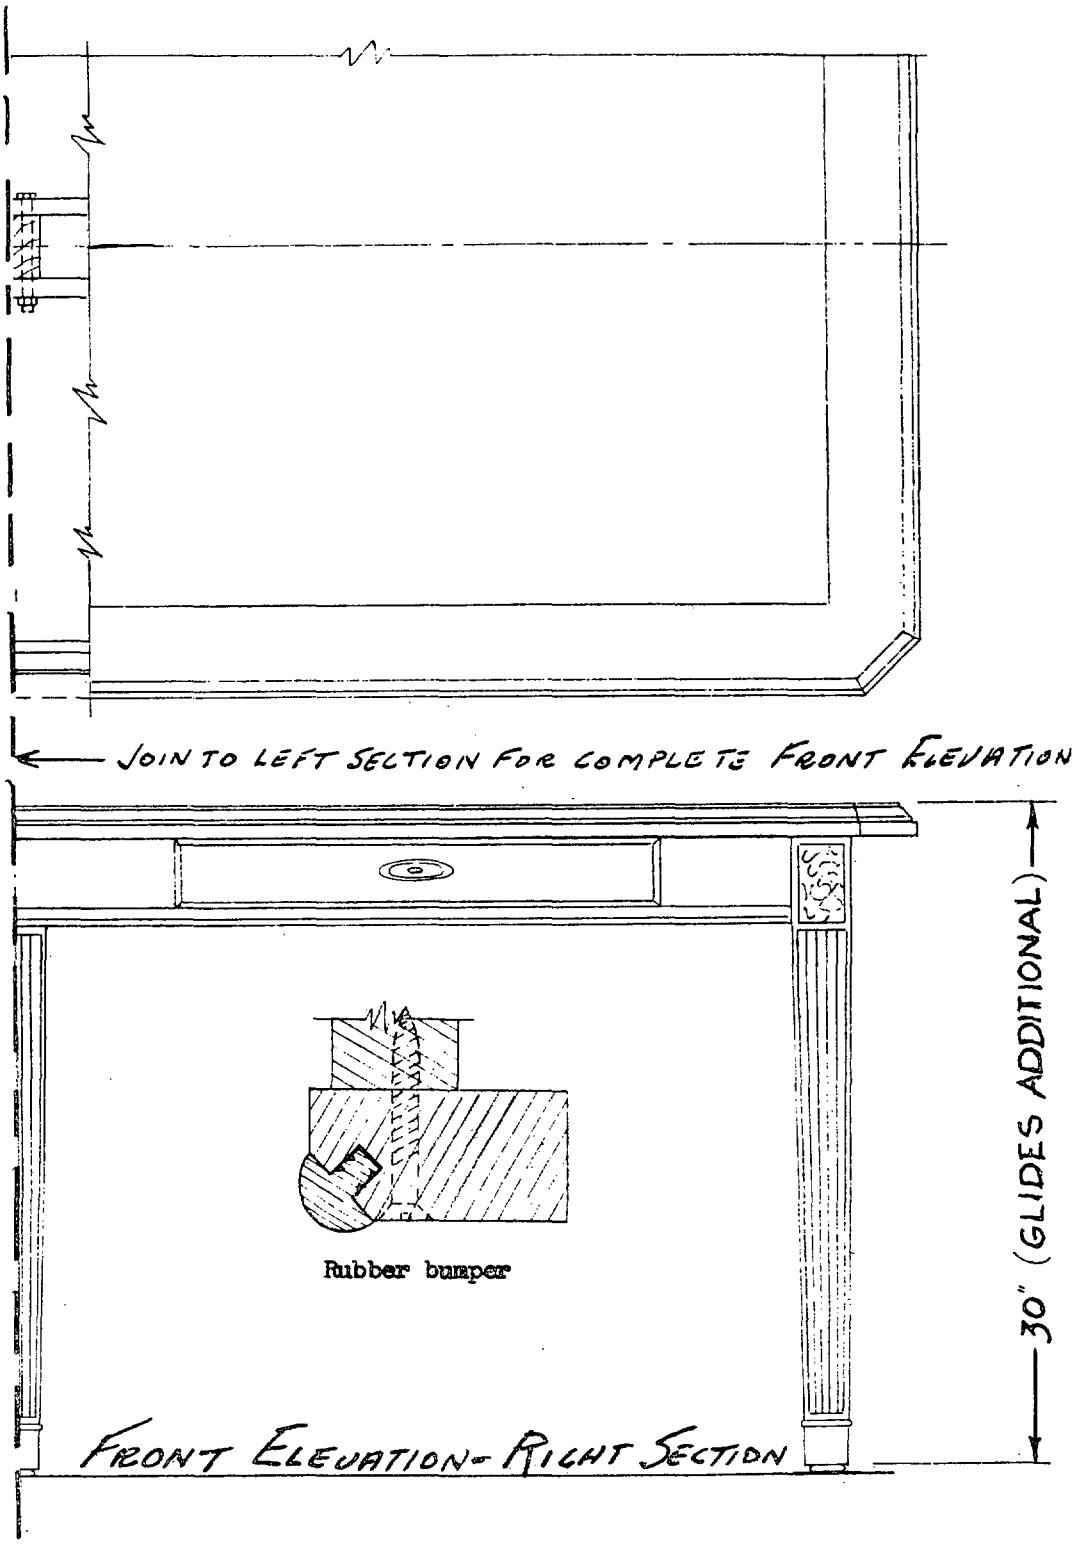


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 5(13). Edge Band and Top Section

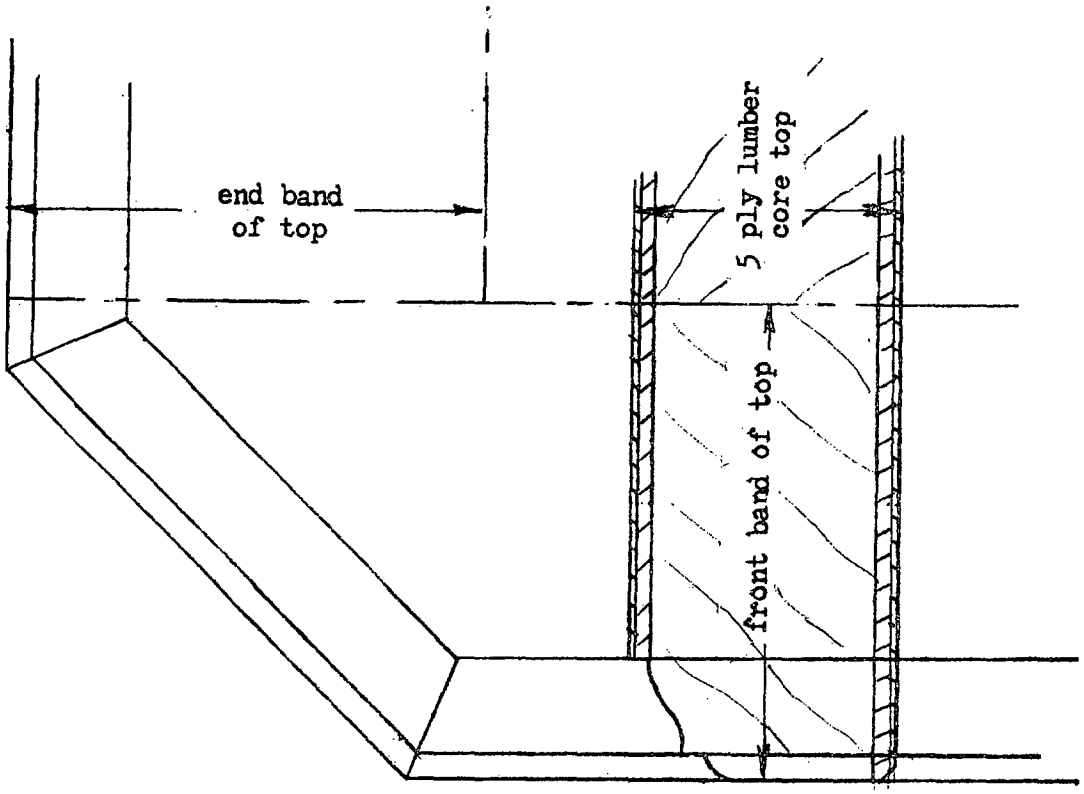

All edge bands shall be of solid walnut

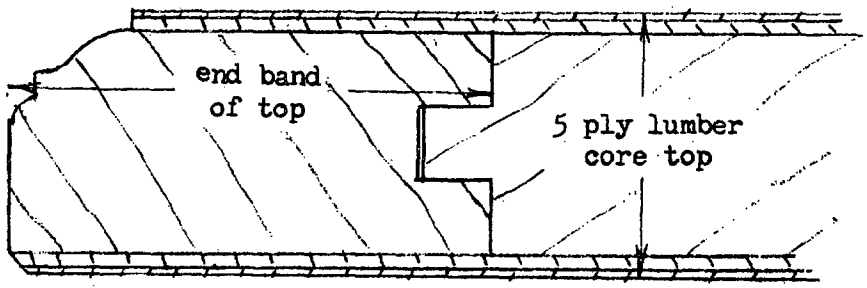

Construction permitted for all Executive Type Office Furniture tops having chamfered corners. The size of the bands shall be governed by the size of chamfered corner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.