AA-O-230/6B
October 7, 1964
SUPERSEDING
Fed. Spec. AA-O-[illegible]
February 27, 1964

FEDERAL SPECIFICATION

OFFICE FURNITURE: CREDENZA, EXECUTIVE OFFICE, WOOD, TRADITIONAL (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers the detailed requirements in traditional design for an executive office credenza General requirements and other information pertaining to the credenza will be found in the Federal Specification AA-O 230, Office Furniture, Executive type, Wood, Traditional (General Specification).

1.2 **Classification.** The credenza covered by this specification shall be of one type and size as shown in the figures.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issues in effect, on date of invitation for bids, which form a part of this specification, will be found in 2 1 of Federal Specification AA-O-230, hereinafter called the General specification.

2 2 Other publications, which form a part of this specification, will be found in 2.2 of the General specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with 3 1 of the General specification

3.2 Materials. The materials used in the construction of the credenza shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers for the various components referenced in the General specification are listed in table I.

TABLE I.—*Material references*

AA-O-230 Par No.	Component
3.2.2	Adhesives
3.2.3	Wood
3.2.3.1	Kinds of Wood
3.2.3.2	Solid wood
3.2.3.3	Plywood
3.2.3.3.1	Matching of veneer plies
3.2.3 4	Seasoning, all wood parts
3.2 3.5	Varieties of wood
3.2.4	Filler
3.2.5	Lacquer
3.2 6	Hardware
3.2 6 1	Face hardware
3.2 6 2	Locks
3.2.6.2.1	Strike-plate
3.2.6.3	Composition glides
3.2 6 4	Shelf standards and supports
3.2.6.5	Other hardware

3.3 Construction

3.3.1 *Design.* The design of the credenza shall be as shown in figures 6(1) and 6(2). The dimensions shall be 72 inches wide by 18 inches deep by 30 inches high (glides additional).

3.3.2 *Tolerances.* Tolerances shall be as specified in 3.3.2 of the General specification.

3.3.3 *Direction of grain.* The grain pattern shall be as shown in figures 6(1) and 6(2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.4 *Joining and assembly.* Joining and assembly shall be as specified in 3.3.4 of the General specification.

3.3 5 *Gluing.* Gluing of all joints shall conform to 3.3.5 of the General specification.

3.3.6 *Drawers.* Construction of the drawers shall be as specified in 3.3.6 of the General specification except that the drawer backs shall be 1/2 inch thick and the sides shall be coved starting 1-1/2 inches from the front and back. The drawers shall be not less than 20 inches wide by 4 inches high by 14 inches deep. Each drawer shall run on a center drawer guide and the runner shall be neatly fitted, glued, and screwed to the front and back rails in true alignment. Each drawer shall have a pull of brass or bronze as shown in figure 6(3).

3.3 7 *Cleating.* All cleats shall be of solid walnut when exposed to view in normal use position and shall be secured to the joining components with screws two ways. Unless otherwise specified all cleats shall be 3/4 by 3/4 inch thick and extend the full length of the components at the joint.

3.3.8 *Plywood parts*

3.3 8 1 *Tops* The credenza tops shall be of 5 ply, lumber-core construction, not less than 1-3/8 inches thick with solid molded edges on the front and two sides and a squared-off solid edge the full length of the back The same method of construction shall be used on all four sides of the top except that the front and sides shall be molded. The size of the edges shall be in accordance with the chamfered corners. The tops shall be chamfered on the two front corners and the chamfer shall be 2 inches The border veneers on the front and two sides shall be 2 1/2 inches wide and shall be set at 45° angles, with the grain pattern reversed at each axis There shall be no border on the back edge The top shall be positioned and attached as specified in 3 3 8 1 of the General specification The top shall be fitted flush to the face of the back posts and extend 5/8 inch beyond the posts on the other three sides.

3.3.8.2 *Dowels.* The dowels used for positioning the top shall be as specified in 3.3.8.2 of the General specification.

3.3.8.3 *Doors.* The doors shall be 5-ply lumber-core construction, faced on two sides, 13/16-inch thick. Each door shall be corebanded on the top and bottom with a minimum 1-1/2 inches of solid wood before the application of the molded edges. The doors shall have a pull as shown in figure 6(1) and shall have a lock and strike-plate as specified in 3.2.6.2 and 3.2.6.2.1 of the General specification.

3.3.8.4 *Adjustable shelf.* Each cabinet section shall be provided with one adjustable shelf, good on two sides, and the shelf shall be 13/16 inch thick. The face veneers and the front edge of the shelves shall match the exposed wood of the cabinet section

3.3.8.5 *Fixed shelf.* The fixed shelf shall be mounted above the knee space, between the two cabinet sections. Each end of the shelf shall be joined to the inside of the end panels by two cleats, the front of which shall be tapered two ways. The back portion of the shelf shall rest on and be fastened to a full length cleat which shall be secured to the back panel. The shelf opening shall be 4 inches. The shelf shall be 3/4 inch thick and shall extend the full length of the knee space.

3.3.8.6 *Dust shields.* Dust shields shall be 3-ply, not less than 3/16 inch thick. They shall be framed into the rail and drawer runs and secured with cleats. There shall be a dust shield in each of the cabinet sections between the drawer and the lower compartment.

3 3 8 7 *Cabinet section back panel.* The back panels of the cabinet sections shall be the height of the section less the height of the base and shall be set flush between the center back posts and the back corner

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

posts The panel shall be 5-ply, lumber-core construction, 3/4 inch thick, two sides face veneer.

3 3.8 8 *Center back panel* The center back panel shall be 5-ply, lumber-core construction, two sides face veneer, 3/4 inch thick The panel shall be tenoned into the back posts fitting flush with the outside face of the posts. The panel shall be the same height as the cabinet section back panels. There shall be a cleat attached to the panel and to the end panel on each side with glue and screws. The screws shall penetrate a minimum of 5/8 inch into the back panel and into the end panel. The cleats shall run from the underside of the fixed shelf to the bottom of the panel and shall have a minimum of three screws into the back panel and into the end panel. A shaped molding, 3/4 inch wide by 1/4 inch thick, shall be glued and screwed along the bottom of the inside of the center back panel the full width between the cleats attached to the back panel and end panel As an alternate application of the molding, the bottom of the back panel may be rabbeted 1/8 inch deep to receive a 3/8 inch thick molding. The screw heads in the molding shall be darkened to match the finish.

3.3.8.9 *End panels.* The end panels shall be 5-ply, lumber-core construction, 3/4 inch thick, two sides face veneer. The panels shall be tenoned into the front and back corner posts. The grain pattern of the end panels shall be as shown in figure 6(2).

3.3 8.10 *Other plywood parts.* The cabinet section bottoms shall be 5-ply, lumber-core construction, 13/16 inch thick

3.3.9 *Solid wood parts.*

3.3.9 1 *Posts* Posts shall be in accordance with 3 3 9.1 of the General specification The inside front posts and the outside front corner posts shall be chamfered and reeded as shown in figure 6(1) The back corner posts shall be chamfered a maximum of 1/8 inch. All posts shall be 1-3/8 by 1-3/8 inches.

3.3.9.2 *Bracket foot base.* The bracket foot base shall be shaped and molded as shown in figure 6(4) and shall be 3/4 inch thick, mitred at the corners. There shall be a bracket foot base applied on three sides of each cabinet section as shown in figures 6(1) and 6(2). They shall be securely glue-blocked to the bottom of the posts. Clamp nails may be used to secure the mitre joints.

3.3 9.2 1 *Base support.* The base shall be supported as specified in 3.3 9.2 4 of the General specification.

3.3.9.3 *Built-up stock.* The built-up stock shall be as specified in 3.3.9.3 of the General specification.

3.4 Methods of finishing. The methods of finishing shall be as specified in 3.4 of the General specification.

3.5 Color and appearance of finish. The color and appearance of the finish shall be as specified in 3.5 of the General specification.

3.6 Identification marking Identification marking shall conform to 3.6 of the General specification.

3.7 Workmanship. Workmanship shall be in accordance with 3.7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in section 4 of the General specification.

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and application of levels of packaging and packing shall be in strict accordance with Fed Std No. 102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5 1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A or B.*

5.1.1 1 *Detachable parts.* Shelves and other detachable parts shall be removed from the credenza and individually cushioned with material conforming to PPP-C-843. The cushioned parts shall be packaged in a box conforming to PPP-B-636, type 1, class 1, style RSC All flaps of the box shall be sealed with strips of 3-inch tape conforming to UU-T-111, class 2.

5 1 1.2 *Doors* All doors shall be immobilized by the use of clips or other suitable means of fastening. The clips shall be faced with cushioning material to prevent scratching or marring of finished surfaces Locks shall not be used to secure doors.

5.1 1.3 *Keys.* Keys shall be placed in an end opening Kraft envelope or cotton drawstring bag. The closed envelope or bag shall be placed and secured to the inside surface of the drawer bottom.

5.1 1.4 *Surface protection.* Each credenza shall be covered with a shroud covering the top, sides and front and extending to the bottom edges of the base. The shroud shall be made from macerated paper blankets, wood-fiber felt blankets or with cellulose wadding conforming to PPP-C-843, type II, The shroud shall be secured in place with pressure sensitive tape.

5.1.2 *Level C.* Credenzas shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing Packing. shall be level A, B, or C, as specified (see 6 2)

5.2 1 *Level A* Each credenza with detachable parts, packaged as specified in 5 1, secured inside, shall be covered with a shroud constructed of material conforming to UU-P-271, class H or M, All seams of the shroud shall be sealed with adhesive conforming to MIL-A-140 The shrouded credenza shall be packed in any of the containers conforming to the following specifications at the option of the contractor:

Specification	*Type or Class*
PPP-B-585	Class 3 use
PPP-B-591	Class II
PPP-B-601	Overseas Type
PPP-B-621	Class 2
PPP-B-640	Class 2, Grade A

Closure and strapping shall be in accordance with the appendix to the box specification.

5.2.2 *Level B.* Each credenza, with detachable parts, packaged as specified in 5 1, secured inside, shall be packed in a box conforming to PPP-B-591, class I; or to PPP-B-640, class 1, grade A. Sealing and closure shall be in accordance with the appendix to the applicable box specification.

5.2.3 *Level C.* The credenzas shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed Std No. 123.

5.3.2 *Military activities.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The executive office type credenza in traditional styling was designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies The credenza should compliment the traditional decor of any executive area when used with other furniture items within the group

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should exercise any desired option herein and procurement documents should specify the following:

(a) Title, symbol and date of this specification.
(b) Title, symbol and date of the General specification.
(c) When preproduction sample is not required.
(d) Level of packaging.
(e) Level of packing.
(f) Marking requirements.

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Desks, wooden, with one or more enclosed pedestals on both sides of an open knee space, which contains cupboards or drawers, and to be not more than 15" from the floor, setup.

Carload minimum weights:

In cars 40' 9" or less in lengths, inside measurements: 10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements, 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Motor:


Desks, wooden, with one or more enclosed pedestals on both sides of an open knee space, which contains cupboards or drawers, the bottoms of which are not more than 15" from the floor, setup, in boxes or crates.

Truckload minimum weights:

10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 6(1). Credenza.

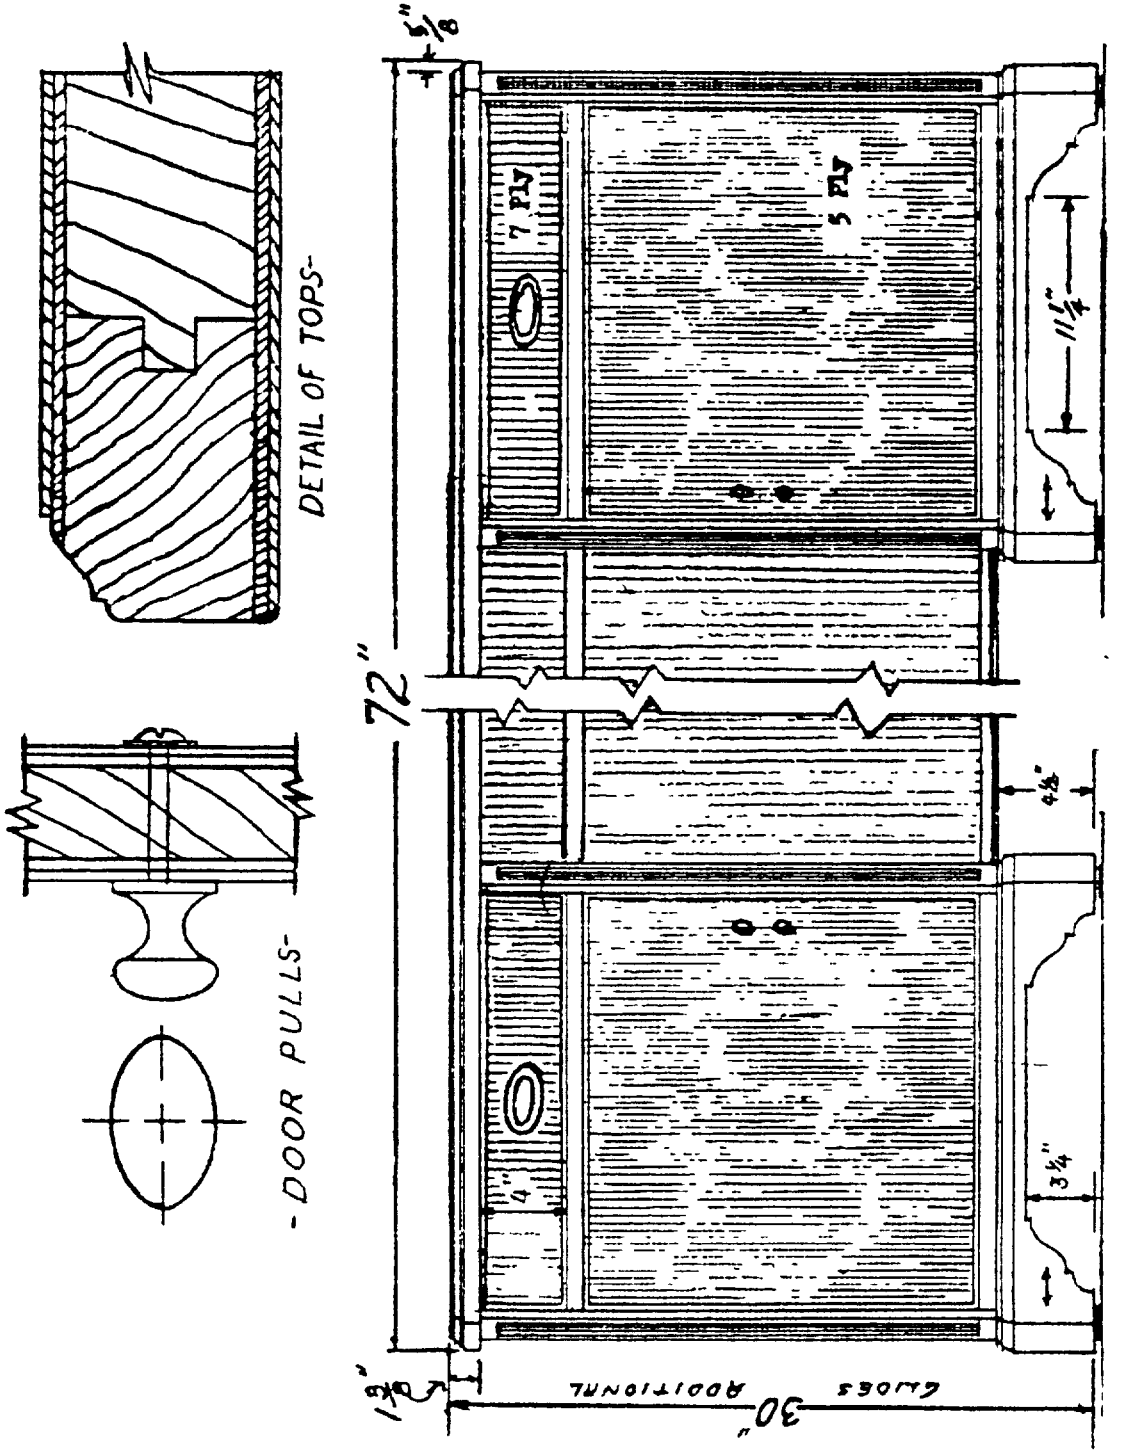


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


FIGURE 6(2). Side and Rear Elevation
Panel Molding and Corner Section.

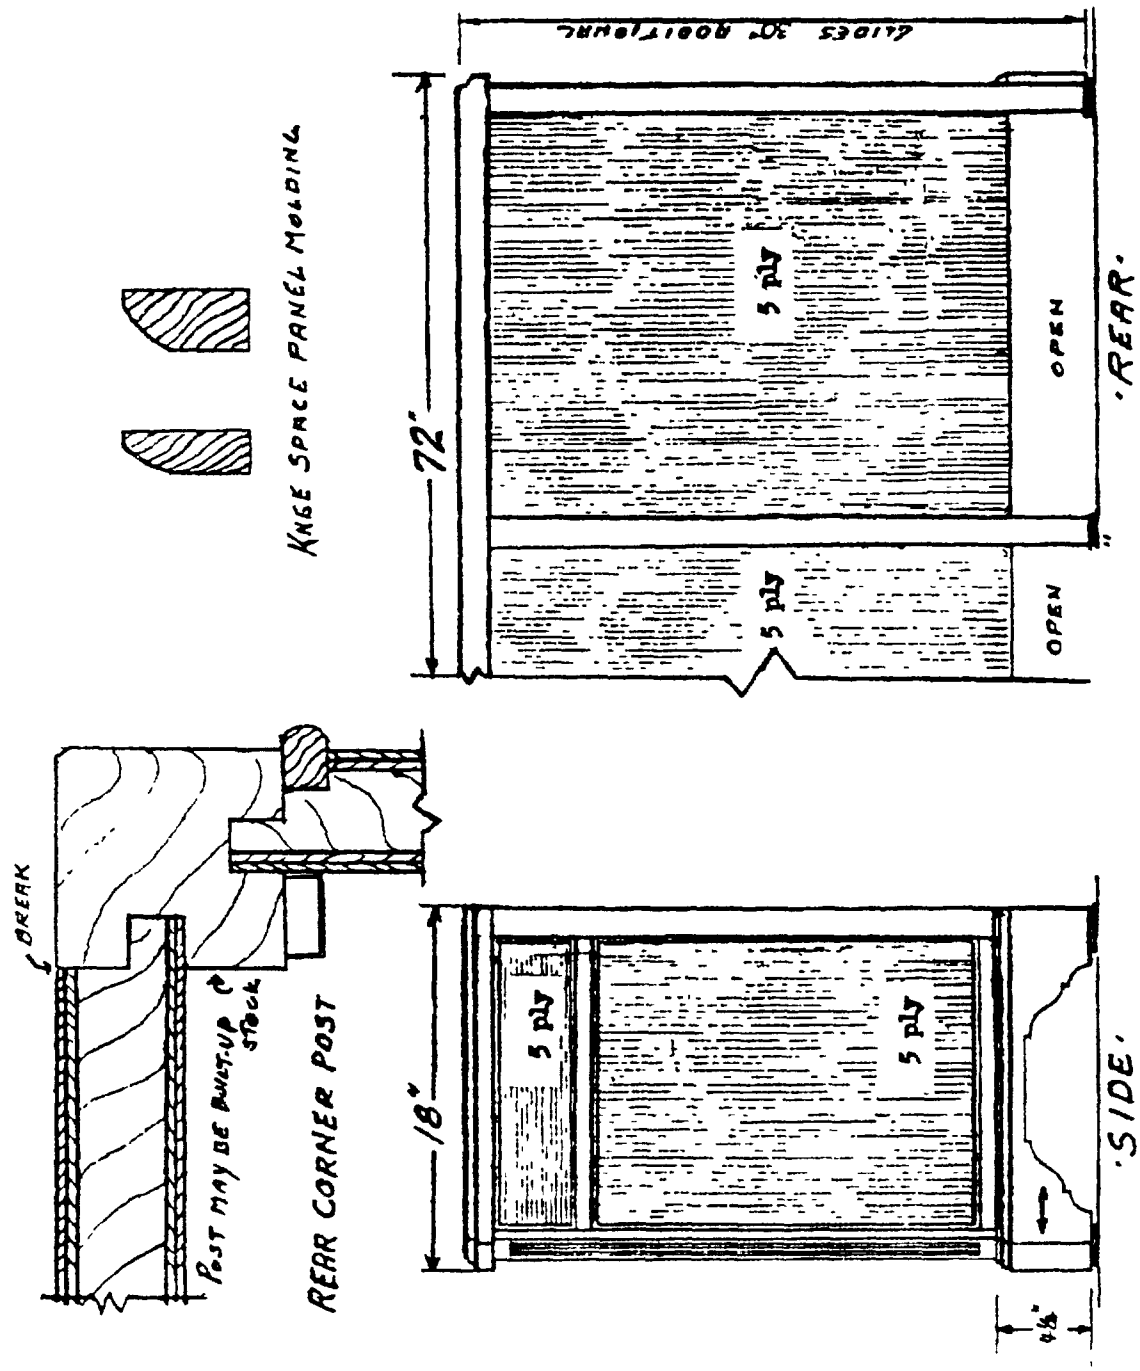

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


FIGURE 6(3). Corner Section and Pull

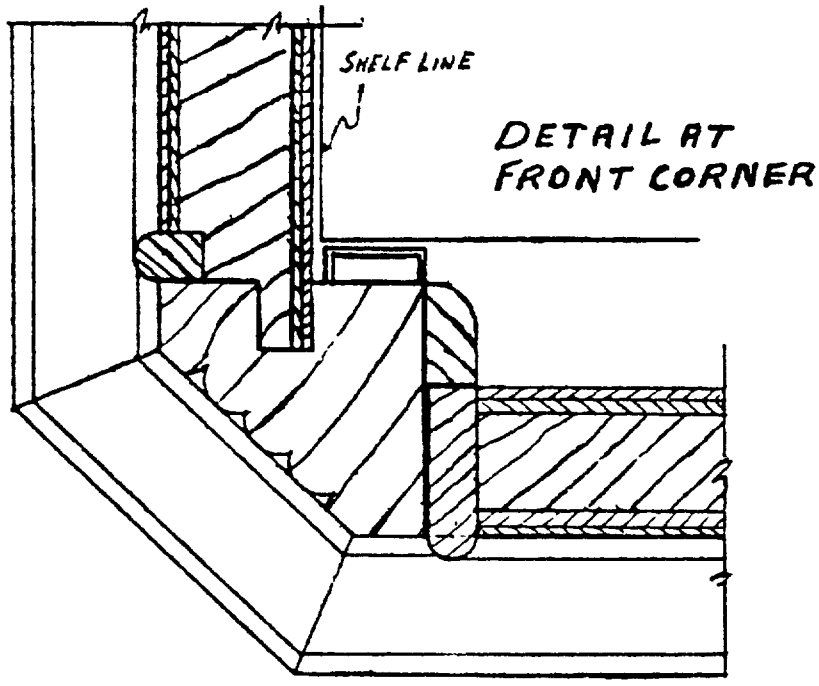

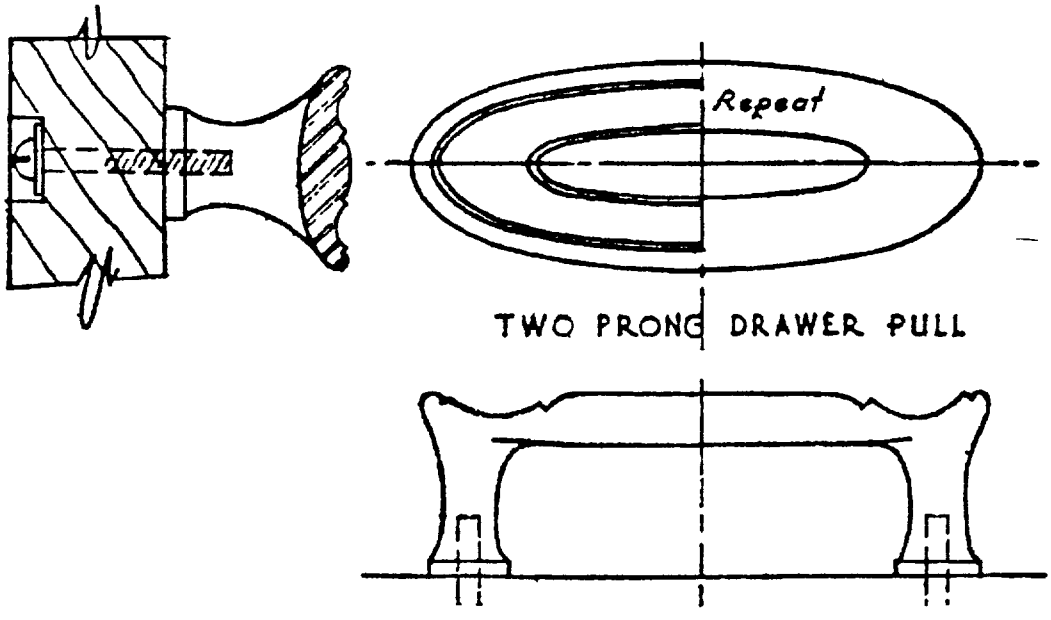

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 6(4). Base Section.

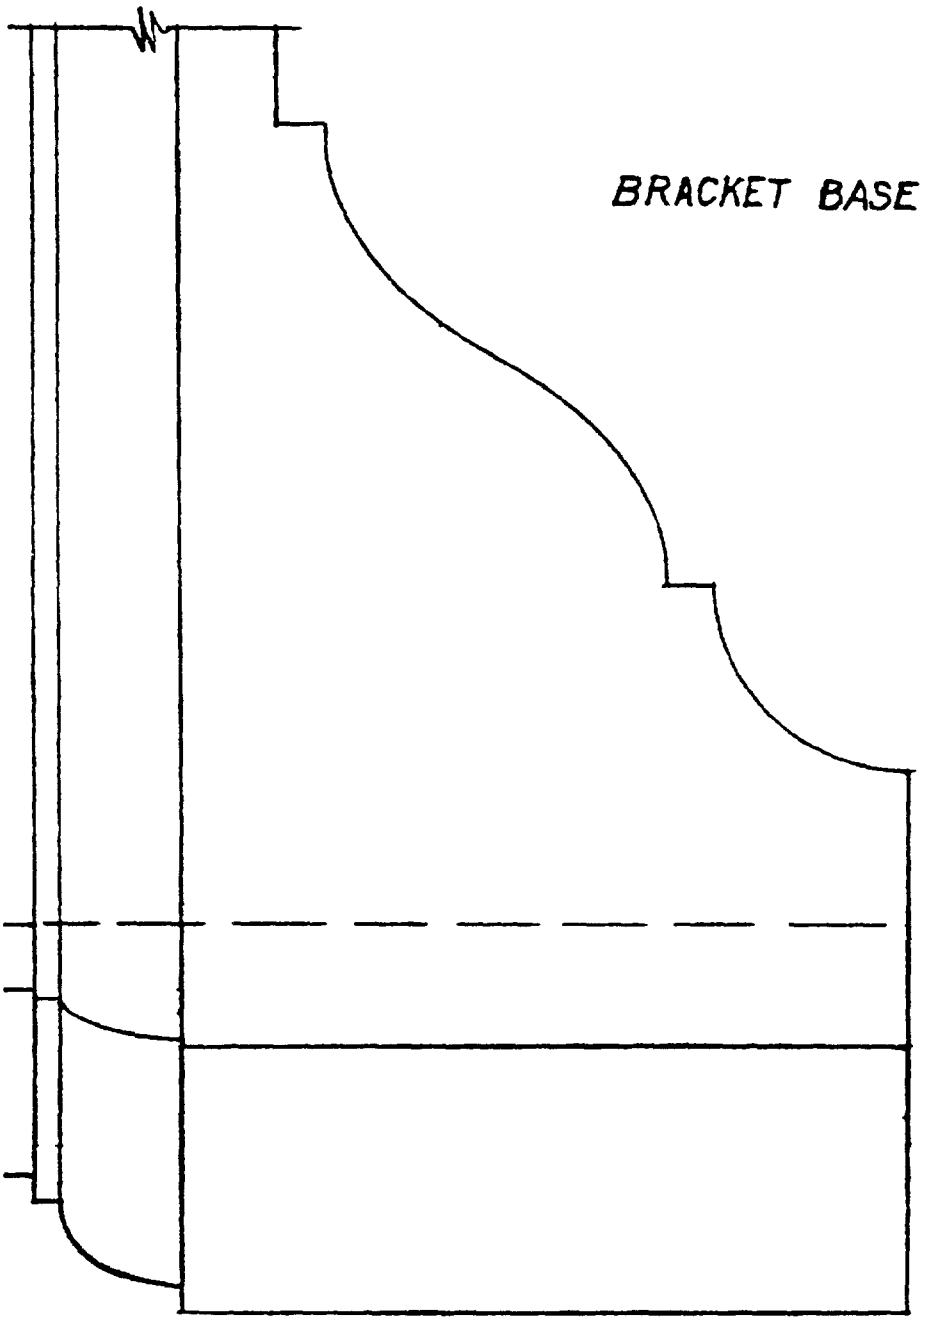

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.