AA-O-230/7a
October 7, 1964

SUPERSEDING
Int. Fed. Spec. AA-O-230/7
February 27, 1964

FEDERAL SPECIFICATION

OFFICE FURNITURE: TYPEWRITER STAND, EXECUTIVE OFFICE, WOOD, TRADITIONAL (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for the executive type office typewriter stand in traditional design. General requirements and other information pertaining to the typewriter stands will be found in Federal Specification AA-O-230, Office Furniture, Executive Type, Wood, Traditional (General Specification).

1.2 Classification The typewriter stand covered by this specification shall be of one type and size.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issues in effect, on date of invitation for bids, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-230, hereinafter called the General specification.

2.2 Other publications, which form a part of this specification, will be found in 2.2 of the General specification

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with 3.1 of the General specification.

3.2 Materials The materials used in the construction of the typewriter stand shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers of the various components as referenced in the General specification are listed in table I.

TABLE I.—*Material references*

AA-O-230 Par. No.	Component
3.2.2	Adhesives
3.2.3	Wood
3.2.3.1	Kinds of wood
3.2.3.2	Solid wood
3.2.3.3	Plywood
3.2.3.3.1	Matching of veneer plies
3.2.3.4	Seasoning, all wood parts
3.2.3.5	Varieties of wood
3.2.4	Filler
3.2.5	Lacquer
3.2.6.3	Composition glides

3.3 Construction. The general construction requirements for the typewriter stand and its components parts shall be as specified in 3.3 of the General specification. The paragraph number for the various components as found in the General specification are listed in table II.

TABLE II.—*Construction references*

AA-O-230 Par. No	Component
3.3.2	Tolerances
3.3.4	Joining and assembly
3.3.5	Gluing of joints
3.3.3.2	Dowels
3.3.9.1	Posts
3.3.9.3	Built-up stock

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.1 *Design.* The design of the typewriter stand shall be as shown in figure 7 (1) The dimensions shall be 36 inches wide by 20 inches deep by 26 inches high (glides additional).

3.3.2 *Direction of grain* The grain pattern shall be as shown in figure 7 (1)

3.3.3 *Molded plinth base* The plinth base shall have a 3/4 inch molded upper edge The overall height of the base plus the molded edge shall be 4 inches. The base shall be 3/4 inch thick, mitred at the corners and secured with glue and screws to the back, end panels, and posts. Clamp nails may be used to secure the mitred joints. The inside base rails shall be secured with countersunk nails and glue The nail holes shall be properly filled There shall be filler blocks (1-1/2 inch by 3/4 inch) between the inner and outer base rails, one centered on each end and two spaced evenly in the back The blocks shall be secured to the inside of the outer rail by glue and two countersunk screws.

3.3 4 *Top* The typewriter stand tops shall be not less than 5-ply, 1-3/8 inches thick with solid molded edges as shown in figure 7 (1) All four corners shall be chamfered and the border veneers shall be 2 inches wide and set at 45° angles, with the direction of grain reversed at each axis as shown in figure 7 (1) The size of the bands shall be governed by the size of the chamfered corners The tops shall be positioned as specified in 3.3 8 1 of the General specification. The tops shall be secured by 3/4 by 3/4 inch cleats

3.3 5 *Front rail.* A nosed or quarter-round front rail (1-1/2 inches by 3/4 inch) shall be securely tenoned into the front corner posts

3.4 **Methods of finishing.** The methods of finishing shall be in accordance with 3 4 of the General specification

3.5 **Color and appearance of finish** The color and appearance of the finish shall be as specified in 3 5 of the General specification

3.6 **Identification marking.** Identification marking shall be as specified in 3 6 of the General specification.

3.7 **Workmanship.** Workmanship shall conform to 3.7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in section 4 of the General specification

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and application of the levels of packaging and packing shall be in accordance with Fed Std. No 102.

5.1 **Packaging.** Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A or B.* Each stand shall be covered and wrapped on the top, sides, front and back with full pads of blankets of nonabrasive cushioning material The cushioning pads or blankets shall be made of macerated paper, wood-fiber felt, or cellulose wadding conforming to PPP-C-843, Type II The pads or blankets shall be secured in place with pressure sensitive tape.

5.1.2 *Level C.* The stands shall be packaged in accordance with the suppliers commercial practice.

5 2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.2)

5.2.1 *Level A.* Each stand, cushioned as specified in 5.1.1, shall be packed in a close-fitting box conforming to PPP-B-636, class 2, V3c, style RSC. The boxes shall be closed, waterproof sealed with tape, and reinforced with filament tape in accordance with the appendix to the box specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.2.2 *Level B.* Each stand, cushioned as specified in 5.1.1, shall be packed in a close-fitting box conforming to PPP-B-636, type I, class 1, style RSC. Closure of the boxes shall be by adhesive applied over at least 75 percent of the flap area or by two strip tape method as specified in Rule 41, Section 7, of the Uniform Freight Classification, using tape conforming to PPP-T-45.

5.2.3 *Level C.* The stand shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking

5.3.1 *Civil agencies.* In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with Fed. Std No 123

5.3.2 *Military* In addition to any special marking specified in the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129

6. NOTES

6.1 Intended use. The executive office typewriter stand in traditional styling was designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. The typewriter stands should compliment the traditional decor of executive areas when used with other furniture items within the group

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following.

(a) Title, symbol and date of this specification.

(b) Title, symbol and date of the General specification.

(c) When preproduction sample is not required.

(d) Level of packaging.

(e) Level of packing.

(f) Marking requirements

6.3 This Federal Specification introduces a new item for use with other executive type traditional furniture.

6.4 Transportation description Transportation descriptions and minimum weight applicable to this commodity:

Rail:

Stands, not otherwise indexed by name, wooden, set-up

Carload minimum weights

In cars 40' 9" or less in lengths, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.

In cars exceeding 40' 9" in lengths, inside measurements 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds

Motor

Stands, not otherwise indexed, wooden, set-up, in boxes or crates


Truckload minimum weights: 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to rule 115, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 7.

TYPEWRITER STAND - 36" X 20" X 26"

CHAMFERED CORNERS (1-7/8")
FULL MOLDED PLINTH BASE
BEADED PANELS
TOP BORDER VENEER 2"
CORNERS REEDED (4)
POSTS 2" X 2"
TOP OVERHANG 3/4" (Four sides)

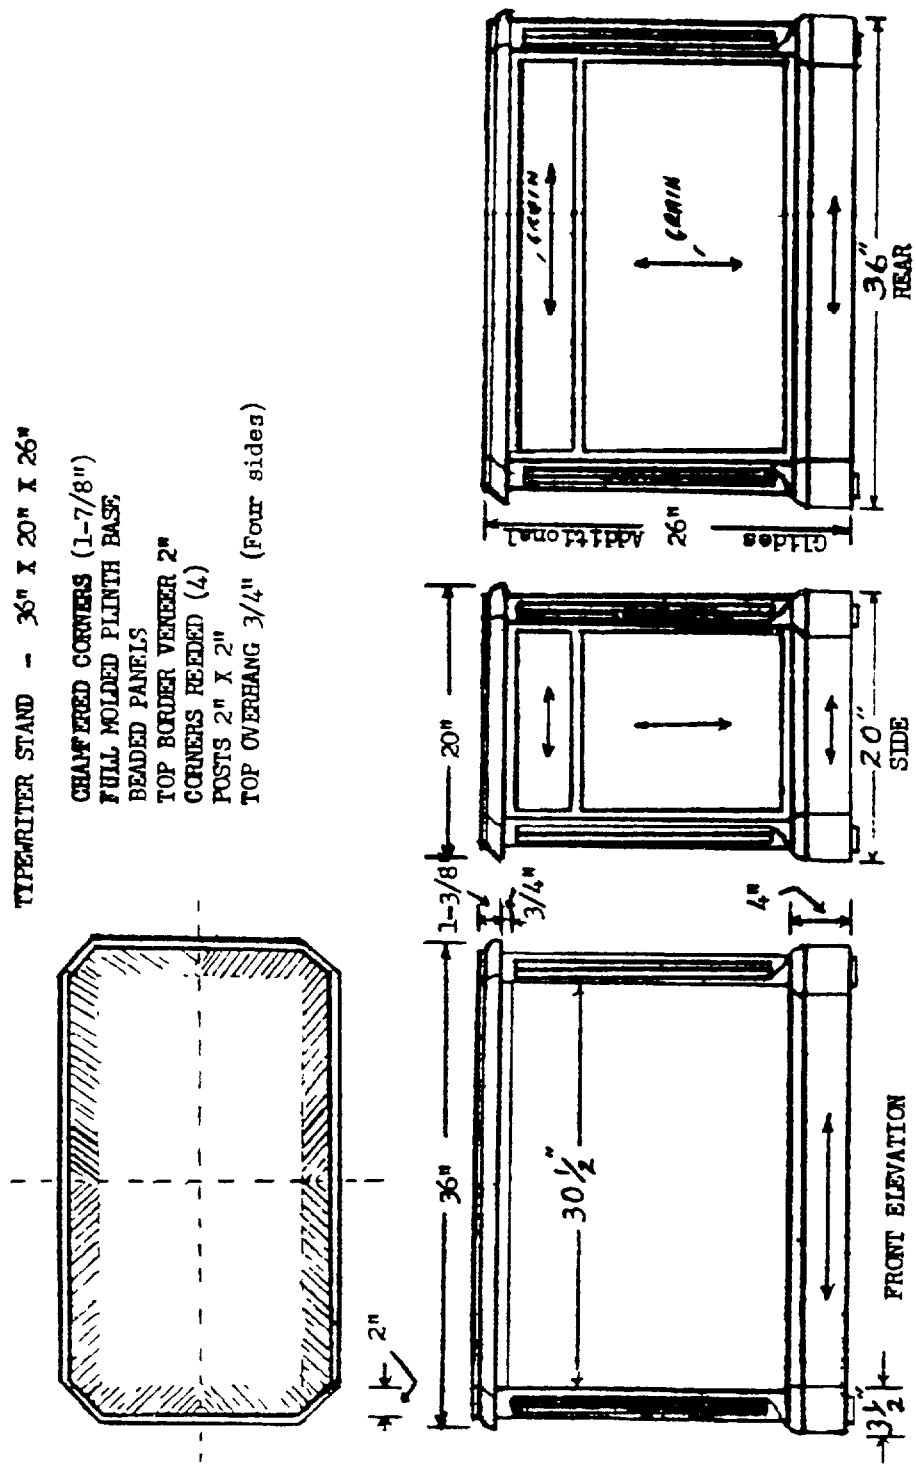

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.