MILITARY SPECIFICATION

KITCHEN, FIELD, TRAILER MOUNTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an expandable, self-contained, trailer mounted field kitchen.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
TT-P-1757	-	Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity
PPP-S-760	-	Strapping, Nonmetallic (and Connectors)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7360

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-1747	-	Pan, Baking and Roasting, Aluminum: Pan Cover, and Warmer Adapter; For Range, Field, Gasoline
MIL-C-5541	-	Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-A-8625	-	Anodic Coatings, For Aluminum and Aluminum Alloys
MIL-D-43916	-	Dispenser, Liquid, Insulated
MIL-C-43917	-	Coffee Maker, Stainless Steel
MIL-E-52798	-	Enamel, Alkyd, Camouflage

STANDARDS

FEDERAL

FED-STT-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

5-13-2500 Drawing List

(Figures 1 thru 5 are miniature copies of the issue of drawings 5-13-2502, sheets 1 thru 5, in effect on the date of specification approval, and are for information only. The issue of the drawings referenced in the contract shall govern.)

LAWS AND REGULATIONS

Department of the Army Technical Manual

TM 10-7360-206-13	-	Organizational and Direct Support Maintenance Manual for Mobile Field Kitchen Trailer, Model MKT-75

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 20260-21T22:55Z
Check the source to verify that this is the current version before use.

49 CFR - Motor Carrier Safety Regulations

(The Code of Federal Regulations (CFR) and Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bid or request for proposal shall apply:

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Loose-Leaf Section No. 6 - Loading of Department of Defense Material on Open Top Cars

(Copies of AAR publications may be obtained from the Association of American Railroads, 59 East Van Buren Street, Chicago, IL 60605).

AMERCIAN WELDING SOCIETY (AWS)

Standard Qualification Procedure of the American Welding Society

(Application for copies should be addressed to the American Welding Society, 2501 Seventh Street, N.W., Miami, FL 33125.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E-165 - Standard Methods for Liquid Penetrant Inspection

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Welding Qualifications of the American Society of Mechanical Engineers

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.2 Initial production testing sample. When specified (see 6.2), the contractor shall furnish a sample for initial production inspection and approval (see 4.4 and 6.4).

3.3 Comparison inspection testing sample. When specified (see 6.2), the contractor shall furnish a sample for comparison inspection and approval (see 4.5 and 6.5).

3.4 Alternate components. Components offered as equivalent to components specified hereinafter and on the referenced drawings as a specific manufacturer's part or model number or equal, shall be functionally equal to the manufacturer's model number identified, and of equal or better quality. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other components, unless such modification or change is specifically approved by the contracting officer. Prior to manufacture of the first article, or if none is required, prior to commencing production, the contractor shall submit for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified above. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with the necessary supporting data, authorizes commencement of manufacture but does not relieve the contractor of responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.5 Materials and components. The materials and components used shall conform to the applicable referenced specifications, standards, drawings, and requirements specified herein. Where materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice provided the completed items comply with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

3.5.1 Primer, paint. Paint primer for metal surfaces shall conform to color [illegible], composition optional, of TT-P-1757.

* 3.5.2 Enamel. Enamel paint for metal surfaces shall conform to color FOREST GREEN or BLACK of MIL-E-52798.

3.5.3 Thread, polyester. The thread shall conform to type I, class 1, sub-class B, dyed shade S-1 (CA No. 66022) of V-T-285. The dyed thread shall show fastness to weathering equal to or better than the standard shade sample (see 6.6). Thread sizes shall be as follows:

For type 301 stitching - size FF for needle and bobbin

For type 401 stitching - size FF for needle, size F for looper

3.5.4 Dispenser, liquid, plastic. Four liquid dispensers shall be provided with each kitchen. Dispensers shall conform to MIL-C-43916.

3.5.5 Coffee maker. One coffee maker shall be provided with each kitchen. The coffee maker shall conform to MIL-C-43917.

3.6 Design and construction. Design and construction for the kitchen shall be as specified herein and as shown on the drawings listed on Drawing 5-13-2500.

3.6.1 Welders. Prior to assigning any welder to structural welding on kitchens to be furnished under this specification, the contractor shall provide the contracting officer or his authorized representative with the names of welders to be employed in the work, together with certification that each of these welders has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be performed.

a. Standard Qualification Procedure of the American Welding Society

b. Welding Qualification of the American Society of Mechanical Engineers

3.6.2 Stitches, seams, and stitching. All stitching shall conform to type 301 or 401 of FED-STD-751 with 5 to 7 stitches per inch (2 to 3 stitches/cm). Thread tension shall be maintained so that there is no loose stitching. All thread ends shall be trimmed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

3.6.2.1 Thread lubrication. The addition of any lubricant to the polyester sewing thread prior to or during the sewing operation is prohibited. Water or air spraying for needle cooling is permissible.

3.6.2.2 Thread breaks. Thread breaks in stitching shall be overstitched not less than 1-inch (25 mm) at each break on type 301 stitching and not less than 1-1/2 inches (38.1 mm) at each break on type 401 stitching.

3.6.2.3 Stitching ends. Stitching at the ends on type 301 stitching shall be backstitched or backtacked not less than 1-inch (25 mm) except where ends are turned under in a hem or held down by other stitching.

3.6.3 Setting of grommets. Holes punched to receive grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the material.

3.6.4 Fusing of polyester and cord. The cut ends of braided cords shall be fused to prevent fraying.

3.6.5 Attachment of slide fasteners. Care shall be exercised to trim all thread ends to 1/2 inch (12.7 mm) or less and to maintain specified distances between edges of fabric attached to slide fastener tape so that there will be no interference with the operation of the slider. The length of the slide fastener chain shall be such that after the slide fastener is sewed on, the tape shall not be puckered and the slider shall operate freely.

3.6.6 Electrical. The electrical circuits shall maintain continuity from end to end without evidence of internal or external shorts during all operating conditions. All lights shall operate in accordance with requirements specified on the applicable wiring diagram and assembly drawings.

3.6.7 Shock absorber kit assembly. The shock absorber kit assemblies shall be in accordance with requirements on Drawings 5-13-2507 and 5-13-2508 and positioned in accordance with requirements on Drawing 5-13-2509. The shock absorbers shall not leak any oil after mounting and after road testing of the kitchen trailer (see 4.7.1).

3.6.8 Travel cover. The travel cover shall adequately enclose the collapsed kitchen and the tensioning cord shall be connected to prevent any baggy or loose areas in the cover.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55Z
Check the source to verify that this is the current version before use.

3.6.9 Platform assembly. The ramp hinges or fold out braces shall provide free movement to the ramps during deployment and striking of the kitchen. The leveling jacks shall freely move from the retained, travel position to the erection, support position. The latch mechanisms of the ramps and corner posts shall freely latch and unlock with the mating component. The nine ladder positions in the ramps shall readily accept each of the three ladders interchangeably.

3.6.10 Fabric support poles. The fabric support poles shall be adjustable to pull the fabric tight when in the expanded configuration. The poles shall be straight with fixed upper and lower pins and shall be of the quantity specified on the applicable drawings.

3.6.11 Handrails. The handrails shall be firmly retained by the mounting brackets to prevent accidental release during movement of the fabric support pole.

3.6.12 Roof fabric assemblies. The zippers of the roof fabric shall be assembled with zippers facing inward. The mosquito netting and foul weather curtains shall be fabricated in accordance with their applicable drawings and shall assemble with their mating component and shall enclose the kitchen as specified on the applicable drawings.

3.6.13 Roof vents. The roof vents shall operate smoothly, without binding, from fully closed to completely open. The operating levers and the cover shall not be loose and the screen shall not be damaged or interfere with the operation of the vent.

3.6.14 Struts. The curtain hold out struts shall be furnished in the quantity specified and shall assemble with their mating components.

3.6.15 Cargo strap ratchets. The cargo strap ratchets shall operate freely until all slack is removed and then the locking mechanism shall retain the ratchet in this position until manually released.

3.6.16 Rain trough. The rain trough shall be as specified on the applicable drawings and with the mating hook and pile fasteners aligning properly.

3.6.17 Tables. The drop leaf tables shall not bind during erection or collapsing and the detent pins shall adequately lock into position.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

3.6.18 Cooking rack/frame. The cooking rack/frame shall support the griddle without any binding and it shall provide sufficient clearance in the front with the burner unit.

3.6.19 Drawers and doors. All drawers and doors shall have latches that engage and disengage under light hand pressure (showing correct alignment of latch), opening and closing without binding, and no loose components. The drawer joints and seams shall be sealed. The space between the doors and frame and the drawers and cabinets shall be in accordance with the requirements of the applicable drawings.

3.6.20 Leveling bubbles. The leveling bubbles shall be located in accordance with the applicable drawings and shall indicate the horizontal position of the kitchen during erection.

3.6.21 Floor mat. The floor mat shall be in accordance with the applicable drawing and shall not contain any tears or holes.

3.7 Finish.

3.7.1 Metal surface preparation. Aluminum alloy surfaces other than those specified in 3.7.4 shall have a chemical conversion coating in accordance with class 1A of MIL-C-5541. Metals other than aluminum shall be free of grease, oil, dirt, rust and other foreign matter.

3.7.2 Priming. After surface preparation, all metal surfaces to be painted shall be coated with the primer specified in 3.5.1.

3.7.3 Painting. After priming, all metal surfaces to be painted shall be coated with the enamel specified in 3.5.2 to a thickness of 1.5 mil.

* 3.7.4 Anodic coatings. Components and assemblies requiring anodizing, as specified on the applicable drawings, shall conform to type I, class 1 of MIL-A-8625. Dyed anodic coatings shall conform to type 1, class 2 with color similar to FOREST GREEN of MIL-E-52798 (see 6.8). Corner roof support posts and threaded portions of fabric support poles shall be anodized in accordance with type III, class 1 coatings of MIL-A-8625 with a minimum coating thickness of 2.0 mils, unsealed. Griddle surface shall be anodized in accordance with type III, class 1 coatings of MIL-A-8625 with a minimum thickness of 2.0 mils unsealed, using the Sanford process or equal.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55Z
Check the source to verify that this is the current version before use.

3.8 Performance.

3.8.1 Over road. The kitchen, in the travel configuration, shall travel 5 miles (8 km) on paved roads at up to 50 miles per hour (mph) (80.5 km/h), 5 miles (8 km) on gravel roads at 30 mph (48.3 km/h), 5 miles (8 km) on level cross-country roads at 5 mph (8 km/h), and 5 miles (8 km) on hilly cross-country roads at 5 mph (8 km/h) without any damage to components or to welds or loosening or binding of components when tested as specified in 4.7.1. The trailer shall be towed by a 2-1/2 ton truck (see 3.10).

3.8.2 Erection and component operation. The kitchen shall be capable of being erected in accordance with TM 10-7360-206-13. No component used in erection, or noticed during erection, shall be missing, defective, or incorrectly fabricated when inspected as specified in 4.6.3.1.

3.8.3 Rainproof. The kitchen, expanded and secured for foul weather, shall not have rain leakage in areas where food preparation or holding equipment is located when subjected to the rain test specified in 4.7.2.

* 3.9 Government furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.2 and 6.7):

Item No.	Description	Identification (NSN)	Quantity/Each End Item
1	Chassis, Trailer, M103A3, 1-1/2 Ton	2330-00-141-8052	1
2	Range Outfit, M59 w/Burner Unit	7360-00-082-2153	2
3	Burner Unit, M2	7310-00-842-9247	4
4	Accessory Outfit	7360-00-187-4757	1
5	Food Container, Insulated	7330-00-238-2411	8
6	Bag, Water-Sterilizing	4610-00-268-9890	2
7	Rack Set, Baking, for Cabinet	7360-00-106-5965	1
8	Lantern, Gasoline	6260-00-170-0430	3
9	Pan, Baking and Roasting	7330-00-485-7376	3

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55Z
Check the source to verify that this is the current version before use.

Item No.	Description	Identification (NSN)	Quantity/Each End Item
10	Pan, Baking	7330-00-272-2589	4
11	Board, Food Slicing and Chopping	7330-00-078-5706	1
12	Can, Water, Plastic, 5-Gallon	7240-00-089-3827	8
13	Can, Gasoline, 5-Gallon	7240-00-222-3088	3
14	Pad, Bakery	7330-00-379-4439	4
15	Pot, Cooking, 10-Gallon	7330-00-292-2306	1
16	Cover, Pot, 10-Gallon	7330-00-250-6300	1
17	Pot, Cooking, 15-Gallon w/cover	7330-00-292-2307	1
18	Tongs, Food Service, SS, 12"	7330-00-616-0997	2
19	Spoon, Serving, Slotted, 15"	7340-00-205-1421	2
20	Cloth, Wind-Resistant Sateen, Cotton, Fire and Water Resistant (43" width)	8305-01-032-5059	110 yds
21	Pin, Rolling, Wooden, 23" x 3-3/4"	7330-00-153-9749	1
22	Colander, SS, 16-Quart	7330-00-266-7453	1
23	Steak Turner, SS, Offset	7330-00-634-1995	2
24	Knife, Boning	7340-00-197-1271	1
25	Knife, Cooks	7340-00-488-7950	1
26	Knife, Paring	7340-00-488-7939	2
27	Knife, Steak	7340-00-197-1274	1
28	Extinguisher, Fire	4210-00-270-4512	2

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55Z
Check the source to verify that this is the currentversion before use.

Item No.	Description	Identification (NSN)	Quantity/Each End Item
29	Bracket Assy., Liquid, Cont., 5-Gallon	2590-00-473-6331	3
30	Plate, Splash, Pots	7330-00-379-2544	1
31	Turner, Food	7330-00-256-2158	1
32	Skimmer	7330-00-237-8277	1
33	Dipper, No. 56	7330-00-272-2489	1
34	Ladle	7330-00-248-1153	1
35	Measuring Set, Spoon	7330-00-272-7876	1
36	Table, Field	7105-00-269-9275	2
37	Peeler, Potato	7330-00-238-8316	1
38	Spoon, Food Service	7340-00-223-7800	1
39	Spoon, 15"	7340-00-240-7080	1
40	Fork, 15"	7340-00-223-7791	1
41	Fork, 21"	7340-00-223-7792	1
42	Technical Manual	TM 10-7360-206-13	1
43	Warmer Adapter	Item 3 of MIL-P-1747	2
44	Cloth, Duck, Nylon, 12.5 oz.	8305-00-107-0079	40 yds
45	Tape, Nylon, 1"	8315-00-231-8531	10 yds
46	Webbing, Nylon, 1-1/2"	8305-00-263-2472	52 yds
47	Roll Cutlery	7360-00-274-7088	1
48	Case, Maintenance and Operational Manuals	7520-00-559-9618	1
49	Webbing, Nylon, 1"	8305-00-261-8579	47 yds
50	Webbing, Nylon, 1"	8305-00-435-4741	15 yds

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

Item No.	Description	Identification	Quantity/Each End Item
51	Cloth, Coated	8305-00-286-7034	2 yds
52	Dispenser, Pancake	7330-00-412-2449	1
53	Bowl, Food Mixing	7330-00-262-2323	1
54	Strainer, China Cap	7330-00-815-1456	1
55	Spout, Can, Gasoline	7240-00-117-6154	1

3.10 Government-loaned property. The following property in the quantity indicated will be loaned by the Government:

Item No.	Description	Identification (NSN)	Quantity/ Contract
1	Truck with heater, 2-1/2 ton, M35, or Truck with heater, 2-1/2 ton, M135	2320-00-835-8463 2320-00-835-8351	1

3.11 Lubrication.

3.11.1 Corner posts and fabric support poles. Corner posts and all threaded portions of the fabric support poles, both male and female, shall be coated with a commercial silicone lubricant.

3.12 Workmanship.

3.12.1 Finish. All components and assemblies of the kitchen shall be free from dirt, rust, or other extraneous material, burrs, slivers, rough die, tool or grind marks, dents and cracks. External surfaces shall be free from sharp edges and corners. Painted surfaces shall be smooth, uniformly coated, free of runs, wrinkles, peeling, and areas of no film. Any painted coating damaged during assembly or examination shall be touched-up by priming (see 3.5.1) and painting (see 3.5.2).

3.12.2 Welding. The surfaces of parts to be welded shall be free from oxide, scale, paint, grease and other foreign matter. Welds shall have a smooth, regular bead, shall be uniform in cross section, and shall be free of cracks, porosity, burn holes, undercuts, overlapping, or piling up. All scale and flux shall be removed from the finished weld area.

3.12.3 Fastening devices. Threaded fastener and rivet holes shall have burrs removed. Threaded fasteners shall not be broken, cracked, or stripped and shall be securely torqued. Rivets shall fill the hole completely and the heads shall be in full contact with the surface of the riveted members.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

3.12.4 Fabric. All seams shall be tightly sewn, and shall not have areas of pulled-out stitching. There shall be no tears or holes in the fabric. All grommets or other fasteners shall be securely set.

3.13 Identification marking. Marking shall be as specified on component drawings. An aluminum identification plate shall be riveted to the front skirt in the location shown on Drawing 5-13-2512. The plate shall include the following permanent marking:

KITCHEN, FIELD, TRAILER MOUNTED
US
NSN 7360-00-138-7782
CONTRACT NO.
SERIAL NO.
MODEL NO. MKT-75
MANUFACTURER'S NAME AND ADDRESS

3.14 Arrangement of components and equipment. The components and equipment of the kitchen shall be arranged in accordance with the applicable illustrations of TM 10-7360-206-13.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Initial production inspection (see 4.4)
c. Comparison sample inspection (see 4.5)
d. Quality conformance inspection (see 4.6)

4.3 First article inspection. When a first article is required, it shall be inspected as specified in 4.6.3.1, 4.6.3.2 and tested as specified in 4.7.1, and 4.7.2. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Initial production sample inspection. When an initial production sample is required, the kitchen(s) shall be inspected as specified in 4.6.3.1, 4.6.3.2 and tested as specified in 4.7.1 and 4.7.2. The presence of any defect or failure of any test shall be cause for rejection of the initial production sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

4.5 Comparison sample inspection. When a comparison sample is required, the kitchen(s) shall be inspected as specified in 4.6.3.1, 4.6.3.2 and tested as specified in 4.7.1 and 4.7.2. The presence of any defect or failure of any test shall be cause for rejection of the comparison sample.

4.6 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.6.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, standards and drawings unless excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.6.2 In-process inspection.

4.6.2.1 Visual examination of process. Examination shall be made of the following fabrication processes to establish conformance with specified requirement. Whenever non-conformance is noted, correction shall be made to the process and all affected items processed.

a. Thread lubricant is not used during stitching (see 3.6.2.1)
b. Metal surface preparation for welding (see 3.12.2)
c. Surface preparation for painting (see 3.7.1)
d. Application of primer (see 3.7.2)
e. Application of enamel (see 3.7.3)
f. Arrangement and mounting of components and equipment during packaging (see 3.14).

* 4.6.2.2 Dimensional examination of process. All component parts, prior to assembly, shall be examined for compliance with dimensions specified on the applicable drawings. Any dimension not within dimensional tolerance shall be a defect. The inspection level shall be II with an AQL of 6.5 defects per hundred units.

4.6.2.3 In-process testing.

4.6.2.3.1 Ice chest insulation density. Prior to the start of production on each day that ice chests are to be produced, the density test of foamed-in-place insulation used in the ice chest shall be performed as specified in 4.7.3. The inspection lot shall be the amount of material used in one day's production. The sample unit shall be a 6-inch (150 mm) cube of each density specified on Drawing 5-13-1544. If the sample does not conform to the specified density, adjustments shall be made to the foaming equipment and the test repeated. No insulation shall be installed until the density of the foam conforms with requirements on Drawing 5-13-2544.

* 4.6.2.3.2 Ice chest inner body skin. The ice chest inner body skin with coupling as shown on Drawing 5-13-2544 shall not leak when tested as specified in 4.7.4. The inspection level shall be II with an AQL of 6.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

* 4.6.2.3.3 Liquid penetrant weld inspection. Prior to any surface treatment, sample kitchens shall have a liquid penetrant weld inspection in accordance with ASTM E 165, method B, procedure B-1, on all kitchen frame structural welds. Kitchen frame structural welds shall be separated into the following categories for inspection purposes.

(1) Platform frame and ramp assemblies, less deck plates.
(2) Shock absorber kit brackets.
(3) Levelling jack assembly brackets and struts.
(4) Corner post assemblies.
(5) Roof frame assembly.
(6) Ladder assembly.

Each of the categories shall be inspected separately. One sample item from each category shall be inspected for each lot of 15 completed items. A lot of less than 15 items shall be considered a full lot. Evidence of any weld cracks or gross porosity shall constitute a defect. The inspection level shall be II with an AQL of 2.5 defects per hundred units.

4.6.3 End item inspection. The inspection lot shall be all complete kitchens offered for inspection at one time.

4.6.3.1 Visual examination. From the closed travel configuration, the kitchen shall be expanded and during and after expansion, examined for the defects listed in table I. The inspection level shall be II with an AQL of 2.5 for major defects and 4.0 for minor defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Workmanship			
Finish	Extraneous material, such as dirt, grease, rust, epoxy		X
	Rough tool, die or grind marks		X
	Dents, scratches, cracks not affecting serviceability		X
	Dents, scratches, cracks affecting serviceability	X	
	Burrs or slivers which may inflict injury	X	
	Sharp edges, sharp corners	X	
	Extraneous holes	X	
Painted surfaces	Film not uniform, not smooth		X
	Runs, wrinkles, peeling		X
	Areas of no film		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Welding	Cracks, burn holes, undercutting, over-lapping, piling up	X	
	Irregular bead, non-uniform cross section	X	
	Scale, flux, splatter not removed		X
Fasteners			
Threaded	Broken, cracked, stripped	X	
	Loose, rusted		X
Rivets	Loose, head not in full contact with member		X
	Not sealed, when applicable		X
Fabric assemblies	Holes or tears	X	
	Thread breaks not overstitched at least 1 inch (25 mm) (type 301 stitching) or 1-1/2 inches (38 mm) (type 401 stitching)		X
	Loose stitching, untrimmed thread ends		X
	Grommets or other fasteners not securely set		X
	Stitching at ends not backstitched		X
	Not correctly marked		X
Construction and workmanship (applicable to all components	Any burr or rough edge	X	
	Any component fractured or malformed	X	
	Any component not in proper alignment or not located as specified	X	
	Functioning component that is inoperative or will not operate as intended	X	
Travel cover	Hook and pile fasteners do not mate; excessive overlap		X
	Fabric too loose, or baggy		X
Leveling jacks	Binding during operation		X
	Release pin detent balls defective		X
	Release pins bind during removal		X
Ramps	Ramp hinges or fold out braces bind		X
	Latch slides bind		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction (cont'd)			
Corner posts	Latches fail to latch	X	
	Not lubricated		X
	Binding during operation	X	
Fabric tent poles	Cannot be adjusted to pull roof fabric tight		X
	Missing, bent, upper or lower pin missing	X	
	Threads not lubricated, evidenced by squeaking or difficult turning		X
	Not anodized		X
Handrails	Handrails fall out when fabric support pole is bumped		X
	Not anodized		X
Roof fabric	Zippers do not face inward		X
Cargo strap ratchets	Binding in operation or failure to lock tightly		X
Mosquito netting and foul weather curtains	Construction defects, incompatible fit		X
Foul weather curtain hold out struts	Not number specified		X
	Do not fit in attachment holes		X
Rain trough	Missing		X
	Hook and pile fasteners do not mate		X
Drop leaf tables	Bind during set up		X
	Defective detent pins		X
	Spring catch missing		X
Ladders	Do not fit in holes in ramps in all 9 locations (see TM 10-7360-206-13)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction (cont'd)			
Roof vents	Binding during operation		X
	Operating levers loose or missing or does not lock		X
	Screen damaged, sags, missing; cover loose		X
Shock absorber kit assembly	Incorrect position of mounting bracket	X	
	Damage to brake line during assembly	X	
	Leaking of shock absorber fluid	X	
	Incorrect orientation of shock absorber	X	
Griddle	Does not fit on cooking racks	X	
	Not anodized as specified	X	
Burner units	Do not fit into cooking racks	X	
Cabinet drawers, doors, including ice chest	Binding in opening or closing		X
	Improper latch alignment or engagement		X
	Defective or loose parts		X
	Excessive space between doors and frame		X
	Drawer joints and seams not sealed		X
Leveling bubbles	Missing, broken or not parallel with platform when in operating position		X
Floor mat	Sized wrong, torn, holes		X
Identification marking	Omitted incorrect, illegible or misplaced	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Components (other than GFP items)	Missing or not specified quantity		X
All GFP items (see 3.9)	Any item missing or not furnished in quantity specified		X

4.6.3.2 Dimensional examination. The complete kitchen including all manufactured components, but excluding all GFP items shall be examined for compliance with dimensions specified. Any dimension not within the specification tolerance shall be a defect. The inspection level shall be II with an AQL of 6.5 defects per hundred units.

* 4.6.3.3 End item testing. The tests as specified in 4.7.1 and 4.7.2 shall be performed on one complete kitchen from every lot of fifty, or fraction thereof, but not more than one months production of completed kitchens. Failure to pass the tests shall be cause for rejection of the lot.

* 4.6.4 Packing inspection. An examination shall be made to determine whether the preservation-packaging, packing and marking complies with section 5 requirements. Defects shall be scored in accordance with table II. The sample unit shall be one kitchen fully prepared for delivery, except that it may be expanded. The lot size shall be the number of kitchens in the end item inspection lot. The inspection level shall be S-4 and the AQL shall be 6.5 defects per hundred units.

TABLE II. Inspection of packaging defects

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Strapping or edge protectors incorrectly applied.
Content	Component and equipment not arranged, or protected and secured as specified. Packing list not inside specified envelope and envelope not in manuals case.
Packing	Kitchen not in accordance with the applicable mode of shipment.
Precautionary sign	Missing, incorrectly worded, or not secured in a conspicous place in the locations specified.

Source: https://assist.dla.mil -- Downloaded: 20261010-21T22:55Z
Check the source to verify that this is the current version before use.

4.7 Tests.

4.7.1 Road and terrain tests. The complete trailer-mounted kitchen, packed and closed for travel, as specified in TM 10-7360-206-13, with water and gas cans filled, shall be towed over not less than 5 miles (8 km) of paved roads at speeds up to 50 miles per hour (mph) (80.5 km/h); over not less than 5 miles (8 km) of graveled roads at speeds averaging 30 mph (48.3 km/h); over not less than 5 miles (8 km) of level cross-country roads at 5 mph (8 km/h) average speed; and over not less than 5 miles (8 km) of hilly cross country roads at 5 mph (8 km/h) average speed to determine compliance with 3.6.7 and 3.8.1. Prior to road test the tail light assemblies shall be checked for electrical continuity and proper operation and the trailer chassis shall be checked for proper lubrication and brakes tested for proper operation. Failure to conform to 3.6.7 and 3.8.1 shall determine failure of this test.

4.7.1.1 Paved and graveled roads. The paved and graveled road tests shall each include not less than 10 quick starts and stops.

4.7.1.2 Level cross-country roads. Level cross-country roads shall be dirt roads with surface irregularities, such as pot holes, mounds, rocks and tree roots randomly spaced. The roads shall not include any grades greater than 5 percent.

4.7.1.3 Hilly cross-country roads. Hilly cross-country roads shall be dirt roads with surface irregularities as specified in 4.7.1.2, but with numerous grades both ascending and descending including but not exceeding 15 percent. The grades shall be approximately one-half ascending and one-half descending.

4.7.2 Rain test. The kitchen in the expanded configuration and secured for foul weather, shall be exposed to simulated rainfall at the rate of 3 inches (76.2 mm) + 1 inch (25.4 mm) per hour as measured 6 inches (152.4 mm) from the surface of the kitchen roof by a U.S. Weather Bureau type gage. The rain shall fall vertically for 15 minutes, and at a 30 to 45 degree angle from the vertical for 20 minutes. The orientation of the kitchen during the angle rainfall shall be such that the long side of the kitchen faces directly into the rain for 10 minutes, and one front corner of the kitchen faces directly into the rain for 10 minutes. Examination of the kitchen interior shall be made during testing to determine compliance with 3.8.3. Nonconformance with 3.8.3 shall constitute failure of this test.

4.7.3 Density test for ice chest insulation. A minimum 8-inch (203.2 mm) sample cube of urethane foam shall be taken, and from its center, a 6-inch (152.4 mm) cube shall be carefully cut and weighed. This weight, 1/8 of a cubic foot (0.028 m^3), shall be multiplied by 8 to determine conformance to density requirements specified on Drawing 5-13-2544 (see 4.6.2.3.1).

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55Z
Check the source to verify that this is the current version before use.

4.7.4 Ice chest inner body skin leakage test. The ice chest inner body coupling shall be plugged and the inner body with sides braced shall be filled with water. All exterior surfaces shall be examined to determine compliance with 4.6.2.3.2. Any evidence of water leakage shall constitute failure of this test.

4.8 Certificate examination. Certificates of compliance that are submitted as proof of compliance with the specification requirements shall be examined and validated (see 3.6.1).

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A.

* 5.1.1 Level A. The components and equipment of the kitchen, except for the three gasoline cans, shall be arranged as specified in 3.14. The gasoline cans shall be stowed inside the kitchen on top of the storage cabinet or other void at the option of the contractor. The components and equipment of the kitchen shall be adequately protected and secured to prevent being damaged or causing damage while in transit. The kitchen, in travel configuration, shall be horizontally strapped with two 1/2 inch (12.7 mm) by 0.020-inch (.5 mm) nonmetallic straps conforming to type II or III of PPP-S-760. The straps shall divide the height of the kitchen into approximately thirds. Edge protectors shall be placed under the straps at the corners of the kitchen. Edge protectors shall be of commercial construction or be made from 3 by 3-inch (76 by 76 mm) weather-resistant solid fiberboard material.

5.2 Packing. Packing shall be level A.

5.2.1 Level A. Kitchens, preserved-packaged as specified in 5.1, shall be packed for shipment as specified herein.

5.2.1.1 Railway shipment. For railway shipment, tire pressure shall be increased 10 pounds over the required running pressure. Loading of vehicles for railway shipment shall be on open-top cars in accordance with rules governing the loading of Department of Defense materials on open-top cars and Loose Leaf Section No. 6 of the Association of American Railroads.

5.2.1.2 Highway haulaway shipment. The units shall be placed on the bed of rails of haulaway vehicles so that the load is evenly distributed and secured. Parking brakes shall be locked and the levers wired or blocked in position. Loading of units for haulaway shall be in accordance with the Department of Transportation Safety Regulations. Tire pressure shall be increased to 10 pounds over the required running pressure (16 g/m^2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

5.2.1.3 Highway towaway shipment. No processing of the trailer units running gear shall be performed prior to highway shipment that would impair necessary operation or safety during transit. Wheel bearings and other fittings shall be lubricated to capacity and brake fluid reservoir shall be filled prior to towing. Towaway rules for shipment by driveaway shall be in accordance with the Department of Transportation Safety Regulations. Tire pressure shall be the required running pressure. Processing of the trailer units running gear, not accomplished prior to highway shipment, shall be performed at intermediate destination when vehicles are to be placed in storage or shipped overseas.

* 5.3 Marking. In addition to any special marking required by the contract or order, the trailer mounted units shall be marked in accordance with MIL-STD-129. The packing list required shall be placed inside a water-resistant envelope. The envelope shall be placed in the maintenance and manuals case.

5.3.1 Humping precaution. A large sign containing the words "DO NOT HUMP" shall be secured in a conspicuous place on each side of the open-top car.

6. NOTES

6.1 Intended use. The trailer mounted field kitchen is intended for use in feeding personnel in the field where mobility is required. It replaces the M-1948 Kitchen Tent.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When first article is required (see 3.1, 4.3 and 6.3).
(c) When initial production testing sample is required (see 3.2, 4.4 and 6.4).
(d) When comparison inspection testing sample is required (see 3.3, 4.5 and 6.5).
(e) Source and delivery of government furnished property (see 3.9 and 6.7).

6.3 First article. When a first article is required, it shall be inspected and approved under appropriate provisions of ASPR 7-104.55. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:55Z
Check the source to verify that this is the currentversion before use.

6.4 Initial production test. When an initial production test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the initial production test sample.

6.5 Comparison inspection test. When a comparison test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the comparison test sample.

6.6 Thread sample. For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

* 6.7 Notes. The contracting officer shall insure all components of the M-59 field ranges, M-2 burner units, and accessory outfits are included as specified in 3.9, prior to supplying them to the contractor. Also the contracting officer shall insure that the trailer chassis, item 1 of 3.9 GFP, includes the brake handle Ordance part no. 11652179, composite lights Ordance part no. 11614157, and painted color FOREST GREEN of MIL-E-52798.

6.8 Color chip. For access to color chip sample of enamel specified in 3.7.4, address the procuring office issuing the invitation for bids.

6.9 Changes from previous issue. The margins of this specification are marked with asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD
DLA - GS


Preparing activity:

Army - GL

Project No. 7360-A136

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.


NOTES:
1. SECTION A-A & B-B ON DWG S-48-2508 SH 2 OF 5.
2. NOT SHOWN, USED FOR PACKING PURPOSES ONLY.
3. USE NUTS SUPPLIED WITH ITEM (P32) TO ATTACH ITEMS (P28) (P29) (P30) AND (P31).
4. MODULE PER END ITEM SPECIFICATION.
5. NOT SHOWN, STORED W/ TRAILER & USED FOR RAISING ROOF.
6. (P28) OMITTED ON POST WITH FIRE EXTINGUISHER BRACKET.

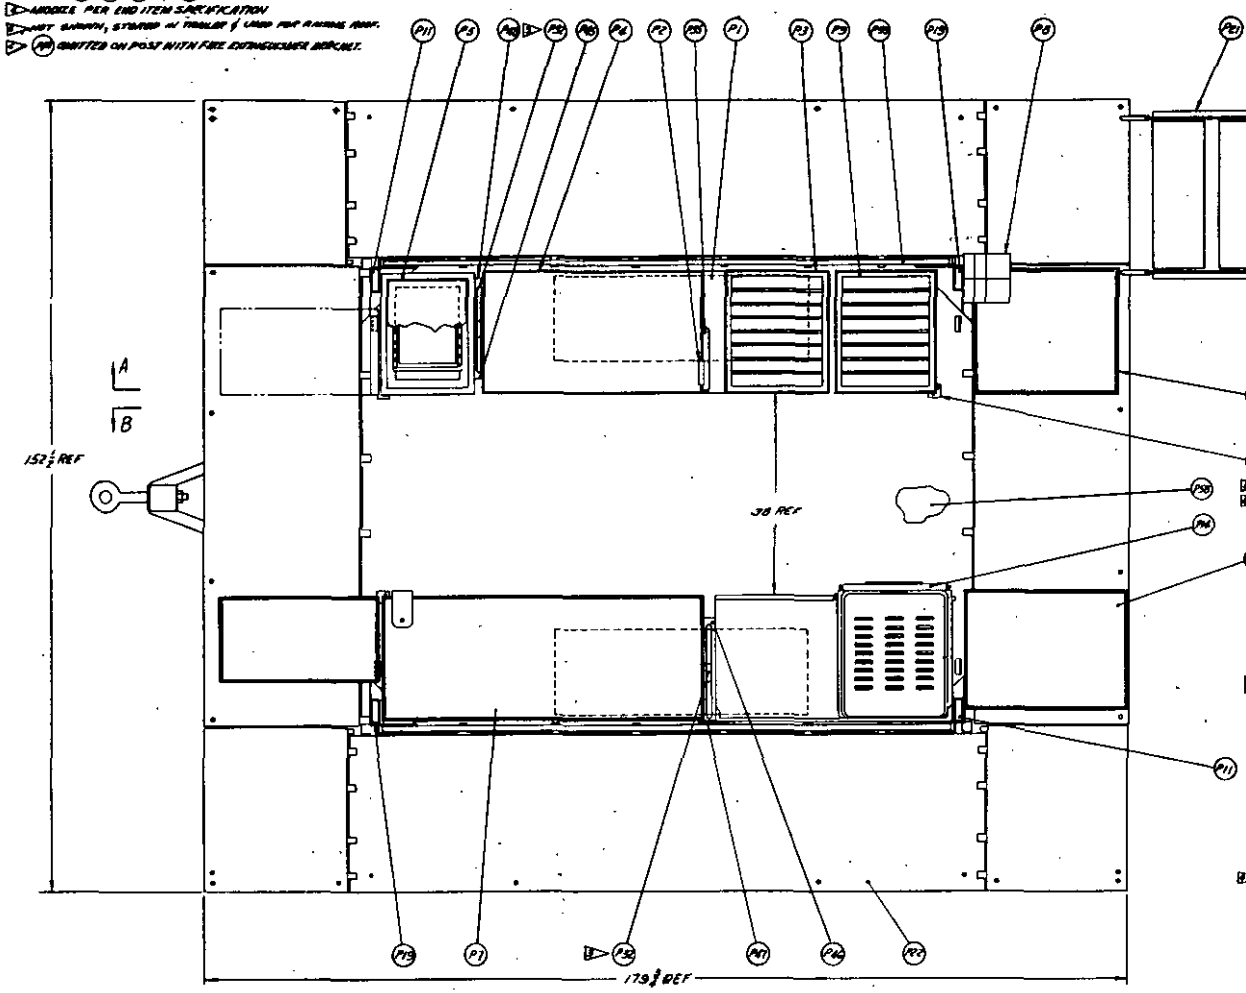


PLAN VIEW
ROOF REMOVED

PARTS LIST

Source: https://assist.dla.mil -- Downloaded: 20260-21T22:43:37
Check the source to verify that this is the current version before use.

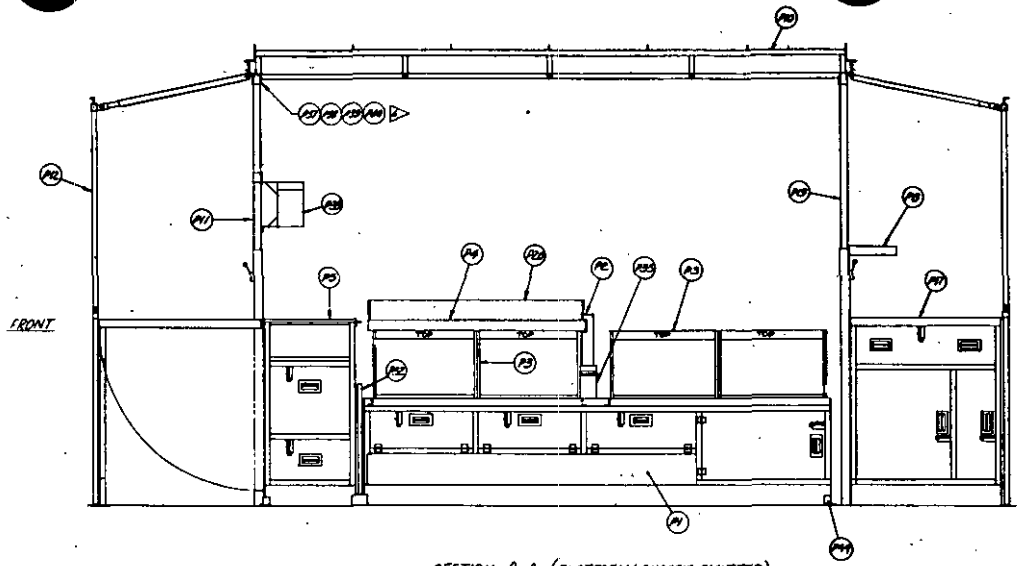


SECTION A-A (PLATFORM & CHASSIS OMITTED)

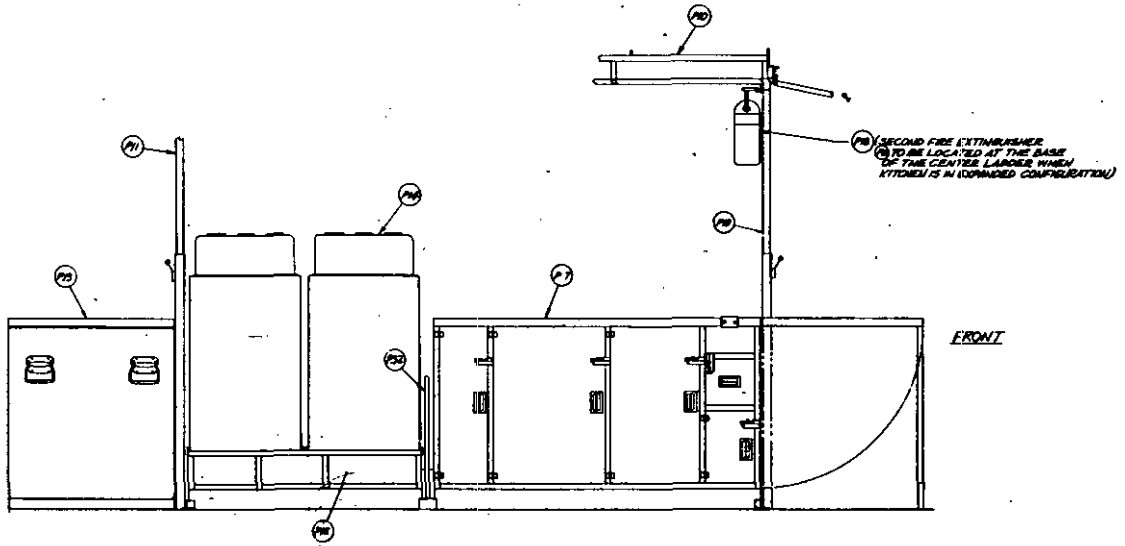

SECTION B-B (PLATFORM & CHASSIS OMITTED)

KITCHEN, FIELD, TRAILER MOUNTED
LOCATION ASSEMBLY
ELEVATION SECTIONS

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:55
Check the source to verify that this is the current version before use.

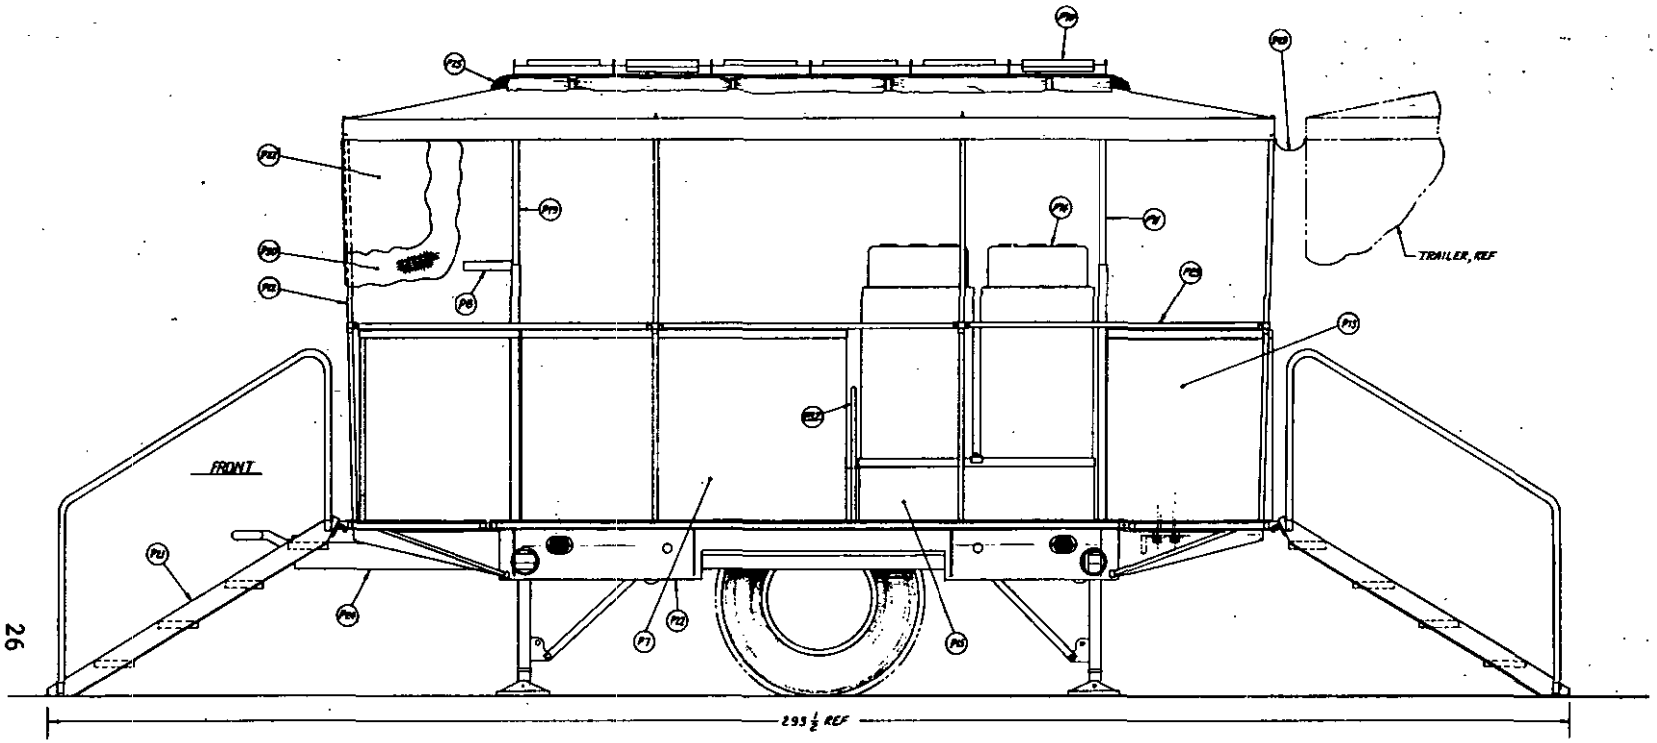


KITCHEN, FIELD, TRAILER MOUNTED
LOCATION ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

KITCHEN, FIELD, TRAILER MOUNTED
LOCATION ASSEMBLY
DOOR, CLOSED VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.

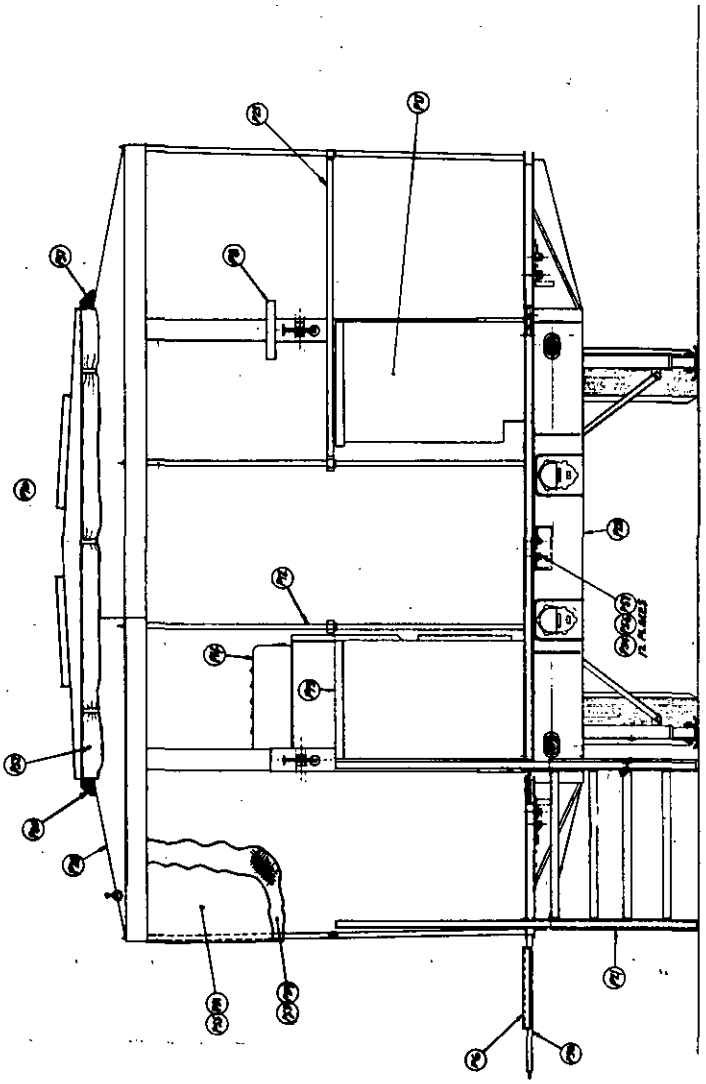

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-020/5199

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-21T22:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-K-43911A(GL) - Kitchen, Field, Trailer Mounted

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:55Z
Check the source to verify that this is the current version before use.