MIL-T-43908A(GL)

7 December 1976
SUPERSEDING
MIL-T-43908(GL)
31 October 1974

MILITARY SPECIFICATION

# TABLES, HOT FOOD, GAS

This specification is approved for use by the Natick Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

* 1.1 Scope. This specification covers dry heat or moist heat, hot food tables, gas heated having compartments for accommodating specified sizes of food pans.

* 1.2 Classification. The hot food tables shall be of the following sizes and types, as specified (see 6.2):

Size 4 - Four food storage compartments for four 12 by 20 inch food pans.
Size 5 - Five food storage compartments for five 12 by 20 inch food pans.
Size 6 - Six food storage compartments for six 12 by 20 inch food pans.

Type D - Dry heat.
Type M - Moist heat.

## 2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Command, Natick, MA 01760 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7310

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| L-P-390 | - | Plastic Molding and Extrusion Material Polyethylene and Copolymers (Low, Medium and High Density) |
| L-P-394 | - | Plastic Molding Materials, Polypropoline, Injection and Extension |
| LLL-B-568 | - | Board, Food Slicing |
| PPP-B-601 | - | Boxes, Wood, Cleated-Plywood |
| PPP-B-621 | - | Boxes, Wood, Nailed and Lock-Corner |
| PPP-B-636 | - | Boxes, Shipping, Fiberboard |
| PPP-T-45 | - | Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing |

MILITARY

| | | |
|---|---|---|
| MIL-P-43940 | - | Pans, Food SErving, Rectangular and Insets, Round |

STANDARDS

MILITARY

| | | |
|---|---|---|
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | - | Marking for Shipping and Storage |
| MIL-STD-1186 | - | Cushioning, Anchoring, Bracing, Blocking and Waterproofing; With Appropriate Test Methods |

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN GAS ASSOCIATION (A.G.A.)

Directory of Certified Appliances and Accessories

(Application for copies should be addressed to the American Gas Association, 8501 East Pleasant Valley Road, Cleveland, OH 44131.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.31 - Gas Counter Appliances

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018, or the American Gas Association, 8501 East Pleasant Valley Road, Cleveland, OH 44131.)



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 4 - Commercial Cooking and Hot Food Storage Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, MI 48105.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | | |
|---|---|---|
| A 167 | - | Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip |
| A 269 | - | Seamless and Welded Austenitic Stainless Steel Tubing for General Service |
| D 2240 | - | Indentation Hardness of Rubber and Plastics by Means of a Durometer |

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. Hot food tables delivered under this specification shall be the manufacturer's standard commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

3.2 Codes and standards. The hot food tables shall comply with the applicabl requirements of ANSI Z21.31 and NSF Standard No. 4.



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the currentversion before use.

* 3.2.1 Compliance. Prior to commencing production, the contractor shall submit to the contracting officer or his authorized representative satisfactory evidence that the hot food tables he proposes to furnish under this specification meet the applicable requirements of ANSI and NSF as follows:

3.2.1.1 ANSI. Acceptable evidence of meeting the requirements of ANSI Z21.31 shall be a reproduced copy of the A.G.A. Appliance Certificate; a listing of the hot food tables in the A.G.A. Directory of Certified Appliances and Accessories; or a certified test report from a recognized independent testing laboratory acceptable to the Government stating that the hot food tables have been tested and conform to the applicable requirements of ANSI Z21.31.

3.2.1.2 NSF. Acceptable evidence of meeting the requirements of NSF Standard No. 4 shall be:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished hot food tables, or

(2) A certification issued for the hot food tables by NSF under their special one-time contract evaluation/certification service, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the Army Medical Department indicating that the hot food tables have been tested and conform to NSF Standard No. 4.

3.3 Materials and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial hot food tables provided the completed items comply with all provisions of this specification.

3.3.1 Stainless steel sheet and strip. Stainless steel sheet and strip shall conform to type 302 or 304 of ASTM A 167.

3.3.2 Stainless steel tubing. Stainless steel tubing shall conform to any type in the 300 series specified in ASTM A 269.

3.3.3 Plastic. The plastic for the carving shelf shall be a virgin high density ethylene copolymer material conforming to type I, class H of L-P-390 or type I or III B of L-P-394. Clean, unburned plastic material in the form of imperfect parts of the same composition as the virgin material and produced in the molding or finishing operation, may be reground and mixed with the virgin material. When reground is mixed with the virgin material, the reground shall not exceed a level of 15 percent by weight of the blended mixture. The plastic board shall have a Shore D Durometer hardness reading of not less than 55 nor more than 75 and shall weigh not less than 1.75 nor more than 3.5 pounds per square foot per 3/4-inch of thickness when tested as specified in 4.4.5 and 4.4.6, respectively.



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the currentversion before use.

3.4 Design and construction. The hot table shall be designed to maintain correct food temperature with dry heat (type D) and moist heat (type M) while food is being dispensed. The hot food tables shall consist essentially of a tabletop, insulated heated food compartments, a cabinet body having a dish shelf and a bottom shelf, casters, a quick-disconnect flexible gas supply line, gas burner units, thermostatic gas controls, and a sneeze-guard with serving shelf. The center of gravity shall be low enough to prevent the hot food table from tilting when tested as specified in 4.4.2.1. When the dish shelf is loaded to capacity, the hot food table shall show no evidence of permanent distortion, or parts failure, and shall not tip over when tested as specified in 4.4.2.1. When fully laoded, the hot food table shall roll easily and dishes shall remain in place when the table is moved.

3.4.1 Dimensional. Hot food tables shall be as illustrated on figure 1. Hot food tables shall be not less than 34 inches from the floor to the tabletop including legs.

3.4.2 Tabletop, cabinet body, dish shelf, and bottom shelf. The tabletop shall be fabricated of one piece stainless steel conforming to 3.3.1 having a minimum thickness of 14 gauge (0.0781-inch). The tabletop shall be fabricated in accordance with figure 1 and shall have cutouts to accommodate and support four, five, and six (12 by 20 inch) food pans for sizes 4, 5, and 6 hot food tables, respectively. The pan flanges shall be in contact with the tabletop around the entire periphery of the cutouts and the bottom of the pans shall not contact the bottom of the compartments. The overhanging lip shall function as a work shelf. The edge of the work shelf facing the operator shall be rolled out and down to form a full 180 degree 1-1/2 inch diameter section. The material of the work shelf shall be turned down on each side to form enclosing and reinforcing panels with the dish shelf below the work shelf. The cabinet body shall be closed on three sides. The open side shall be on the attendant's side. The open side shall provide access to the dish shelf and the bottom shelf. The open side shall be from the bottom of the food compartments to the bottom of the cabinet body. The exterior of the cabinet body shall be constructed of stainless steel conforming to 3.3.1 having a minimum thickness of 20 gauge (0.0375 inch). The manufacturer shall employ his standard fabrication method for frame members to provide structural strength. The dish shelf shall be located within the cabinet body. The dish shelf shall be located 11-1/2 inches plus or minus 1 inch below the tabletop, and, in any case, below the heating compartments. The dish shelf shall be stainless steel conforming to 3.3.1 having a minimum thickness of 16 gauge (0.062 inch). The dish shelf shall be a minimum of 9 inches deep (front to back) and shall extend the full length of the cabinet body. The bottom shelf shall be located within the cabinet body. Hot food tables of a design having an over hang dish shelf shall not tip when the dish shelf is uniformly loaded and tested as specified in 4.4.2.1. The bottom shelf shall be made in sections and shall be removable without use of tools. The bottom shelf shall be constructed of stainless steel conforming to 3.3.1 having a minimum thickness of 16 gauge (0.062 inch). The bottom shelf shall extend the full length and width of the cabinet body and shall be 8 to 11 inches above the floor.



Source: https://assist.dla.mil -- Downloaded: 202640-21T22:54Z
Check the source to verify that this is the currentversion before use.

3.4.3 Insulated heated food compartments. The food compartments shall be constructed of stainless steel conforming to 3.3.1 having a minimum thickness of 18 gauge (0.050 inch). The food compartments shall be designed to accommodate 12 by 20 by 6 inch deep food pans, and insulated to maintain a temperature range from 140°F to 200°F within the compartments when tested as specified in 4.4.1. The food compartments shall be closed on all sides except the top. Compartments designed with a cutout in the bottom of the food compartments for gas burner operation shall have a removable plate to aid in heat distribution and radiation. The number of insulated heated food compartments shall equal the number of cutouts required for the specified size of the hot food table. Food compartments for type D units shall be for use with dry heat and type M units shall be used with moist heat. Type M hot food tables shall be provided with a drain and valve installed in each compartment with all drains connected to a common manifold for discharge to waste. Valves shall be easily shut off from the operator's side.

* 3.4.4 Carving shelf. Unless other specified (see 6.2), a hard maple carving shelf shall be provided and shall be made of hard maple laminations 10 inches wide by a minimum of 1-1/8 inches thick by length to be compatible with size of hot food table (see figure 1). Each hard maple laminate shall be not greater than 1-3/4 inch wide. When specified (see 6.2), the carving shelf may be fabricated of stainless steel as specified in 3.3.1 or of plastic specified in 3.3.3. The stainless steel or plastic shelf shall be 10 inches wide by a minimum of 3/4 inch thick by length to be compatible with size of hot food table (see figure 1). The shelf shall be removable without the use of tools. All hardware used to support the carving shelfshall be type 302 or 304 stainless steel. The carving shelf shall be installed on the attendant's side and shall extend the full length of the table and shall be mounted on the work shelf.

* 3.4.5 Gas burner and fuel system. An individual gas burner shall be supplied for each food compartment. The fuel system, including burners, shall be designed to burn natural gas. Burner gas valves and pilot gas valves shall be of the fixed orifice type with interchangeable orifice hoods or orifice bushings. Each burner unit shall be provided with two orifice hoods, one orfice hood drilled for natural gas and the other drilled for liquefied petroleum gas. The manufacturer shall provide instructions for conversion from one type of gas to the other. The orifice hoods or orifice bushings shall be color coded as follows: (1) unpainted brass for natural gas and (2) black for liquefied petroleum gas. Each hot food table shall be provided with a filter or filters placed in the gas line to the pilots. Gas components and piping shall be assembled so that there are no leaks when tested as specified in 4.4.3. Each burner and pilot light assembly shall have a minimum rating of 3500 Btu per hour when tested as specified in 4.4.4.

3.4.5.1 Burner ignition. All burners shall be equipped with a means for ignition of gas (see 4.4.3). An automatic pilot device, with shutoff, shall be supplied on each burner unit.



Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:54Z
Check the source to verify that this is the current version before use.

3.4.6 Thermostats. Each burner unit shall be equipped with an adjustable thermostat with a temperature adjustment, ranging from 140°F to 200°F installed in the temperature control system. An "OFF" position and graduations evenly spaced shall be marked on the thermostat dial.

* 3.4.7 Sneeze-guard with serving shelf. The hot food table shall be provided with a sneeze-guard and stainless steel serving shelf. When specified (see 6.2), a plexiglass serving shelf shall be provided. The serving shelf shall be 14 inches above the top. The serving shelf shall be 10 inches wide and removable without the use of tools. The stainless steel serving shelf shall be constructed of stainless steel conforming to 3.3.1 having a minimum thickness of 16 gauge (0.0625 inch). The frame of the sneeze-guard shall be fabricated of stainless steel and shall support the curved plexiglass front, ends, and serving shelf. The ends of the sneeze-guard shall be covered with stainless steel. The sneeze-guard assembly shall be installed on the patron's side (opposite attendant's side). Space for venting of vapor shall be provided at the top and bottom of the installed plexiglass. Provisions shall be made for ready replacement of the plexiglass in the event of breakage. The legs of the sneeze-guard assembly shall be attached to the tabletop by at least two studs, bolts, or screws with lock washers and nuts drawn up right. When bolts or screws are used, the fastener shall be attached to the framework.

3.4.8 Tray rail. When specified (see 6.2), a tray rail consisting of three 1 inch nominal-diameter tubes with supporting hardware shall be supplied with each hot food table installed on the patron's side. The tray rail shall extend the full length of the table and have the ends of the tubes closed. The height of the tray rail from the floor shall be adjustable between 34 and 35 inches. The tubes and supporting hardware shall be fabricated of stainless steel conforming to 3.3.1 and 3.3.2, as applicable. The tube type tray rail shall be at least 10 inches wide including mounting brackets. When specified (see 6.2), a one piece stainless steel tray shelf shall be provided for each size table. The stainless steel shelf shall be provided with a minimum of two "V" shaped ridges, die formed in the top to permit easy tray sliding. The shelf shall extend the full length of the table and shall be at least 10 inches and not more than 15 inches wide including hardware. All supporting hardware, tray rail(s), and shelf shall be removable.

3.4.9 Adapters, pans, and covers. Pans and covers shall be stainless steel conforming to MIL-P-43940. Unless otherwise specified (see 6.2), the quantity and sizes of pans to be furnished for each size hot food table shall be in accordance with table I.



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

TABLE I. Pan Sizes

| Pan size 1/ and tureen | Quantity per table 2/ Size 4 | Size 5 | Size 6 | Depth inches | Capacity qts |
|---|---|---|---|---|---|
| 3-Full size | 3 | 4 | 5 | 4 | 15 |
| 6-One half size | 4 | 6 | 4 | 4 | 6-3/4 |
| 9-One half long | 2 | 2 | 4 | 4 | 6-1/2 |
| 12-One third size | 3 | 3 | 6 | 4 | 4-1/4 |
| Tureen | 1 | 1 | 1 | 8 | 32 |

1/ Pan sizes to be in accordance with MIL-P-43940.

2/ Pans with covers to be furnished with each size hot food table.

* 3.5 Marking. Identification shall be permanently marked directly on the item or on an aluminum, brass, or stainless steel plate permanently affixed to the item. Marking shall be stamped, embossed, engraved or by photosensitive means. The plate thickness shall be not less than 0.012 inch.

* 3.5.1 Marking for identification. Each hot food table shall be permanently and legibly marked with the manufacturer's model and name, trade name, or trademark easily identified with said manufacturer. In addition, the following data shall be provided: National Stock Number, Contract Number, Serial Number, Btu rating, and item name.

* 3.6 Finish. All surfaces shall comply with NSF Standard No. 4. Hot food table shall be smooth on all surfaces and edges and shall be free from discoloration.

* 3.7 Workmanship. All components and assemblies of the hot food table shall be free from dirt and other extraneous material, burrs, slivers, rough die, tool and grind marks, dents, and cracks. Castings and molded parts if used, shall be free of sand, fins, pits, blow holes and sprues. External surfaces shall be free from sharp edges and sharp corners.

* 3.7.1 Metal fabrication. Metal used in the fabrication on the hot food table shall be free from kinks. Forming and shearing shall not cause damage to the metal.

* 3.7.2 Welding and brazing. The surfaces of parts to be welded or brazed shall be free from rust, scale, paint, grease and other foreign matter. Welds shall be continuous, smooth and free of cracks, burn holes, undercuts, fissures or incomplete fusion. All scale shall be removed from the finish weld area.

* 3.7.3 Fastening devices. Threaded fasteners and rivet holes shall be accurately punched or drilled and shall have burrs removed. Threaded fasteners shall not be broken, cracked, or stripped and shall be drawn tight. Rivets shall fill the hole completely and the heads shall be in full contact with the surface of the member and concentric with the hole.



Source: https://assist.dla.mil -- Downloaded: 202640-21T22:54Z
Check the source to verify that this is the current version before use.

## 4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The inspection lot shall be all hot food tables of the same size offered for inspection at one time.

* 4.2.2.1 Visual examination. The hot food tables shall be examined for the defects in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE II. Classification of defects

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Standard product | Item not in accordance with manufacturer's standard product, except for changes necessary to comply with specification requirements | X | |
| Finish | Not in accordance with NSF | X | |
| | Edges and surfaces not smooth | X | |
| | Not free of discoloration or stains | | X |



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Construction and workmanship (general) | Component missing | X | |
| | Any wearing part not accessible for adjustment or replacement | X | |
| | Any component fractured or malformed | X | |
| | Any component misplaced or not in alignment | X | |
| | Any burr, sliver, sharp edge, rough die, tool, gouge, trim, or grind marks | X | |
| | Any component fractured, buckled, bent, dented, punctured, or malformed | X | |
| | Functioning component that is inoperative or will not operate as intended | X | |
| | Functioning component that required abnormal force to operate | | X |
| | Any adjustable assembly not properly adjusted to perform the intended function | | X |
| | Not fabricated of material specified | X | |
| Cabinet body | Not closed on three sides: open side not on attendant's side | X | |
| Tabletop | Cutouts not number required: not proper size | X | |
| | Pan flanges not in contact with tabletop | X | |
| Bottom shelf | Not fabricated in sections for removal, does not extend full length and width of cabinet | X | |
| Dish shelf | Does not extend full length of cabinet | X | |
| Heated food compartment | Not completely enclosed except top | X | |
| | Heat distribution plate not provided (when applicable) | X | |
| Carving shelf | Not hard maple laminate | X | |
| | Does not extend full length of cabinet | X | |
| | Not removable without use of tools | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Construction and workmanship (general) (cont'd) | | | |
| Gas burner assembly | Not number of units required | X | |
| | Orifices not properly color coded | X | |
| Thermostats | Fewer supplied than number of burner units | X | |
| Sneeze-guard (when specified) | Cracked or chipped | X | |
| | Vapor vents not provided | X | |
| | Serving shelf not removable without use of tools | | X |
| | Does not extend full length of cabinet; not installed on patron's side | X | |
| Tray rail or solid tray shelf (when applicable) | Ends of tubes not closed | X | |
| | Raised ridges not provided (solid tray shelf) | X | |
| | Not installed on patron's side | X | |
| | Does not extend full length of cabinet | X | |
| Pans, covers and adapters (as applicable) | Pans, covers not in sizes and quantities ordered | X | |
| | Adapters not provided | X | |
| Welding and brazing (when applicable) | Missing | X | |
| | Not continuous, not smooth, not uniform, burn holes, cracks, fissures, incomplete fusion | X | |
| | Not finished to blend to adjacent surface | X | |
| | Not free from flux, scale, paint, or areas of other foreign material | X | |
| Threaded fasteners | Missing, stripped or cross-threaded, fractured | X | |
| | Loose | | X |
| Rivets | Loose, not in full contact with members riveted | X | |
| Marking | Missing, not permanent, not legible, marking not as specified | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. The hot food tables shall be examined for compliance with dimensions specified herein and as illustrated on figure 1. Any dimensions not within the specification requirements shall be a defect. The inspection level shall be S-4 with an AQL of 6.5 expressed in terms of defects per hundred units.

4.2.2.3 End item testing. Each hot food table shall be tested as specified in 4.4.3. Failure of this test shall be cause for rejection of the unit. The tests as specified in 4.4.1, 4.4.2, 4.4.2.1, and 4.4.4 and when applicable, 4.4.5 and 4.4.6 shall be performed on one production unit (see 6.3). Failure of any test shall be cause for rejection of the lot.

4.2.3 Examination of packaging. An examination shall be made to determine that preservation-packaging, packing and marking complies with the section 5 requirements. Defects shall be as listed in table III. The sample unit shall be one shipping container, fully prepared for delivery, except that it need not be closed. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE III. Examination of packaging

| Examine | Defect |
|---|---|
| Markings (exterior and interior container) | Missing; incorrect; illegible; of improper size, location, sequence, or method of application. |
| Materials | Any component missing, damgaged, or not as specified. |
| Workmanship | Inadequate application of components, such as incomplete closure of fiberboard box flaps, inadequate stapling or improper taping.<br>Cushioning not used when necessary,<br>Bulged or distorted fiberboard box. |

4.2.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601 or PPP-B-621, inspection for defects in closure and strapping shall be in accordance with the applicable container specification. Inspection for defects in cushioning, anchoring, bracing, blocking, and shrouding shall be in accordance with MIL-STD-1186.

4.3 Certificate examination. Certificates of compliance, certified test reports, approval labels, or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with the specification requirements shall be examined and validated.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

4.4 Tests.

4.4.1 Functional test. The hot food table shall be connected to a compatible gas supply.

(1) Conduct the test in a room having an ambient temperature of not less than 75°F and not more than 80°F.
(2) Test only one heating compartment at a time.
(3) Place a 12 by 20 inch pan having a depth of 2-1/2 inches, in one of the top openings. Place a cover over each unused top opening.
(4) Fill pan to the 1-1/2 inch level with water that has a temperature less than 80F.
(5) Set the temperature control to its lowest and then highest range setting, allowing the temperature of the water to stabilize at each setting.
(6) Check for conformance with the temperature range specified in 3.4.3.
(7) Failure to meet the requirements of 3.4.3 shall constitute failure of this test.

4.4.2 Operational test. Connect the hot food table to an appropriate gas supply. Ignite pilots as instructed by the manufacturer. Operate each gas control to assure ignition of fuel to determine conformance to 3.4.5.1. Allow enough operating time to assure that the burner cycles "ON" and "OFF". Check for leaks at all joints in the gas burner assembly by using a solution of soap and water or other appropriate solution to determine compliance with 3.4.6. Failure to conform to the requirements of 3.4.5 and 3.4.5.1 shall constitute failure of this test.

4.4.2.1 Stability test. With empty food service pans filling the top openings of the hot food table, uniformly load the hot food table dish shelf with weight to simulate storage of 9 inch plates per the following weights:

| | |
|---|---|
| Size 4 | 150 lbs |
| Size 5 | 175 lbs |
| Size 6 | 200 lbs |

The loaded hot food table shall be pushed a distance of not less than 10 feet on a smooth floor surface in a sideways direction fore and aft to determine load retention, any deformation and proper operation of the casters. The loaded hot food table shall comply with the tipping requirements of 3.4.2. Any nonconformance with the requirements specified shall constitute failure of this test.

4.4.3 Gas burner input. Connect gas meter in series with the gas supply line and the inlet side of the hot food table. Obtain from the local gas company the heating value of the gas to be used expressed in Btu per hour. Check whether the gas valve hoods are correct for the type of gas to be used. Place a full size food pan in each compartment. Fill the pans with water. Ignite the gas burners and operate at full capacity. The burner input in Btu per hour can be obtained by multiplying the cubic feet of gas flow per hour by the heat valve Btu of the gas used and dividing by the number of burners in the hot food table. Check the Btu capacity for conformance to the requirements of 3.4.5. Any nonconformance shall constitute failure of this test.



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

4.4.4 Cutting board material. Carving shelf shall be tested in accordance with ASTM D 2240 to determine compliance with the requirements of 3.3.3. Four determinations shall be made on each sample unit and the average of the determinations shall be calculated. The determination shall be made at least 1/2 inch in from each corner. Inability of the average to meet the requirements specified in 3.3 shall constitute failure of this test.

4.4.5 Material weight. Carving shelf shall be weighed to determine compliance with the requirements of 3.3. Inability to meet the requirements shall constitute failure of this test.

* 5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. Removable legs and sneeze guard with serving shelf shall be disassembled from the table. Hardware removed during disassembly shall be reassembled on the detached components.

5.1.1.2 Unit packaging.

5.1.1.2.1 Sneeze-guard with serving shelf. The sneeze-guard with serving shelf shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, class domestic of PPP-B-636. Cushioning shall be used, as necessary, to prevent movement or damage while in transit. Each box shall be securely closed with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.1.2.2 Removable legs. The legs shall be packaged in a snug-fitting fiberboard box as specified in 5.1.1.2.1.

5.1.2 Level C. The hot food tables shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Each complete hot food table, packaged as specified in 5.1, shall be packed in a shipping container conforming to overseas type, style A or B, grade A or B, type 3 load of PPP-B-601 or class 2, style 2 or 4, grade A or B, type 3 load of PPP-B-621. The contents shall be cushioned, anchored, braced, blocked, and provided with a full height shroud as specified in MIL-STD-1186. Each shipping container shall be closed and strapped in accordance with the appendix of the applicable container specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Each complete hot food table, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the shipping containers shall be domestic type, style A or B, grade B, type 3 load of PPP-B-601 or class 1, style 2 or 4, grade B, type 3 load of PPP-B-621, and shrouds shall not be required.

5.2.3 Level C packing. Each complete hot food table, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall comply with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The hot food tables are intended for dispensing food in serving lines of Military dining facilities.

* 6.2 Ordering data. Purchasers should exercise any desired option offered herein, and procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size of table required (see 1.2).
(c) When a laminated hard maple carving shelf is not required (see 3.4.4).
(d) When a stainless steel or plastic carving shelf is required (see 3.4.4).
(e) Length of gas line connector if other than specified (see 3.4.6).
(f) When a tray rail is required (see 3.4.8).
(g) When a tray shelf is required (see 3.4.8).
(h) When pans and covers are not required (see 3.4.9).
(i) Selection of the applicable level of preservation-packaging and packing (see 5.1 and 5.2).

6.2.1 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

6.3 End item tests. Performance of tests as specified in 4.4.1, 4.4.2, and 4.4.4 should be limited to one successful demonstration of compliance to the requirements of this specification for each contract.



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

6.4 Changes from previous issue. The outside margins of this specification have been marked with an asterisk (*) to indicate where changes (deletions, additions, etc.) from the previous issue have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

NOTE: This document has a sketch and is to be identified as figure 1.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 7310-A557



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

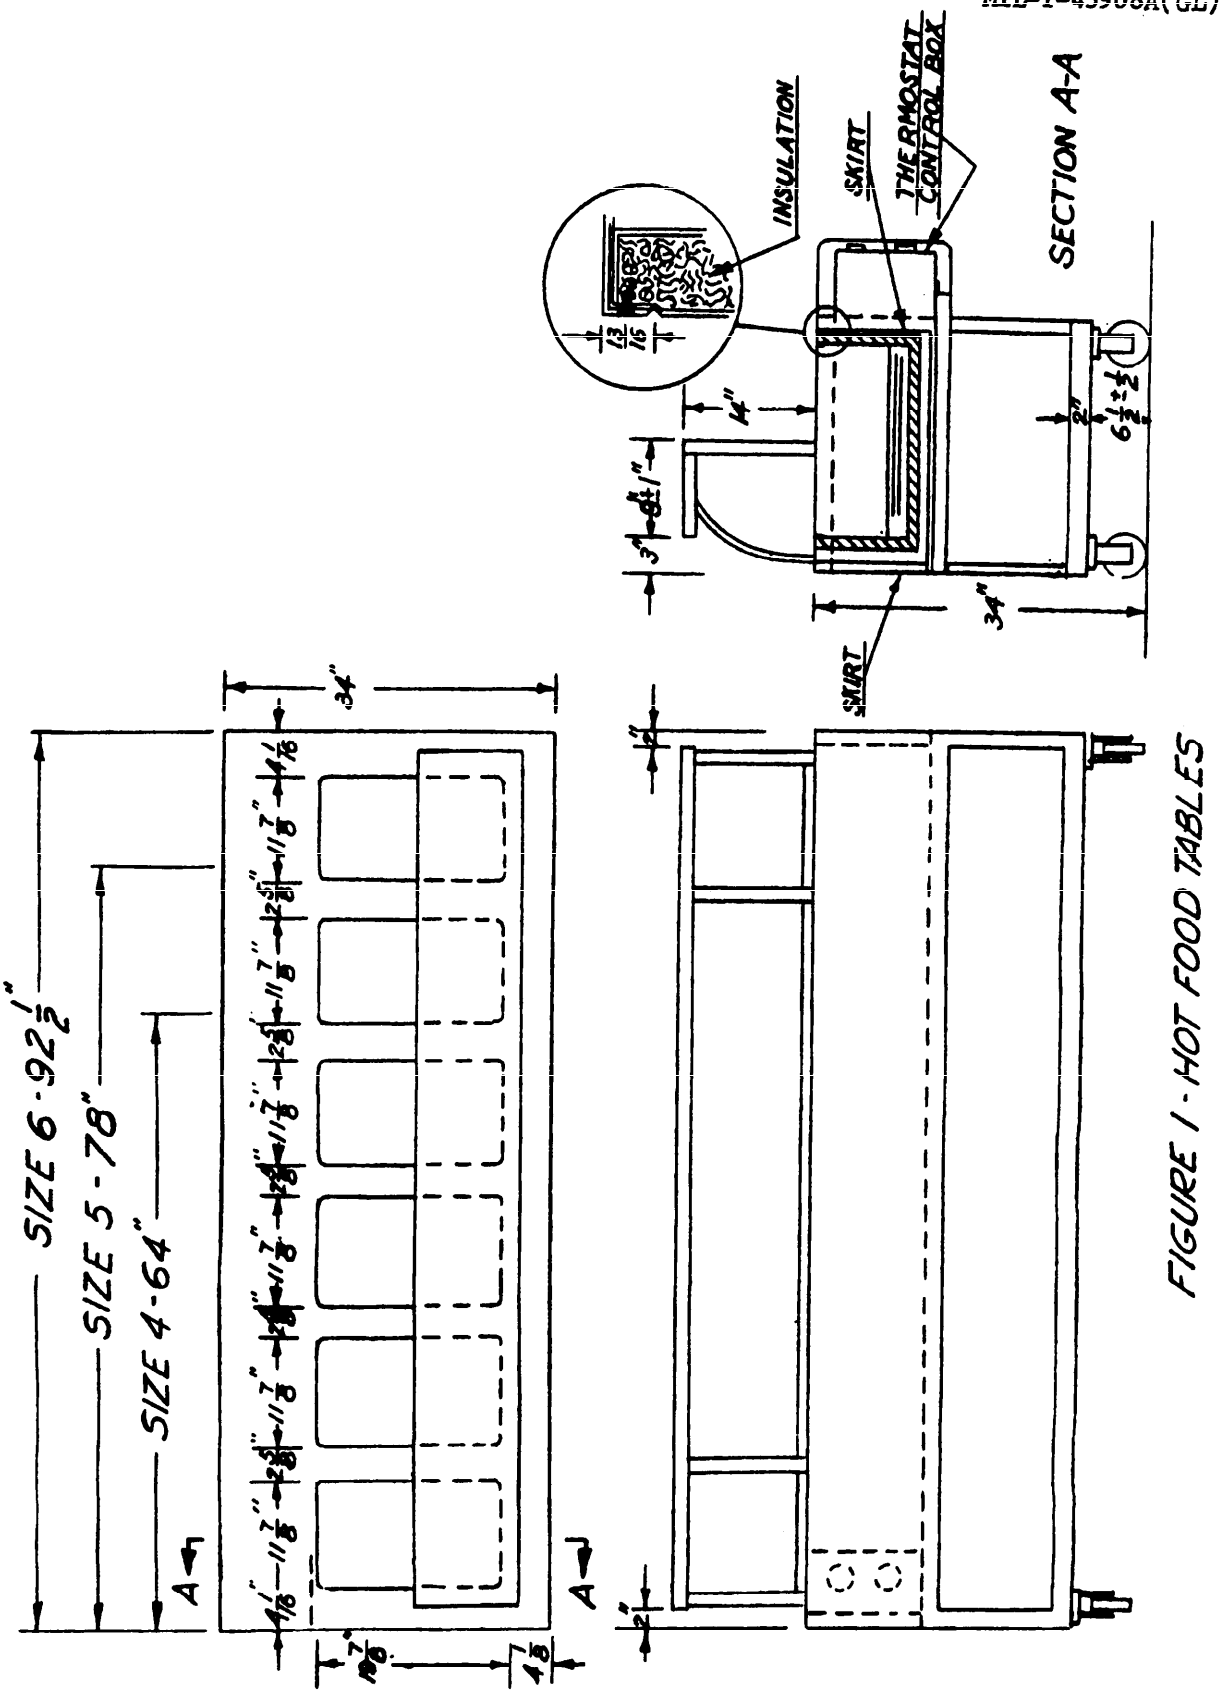



FIGURE 1 - HOT FOOD TABLES



Source: https://assist.dla.mil -- Downloaded: 202610-21T22:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:54Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DOD 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Research and Development Command
Attn: DRXNM-TD
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:54Z
Check the source to verify that this is the current version before use.