INCH-POUND

MIL-DTL-32082A
16 February 2012
SUPERSEDING
MIL-DTL-32082
1 May 2001

DETAILED SPECIFICATION

COVERALLS, MECHANICS, COLD WEATHER

This specification is approved for use by all Department and Agencies of the Department of Defense (DoD).

1. SCOPE

1.1 Scope. This specification covers requirement for a coverall made from camouflage printed cotton/nylon twill cloth intended to be worn by mechanics in the Department of the Army as a protective garment over cold weather clothing.

1.2 Classification. (see 6.2).

1.2.1 Types. The coverall types are as follows:

Type I - Woodland Camouflage Print
Type II - Desert Camouflage Print
Type III - Universal Camouflage Print

1.2.2 Sizes. The coverall sizes are as follows:
Small, Medium, Large, X Large, and XX Large.

Note: The above mentioned sizes may be abbreviated as:
SML, MED, Large, XLG, and XXLG.

Comments, suggestions, or questions on this document should be addressed to: Attn: DLA Troop Support Standardization Team, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, you may want to verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.daps.dla.mil/

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in Sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in Sections 3, 4, or 5 of this specification whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

COMMERCIAL ITEM DESCRIPTIONS

A-A-55634 - Zippers (Fasteners, Slide Interlocking)
A-A-55126 - Fastener Tape, Hook and Loop, Synthetic
A-A-50199 - Thread, Polyester Core, Cotton, or Polyester Covered

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-44031 - Cloth, Camouflage Pattern, Cotton and Nylon
MIL-C-44034 - Cloth, Twill, Camouflage pattern, Cotton and Nylon for Desert Uniform
MIL-W-5664 - Webbing, Textile, Elastic

(Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

AMERICAN ASSOCIATION OF TEXTILE CHEMIST AND COLORISTS (AATCC)

AATCC Test Method 88B - Smoothness of Seams in Fabrics after Repeated Home Laundering

(Copies of documents are available on line at www.aatcc.org or from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

ANSI/ASQ Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies are available online at http://www.asq.org or from the American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203.)

ASTM INTERNATIONAL

ASTM D 6193 - Standard Practice for Stitches and Seams
ASTM D 5035 - Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Strip Method)

(Copies of documents are available online at http://www.astm.org or from the ASTM INTERNATIONAL, PO Box C700, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with (see 4.2).

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Description. The coverall shall be a one-piece, unlined garment with a slide fastener front fly closure with heavy duty plastic front slide fastener with double sliders, underarm ventilation slide fasteners with thongs, reinforced knee, elbow and seat patches. The front shall have slanted front chest pockets with two pieces of 5-1/4 inch long by 1-inch wide loop fastener tape placed (as indicated on patterns) for placement of U.S. Army tape and nametape. The coveralls also have a piece of 2-inch by 2-inch loop tape placed on front flap (as indicated on patterns) for placement of rank, and a piece of 4-inch long by 2-inch wide loop tape on right sleeve (as indicated on patterns) for placement of U.S. Flag. The coveralls have lower front patch pockets with pass throughs. Hook and loop fastener tape adjustment tabs for the sleeves and leg bottoms. Additional loop tape is required at sleeve and ankles to correspond with hook on tabs when in the relaxed position. The waistband shall have elastic webbing in the center back tunnel. Other pockets include hip pockets with hook and loop closures and a bellowed utility pocket on left sleeve with loop placed on the front of the flap and pocket (as indicated on patterns) for placement of unit patch, with a hook closure.

3.4 Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

3.4.1 Basic material. The basic cloth shall be a Woodland Camouflage printed cotton/nylon twill cloth conforming to Class 5 of MIL-DTL-44031 for Type I, Desert Camouflage printed cotton/nylon twill cloth conforming to Class 3C of MIL-C-44034 for Type II, and Universal Camouflage printed cotton/nylon twill cloth conforming to Class 3 of MIL-DTL-44031 for Type III. Use of fabric seconds or ground shade cloth is acceptable for inside the waistband and front side pass thru reinforcement pieces only.

3.4.2 Thread. Cotton-covered polyester thread conforming to A-A-50199 shall be used in the following thread sizes: Tex size 61-70 and Tex size 36-45, 3-ply for 301 stitch type; and Tex size 31-35, 2-ply for overedging. For the alternate seam type (LSbm-3), the 516 safety stitch portion of the seam shall be Tex size 36-45, 2 ply for all 401 stitching portions (top and bottom threads), and the overedge stitch portion shall be Tex size 36-45, 2 ply for the needle with Tex size 31-35, 2-ply for the loopers. For the 301 lockstitch-topstitch portion use Tex size 61-70, 2 ply, for the needle and Tex size 36-45, 2 ply for the bobbin. The color for Type I shall be Camouflage Green 483, approximating color chip 34094, Type II shall be Khaki P-1, C. A. 66019 and Type III shall be Foliage Green 504.

3.4.3. Fastener tape. The hook and loop tape conforming to A-A-55126 shall be Camouflage Green 483 for Type I , Tan 380 for Type II or Foliage Green 504 for Type III. Tape maybe cut ultrasonically or with a hot knife. As an alternate, except without selvage edges, YKK Cosmolon Edge to Edge with heat-sealed edges or Velcro “DD” an edge to edge loop tape (or equal), may be used (see 6.4).

3.4.4 Elastic webbing. The elastic webbing for the waistband section shall be 1-1/2 inches wide, conforming to Type II of MIL-W-5664. Colorfastness requirements shall not apply. The elastic shall be completely covered on the inside of the coverall with a tunnel of basic material. The elastic shall be caught in the stitching at both ends, but not in the stitching forming the top and bottom of the tunnel. The elastic shall be cut to the following lengths as listed in Table I:

TABLE I. Elastic webbing for waistband

Size	Length (inches)
Small	14-1/2
Medium	16-1/2
Large	18-1/2
X Large	20-1/2
XX Large	22-1/2
Tolerance	± 1/2

3.4.5 Zippers (slide fastener). The zippers shall conform to the requirements of A-A-55634 and to Table II of this document. Zipper chain shall be Type I, style 13with automatic locks, multiple mouth to mouth slider arrangement, open top, bridge bottom plastic individual element chain with minimum of (Size 10) 160 pounds or (size 9) 145 pounds crosswise strength for front closure and (Size 5) 100 pounds for pockets and underarm. The slide fastener tape shall be polyester and shall approximately match the color of the basic material. Both pronged and solid

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

bottom stops shall be acceptable. Lengths of slide fasteners in Table II shall be measured from stop to stop.

TABLE II. Zippers (Slide fasteners)

Location	Quantity	Type	Style	Size	Length (inches)	Direction of slide fastener to close
Front opening	1	I	13	9 or 10	Small – 27-1/2 Med – 28-1/2 Large – 29-1/2 X Large – 30-1/2 XX Large – 31-1/2	Top slider upward and bottom slider downward
Slanted chest pockets	2	I	4	5	7	Downward (toward the center)
Ventilation underarm	2	I	4	5	10	Downward (toward body)

3.4.6 Zipper thong. All zippers shall have a 3/8 inch wide thong tied to the pull section made from plain weave nylon tape with a breaking strength of 200 pounds. The length of the finished thong shall be 3 to 3-1/2 inches. The color of the thong shall be Black 357 or Camouflage Green 483 for Type I, Tan 380 for Type II or Foliage Green 504 for Type III. As an alternate the thong can be made from basic material with all sides and ends turned in or otherwise clean finished.

3.5 Labels. Each coverall shall have a size label, an identification label, and a care label. The size and identification labels or the identification and care labels may be combined. The identification label shall contain the size, NSN, item nomenclature, contract number and fiber content. The inscription shall have a minimum font size of 10 points. The inscription legibility, label, and label attachment shall last the expected life of the coveralls. The labels shall be stitched flat on all four sides on the inside center back of the garment approximately 1 inch below the collar. The care or the combination label shall include the following information:

1. Coveralls may be worn over intermediate layer of the cold, dry combat uniform.
2. **WARNING:** Launder with zippers and hook and loop fasteners engaged. Do not use iron on hook and loop fasteners.
3. Pockets are designed to accommodate operational equipment and personal effects.
4. Launder in accordance with laundry formula E in fixed laundries or laundry formula I in field laundries.
5. **DO NOT USE STARCH OR BLEACH.**
6. **DO NOT REMOVE THIS LABEL.**

3.5.1 Bar coding. Bar codes (if applicable) shall be as specified in the solicitation and/or contract (see 6.2).

3.6 Patterns. The Government shall furnish a complete set of patterns or a master pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

with grade rules to maintain uniformity and consistency in manufacturing. The Government patterns shall be used to create the contractor's working patterns. Minor pattern modifications are permitted to accommodate manufacturing procedures; however the design and finished measurements must be obtained. Pattern guidelines shall not be modified. Adhesive patterns are prohibited. Pattern parts shall be as listed in Table III.

TABLE III. List of pattern parts

Reference Number	Pattern piece	Cut parts
1	Sleeve tab	4
2	Leg tab	4
3	Sleeve pocket divider	1
4	Sleeve pocket flap	1
5	Front side pass thru	2
6	Sleeve pocket	1
7	Hip pocket flap	2
8	Hip pocket	2
9	Seat patch	2
10	Elbow patch	2
11	Breast patch pocket	2
12	Knee patch	2
13	Front patch pocket	2
14	Collar	2
15	Breast patch pocket slide fastener cover	2
16	Sleeve slide fastener welting	4
17	Back belt	1
18	Upper left front	1
19	Upper right front	1
20	Right Sleeve	1
21	Left Sleeve	1
22	Upper back	1
23	Lower right front	1
24	Lower left front	1
25	Lower back	2

3.7 Construction. Stitches and seams are as specified in Table IV and ASTM D 6193. If not specified, seaming shall be accomplished by stitch type 301. Drill holes when used shall be covered. The outer edges of the thigh pockets shall be caught in the side seams. All raw edges shall be overedged. All double stitching shall be 1/4 inch gauge, with the first row 1/16 to 1/8 inch from the edge. There shall be 8 to 10 stitches per inch. Gauge of stitching for the hook and loop fastener tape shall be 1/8 to 3/16 inches from the edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Construction

Reference Number	Component	Stitch Type	Seam Type
1.	Shoulder, armhole and underarm seam, side seam, inseam, waist seam, crotch and seat seam shall be double lapped double stitched, 1/4 inch gauge. As an alternate, join sleeves to armhole and over-edge raw edges, turn seam toward body and raise stitch 3/16 to 1/4 inch from the edge, except stitch type shall be 301 topstitched.	301 or 401	LSc-2 or LSbm-3
2.	Pocket flaps, ankle and sleeve tabs, and collar: single topstitch, 1/4 inch gauge.	301	Sse-2
3.	Knee, elbow, and seat patches shall be double stitched 1/4 inch gauge.	301 or 401	LSd-2
4.	Sleeve hem and bottom leg hem, stitch approximately 1 inch from the edge; sleeve pocket opening, stitch 5/8 inch from edge.	301	EFb-1
5.	Back waist elastic tunnel.	301	SSat-2
6.	The slide fastener (zipper) closures for the chest pocket and underarm ventilation shall have welting (without cording) that are flush with each other when the zipper is closed. The zipper tape shall be secured to the coverall with double stitching, 1/4 inch gauge.	301	OSf-1
7.	All pockets shall be double stitched to the coverall, 1/4 inch gauge, except the utility pocket to sleeve shall be single stitched 1/16 to 1/8 inch from edge of pocket. The utility sleeve pocket shall have bellows on the sides and a pencil pocket stitched to the inside, as marked on pattern. The pencil pocket inside utility pocket shall be stitched down the center forming two compartments.	301	LSd-2 LSd-1
8.	The pass through pockets shall be edged and faced with a double welt and double stitched with 1/2 inch gauge. The facing edges shall be turned under and stitched in place.	301	SSa-2
9.	Front opening zipper tape shall be double stitched to coverall 1/4 inch gauge.	301	SSa-2
10.	Edge of front facing shall be turned and edge stitched to the coverall.	301	LSd-1
11.	Outer edge of front facing shall be topstitched 1/4 inch from the edge.	301	OSf-1
12.	Bartacks (3/8 to 1/2 inch) Front opening – One horizontal at each side of top side fastener, near neck through all plies (through right facing)	28 stitches	Bartack

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Construction – Continued

Reference Number	Component	Stitch Type	Seam Type
13.	Two horizontal bartacks at each side of bottom fastener tape, (or as an alternate, a 1-inch bartack at the base of the zipper covering both tapes.) through all plies to secure slide fastener. Two horizontal bartacks at the corners of the left facing to secure facing and crotch seam	28 stitches	Bartack
14.	Front Patch Pocket – at top, on waist seam through all plies.	28 stitches	Bartack
15.	One horizontal bartack at each leg bottom side seam, no more than 3/8 inches from bottom of leg.	28 stitches	Bartack
16.	One at each sleeve bottom across the underarm seam (horizontal), no more than 3/8 inches from the bottom of the sleeve.	28 stitches	Bartack
17.	One horizontal bartack on each side of the hip pocket opening at the top through all plies.	28 stitches	Bartack
18.	One horizontal bartack through each side of hip pocket flap, attaching flap to coverall, through all plies.	28 stitches	Bartack
19.	One horizontal bartack on sleeve pocket at each side of flap, in line with stitching attaching flap to coverall.	28 stitches	Bartack
20	One horizontal bartack at each end of underarm ventilation slide fasteners.	28 stitches	Bartack
21.	One vertical bartack at bottom of each Front Patch Pocket opening, on side seam, through all plies.	28 stitches	Bartack
22.	One vertical bartack at each corner of leg and sleeve tabs.	28 stitches	Bartack
23.	One vertical bartack at each corner of waist tunnel through all plies.	28 stitches	Bartack
24.	One vertical bartack at each side at bottom of sleeve pocket, through all plies. Horizontal bartacks, one at each side at top of sleeve pocket.	28 stitches	Bartack
25.	Bartack at both ends of chest pockets slide fasteners superimposed on the edge stitching of the pockets.	28 stitches	Bartack
26.	One vertical bartack on each zipper thong approximately 1/4 inch from zipper pull.	28 stitches	Bartack
27.	Cut all pieces of hook and loop tape as specified and position on coveralls in locations specified on patterns	301	SSa-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The finished coveralls shall conform to the measurements shown in Table V.

TABLE V. Finished measurements in inches

Sizes	Small	Medium	Large	X Large	XX Large	Tolerance
Back width 1/	18	19	20	21	22	± 1/2
1/2 Chest 2/	23	25	27	29	31	+ 1/2
1/2 Waist 3/	19-1/2	21-1/2	23-1/2	25-1/2	27-1/2	± 3/4
Sleeve length 4/	22-1/2	22-1/2	22-1/2	22-1/2	22-1/2	± 1/2
Sleeve width 5/	6-3/4	7	7-1/4	7-1/2	7-3/4	± 1/2
Leg inseam 6/	32	32	32	32	32	± 1/2
Ankle width 7/	10-1/4	10-3/4	11-1/4	11-3/4	12-1/4	± 1/2
Overall length 8/	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	± 1/2
Back elastic cut length	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2	± 1/2

1/ Measure across back, from back arm seam to back arm seam. (Reference point A)
2/ Measure across chest, with front opening closed, from bottom of armhole to bottom of armhole. (Reference point B)
3/ Measure across front at waist, from folded edge to folded edge with elastic fully stretched. (Reference point C)
4/ Measure along inseam from armhole seam to bottom of sleeve. (Reference point D)
5/ Measure bottom width of sleeve from folded edge to folded edge. (Reference point E)
6/ Measure leg inseam from crotch joining seam to bottom of leg. (Reference point F)
7/ Measure bottom width of ankle from folded edge to folded edge. (Reference point G)
8/ Measure from base of neck along center of back to bottom of leg. (Reference point H)

NOTE: Sleeve pockets shall measure 3-1/2 (± 1/8) inches in width (taken across the top of the pocket including the flap) and 6-1/4 (± 1/8) inches in length (taken along the side) for all sizes.

3.9 Figures. The figures 1 and 2 are furnished for informational purposes only. If there are any inconsistencies between the written document and the figures, the written document shall control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

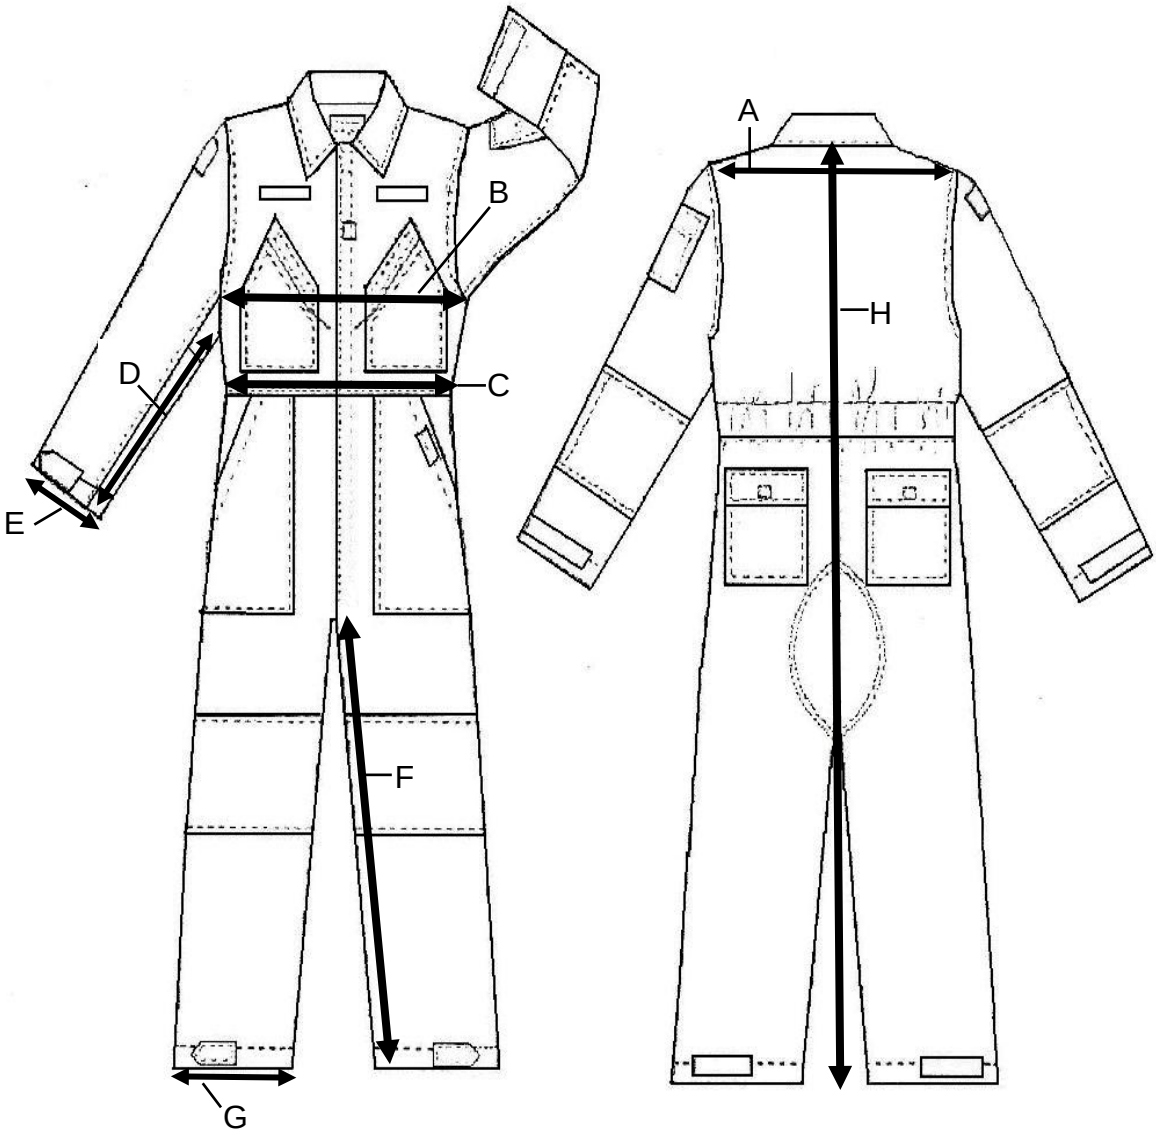


FIGURE 1. Coveralls, mechanics, cold weather measurement reference points

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.2).
2. Conformance inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. A first article, submitted in accordance with 3.1, shall be inspected, examined for appearance, color and finished defects as specified in Table VI.

4.3 Conformance inspection. Conformance inspection shall include the examination of 4.6 and the test in 4.5 as applicable. Sampling for inspection shall be performed in accordance with ANSI/ASQ Z1.4 and with acceptance quality levels as specified in the contract and/or order, except where otherwise indicated.

4.4 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with all the requirements of referenced documents, unless otherwise excluded, amended, modified or qualified in this specification or applicable procurement document.

4.5 Zipper thong. The thong shall be tested for breaking strength in accordance with ASTM D 5035 and in accordance with the requirements of 3.4.6.

4.6 Visual examination. Coveralls shall be examined for the defects listed in Table VI.

TABLE VI. Defects

Defect	Classification	
	Major	Minor
Material defects		
Outside-Any hole, cut, tear, or weakening defect such as smash, multiple float, needle chew, loose slub, fabric cut on wrong side, stamping marks, color not as specified.	101	
Visible mend, broken or missing yarn, misweave, thin place, shade part/bar greater than 1/4 inch.	102	
No printed dye penetration – up to 1/4 inch		201
No printed dye penetration – more than 1/4 inch	103	
Poor printed dye penetration – up to 1/4 inch		202
Poor printed dye penetration – more than 1/4 inch	104	
Inside – Defects listed above not affecting the performance serviceability and appearance.		203
Cutting and marking		
Any component part not cut in accordance with the grainline	105	
Any component part not cut in accordance with patterns that effects the design or finished dimensions	106	
Corrosive metal fastening device or sewn on ticket or adhesive	107	
General Workmanship		
Any operation not performed as specified or not meeting general commercial expectations.	108	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects - Continued

Defect	Classification	
	Major	Minor
Stitching and seams		
End of stitching not caught in other seams or not securely backstitched	109	
2 Broken stitches		204
More than 2 broken stitches	110	
2 skipped stitches		205
More than 2 skipped stitches	111	
Loose tension resulting in loose seam	112	
Thread breaks not securely overstitched for a 1/2 inch distance	113	
Seams which are twisted, or pleated		206
Puckering – double lapped seams with a rating of 2 in accordance with AATCC-88B effecting a major portion of a seam.		207
Puckering – double lapped seams with a rating of 1 in accordance with AATCC-88B.	114	
Puckering – single needle seams with a rating of 2 in accordance with AATCC-88B effecting a major portion of a seam.		208
Puckering – single needle seams with a rating of 1 in accordance with AATCC-88B.	115	
Stitching and seams- continued		
Edges not properly forced out		209
Any joining seams staggered by 1/2 inch or more	116	
Open seam 1/2 inch or more	117	
Open seam less than 1/2 inch		210
Any raw edges 1/4 inch or more on outside of coverall	118	
Any raw edges 1/4 inch or more on inside of coverall		211
Any loose, missing or misplaced bartacks	119	
Looper thread on outside of garment		212
Edges of slide fastener covers overlapped or gapping more than 1/16 inch		213
Stitching and seams- continued		
Thread ends not trimmed or removed		214
Gauge of stitching or stitches per inch irregular		215
Components		
Any component part omitted twisted, not specified size, missing, misplaced, poorly shaped, reversed or not cut in accordance with patterns effecting dimensions, design or finished dimensions.	120	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects - Continued

Defect	Classification	
	Major	Minor
Slide fasteners/Zippers		
Any zipper not entirely covered by respective flap	121	
Zipper buckling, causing rippling effect	122	
Fronts		
Uneven in length by 1 inch or more when zipper is closed	123	
Uneven in length up to 1 inch when zipper is closed		216
Zipper thong not between 3 and 3-1/2 inches long		217
Collar		
Collar edges not forced out	124	
Pockets		
Any pocket 1/2 inch or more out of horizontal or vertical alignment	125	
Any pocket 3/8 to 1/2 inch out of horizontal or vertical alignment		218
Hook and Loop Fastener Tape		
Not material specified	126	
Misplaced or not serving intended purpose	127	
Missing		219
Cut length more or less than specified	128	

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materials is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Department or Defense Agency or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The camouflage coverall is intended to be worn by mechanics and can be worn over the intermediate layer of the cold, dry combat uniform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:
a. Title, number, and date of this specification.
b. Type and sizes required (see 1.2).
c. The specific issue of individual documents referenced (see 2.2).
d. When first article is required (see 3.1, 4.2, 6.3).
e. When bar coding (if applicable) is required (see 3.5.1)
f. Conformance inspection acceptance quality limits (see 4.3)
g. Inspection conditions (see 4.4)
h. Packaging (see 5.1).

6.3 First article. When a first article inspection is required (see 3.1), it will be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Known sources for alternate fastener tape, hook and loop.

a. YKK Corporation of America, Atlanta, GA
b. Velcro USA, Inc. 406 Brown Avenue, Manchester, NH 03103


6.5 Subject term (key word) listing.

Cloth, printed
Desert Camouflage
Fastener tape, Hook and loop
Universal Camouflage
Webbing, Elastic
Woodland Camouflage
Zipper, Zipper thong

6.6 Replacement data. The thread types covered are listed by Tex (sizes) the corresponding Ticket numbers are listed below.

Tex Sizes	Ticket Number
Range	Sizes
21-24	120
25-30	100
31-35	70
36-45	50
46-60	40
61-70	30
71-105	24
106-150	16
151-210	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

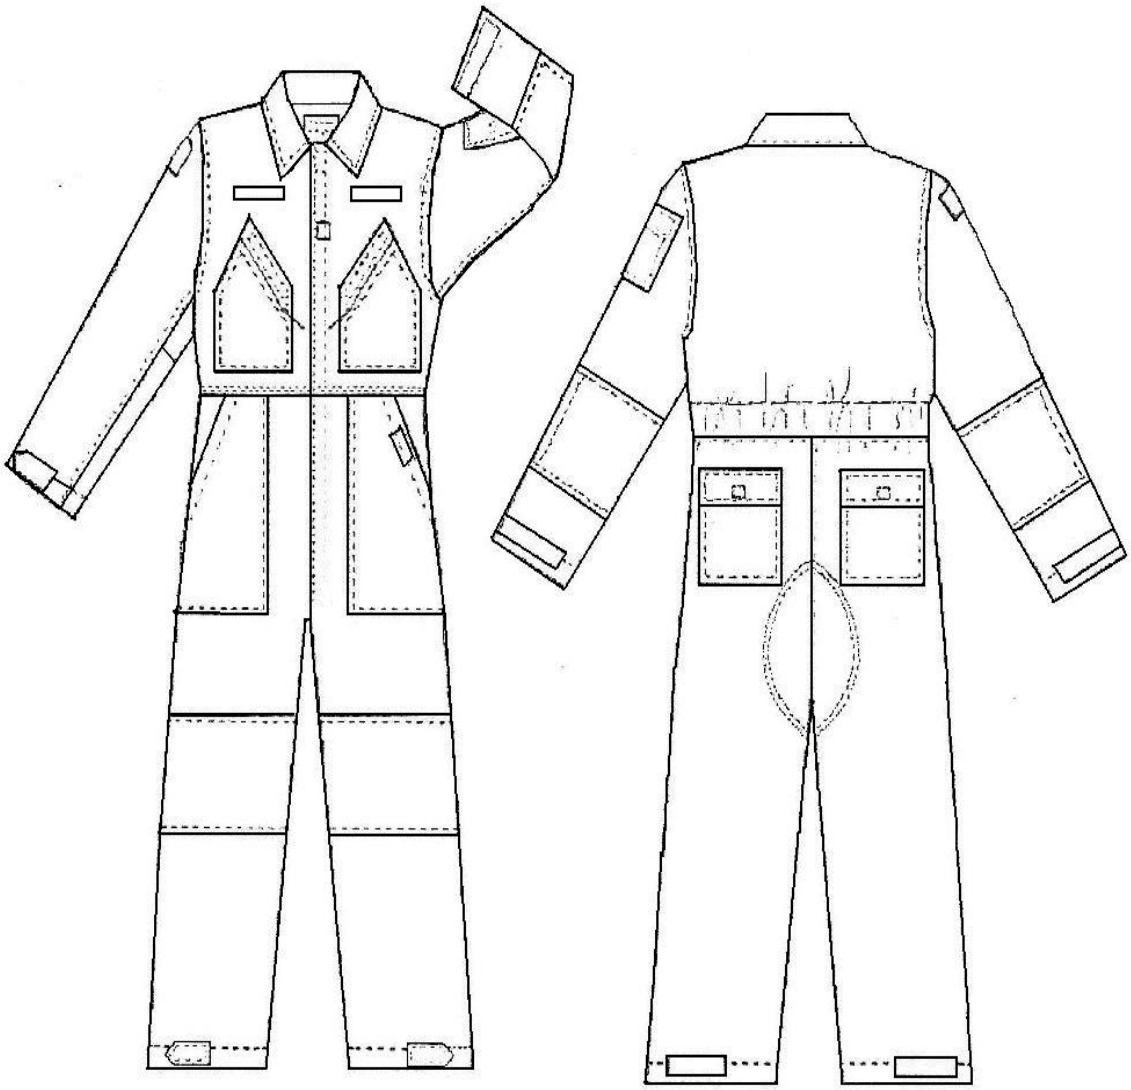

Front View Back View

FIGURE 2. Coveralls, mechanics, cold weather

6.7 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issues, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:

Army – GL

Review Activities:

Army – MD

Preparing Activity:

DLA-CT

Project No. 8415-2011-002

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.