INCH-POUND
MIL-DTL-32082B
06 January 2021
SUPERSEDING
MIL-DTL-32082A
16 February 2012

DETAIL SPECIFICATION

COVERALLS, MECHANICS, COLD WEATHER

This specification is approved for use by all Departments and Agencies of the Department of Defense (DoD).

1. SCOPE

1.1 Scope. This specification covers requirements for coveralls made from camouflage printed cotton/nylon twill cloth intended to be worn by mechanics in the Department of the Army as a protective garment over cold weather clothing.

1.2 Classification. The coveralls covers the following types and sizes as specified (see 6.2).

1.2.1 Types.

Type I - Woodland Camouflage Pattern
Type II - Desert Camouflage Pattern
Type III - DELETED
Type IV - Operational Camouflage Pattern

1.2.2 Sizes.

Small (SML), Medium (MED), Large (LG), X Large (XLG) and XX Large (XXLG)

Comments, suggestions, or questions on this document should be addressed to: Attn: DLA Troop Support Standardization Team, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, you may want to verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil/.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50199 - Thread, Polyester Core, Cotton or Polyester-Covered
A-A-55126 - Fastener Tapes, Hook and Loop, Synthetic
A-A-55634 - Zippers (Fasteners, Slide Interlocking)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-C-44034 - Cloth, Twill Camouflage Pattern, Cotton and Nylon for Desert Uniform
MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage (General Use)
MIL-DTL-44031 - Cloth, Camouflage Pattern: Cotton and Nylon
MIL-W-5664 - Webbing, Textile, Elastic

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. N/A

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC TM88B - Test Method for Seam Smoothness in Fabrics after Home Laundering.

(Copies of this documents are available online at https://www.aatcc.org.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at https://asq.org.)

ASTM INTERNATIONAL

ASTM D3990 - Standard Terminology Relating to Fabric Defects
ASTM D5035 - Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Strip Method)
ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of these documents are available online at https://www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Recycled, recovered, or environmentally preferable or biobased materials. Recycled, recovered, or environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Design. The coveralls shall be a one-piece, unlined garment with a zipper (slide fastener) front fly closure, with heavy duty plastic front zipper with double sliders, underarm ventilation zipper with thongs, reinforced knee, elbow and seat patches. The front shall have slanted front chest pockets with two pieces of 5-1/4 inch long by 1-inch wide loop fastener tape placed (as indicated on patterns) for placement of US Army tape and nametape. The coveralls also have a 2-inch by 2-inch loop tape piece placed on front flap (as indicated on patterns) for placement of rank, and a 4-inch long by 2-inch wide loop tape piece on right sleeve (as indicated on patterns) for placement of US flag. The coveralls have lower front patch pockets with pass throughs. Hook and loop fastener tape adjustments tabs for the sleeves and leg bottoms. Additional loop tape is required at sleeve and ankles to correspond with hook on tabs when in the relaxed position. The waistband shall have elastic webbing in the center back tunnel. Other pockets include hip pockets with hook and loop closures and a bellowed utility pocket on left sleeve with loop placed on the front of the flap and pocket (as indicated on patterns) for placement of unit patch, with hook closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

3.3.1 Figures. The Figures 1 and 2 are furnished for informational purposes only. If there are any inconsistencies between the written document and the figures, the written document shall govern.

3.4 Material.

3.4.1 Basic material. The basic cloth shall be a printed cotton/nylon twill cloth.

3.4.1.1 Type I. The cloth for Type I coveralls shall conform to MIL-DTL-44031, Class 5.

3.4.1.2 Type II. The cloth for Type II coveralls shall conform to MIL-C-44034, Class 3C.

3.4.1.3 Type IV. The cloth for Type IV coveralls shall conform to MIL-DTL-44031, Class 11.

The use of fabric seconds or ground shade cloth is acceptable for inside the waistband and front side pass thru reinforcement pieces only.

3.4.2 Thread. Cotton-covered polyester thread conforming to A-A-50199 shall be used in the thread sizes as specified in Table I. The color for Type I shall be camouflage Green 483, Type II shall be Khaki P-1, C.A. 66019, and Type IV shall be Tan 499.

TABLE I. Thread requirements.

Component area	Thread specification	Stitch type	Tex size	Ply
Seaming and stitching	A-A-50199, Type I	301	61-70 and 46-60	3
Overedge stitching (raw edges)	A-A-50199, Type I	301	31-35	2
Alternate seam Type LSbm-3 thread requirements				
Seam and stitching	A-A-50199, Type I	516 safety stitch	36-45	2
Seam stitching and overedge Needle Looper	A-A-50199, Type I	401	 36-45 31-35	2
Lockstitch-topstitch Needle Bobbin	A-A-50199, Type I	301	 61-70 36-45	2

3.4.3 Fastener tape. The hook and loop tape conforming to Type II, Class 1 or Class 4 of A-A-55126, shall be Camouflage Green 483 for Type I, Tan 380 for Type II, and Tan 499 for Type IV. The tape may be cut ultrasonically or with a hot knife.

3.4.4. Elastic webbing. The elastic webbing for the waistband section shall be 1-1/2 inches wide, conforming to MIL-W-5664, Type II. Colorfastness requirements shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

The elastic shall be completely covered on the inside of the coveralls with a tunnel of basic material. The elastic shall be caught in the stitching at both ends, but not in the stitching forming the top and bottom of the tunnel. The elastic shall be cut to the following lengths as listed in Table II.

TABLE II. Elastic webbing for waistband.

Size	Length (inches)
Small	14-1/2
Medium	16-1/2
Large	18-1/2
X Large	20-1/2
XX Large	22-1/2
Tolerance	±1/2

3.4.5 Zippers (interlocking slide fasteners). The zippers shall conform to the requirements of A-A-55634, Type I, Style 13 and to Table III of this document. Zipper chain shall be Type I, Style 13 with automatic locks, multiple mouth slider arrangement, open top, bridge bottom plastic individual element chain with minimum of (Size 10) 160 pounds or (Size 9) 145 pounds crosswise strength for front closure and (Size 5) 100 pounds for pockets and underarm. The slide fastener tape shall be polyester and shall approximately match the color of the basic material. Both pronged and solid bottom stops shall be acceptable. Length of slide fasteners in Table III shall be measured from stop to stop.

TABLE III. Zippers (interlocking slide fasteners).

Location	Quantity	Type	Style	Size	Length (inches)	Direction of slide fastener to close
Front opening	1	I	13	9 or 10	Small - 27-1/2 Medium - 28-1/2 Large - 29-1/2 X Large - 30-1/2 XX Large - 31-1/2	Top slider upward and bottom slider downward
Slanted chest pocket	2	I	4	5	7	Downward (toward the center)
Ventilation underarm	2	I	4	5	10	Downward (toward body)

3.4.6 Zipper thong. All zippers shall have a 3/8 inch wide thong tied to the pull section made of plain weave nylon tape and a breaking strength of 200 pounds. The length of the finished thong shall be 3 to 3-1/2 inches. The color of the thong shall be black 357 or Camouflage Green 483 for Type I, Tan 380 for Type II and Tan 499 for Type IV. As an alternate the thong can be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

made from basic material with all sides and ends turned in or otherwise clean finished.

3.5 Combination size, identification, and instruction label. The coveralls shall have a combination size, identification, and instructions label in accordance with Type V or Type VI, Class 14 of MIL-DTL-32075. The label shall be sewn on all sides and placed on the inside center back approximately 1-inch below the collar and shall contain the following information:

SIZE: MEDIUM (EXAMPLE)
ITEM NAME:
NSN: XXXX-XX-XXX-XXXX
CONTRACT NUMBER:
CONTRACTOR'S NAME:
FIBER CONTENT:

The care label shall include the following information:

1. Coveralls may be worn over intermediate layer of the cold, dry combat uniform.
2. WARNING: Launder with zippers and hook and loop fasteners engaged. Do not use iron on hook and loop fasteners.
3. Pockets are designed to accommodate operational equipment and personal effects.
4. Launder in accordance with laundry formula E in fixed laundries or laundry formula I in field laundries.
5. DO NOT USE STARCH OR BLEACH
6. DO NOT REMOVE THIS LABEL

3.5.1 Bar coded hang tag. The coveralls shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar coding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the coveralls when it is folded and/or packaged as specified and so it causes no damage to the coveralls. Each tag shall have in addition the following inscription:

MADE FOR DEFENSE LOGISTICS AGENCY
MANUFACTURER'S NAME
CONTRACT #
SIZE:
NSN:
DESCRIPTION: COVERALLS, MECHANICS, COLD WEATHER

3.6 Patterns. The Government shall furnish a complete set of patterns or a master pattern with grade rules to maintain uniformity and consistency in manufacturing. The Government patterns shall be used to create the contractor's working patterns. Minor pattern modifications are permitted to accommodate manufacturing procedures; however the design and finished measurements must be obtained. Pattern guidelines shall not be modified. Adhesive patterns are prohibited. Pattern parts shall be as listed in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE IV. List of pattern parts.

Reference number	Pattern piece	Cut parts
1	Sleeve tab	4
2	Leg tab	4
3	Sleeve pocket divider	1
4	Sleeve pocket flap	1
5	Front side pass thru	2
6	Sleeve pocket	1
7	Hip pocket flap	2
8	Hip pocket	2
9	Seat patch	2
10	Elbow patch	2
11	Breast patch pocket	2
12	Knee patch	2
13	Front patch pocket	2
14	Collar	2
15	Breast patch pocket slide fastener cover	2
16	Sleeve slide fastener welting	4
17	Back belt	1
18	Upper left front	1
19	Upper right front	1
20	Right Sleeve	1
21	Left Sleeve	1
22	Upper back	1
23	Lower right front	1
24	Lower left front	1
25	Lower back	2

3.7 Construction. Stitches and seams are as specified in Table V and ASTM D6193. If not specified, seaming shall be accomplished by stitch type 301. Drill holes when used shall be covered. The outer edges of the thigh pockets shall be caught in the side seams. All raw edges shall be overedged. All double stitching shall be 1/4 inch gauge, with the first row 1/16 to 1/8 inch from the edge. There shall be 8 to 10 stitches per inch. Gauge of stitching for the hook and loop fastener tape shall be 1/8 to 3/16 from the edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE V. Construction.

Reference number	Component	Stitch type	Seam type
1	Shoulder, armhole and underarm seam, inseam, waist seam, crotch and seat seam shall be double lapped double stitched, 1/4 inch gauge. As an alternate, join sleeves to armhole and overedge raw edges, turn seam toward body and raise stitch 3/16 to 1/4 from edge, except stitch type shall be 301 topstitched.	301 or 401	LSc-2 or LSbm-3
2	Pocket flaps, ankle and sleeve tabs, and collar: single topstitch, 1/4 inch gauge.	301	SSe-2
3	Knee, elbow, and seat patches shall be double stitched 1/4 inch gauge.	301 or 401	LSd-2
4	Sleeve hem and bottom leg hem, stitch approximately 1-inch from edge; sleeve pocket opening, stitch 5/8 inch from edge.	301	EFb-1
5	Back waist elastic tunnel	301	SSat-2
6	The slide fastener (zipper) closures for the chest pocket and underarm ventilation shall have welting (without cording) that are flush with each other when the zipper is closed. The zipper tape shall be secured to the coveralls with double stitching, 1/4 inch gauge.	301	OSf-1
7	All pockets shall be double stitched to the coveralls, 1/4 inch gauge, except the utility pocket to sleeve shall be single stitched 1/16 to 1/8 inch from edge of pocket. The utility sleeve pocket shall have bellows on the sides and a pencil pocket stitched to the inside, as marked on pattern. The pencil pocket inside utility pocket shall be stitched down the center forming two compartments.	301	LSd-2 LSd-1
8	The pass through pockets shall be edged and faced with a double welt and double stitched with 1/2 inch gauge. The facing edges shall be turned under and stitched in place.	301	SSa-2
9	Front opening zipper tape shall be turned and edge stitched to the 1/4 inch gauge.	301	SSa-2
10	Edge of front facing shall be turned and edge stitched to the coveralls.	301	LSd-1
11	Outer edge of front facing shall be topstitched 1/4 inch from the edge.	301	OSf-1
12	Bartacks (3/8 to 1/2 inch) Front opening – one (1) horizontal at each side of top side fastener, near neck through all plies (through right facing)	28 stitches	Bartack

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE V. Construction. - Continued

Reference number	Component	Stitch type	Seam type
13	Two horizontal bartacks at each side of the bottom fastener tape, (or as an alternate, a 1-inch bartack at the base of the zipper covering both tapes) through all plies to secure slide fastener. Two horizontal bartacks at the corners of the left facing to secure facing and crotch seam.	28 stitches	Bartack
14	Front Patch Pocket – at top, on waist seam through all plies.	28 stitches	Bartack
15	One horizontal bartack at each leg bottom side seam, no more than 3/8 inches from the bottom of leg.	28 stitches	Bartack
16	One at each sleeve bottom across the underarm seam (horizontal), not more than 3/8 inches from the bottom of the sleeve.	28 stitches	Bartack
17	One horizontal bartack on each side of the hip pocket opening at the top through all plies.	28 stitches	Bartack
18	One horizontal bartack through each side of hip pocket flap, attaching flap to coveralls, through all plies.	28 stitches	Bartack
19	One horizontal bartack, on sleeve pocket at each side of flap, in line with stitching attaching flap to coveralls.	28 stitches	Bartack
20	One horizontal bartack at each end of underarm ventilation slide fasteners.	28 stitches	Bartack
21	One vertical bartack at bottom of each front patch pocket opening, on side seam, through all plies.	28 stitches	Bartack
22	One vertical bartack at each corner of leg and sleeve tabs.	28 stitches	Bartack
23	One vertical bartack at each corner of waist tunnel through all plies.	28 stitches	Bartack
24	One vertical bartack at each side at bottom of sleeve pocket, through all plies. Horizontal bartacks, one at each side of top of sleeve pocket.	28 stitches	Bartack
25	Bartack at both ends of chest pockets slide fasteners superimposed on the edge stitching of the pockets.	28 stitches	Bartack
26	One vertical bartack on each zipper thong approximately 1/4 inch from zipper pull.	28 stitches	Bartack
27	Cut all pieces of hook and loop tape as specified and position on coveralls in locations specified on patterns.	301	SSa-1

3.8 Finished measurements. The finished coveralls shall conform to the measurements shown in Table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.


TABLE VI. Finished measurements (inches).

Sizes	Small	Medium	Large	X Large	XX Large	Tolerance
Back width 1/	18	19	20	21	22	±1/2
1/2 Chest 2/	23	25	27	29	31	±1/2
1/2 Waist 3/	19-1/2	21-1/2	23-1/2	25-1/2	27-1/2	±3/4
Sleeve length 4/	22-1/2	22-1/2	22-1/2	22-1/2	22-1/2	±1/2
Sleeve width 5/	6-3/4	7	7-1/4	7-1/2	7-3/4	±1/2
Leg inseam 6/	32	32	32	32	32	±1/2
Ankle width 7/	10-1/4	10-3/4	11-1/4	11-4/3	12-1/4	±1/2
Overall length 8/	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	±1/2
Basic elastic cut length	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2	±1/2

1/ Measure across back, from back arm seam to back arm seam. (Reference point A)
2/ Measure across chest, with front opening closed, from bottom or armhole to bottom of armhole. (Reference point B)
3/ Measure across front at waist, from folded edge to folded edge with elastic fully stretched. (Reference point C)
4/ Measure along inseam from armhole seam to bottom of sleeve. (Reference point D)
5/ Measure bottom width of sleeve from folded edge to folded edge. (Reference point E)
6/ Measure leg inseam from crotch joining seam bottom of leg. (Reference point F)
7/ Measure bottom width of ankle from folded edge to folded edge. (Reference point G)
8/ Measure from base of neck along center of back bottom of leg. (Reference point H)

NOTE: Sleeve pockets shall measure 3-1/2(± 1/8) inches in width (taken across the top of the pocket including the flap) and 6-1/4(± 1/8) inches in length (taken along the side) for all sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

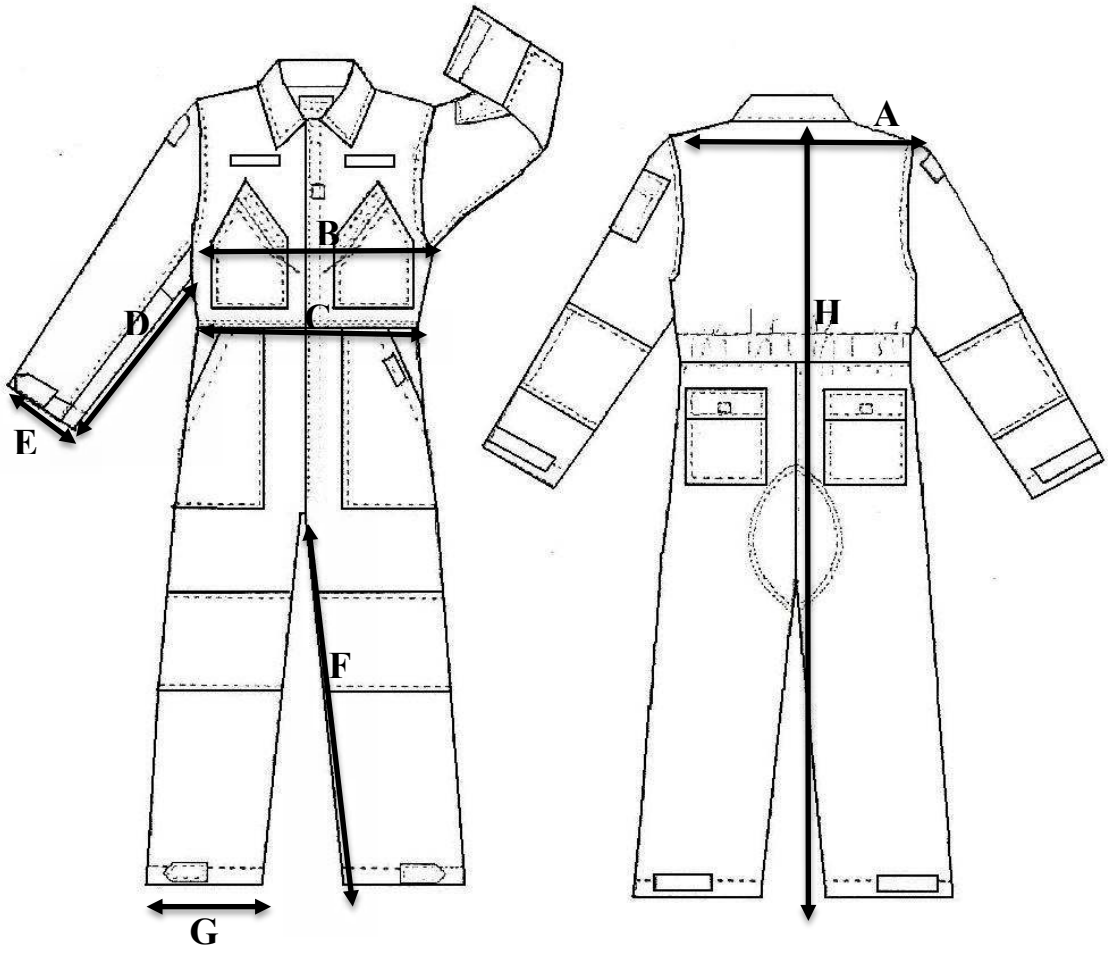

FRONT VIEW BACK VIEW

FIGURE 1. Coveralls, Mechanics, Cold Weather Measurement Reference Points.

3.9 Workmanship. The finished coveralls shall be uniform in quality and shall conform to the quality of product established by this specification. The occurrence of defects, as specified in Table VII, shall not exceed the criteria specified in the contract or purchase order.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. A first article, submitted in accordance with 3.1, shall be inspected, examined for appearance, color and finished defects as specified in Table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

4.3 Conformance inspection. Conformance inspection shall include the visual examination of 4.5 and the tests of 4.4 as applicable. Sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4 and with acceptance quality limits (AQLs) as specified in the contract and/or order, except where otherwise indicated (see 6.2).

4.3.1 Inspection conditions. Unless otherwise specified, excluded, amended, modified or qualified in this specification or applicable procurement documents (see 6.2), all inspections shall be performed in accordance with all the requirements of referenced documents.

4.4 Zipper thong. The thong shall be tested for breaking strength in accordance with ASTM D5035 and in accordance with the requirement of 3.4.6.

4.5 Visual examination. Coveralls shall be examined for defects listed in Table VII. Material defects shall be as defined by ASTM D3990.

TABLE VII. Defects.

Defect	Classification	
	Major	Minor
Material defects		
Outside – any hole, cut, tear or weakening defect such as smash, multiple float, needle chew, loose slub, fabric cut on wrong side, stamping marks, color not as specified.	101	
Visible mend, broken or missing yarn, misweave, thin place, shade part/bar greater than 1/4 inch.	102	
No printed dye penetration – up to 1/4 inch.		201
No printed dye penetration – more than 1/4 inch.	103	
Poor printed dye penetration – up to 1/4 inch.		202
Poor printed dye penetration – more than 1/4 inch.	104	
Inside – defects listed above not affecting the performance serviceability and appearance.		203
Cutting and marking		
Any component part not cut in accordance with the grainline.	105	
Any component part not cut in accordance with patterns that affect the design or finished dimensions.	106	
Corrosive metal fastening device or sewn on ticket or adhesive.	107	
General workmanship		
Any operation not performed as specified or not meeting general commercial expectations.	108	
Stitching and seams		
End of stitching not caught in other seams (or not securely backstitched).	109	
Two (2) broken stitches.		204
More than two (2) broken stitches.	110	
Two (2) skipped stitches.		205

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE VII. Defects. – Continued

Defect	Classification	
	Major	Minor
More than two (2) skipped stitches.	111	
Loose tension resulting in loose seam.	112	
Thread breaks not securely overstitched for a 1/2-inch distance.	113	
Seams that twisted, or pleated.		206
Puckering – double lapped seams with a rating of 2 in accordance with AATCC TM88B effecting a major portion of a seam.		207
Puckering – double lapped seams with a rating of 1 in accordance with AATCC TM88B.	114	
Puckering – single needle seams with a rating of 2 in accordance with AATCC TM88B effecting a major portion of a seam.		208
Puckering – single needle seams with a rating of 1 in accordance with AATCC TM88B.	115	
Edges not properly forced out.		209
Any joining seams staggered by 1/2 inch or more.	116	
Open seam 1/2 inch or more.	117	
Open seam less than 1/2 inch.		210
Any raw edges 1/4 inch or more outside of coveralls.	118	
Any raw edges 1/4 inch or more inside of coveralls.		211
Any loose, missing or misplaced bartacks.	119	
Looper thread on outside of garment.		212
Edges of slide fastener covers overlapped or gapping more then 1/16 inch.		213
Thread ends not trimmed or removed.		214
Gauge of stitching or stitches per inch irregular.		215
Components		
Any component part omitted, twisted, not specified size, missing, misplaced, poorly shaped, reversed or not cut in accordance with patterns affecting dimensions, design or finished dimensions.	120	
Slide fasteners/zippers		
Any zipper not entirely covered by respective flap.	121	
Zipper buckling, causing rippling affect.	122	
Fronts		
Uneven in length by 1-inch or more when zipper is closed.	123	
Uneven in length up to 1-inch when zipper is closed.		216
Zipper thong not between 3 and 3-1/2 inches long.		217
Collar		
Collar edges not forced out.	124	
Pockets		
Any pocket 1/2 inch or more out of horizontal or vertical alignment.	125	
Any pocket 3/8 to 1/2 inch out of horizontal or vertical alignment.		218
Hook and loop fastener tape.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

TABLE VII. Defects. – Continued

Defect	Classification	
	Major	Minor
Not material specified.	126	
Misplaced or not serving intended purpose.	127	
Missing.		219
Cut length more or less than specified.	128	

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Department or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD- ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The camouflage coveralls are intended to be worn by mechanics and can be worn over the intermediate layer of the cold, dry combat uniform.

6.2 Acquisition requirements. Acquisition documents should specify the following:


a. Title, number, and date of this specification
b. Type and sizes required (see 1.2)
c. The specific issue of individual documents referenced (see 2.2)
d. When first article is required (see 3.1, 4.2)
e. Conformance inspection (see 4.3)
f. Inspection conditions (see 4.3.1)
g. Packaging (see 5.1)

6.3 Changes from previous issue. Marginal notations are not used on this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing.

Cloth printed
Fastener tape
Operational Camouflage Pattern (OCP)
Webbing, elastic
Zipper, zipper thong

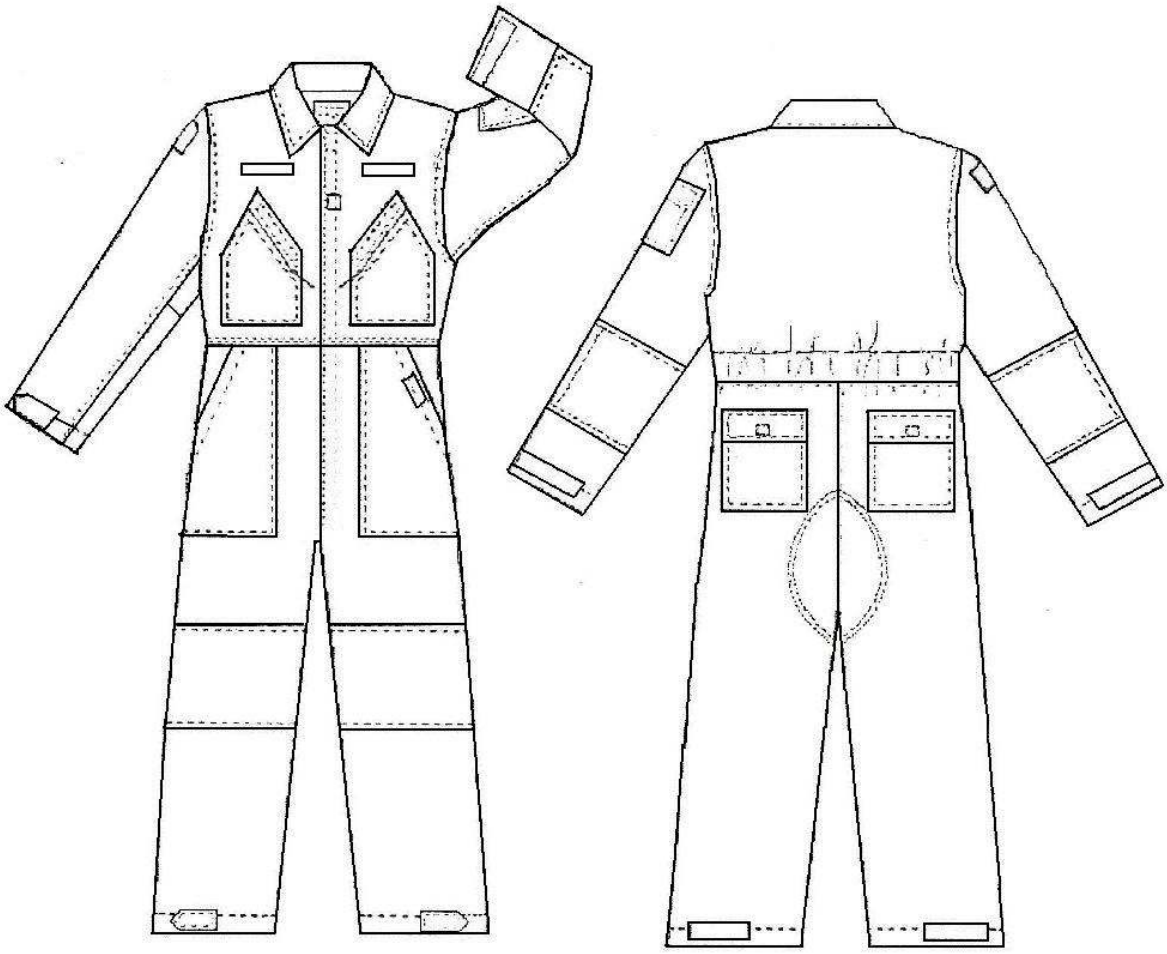

FRONT VIEW BACK VIEW

FIGURE 2. Coveralls, Mechanics, Cold Weather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL

Preparing Activity:
DLA-CT

Review activities:
Army - MD

(Project: 8415-2021-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:37Z
Check the source to verify that this is the current version before use.