
INCH-POUND
MIL-F-15160/10E
29 October 1990
SUPERSEDING
MIL-F-15160/10D
28 December 1976

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (INDICATING), STYLE F10

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-F-15160

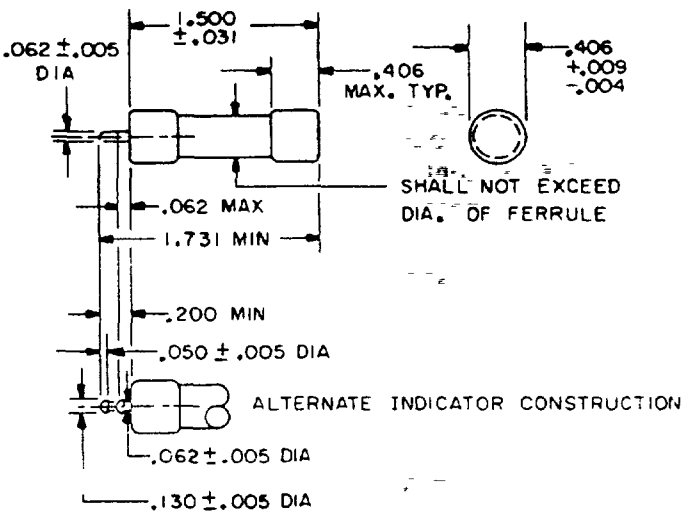

INCHES	MM
0.004	0.10
0.005	0.13
0.031	0.79
0.050	1.27
0.062	1.57
0.130	3.30
0.200	5.08
0.406	10.31
1.500	38.10
1.731	43.97

NOTES

1. All dimensions are in inches
2. Metric equivalents are given for information purposes only and are based on 1 inch = 25.4 mm
3. Pin shall apply 0.75 ounce min ejection force with the fuse blown and the pin extended 1.731 inches (43.97 mm) from opposite end of fuse

FIGURE 1 *Style F10, characteristic A and B*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

Physical

Material

Case – Fiber tube
Ferrule – Brass, copper, or copper alloy
Finish – Nickel or bright alloy plate, silver plated when specified.

Contact

Characteristic A – Red button or tip
Characteristic B – Silver plated button or tip
Spring – Phosphor bronze, or corrosion-resistant steel
Terminal strength – MIL-STD-202, method 211, test condition E, 2 pound-inch torque between ferrules and fuse body.

Electrical.

Current rating – See table I
Voltage rating – See table I
Characteristic – See table I
Overload interrupt·
Characteristic A – Within 1 hour at 135 percent of rated current
Characteristic B – Maximum within 1 hour at 135 percent of rated current, and a minimum of 12 seconds at 200 percent
Short circuit ac interrupt – 1,000 amperes

2 *Type designation* Type designation shall be as shown in table I.

3 *Qualification* Required.

TABLE I. *Type designation* [1]

Style	Characteristic	Voltage	Current rating
F10	A	250	1A
F10	A	250	2A
F10	A	250	3A
F10	A	250	4A
F10	A	250	5A
F10	A	250	6A
F10	A	250	8A
F10	A	250	10A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

TABLE I. *Type designation*[1] – *Continued*

Style	Characteristic	Voltage	Current rating
F10	A	250	12A
F10	A	250	15A
F10	A	125	20A
F10	A	125	25A
F10	A	125	30A
F10	B	250	1/10A
F10	B	250	15/100A
F10	B	250	2/10A
F10	B	250	3/10A
F10	B	250	4/10A
F10	B	250	1/2A
F10	B	250	6/10A
F10	B	250	8/10A
F10	B	250	1A
F10	B	250	1-1/4A
F10	B	250	2A
F10	B	250	2-1/2A
F10	B	250	3A
F10	B	250	3-2/10A
F10	B	250	4A
F10	B	250	5A
F10	B	250	5-6/10A
F10	B	250	6-1/4A
F10	B	125	7A
F10	B	125	8A
F10	B	125	10A

[1]For silver plated terminals, the designator "S" is added after the current rating

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

NOTE: If labels are used, 5 additional samples of any rating are required

Cross-reference. For applicable cross-reference see table II The existing stocks of superseded items may be used When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:42Z
Check the source to verify that this is the current version before use.

TABLE II *Cross-reference*

Superseding No	Superseded numbers of CAGE		
	81349	96906	71400
F10A250V 1A[1]	F10G1R00A[1]	MS15453-1[2]	MIN 1
F10A250V 2A	F10G2R00A	MS15453-2	MIN 2
F10A250V 3A	F10G3R00A	MS15453-3	MIN 3
F10A250V 4A	F10G4R00A	MS15453-4	MIN 4
F10A250V 5A	F10G5R00A	MS15453-5	MIN 5
F10A250V 6A	F10G6R00A	MS15453-6	MIN 6
F10A250V 8A	F10G8R00A	MS15453-7	MIN 8
F10A250V 10A	F10G10R0A	MS15453-8	MIN 10
F10A250V 12A	F10G12R0A	MS15453-9	MIN 12
F10A250V 15A	F10D15R0A	MS15453-10	MIN 15
F10A125V 20A	F10D20R0A	MS15453-11	MIN 20
F10A125V 25A	F10D25R0A		MIN 25
F10A125V 30A	F10D30R0A		MIN 30
F10A250V 1/10A			FNJ 1/10
F10A250V 15/100A			FNJ 15/100
F10A250V 2/10A			FNJ 2/10
F10A250V 3/10A			FNJ 3/10
F10A250V 4/10A			FNJ 4/10
F10A250V 1/2A			FNJ 1/2
F10A250V 6/10A			FNJ 6/10
F10A250V 8/10A			FNJ 8/10
F10A250V 1A			FNJ 1
F10A250V 1 1/4A			FNJ 1 1/4
F10A250V 2A			FNJ 2
F10A250V 2 1/2A			FNJ 2 1/2
F10A250V 3A			FNJ 3
F10A250V 3 2/10A			FNJ 3 2/10
F10A250V 4/A			FNJ 4
F10A250V 5A			FNJ 5
F10A250V 5 6/10A			FNJ 5 6/10
F10A250V 6 1/4A			FNJ 6 1/4
F10A250V 7A	F10G7R00B		FNJ 7
F10A250V 8A	F10G8R00B		FNJ 8
F10A250V 10A	F10G10A0B		FNJ10

[1]A letter "S" following the part number signifies silver plating
[2]A second dash number (-1) signifies silver plating

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity:
Navy – SH -
(Project 5920-0447-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.