INCH-POUND
MIL-PRF-15160/10F
12 October 1999
SUPERSEDING
MIL-PRF-15160/10E
29 October 1990

PERFORMANCE SPECIFICATION SHEET

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-15160.

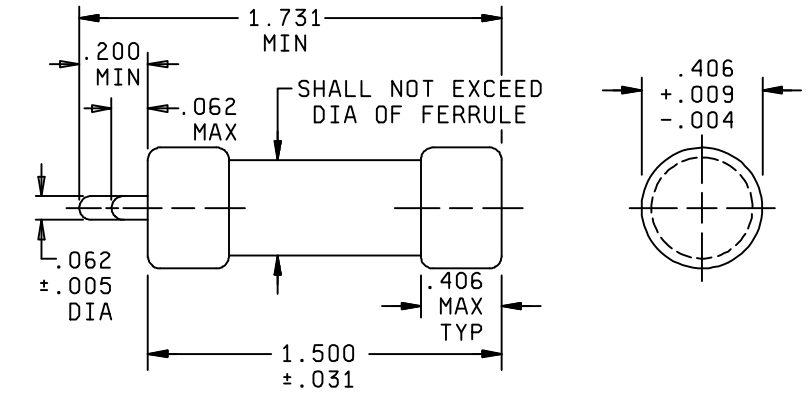

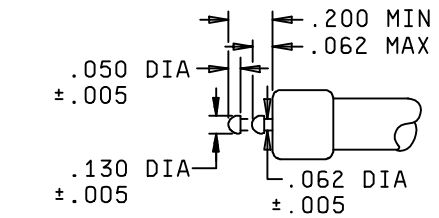

ALTERNATE INDICATOR CONSTRUCTION

Inches	mm	Inches	mm
0.004	0.10	0.130	3.30
0.005	0.13	0.200	5.08
0.031	0.79	0.406	10.31
0.050	1.27	1.500	38.10
0.062	1.57	1.731	43.97

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F10, characteristics A and B.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body: Fiber tube.

Ferrule: Brass, copper, or copper alloy.

Finish: Nickel or bright alloy plate, silver plated when specified.

Contact:

Characteristic A – Red button or tip.

Characteristic B – Silver plated button or tip.

Spring – Phosphor bronze, or corrosion-resistant steel.

Terminal strength: Method 211 of MIL-STD202, test condition E, 2 inch-pound torque between ferrules and fuse body.

Electrical:

Current rating: See table I.

Voltage rating: See table I.

Characteristic: See table I.

Overload interrupt:

Characteristic A - Within 1 hour at 135 percent of rated current.

Characteristic B - Maximum within 1 hour at 135 percent of rated current, and a minimum of 12 seconds at 200 percent.

Short circuit ac interrupt: 1,000 amperes.

Type designation: Type designation shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

TABLE I Type designations and electrical rating. 1/

Style	Characteristic	Maximum voltage	Current rating
F10	A	250V	1A
F10	A	250V	2A
F10	A	250V	3A
F10	A	250V	4A
F10	A	250V	5A
F10	A	250V	6A
F10	A	250V	8A
F10	A	250V	10A
F10	A	250V	12A
F10	A	250V	15A
F10	A	125V	20A
F10	A	125V	25A
F10	A	125V	30A
F10	B	250V	1/10A
F10	B	125V	15/100A
F10	B	125V	2/10A
F10	B	125V	3/10A
F10	B	250V	4/10A
F10	B	250V	1/2A
F10	B	250V	6/10A
F10	B	250V	8/10A
F10	B	250V	1A
F10	B	250V	1 1/4A
F10	B	250V	2A
F10	B	250V	2 1/2A
F10	B	250V	3A
F10	B	250V	3 2/10A
F10	B	250V	4A
F10	B	250V	5A
F10	B	250V	5 6/10A
F10	B	250V	6 1/4A
F10	B	125V	7A
F10	B	125V	8A
F10	B	125V	10A

1/ For silver plated terminals, the designator “S” is added after the current rating.

VERIFICATION:

Qualification inspections: The number of qualification samples required shall be:

a. 24 samples maximum current rating of each voltage and design.

b. 24 samples minimum current rating of each voltage and design.

NOTE: If labels are used, five additional samples of any rating are required.

Cross-reference: For applicable cross-reference see table V. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

TABLE III. Cross reference.

Superseding Number	Superseded numbers for CAGE		
	81349	96906	71400
F10A250V 1A 1/	F10G1R00A 1/	MS15453-1 2/	MIN 1
F10A250V 2A	F10G2R00A	MS15453-2	MIN 2
F10A250V 3A	F10G3R00A	MS15453-3	MIN 3
F10A250V 4A	F10G4R00A	MS15453-4	MIN 4
F10A250V 5A	F10G5R00A	MS15453-5	MIN 5
F10A250V 6A	F10G6R00A	MS15453-6	MIN 6
F10A250V 8A	F10G8R00A	MS15453-7	MIN 8
F10A250V 10A	F10G10R00A	MS15453-8	MIN 10
F10A250V 12A	F10G12R00A	MS15453-9	MIN 12
F10A250V 15A	F10D15R00A	MS15453-10	MIN 15
F10A250V 20A	F10D20R00A	MS15453-11	MIN 20
F10A250V 25A	F10D25R00A		MIN 25
F10A250V 30A	F10D30R00A		MIN 30
F10A250V 1/10A			FNJ 1/10
F10A250V 15/100A			FNJ 15/100
F10A250V 2/10A			FNJ 2/10
F10A250V 3/10A			FNJ 3/10
F10A250V 4/10A			FNJ 4/10
F10A250V 1/2A			FNJ 1/2
F10A250V 6/10A			FNJ 6/10
F10A250V 8/10A			FNJ 8/10
F10A250V 1A			FNJ 1
F10A250V 1 1/4A			FNJ 1 1/4
F10A250V 2A			FNJ 2
F10A250V 2 1/2A			FNJ 2 1/2
F10A250V 3A			FNJ 3
F10A250V 3 2/10A			FNJ 3 2/10
F10A250V 4A			FNJ 4
F10A250V 5A			FNJ 5
F10A250V 5 6/10A			FNJ 5 6/10
F10A250V 6 1/4A			FNJ 6 1/4
F10A250V 7A	F10G7R00A		FNJ 7
F10A250V 8A	F10G8R00A		FNJ 8
F10A250V 10A	F10G10RA0B		FNJ 10

1/ A letter “S” following the part number signifies silver plating.
2/ A second dash number (-1) signifies silver plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, CG, MC, OS, YD2
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5920-0607-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.