
MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F15

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuses described herein shall consist of this document and the latest issue of MIL-F-15160.

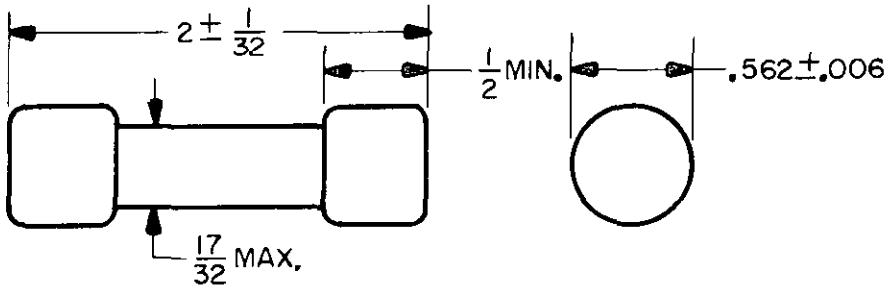

SH 5385

FIGURE 1. Style F15.

NOTE:

1. All dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Case: Fiber
Ferrule: Brass
Finish: Nickel or bright alloy or bright dipped.
Silver plated when specified.
Terminal strength: 5-pound - inch torque.
Electrical: Electrical requirements shall be as specified in table I.

TABLE I. Electrical requirements.

<table>
<tr><td colspan="4">Voltage rating 250 volts ac or dc
(Characteristic A may be used for 450 Vrms ac)</td></tr>
<tr><td rowspan="2">Overload blowing</td><td>Percent nominal rating</td><td>Char. A. blowing time</td><td>Char. B. blowing time</td></tr>
<tr><td>135
500</td><td>0-1 hour
--------</td><td>0-1 hour
10-25 seconds</td></tr>
<tr><td rowspan="4">Short circuit</td><td colspan="2">Voltage</td><td>Fuse rating (amp)</td><td>Applied current (amp)</td></tr>
<tr><td colspan="2">250 Vdc</td><td>All</td><td>10,000</td></tr>
<tr><td rowspan="2">Char. A. only 450 Vrms ac single phase 10-20 percent power factor</td><td>0-20</td><td>8,000</td></tr>
<tr><td>25-30</td><td>1,500</td></tr>
</table>

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:42Z
Check the source to verify that this is the current version before use.

Type designation: Type designation shall be as specified in table II.

TABLE II. Type designation.

Style	Characteristic	Voltage	Current
F15	A	250V	1A
F15	A	250V	3A
F15	A	250V	6A
F15	A	250V	10A
F15	A	250V	15A
F15	A	250V	20A
F15	A	250V	25A
F15	A	250V	30A
F15	B	250V	1A
F15	B	250V	1-6/10A
F15	B	250V	2A
F15	B	250V	2-1/2A
F15	B	250V	3-2/10A
F15	B	250V	4A
F15	B	250V	5A
F15	B	250V	6-1/4A
F15	B	250V	8A
F15	B	250V	10A
F15	B	250V	12A
F15	B	250V	15A
F15	B	250V	20A
F15	B	250V	25A
F15	B	250V	30A

QUALITY ASSURANCE PROVISIONS

Qualification inspection. The number of qualification samples required shall be:

(a) 36 samples maximum current rating of each voltage and design.
(b) 36 samples minimum current rating of each voltage and design.

Material. Alternate to fiber material (tube) shall have an average burst strength of 2100 pounds per square inch (lb/in^2) with a minimum value of 1450 lb/in^2.

PACKAGING

Unit packaging. The standard unit package shall be 5 pieces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS, YD
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC
Air Force - 19

Preparing activity:
Navy - SH
(Project 5920-0437-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:42Z
Check the source to verify that this is the current version before use.