
INCH-POUND
MIL-F-15160/19B
29 October 1990
SUPERSEDING
MIL-F-15160/19A
29 December 1986


MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F19

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160

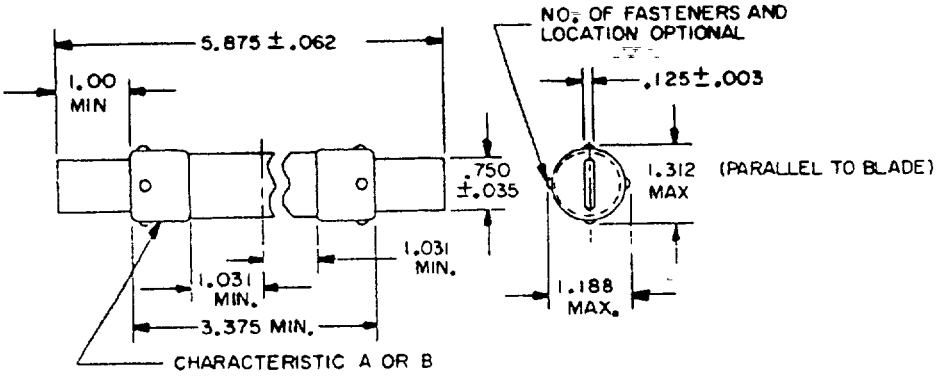

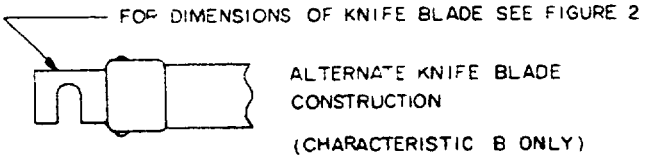

INCHES	MM
0 003	0 08
0 035	0 89
0 062	1.57
0 125	3 18
0 750	19 05
1 000	25 40
1.031	26.19
1 188	30.18
1.312	33.32
3.375	85 73
5 875	149.23


NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information purposes only and are based on 1 inch = 25 4 mm


FIGURE 1 *Style F19, characteristic A and B*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:43Z
Check the source to verify that this is the current version before use.

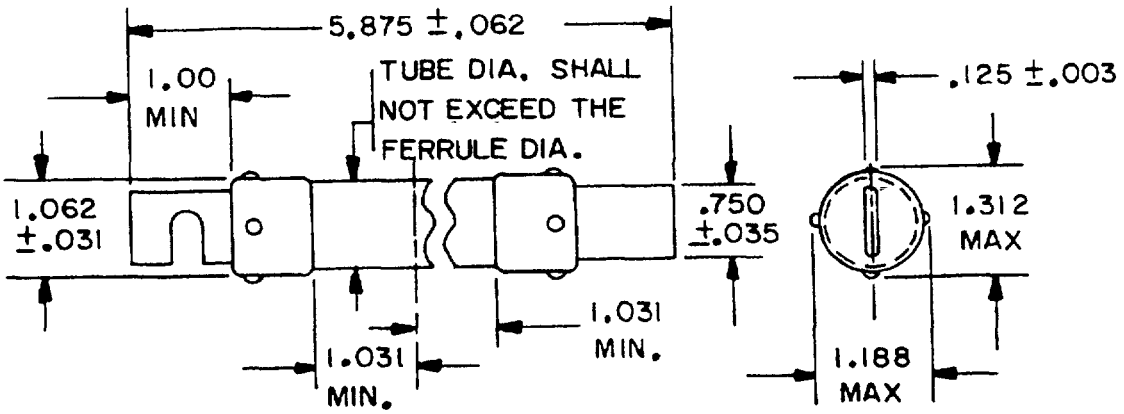

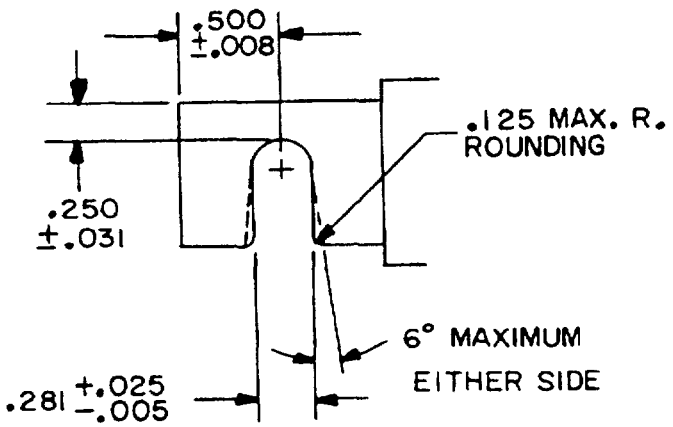

REJECTION GROOVE DETAIL

INCHES	MM
0 003	0 08
0 005	0 13
0 008	0.20
0.025	0 64
0 031	0 79
0 035	0 89
0 062	1 57
0 125	3 18
0 250	6.35
0 281	7.14
0.500	12.70
0 750	19 05
1 000	25 40
1 031	26 19
1 062	26 97
1 188	30 16
1 312	33.32
5 875	149 23

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information purposes only and are based on 1 inch = 25 4 mm

FIGURE 2 *Style F19, characteristic BR*

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1 *Design and construction* See figures 1 and 2

Physical:

Case – Fiber or alternate material
(Alternate to fiber material (tube) shall have an average burst strength of 1,950 pounds per square inch with a value of not less than 1,400 pounds per square inch)
Knifeblade – Copper
Finish – Nickel, bright alloy, or bright dipped, silver plated when specified
Terminal strength – MIL-STD-202, method 211, test condition E, 5 pound-inch torque between ferrules and fuse body.

Electrical

Electrical requirements shall be as specified in table I
Shock – MIL-STD-202, method 207, HI shock
Vibration – MIL-STD-202, method 204, test condition A (except 5 g, 500 Hz).

2 *Type designation* Type designation shall be as specified in table II.

3. *Qualification:* Required.

TABLE I. *Electrical requirements*

	Characteristic		
	A	B	BR
Voltage rating	250 Vac 250 Vdc 450 Vrms ac	250 Vac 250 Vdc –	250 Vac 250 Vdc –
Overload test[1]			
135%	0 – 2 hr	0 – 2 hr	0 – 2 hr.
500%	–	10 – 25 sec	10 – 25 sec
Short circuit test			
at 250 Vdc	10,000A	10,000A	10,000A
at 250 Vac	–	–	200,000A (20% PF max)
at 450 Vrms ac[2]	(50% PF max)[3] 3,000	–	–

[1]Overload is shown as a percentage of the current rating of the fuse
[2]Characteristic A fuses may be used for 450 Vac
[3]Power factor (PF)

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:43Z
Check the source to verify that this is the current version before use.

TABLE II *Type designation* [1]

Style	Characteristic	Voltage	Current
F19	A	250	70A
F19	A	250	80A
F19	A	250	90A
F19	A	250	100A
F19	B[2,3]	250	70A
F19	B	250	80A
F19	B	250	90A
F19	B	250	100A
F19	BR[4]	250	70A
F19	BR	250	80A
F19	BR	250	90A
F19	BR	250	100A

[1]For silver plated terminals the designator "S" is added after the current rating
[2]The characteristic B fuse is cancelled upon the issue of this document and establishment of a QPL for the type BR fuse
[3]A characteristic B fuse shall not be used to replace characteristic BR fuse
[4]A characteristic BR fuse may be used to replace the characteristic B fuse of the same current rating

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be:

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design

NOTE: If labels are used, 5 additional samples of any rating are required

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:43Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity
Navy – SH
(Project 5920-0447-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:43Z
Check the source to verify that this is the current version before use.