INCH-POUND
MIL-PRF-15160/29B
w/AMENDMENT 1
14 April 2020
SUPERSEDING
MIL-PRF-15160/29B
15 November 2011


PERFORMANCE SPECIFICATION SHEET

FUSES, STYLE F29

INACTIVE FOR NEW DESIGN
AFTER 27 DECEMBER 1990

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-15160.

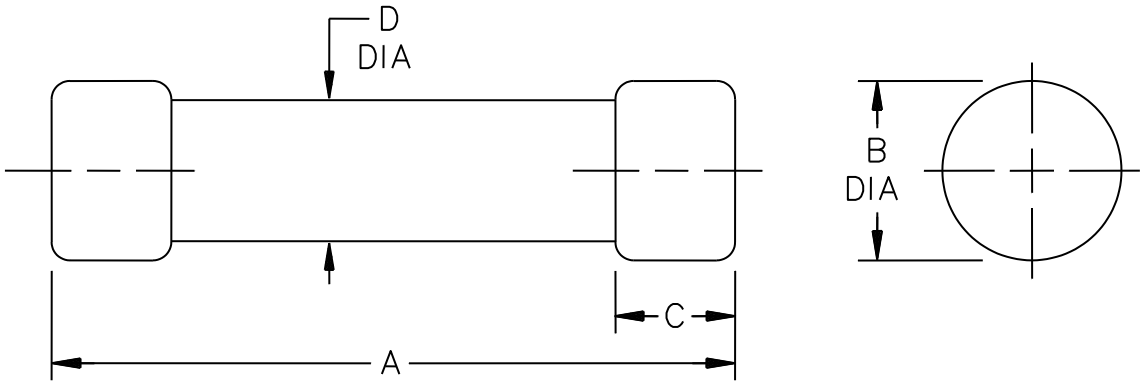

Ltr	Inches		mm	
	Min	Max	Min	Max
A	4.969	5.031	126.21	127.79
B	.804	.820	20.42	20.83
C	.500	---	12.70	---
D	---	.781	---	19.84

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F29, characteristic A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body: Fiber.

Ferrule: Brass.

Finish: Nickel or bright alloy or bright dipped, silver plated when specified.

Terminal strength: 5 inch-pounds.

Type designation: Type designation shall be as specified in table I.

Electrical:

Voltage rating: 5,000 volts maximum.

Overload interrupt: Maximum 1 hour at 135 percent of rated current.

Short circuit interrupt: 5 amperes at 5,000 volts ac.

Current capacity: Maximum 1.5 hours at 110 percent of rated current.

Current rating: See table I.

Voltage rating: See table I.

Characteristic: See table I.

Part or Identifying Number (PIN): The PIN shall be constructed from table I (e.g., F29A5000V1/16A).

TABLE I. Part or Identifying Number. 1/

Style	Characteristic	Voltage	Current
F29	A	5,000	1/16 A
F29	A	5,000	1/8 A
F29	A	5,000	1/4 A
F29	A	5,000	3/8 A
F29	A	5,000	1/2 A
F29	A	5,000	3/4 A
F29	A	5,000	1 A
F29	A	5,000	1 1/2 A
F29	A	5,000	2 A
F29	A	5,000	3 A

1/ For silver plated terminals, the designator “S” is added after the current rating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:44Z
Check the source to verify that this is the current version before use.

VERIFICATION:

Qualification is not applicable for this specification sheet and is replaced by successful completion of Group A and Group B inspections in MIL-PRF-15160, before product is delivered.

Referenced documents. This document only references MIL-PRF-15160.

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5920-2020-004)

Review activities:
Army - MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:44Z
Check the source to verify that this is the current version before use.