INCH-POUND
MIL-PRF-15160/7D
1 April 1998
SUPERSEDING
MIL-PRF-15160/7C
6 January 1976

PERFORMANCE SPECIFICATION SHEET

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F07

INACTIVE FOR NEW DESIGN
AFTER 30 JANUARY 1970

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-15160.

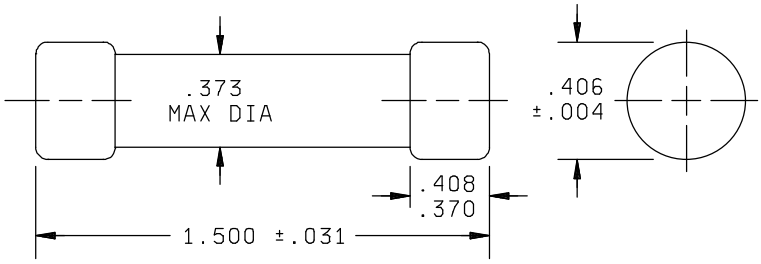

Inches	mm
.004	0.10
.031	0.79
.373	9.47
.406	10.31
.408	10.36
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F07 fuse.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Physical:

Terminals: Ferrule type.

Material: Brass, copper, bronze, or copper alloy.

Finish: Nickel or bright alloy plate, silver plated when specified.

Strength: Method 211 of MIL-STD-202, test condition E, 10 inch-pound torque between ferrules and fuse body.

Body: Glass tube.

Electrical:

Current rating: See table I.

Voltage rating: See table I.

Characteristic: See table I.

Overload interrupt:

Characteristic A: Maximum 1 hour at 135 percent of rated current.

Characteristic B: Maximum 1 hour at 135 percent of rated current, and minimum of 12 seconds at 200 percent.

Short circuit interrupt: Minimum of 10,000 amperes at rated voltage.

Type designation: Type designation shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation. 1/

Style	Characteristic	Maximum voltage	Current rating amperes
F07	A	250V	1A
F07	A	250V	2A
F07	A	250V	3A
F07	A	32V	5A
F07	A	32V	10A
F07	A	32V	15A
F07	A	32V	20A
F07	A	32V	30A
F07	B	125V	1A
F07	B	125V	2A
F07	B	125V	3A
F07	B	32V	5A
F07	B	32V	10A
F07	B	32V	15A
F07	B	32V	20A
F07	B	32V	30A

1/ For silver plated terminals, the designator "S" is added after the current rating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

Cross-reference: For applicable cross-reference see table II. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used (see 6.5).

TABLE IV. Cross-reference.

Superseding number	Superseded numbers for CAGE	
	81349	96906
F07A250V1A 1/	F07G1R00A 1/	N/A
F07A250V2A	F07G2R00A	N/A
F07A250V3A	F07G3R00A	N/A
F07A32V5A	F07G5R00A	MS90083-1 2/
F07A32V10A	F07G10R0A	MS90083-2
F07A32V15A	F07G15R0A	MS90083-3
F07A32V20A	F07G20R0A	MS90083-4
F07A32V30A	F07G30R0A	MS90083-5
F07B125V1A	N/A	N/A
F07B125V2A	N/A	N/A
F07B125V3A	N/A	N/A
F07B32V5A	N/A	MS90083-10
F07B32V10A	N/A	MS90083-11
F07B32V15A	N/A	MS90083-12
F07B32V20A	N/A	MS90083-13
F07B32V30A	N/A	MS90083-14

1/ A letter S following the part number signifies silver plated terminals.
2/ A second dash number (-1) signifies silver plating.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Preparing activity:
DLA - CC

(Project 5920-0520)

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, CG, EC, MC
Air Force - 17, 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.