
INCH-POUND
MIL-F-15160/9D
29 October 1990
SUPERSEDING
MIL-F-15160/9C
6 January 1976

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F09

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160

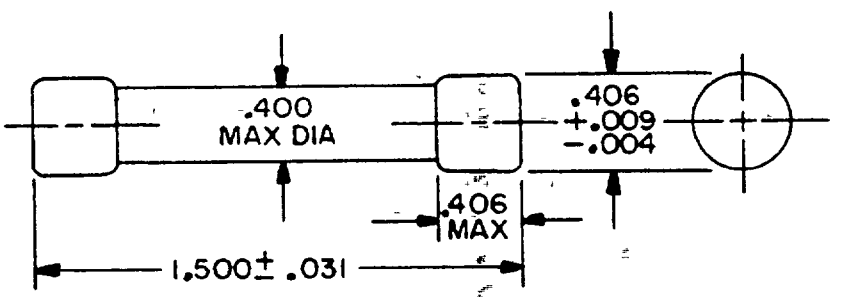

INCHES	MM
0 004	0 10
0 031	0 79
0 400	10 16
0 406	10.31
1.500	38.10

NOTES
1. Dimensions are in inches
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25 4 mm

FIGURE 1 *Style F09, fuse.*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

Physical

Terminals – Ferrule type
Material – Brass, copper, or copper alloy
Finish – Nickel, bright alloy plate or bright dip, silver plated when specified
Strength – MIL-STD-202, method 211, test condition E, 2 pound-inch torque between ferrules and fuse body
Body – Fibre tube.

Electrical.

Current rating – See table I
Voltage rating – See table I
Characteristic – See table I
Overload interrupt:
Characteristic A – Maximum 1 hour at 135 percent of rated current and a maximum of 2 minutes at 200 percent of rated current
Characteristic B – Maximum 1 hour at 135 percent of rated current, and a minimum of 12 seconds at 200 percent
Short circuit interrupt – See table 1

Shock:	F09A 1A thru 30A	MIL-STD-202, method 207 (HI shock)
	F09B 1/10A to 8/10A	MIL-STD-202, method 213, test condition I
	F09B 1A to 30A	MIL-STD-202, method 207 (HI shock)
Vibration	F09A 1A thru 30A	MIL-STD-202, method 204, test condition A (except 5g, 500 Hz)
	F09B 1/10A to 8/10A	MIL-STD-202, method 201
	F09B 1A thru 30A	MIL-STD-202, method 204, test condition A (except 5g, 500 Hz).

2. *Type designation* Type designation shall be as shown in table I

3 *Qualification* Required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

TABLE I. *Type designations and electrical ratings*

Type designation				AC short circuit interrupt		
Style	Characteristic	Maximum voltage	Current rating (amperes)[2]	32 volts	125 volts	250 volts
F09	A	250V	1A	10,000A	10,000A	35A
F09	A	250V	2A	10,000A	10,000A	35A
F09	A	250V	3A	10,000A	10,000A	35A
F09	A	250V	3-1/2A	10,000A	10,000A	35A
F09[1]	A	250V	4A	10,000A	10,000A	35A
F09	A	250V	5A	10,000A	10,000A	100A
F09	A	250V	6A	10,000A	10,000A	100A
F09	A	250V	6-1/4A	10,000A	10,000A	100A
F09	A	250V	7A	10,000A	10,000A	100A
F09	A	250V	8A	10,000A	10,000A	100A
F09	A	250V	10A	10,000A	10,000A	100A
F09	A	250V	15A	10,000A	10,000A	200A
F09	A	250V	20A	10,000A	10,000A	200A
F09	A	250V	25A	10,000A	10,000A	750A
F09	A	250V	30A	10,000A	10,000A	750A
F09	B	250V	1/10A	10,000A	10,000A	35A
F09	B	250V	15/100A	10,000A	10,000A	35A
F09	B	250V	2/10A	10,000A	10,000A	35A
F09	B	250V	3/10A	10,000A	10,000A	35A
F09	B	250V	4/10A	10,000A	10,000A	35A
F09	B	250V	1/2A	10,000A	10,000A	35A
F09	B	250V	6/10A	10,000A	10,000A	35A
F09	B	250V	8/10A	10,000A	10,000A	35A
F09	B	250V	1A	10,000A	10,000A	35A
F09[1]	B	250V	1-1/8A	10,000A	10,000A	35A
F09	B	250V	1-1/4A	10,000A	10,000A	35A
F09[1]	B	250V	1-4/10A	10,000A	10,000A	35A
F09	B	250V	1-6/10A	10,000A	10,000A	35A
F09[1]	B	250V	1-8/10A	10,000A	10,000A	35A
F09	B	250V	2A	10,000A	10,000A	35A
F09[1]	B	250V	2-1/4A	10,000A	10,000A	35A
F09	B	250V	2-1/2A	10,000A	10,000A	35A
F09[1]	B	250V	2-8/10A	10,000A	10,000A	35A
F09	B	250V	3-2/10A	10,000A	10,000A	35A
F09[1]	B	250V	3-1/2A	10,000A	10,000A	35A
F09	B	250V	4A	10,000A	10,000A	35A
F09[1]	B	250V	4-1/2A	10,000A	10,000A	100A
F09	B	250V	5A	10,000A	10,000A	100A

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

TABLE I *Type designations and electrical ratings – Continued*

Type designation				AC-short circuit interrupt		
Style	Charac-teristic	Maximum voltage	Current rating (amperes)[2]	32 volts	125 volts	250 volts
F09[1]	B	250V	5-6/10A	10,000A	10,000A	100A
F09	B	250V	6-1/4A	10,000A	10,000A	100A
F09[1]	B	250V	7A	10,000A	10,000A	100A
F09	B	250V	8A	10,000A	10,000A	100A
F09[1]	B	250V	9A	10,000A	10,000A	100A
F09	B	250V	10A	10,000A	10,000A	100A
F09[1]	B	125V	12A	10,000A	10,000A	Not rated
F09	B	125V	15A	10,000A	10,000A	Not rated
F09	B	32V	20A	10,000A	Not rated	Not rated
F09	B	32V	25A	10,000A	Not rated	Not rated
F09	B	32V	30A	10,000A	Not rated	Not rated

[1]INACTIVE FOR NEW DESIGN AFTER 30 JANUARY 1970
[2]For silver plated terminals the designator "S" is added after the current rating

INSPECTION ROUTINE:

Short circuit test The number of group III samples for qualification and qualification retention (group C) testing shall consist of 4 sample fuses of each of the types and of the current ratings as shown in table II. Short circuit interrupt tests shall be conducted at the ac voltage indicated, and the fuses shall withstand a minimum short circuit current as shown in table II Insulation resistance test shall be in accordance with MIL-F-15160.

TABLE II. *Short circuit tests*

Fuse type	Current rating	Short circuit current	Ac test voltage
F09A	4A	35A	250V
F09A	10A	100A	250V
F09A	20A	200A	250V
F09A	30A	750A	250V
F09A	30A	10,000A	125V
F09B	4A	35A	250V
F09B	10A	100A	250V
F09B	15A	10,000A	125V
F09B	30A	10,000A	32V

Cross-reference For applicable cross-reference see table III The existing stocks of superseded items may be used When exhausted, the superseding parts shall be used

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

TABLE III. *Cross-reference.*

Superseding No	Superseded numbers						
	81349	96906	96906	71400	72076	75915	71424
F09A250V 1A[1]	F09G1R00A[1]	MS90085-9[2]	MS90084-1[1]	BAN1	MOL1	525001	
F09A250V 2A	F09G2R00A	MS90085-15	MS90084-2	BAN2	MOL2	525002	
F09A250V 3A	F09G3R00A	MS90085-19	MS90084-3	BAN3	MOL3	525003	
F09A250V 3½A	F09G3R50A	MS90085-21		BAN3½	MOL3½	52503 5	
F09A250V 4A	F09G4R00A	MS90085-22		BAN4	MOL4	525004	
F09A250V 5A	F09G5R00A	MS90085-24	MS90084-4	BAN5	MOL5	525005	
F09A250V 6A	F09G6R00A	MS90085-26		BAN6	MOL6	525006	
F09A250V 6¼A	F09G6R25A	MS90085-27		BAN6¼	MOL6¼	5256 25	
F09A250V 7A	F09G7R00A	MS90085-28		BAN7	MOL7	525007	
F09A250V 8A	F09G8R00A	MS90085-29		BAN8	MOL8	525008	
F09A250V 10A	F09G10R0A	MS90085-31	MS90084-5	BAN10	MOL10	525010	
F09A250V 15A	F09G15R0A	MS90085-32	MS90084-6	BAN15	MOL15	525015	
F09A250V 20A	F09G20R0A	MS90085-33	MS90084-7	BAN20	MOL20	525020	
F09A250V 25A	F09G25R0A	MS90085-34	MS90084-8	BAN25	MOL25	525025	
F09A250V 30A	F09G30R0A	MS90085-35	MS90084-9	BAN30	MOL30	525030	
F09B250V 1/10A	F09GR100B	MS90085-36		FNM1/10			
F09B250V 15/100A	F09GR150B	MS90085-37		FNM15/100			
F09B250V 2/10A	F09GR200B	MS90085-38		FNM2/10			
F09B250V 3/10A	F09GR300B	MS90085-39		FNM3/10			
F09B250V 4/10A	F09GR400B	MS90085-40		FNM4/10			
F09B250V ½A	F09GR500B	MS90085-41		FNM1/2			
F09B250V 6/10A	F09GR600B	MS90085-42		FNM6/10			
F09B250V 8/10A	F09GR800B	MS90085-43		FNM8/10			
F09B250V 1A	F09G1R00B	MS90085-44	MS90084-10	FNM1	MEN1		
F09B250V 11/8A	F09G1R12B	MS90085-45		FNM11/8	MEN11/8		
F09B250V 1¼A	F09G1R25B	MS90085-46		FNM1	MEN1		
F09B250V 14/10A	F09G1R40B	MS90085-47		FNM14/10	MEN14/10		

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

TABLE III. *Cross-reference – Continued.*

Superseding No	Superseded numbers						
	81349	96906	96906	71400	72076	75915	71424
F09B250V 16/10A	F09G1R60B	MS90085-48		FNM16/10	MEN16/10		
F09B250V 18/10A	F09G1R80B	MS90085-49		FNM18/10	MEN18/10		
F09B250V 2A	F09G2R00B	MS90085-50	MS90084-11	FNM2	MEN2		
F09B250V 2¼A	F09G2R25B	MS90085-51		FNM2¼	MEN2¼		
F09B250V 2½A	F09G2R50B	MS90085-52		FNM2½	MEN2½		
F09B250V 28/10A	F09G2R80B	MS90085-53		FNM28/10	MEN28/10		
F09B250V 31/10A	F09G3R20B	MS90085-55		FNM31/10	MEN31/10		
F09B250V 3½A	F09G3R50B	MS90085-56		FNM3½	MEN3½		
F09B250V 4A	F09G4R00B	MS90085-57		FNM4	MEN4		
F09B250V 4½A	F09G4R50B	MS90085-58		FNM4 5	MEN4½		
F09B250V 5A	F09G5R00B	MS90085-59		FNM5	MEN5		
F09B250V 56/10A	F09G5R60B	MS90085-60		FNM56/10	MEN56/10		
F09B250V 6¼A	F09G6R25B	MS90085-62		FNM6¼	MEN6¼		
F09B250V 7A	F09G7R00B	MS90085-63		FNM7	MEN7		
F09B250V 8A	F09G8R00B	MS90085-64		FNM8	MEN8		
F09B250V 9A	F09G9R00B	MS90085-65		FNM9	MEN9		
F09B250V 10A[1]	F09D10R0B[1]	MS90085-66[2]	MS90084-14[1]	FNM10	MEN10		
F09B125V 12A	F09D12R0B	–	–	FNM12	–		
F09B125V 15A	F09D15R0B	MS90085-67	MS90084-15	FNM15	MEN15		TRM15
F09B32V 20A	F09D20R0B	MS90085-68	MS90084-16	FNM20	MEN20		TRM20
F09B32V 25A	F09D25R0B	MS90085-69	MS90084-17	FNM25	MEN25		TRM25
F09B32V 30A	F09D30R0B	MS90085-70	MS90084-18	FNM30	MEN30		TRM30

[1]A letter "S" following the part number signifies silver plating
[2]A second dash number (-1) signifies silver plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity.
Navy – SH
(Project 5920-0447-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:41Z
Check the source to verify that this is the current version before use.