MIL-T-24270/21D(SH)
2 September 1983
SUPERSEDING
MIL-W-24270/21C(SHIPS)
28 February 1973
MIL-W-24270/23(SHIPS)
13 May 1971

MILITARY SPECIFICATION SHEET


THERMOWELLS FOR THERMOMETERS AND ELECTRICAL TEMPERATURE SENSORS; INSERTION LENGTH - 2 INCHES, BORE - 1/4-INCH, CONNECTION - O-RING 1-5/16 - 12 UNS-2A

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the thermowells described herein shall consist of this document and the latest issue of MIL-T-24270.

FSC 6685

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:51Z
Check the source to verify that this is the current version before use.

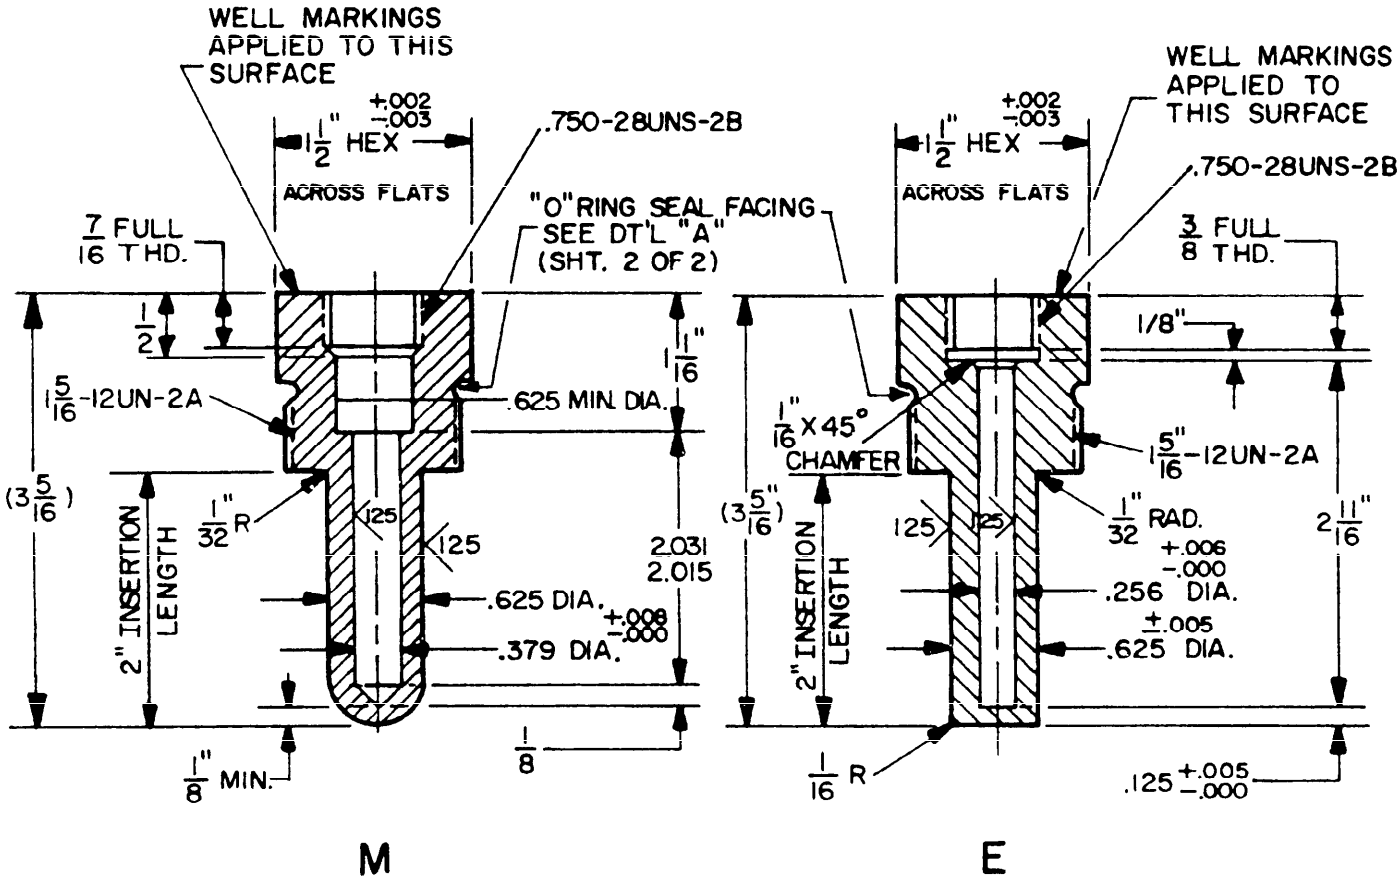


NOTES:

1. Unless otherwise specified tolerances on:
   Fractions: ± 1/64, Decimals: ± 0.010, Angles: ± 1/2 degree.
2. All dimensions in inches.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:51Z
Check the source to verify that this is the current version before use.

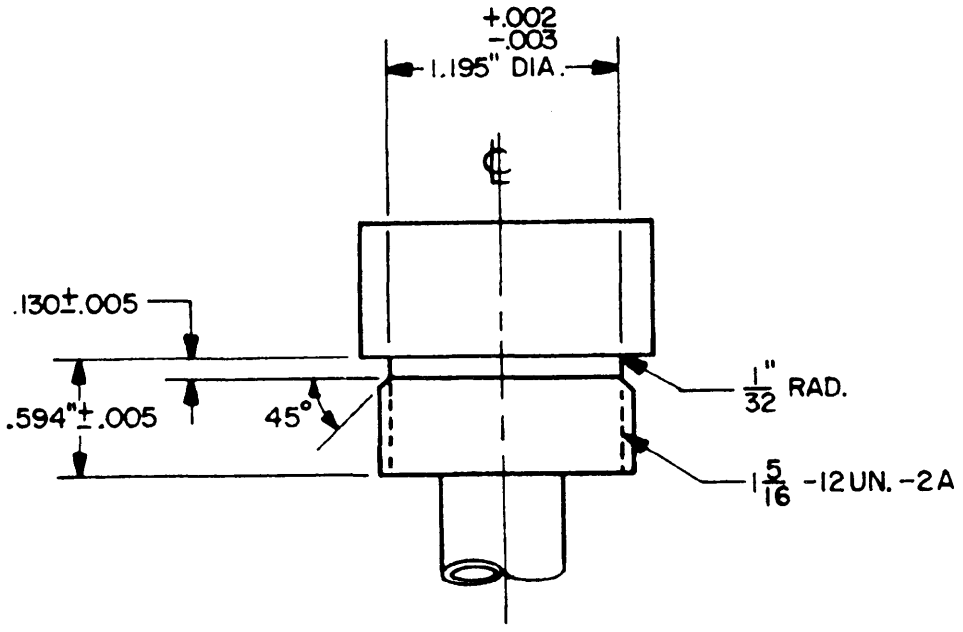

DT'L "A"

NOTES:
1. This O-ring groove is in accordance with MS18229.
2. Seal shall be concentric with thread within .008 inch total indicator reading.
3. Break all sharp edges.
4. O-ring ARP 568-916. Material must be specified for the specific application.

FIGURE 2. O-ring seal facing.

Preparing activity:
Navy - SH
(Project 6685-N681-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:51Z
Check the source to verify that this is the current version before use.

developed simultaneously using normal processing procedures,